1657-1673 Carling Avenue and 386 Tillbury Avenue Transportation Impact Assessment

Step 1 Screening Report

Step 2 Scoping Report

Step 3 Strategy Report (Rev #1)

Prepared for:

1657-1672 Carling Avenue Limited Partnership 2020-464 Bank Street Ottawa, ON K2P 1Z3

Prepared by:



6 Plaza Court Ottawa, ON K2H 7W1

October 2024

PN: 2023-088

Table of Contents

1		Scree	ening	3
2		Existi	ing and Planned Conditions	3
	2.1	Pro	posed Development	3
	2.2	Exis	sting Conditions	5
	2.2	2.1	Area Road Network	5
	2.2	2.2	Existing Intersections	5
	2.2	2.3	Existing Driveways	6
	2.2	2.4	Cycling and Pedestrian Facilities	6
	2.2	2.5	Existing Transit	9
	2.2	2.6	Existing Area Traffic Management Measures	10
	2.2	2.7	Existing Peak Hour Travel Demand	10
	2.2	2.8	Collision Analysis	12
	2.3	Pla	nned Conditions	15
	2.3	3.1	Changes to the Area Transportation Network	15
	2.3	3.2	Other Study Area Developments	16
3		Study	y Area and Time Periods	16
	3.1	Stu	dy Area	16
	3.2	Tim	ne Periods	16
	3.3	Но	rizon Years	17
4		Deve	lopment-Generated Travel Demand	17
	4.1	Мо	de Shares	17
	4.2	Trip	o Generation	17
	4.3	Trip	o Distribution	18
	4.4	Trip	o Assignment	19
5		Exem	nption Review	20
6		Deve	lopment Design	22
	6.1		sign for Sustainable Modes	
	6.2	Circ	culation and Access	22
7		Parki	ing	22
	7.1	Par	king Supply	22
8		Boun	ndary Street Design	23
9		Trans	sportation Demand Management	23
	9.1	Cor	ntext for TDM	23
	9.2	Nee	ed and Opportunity	23
	9.3	TDI	M Program	23
10)	Acces	ss Intersection Design	24
	10.1	Loc	cation and Design of Access	24
11		Sumr	mary of Improvements Indicated and Modifications Options	24
12	-	Conc	lusion	28



List of Figures

3
4
6
7
7
8
8
9
10
11
13
19
20

Table of Tables

Table 1: Intersection Count Date	
Table 2: Existing Intersection Operations	11
Table 3: Study Area Collision Summary, 2018-2022	12
Table 4: Summary of Collision Locations, 2018-2022	13
Table 5: Carling Avenue at Clyde Avenue/Cole Avenue Collision Summary	14
Table 6: Carling Avenue at Churchill Avenue Collision Summary	15
Table 7: TRANS Trip Generation Manual Recommended Mode Shares – Ottawa West	17
Table 8: Trip Generation Person Trip Rates	17
Table 9: Total Residential Person Trip Generation	17
Table 10: Internal Capture Rates	
Table 11: Trip Generation by Mode	18
Table 12: OD Survey Distribution – Ottawa West	19
Table 13: Trip Assignment	19
Table 14: Exemption Review	20
Table 15: Boundary Street MMLOS Analysis	23

List of Appendices

- Appendix A TIA Screening Form and Certification Form
- Appendix B Turning Movement Count Data
- Appendix C Synchro Intersection Worksheets Existing Conditions
- Appendix D Collision Data
- Appendix E Carling Avenue Transit Priority Measures Plan
- Appendix F TDM Checklist
- Appendix G Turing Templates
- Appendix H MMLOS Analysis



1 Screening

This study has been prepared according to the City of Ottawa's 2017 Transportation Impact Assessment (TIA) Guidelines, incorporating the 2023 Revision to Transportation Impact Assessment Guidelines. Accordingly, a Step 1 Screening Form has been prepared and is included as Appendix A, along with the Certification Form for the TIA Study PM. As shown in the Screening Form, a TIA is required, and this study has been prepared to support a zoning bylaw amendment application.

2 Existing and Planned Conditions

2.1 Proposed Development

The proposed development is located at 1657-1673 Carling Avenue and 386 Tillbury Avenue is zoned as Arterial Mainstreet (AM10) for the Carling Avenue parcels and Residential Fourth Density (R4UC) for the Tillbury Avenue parcel. The proposed redevelopment concept consists of a mixed-use building including 370 residential units, 3,846 square feet retail space, 203 vehicle parking spaces, and 374 bicycle parking spaces. The site proposed two accesses, one located at the existing Carling Avenue access and the other replacing the residential driveway on Tillbury Avenue. An internal drive aisle will connect through the site between the accesses. Construction will occur in a single phase estimated to proceed after 2025, upon completion of a future site plan application. The existing site includes approximately 2,000 sq. ft. of a single dwelling unit and a 24,772 sq. ft. commercial plaza with surface parking spaces. Figure 1 illustrates the study area context. Figure 2 illustrates the proposed concept plan.


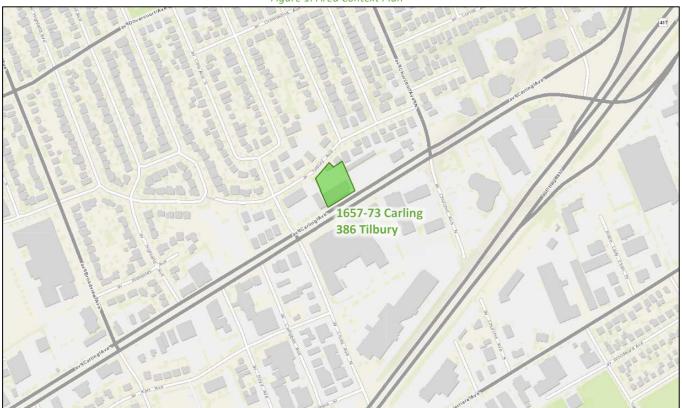


Figure 1: Area Context Plan

Source: http://maps.ottawa.ca/geoOttawa/ Accessed: June 27, 2023



Figure 2: Concept Plan

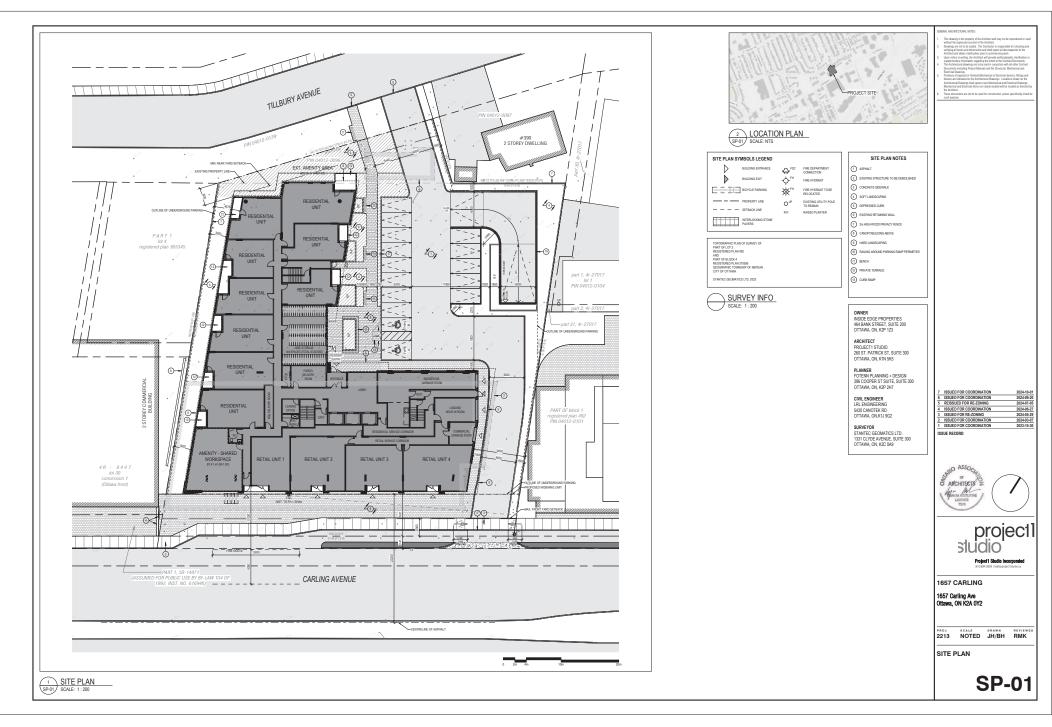

2.2 Existing Conditions

2.2.1 Area Road Network

Carling Avenue: Carling Avenue is a City of Ottawa arterial road with a six-lane divided urban cross-section. Sidewalks are provided on both sides of the roadway. The posted speed limit is 60 km/h. The Ottawa Official Plan reserves a 44.5 metre right of way.

Churchill Avenue: Churchill Avenue is a City of Ottawa major collector road with a two-lane urban cross-section. Sidewalks and cycle tracks on both sides of the road north of Carling Avenue. The posted speed limit is 50 km/h and on-street parking is provided, predominantly in layby/parking bays. The existing right-of-way is 20 metres.

Clyde Avenue: Clyde Avenue is a City of Ottawa local road with a two-lane urban cross-section, with auxiliary leftturn lanes between Carling Avenue and Doheny Street, transitioning to two-lanes with parking on both sides to the south of Doheny Street. A sidewalk is located on the east side of the road, with varying hard surfaces permitting pedestrian movements on the west side. An unposted speed limit of 50 km/h is assumed for the roadway. The existing right-of-way is 20 metres.

Cole Avenue: Cole Avenue is a City of Ottawa local road with a two-lane urban cross-section and is located within a posted 30 km/h area speed limit. A sidewalk is located on both sides of the road between Carling Avenue and Tillbury Avenue, and a sidewalk is located on the east side of the road to the north of Tillbury Avenue. Parking is permitted on both sides of the roadway. The existing right-of-way is 20 metres.

Tillbury Avenue: Tillbury Avenue is a City of Ottawa local road with a two-lane urban cross-section and is located within a posted 30 km/h area speed limit. A sidewalk is located on the south side to the west of Cole Avenue, on the north side between Cole Avenue and Melbourne Avenue, and both sides of the road between Melbourne Avenue and Churchill Avenue. Parking is permitted on both sides of the roadway. The existing right-of-way is 20 metres.

2.2.2 Existing Intersections

The key intersections within 400 metre of the site have been summarized below:


Carling Avenue at Clyde Avenue/Cole Avenue	The intersection of Carling Avenue at Clyde Avenue/Cole Avenue is a signalized intersection. The eastbound and westbound approaches consist of an auxiliary left-turn lane, two through lanes, and a shared through/right-turn lane. The northbound approach consists of an auxiliary left-turn lane, a through lane and a short auxiliary right-turn lane, and the southbound approach consists of an auxiliary left-turn lane and a shared through/right-turn lane. No turn restrictions were noted.
Carling Avenue at Churchill Avenue	The intersection of Carling Avenue at Churchill Avenue is a signalized intersection. The eastbound and westbound approaches consist of an auxiliary left-turn lane, two through lanes, and a shared through/right-turn lane. The northbound and southbound approaches consist of an auxiliary left-turn lane and a shared through/right-turn lane. The northbound approach includes a cycletrack and the southbound approach has a bike lane. No turn restrictions were noted.



Tillbury Avenue at Churchill Avenue	The intersection of Churchill Avenue at Tillbury Avenue is a minor stop-controlled intersection, with all approaches operating as shared all movement lanes. A cycle track cross-ride is present on the Tillbury Avenue approach. No turn restrictions were noted.
Tillbury Avenue at Cole Avenue	The intersection of Cole Avenue at Tillbury Avenue is a minor stop- controlled intersection, with all approaches operating as shared all movement lanes. No turn restrictions were noted.

2.2.3 Existing Driveways

Within 200 metres of the proposed site access, numerous residential driveways are located to the north, and commercial entrances are located along Carling Avenue and Clyde Avenue.

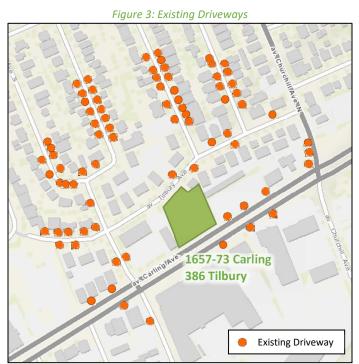

Source: http://maps.ottawa.ca/geoOttawa/ Accessed: June 27, 2023

2.2.4 Cycling and Pedestrian Facilities

Figure 4 illustrates the pedestrian facilities in the study area and Figure 5 illustrates the cycling facilities.

Within the study area, sidewalks are provided along both sides of Carling Avenue, Churchill Avenue north of Carling Avenue, and a section of Cole Avenue, with sidewalks on a single side on various local roads. Future projects will extend these sidewalks to connect through the residential community.

Cycletracks are provided along Churchill Avenue north of Carling Avenue with suggested bike routes through the communities to the north and south of Carling Avenue. Carling Avenue is designated a spine route.




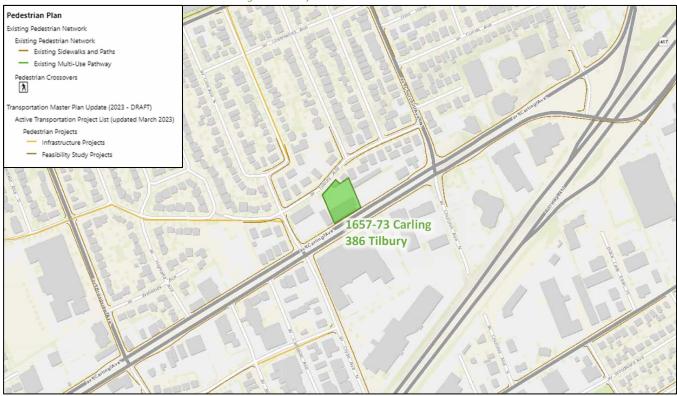


Figure 4: Study Area Pedestrian Facilities

Source: http://maps.ottawa.ca/geoOttawa/ Accessed: June 27, 2023



Source: http://maps.ottawa.ca/geoOttawa/ Accessed: June 27, 2023

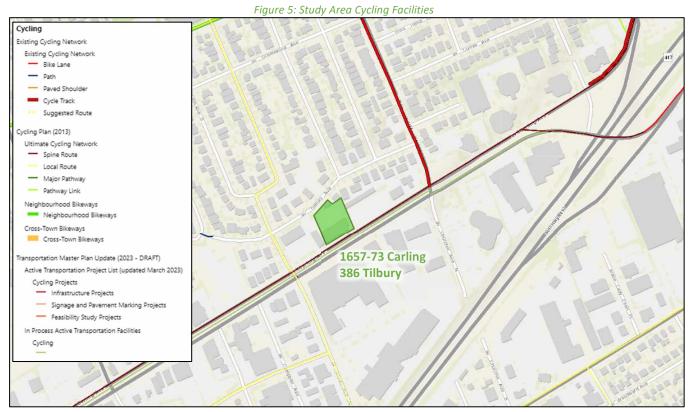

Pedestrian and cyclist volumes included in study area intersection counts, presented in Section 2.2.7, have been compiled and are illustrated in Figure 6 and Figure 7, respectively. No pedestrian and cyclist counts are available at the intersections of Churchill Avenue at Tillbury Avenue and Cole Avenue at Tillbury Avenue. The cyclist volumes at the intersections of Churchill Avenue at Tillbury Avenue and Cole Avenue at Tillbury Avenue were assumed from adjacent intersections. Counts only account for crossing volumes for pedestrians, so no pedestrian volumes can be assumed from the existing counts.


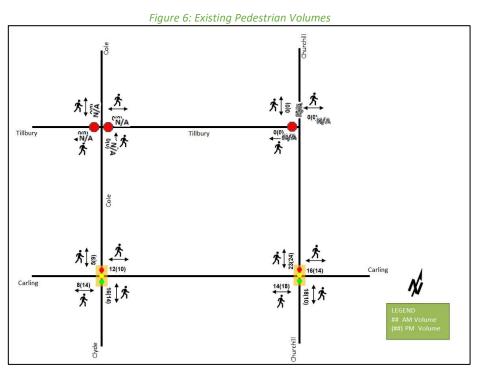


Figure 7: Existing Cyclist Volumes



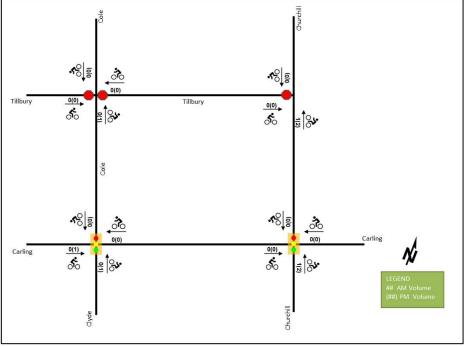

2.2.5 Existing Transit

Figure 8 illustrates the transit system map in the study area and Figure 9 illustrates nearby transit stops. All transit information is from June 27, 2023 and is included for general information purposes and context to the surrounding area.

Within the study area, frequent routes #51, #53, #80 and #85, local routes #50 #55 and #81, and limited-service route #114 are noted to provide service. Along the site frontage, routes #50 and #85 operate and the frequency of these routes within proximity of the proposed site based on May 18, 2023 service levels are:

- Route # 50 30-minute service all day
- Route # 85 15-minute service all day, 20-30-minute service after 6:00 PM



Figure 8: Existing Study Area Transit Service

Source: http://www.octranspo.com/ Accessed: June 27, 2023





Figure 9: Existing Study Area Transit Stops

2.2.6 Existing Area Traffic Management Measures

There are no existing area traffic management measures within the study area.

2.2.7 Existing Peak Hour Travel Demand

Existing turning movement counts were acquired from the City of Ottawa and The Traffic Specialist for the existing Study Area intersection. Table 1 summarizes the intersection count dates.

Table 1: Intersection Count Date					
Intersection	Count Date	Source			
Carling Ave at Clyde Ave/Cole Ave	Wednesday, February 23, 2022	City of Ottawa			
Carling Ave at Churchill Ave	Tuesday, April 25, 2017	City of Ottawa			
Churchill Avenue North at Tillbury Avenue	Monday, 30 September 2019	The Traffic Specialist			
Cole Avenue at Tillbury Avenue	Monday, 30 September 2019	The Traffic Specialist			

Figure 10 illustrates the existing traffic counts and Table 2 summarizes the existing intersection operations. The level of service for signalized intersections is based on volume to capacity ratio (v/c) calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection, and average delay for unsignalized intersections. Detailed turning movement count data is included in Appendix B and the Synchro worksheets are provided in Appendix C.



Source: http://www.octranspo.com/ Accessed: June 27, 2023

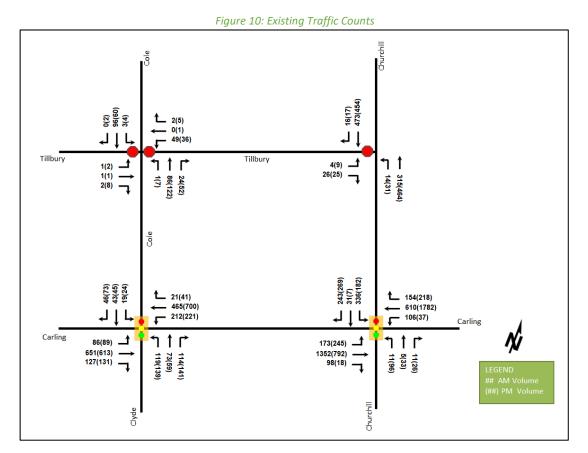


Table 2: Existing Intersection Operations

Interception	Lana	AM Peak Hour			PM Peak Hour				
Intersection	Lane	LOS	V/C	Delay (s)	Q (95 th)	LOS	V/C	Delay (s)	Q (95 th)
	EBL	А	0.18	8.4	14.2	А	0.24	9.6	15.9
	EBT/R	А	0.35	16.3	57.3	А	0.32	16.8	58.3
	WBL	А	0.56	26.8	58.7	А	0.55	13.2	37.4
Carling Ave at	WBT/R	А	0.20	10.9	25.3	А	0.29	14.7	53.2
Clyde Ave/Cole	NBL	С	0.73	69.9	49.0	D	0.86	94.2	#70.6
Ave	NBT	А	0.30	45.9	30.2	А	0.22	49.7	28.7
Signalized	NBR	А	0.43	17.4	22.6	А	0.45	16.2	26.7
	SBL	А	0.11	42.0	11.1	А	0.13	47.8	14.7
	SBT/R	А	0.35	29.6	27.0	А	0.42	33.2	37.3
	Overall	Α	0.59	21.0	-	В	0.61	22.2	-
	EBL	D	0.83	85.7	#79.3	D	0.81	66.3	#122.4
	EBT/R	D	0.84	31.8	#163.8	А	0.36	18.6	65.6
	WBL	В	0.62	64.3	44.1	А	0.35	60.8	20.4
Carling Ave at	WBT/R	А	0.50	27.9	65.6	F	1.24	145.8	#274.1
Churchill Ave	NBL	А	0.07	33.5	7.0	Е	1.00	134.0	#54.2
Signalized	NBT/R	А	0.06	19.2	6.7	А	0.18	22.6	17.4
	SBL	F	1.93	464.8	#193.6	С	0.78	64.1	67.2
	SBT/R	А	0.52	9.6	30.2	А	0.57	9.0	23.9
	Overall	F	1.20	79.4	-	F	1.03	95.4	-



1		AM Peak Hour			PM Peak Hour				
Intersection	Lane	LOS	V/C	Delay (s)	Q (95 th)	LOS	V/C	Delay (s)	Q (95 th)
	EB	А	0.01	9.5	0.0	А	0.01	9.2	0.0
Churchill Avenue North at Tillbury Avenue Unsignalized	WB	В	0.08	10.3	2.3	В	0.07	10.5	1.5
	NB	А	0.00	7.4	0.0	А	0.01	7.4	0.0
	SB	А	0.00	7.5	0.0	А	0.00	7.6	0.0
	Overall	Α	-	2.2	-	Α	-	2.1	-
Colo A	EBL/R	В	0.07	12.9	1.5	В	0.09	14.9	2.3
Cole Avenue at	NBL/T	А	0.02	8.6	0.0	А	0.03	8.6	0.8
Tillbury Avenue	SBT/R	-	-	-	-	-	-	-	-
Unsignalized	Overall	Α	-	0.6	-	Α	-	0.8	-

Queue is measured in metres Peak Hour Factor = 0.90

m = metered queue.

= volume for the 95th %ile cycle exceeds capacity

At the intersection of Carling Avenue at Clyde Avenue/Cole Avenue during the PM peak hour, the northbound left-turn movement may be subject to high delays and extended queues.

At the intersection of Carling Avenue at Churchill Avenue, during the AM peak hour, the eastbound left-turn and eastbound shared through/right-turn movements may exhibit extended queues. High delays may be subject on the eastbound left-turn movement. The southbound left-turn movement is over theoretical capacity and may be subject to high delays and extended queues. During the PM peak hour, the eastbound left-turn and northbound left-turn movements may exhibit extended queues. High delays may be subject on the northbound left-turn movement. The westbound shared through/right-turn movement is over theoretical capacity and may be subject to high delays and extended queues. The overall intersection is forecasted to be over theoretical capacity during both peak hours. It is noted that the City will be upgrading the intersection within 2-3 years and it is recommended that it be reviewed at this time for potential capacity improvements along with the protected pedestrian and cycling improvements.

2.2.8 Collision Analysis

Collision data have been acquired from the City of Ottawa open data website (data.ottawa.ca) for five years prior to the commencement of this TIA for the surrounding study area road network. Table 3 summarizes the collision types and conditions in the study area, Figure 11 illustrates the intersections and segments analyzed, and Table 4 summarizes the total collisions for each of these locations. Collision data are included in Appendix D.

		Number	%
Total C	Collisions	92	100%
	Fatality	0	0%
Classification	Non-Fatal Injury	29	32%
	Property Damage Only	63	68%
	Angle	5	5%
	Rear end	29	32%
	Sideswipe	25	27%
Initial Impact Type	Turning Movement	27	29%
	SMV Other	5	5%
	Other	1	1%
	Dry	63	68%
Deed Curfese Candition	Wet	14	15%
Road Surface Condition	Loose Snow	5	5%
	Slush	7	8%

Table 3: Study Area Collision Summary, 2018-202



		Number	%
Tota	al Collisions	92	100%
	Packed Snow	2	2%
	Ice	1	1%
Pedestrian Involved		3	3%
Cyclists Involved		5	5%

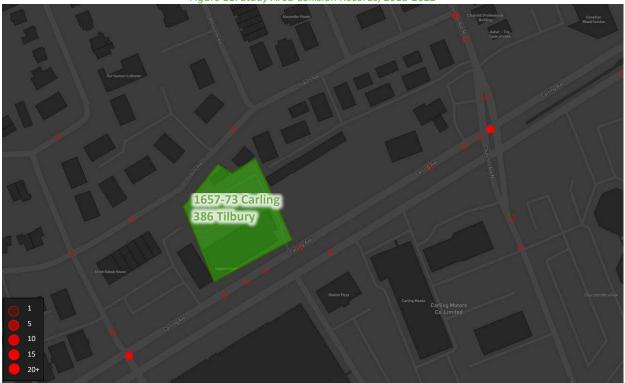


Figure 11: Study Area Collision Records, 2018-2022

Table 4: Summary of Collision Locations, 2018-2022

	Number	%
Intersections / Segments	92	100%
Carling Ave at Clyde Ave/Cole Ave	48	52%
Carling Ave at Churchill Ave	30	33%
Carling Ave WB btwn Clyde Ave/Cole Ave and Churchill Ave	7	8%
Churchill Ave N Btwn Tillbury Ave & Carling Ave	2	2%
Churchill Ave at Tillbury Ave	2	2%
Cole Ave at Tillbury Ave	1	1%
Carling Ave EB btwn Clyde Ave/Cole Ave and Churchill Ave	1	1%
Cole Ave btwn Carling Ave and Tillbury Ave	1	1%

Within the study area, the intersection of Carling Avenue at Clyde Avenue/Cole Avenue and Carling Avenue at Churchill Avenue are noted to have experienced higher collisions than other intersections. Table 5 and Table 6 summarize the collision types and conditions for each of the intersections.

A total of three pedestrian collisions and five cyclist collisions are noted within the study area, including two pedestrian collisions and two cyclist collisions at Carling Avenue at Clyde Avenue/Cole Avenue, one pedestrian collision and one cyclist collision on Carling Avenue westbound between Clyde Avenue/Cole Avenue and Churchill



Avenue, one cyclist collision on Churchill Avenue North between Tillbury Avenue and Carling Avenue, and one cyclist collision at Cole Avenue at Tillbury Avenue.

The pedestrian collision at Carling Avenue at Clyde Avenue/Cole Avenue involved a northbound vehicle turning right, and the other pedestrian collision involved a northbound vehicle turning left, and the other pedestrian collision on Carling Avenue westbound between Clyde Avenue/Cole Avenue and Churchill Avenue may be due to the loose snow surface conditions. The cyclist collision at Carling Avenue at Clyde Avenue/Cole Avenue/Cole Avenue/Cole Avenue/Cole Avenue/Cole Avenue/Cole Avenue/Cole Avenue involved a westbound right turning vehicle and westbound through bicycle, and other cyclist collisions occurred under clear and dry surface conditions during daylight. No detailed collision records were available for the other cyclist collisions.

It is noted that four collisions are noted occurred across the site frontage, which is on the segment of Carling Avenue Westbound between Clyde Avenue/Cole Avenue and Churchill Avenue. Based on the detailed collision records, two collisions are likely due to loose snow surface conditions, one involved a truck going ahead and a automobile turning right along the frontage (approximately 50 metres from the site existing access and 13.5 metres from the 1677 Carling existing access), and the collision that occurred on October 29, 2021, does not have detailed records available. No further review of this segment is required as part of this study.

		Number	%
Total C	Collisions	48	100%
	Fatality	0	0%
Classification	Non-Fatal Injury	16	33%
	Property Damage Only	32	67%
	Angle	3	6%
	Rear end	9	19%
Initial Impact Type	Sideswipe	11	23%
	Turning Movement	22	46%
	SMV Other	2	4%
	Other	1	2%
	Dry	28	58%
	Wet	12	25%
Road Surface Condition	Loose Snow	2	4%
Road Surface Condition	Slush	4	8%
	Packed Snow	1	2%
	Ice	1	2%
Pedestrian Involved		2	4%
Cyclists Involved		2	4%

 Table 5: Carling Avenue at Clyde Avenue/Cole Avenue Collision Summary

The Carling Avenue at Clyde Avenue/Cole Avenue intersection had a total of 48 collisions during the 2018-2022 time period, with 32 involving property damage only and the remaining 16 having non-fatal injuries. Turning movement comprised the majority of collision types at this intersection with 22 collisions, followed by eleven sideswipe, nine rear end, three angle collisions, two SMV other collisions, with the remaining one other collision.

The detailed collision records for this intersection ranges of 2016-2020. A total of 22 turning movement collisions were observed between this range. The detailed collision records outline that a total of nine collisions were involved westbound left and eastbound through vehicles and a total of nine collisions were involved eastbound left and westbound through vehicles. These collisions may be related to the high volumes of eastbound and westbound through movements, as well as the protected/permissive phases of the eastbound and westbound



left turns. It is noted that the eastbound and westbound left turns at the intersection of Carling Avenue and Clyde Avenue/Cole Avenue have been modified to fully protected left-turn movements, which are anticipated to help reduce turning movement collisions.

During the 2016-2020 time period, the pedestrian collision at Carling/Clyde involved a northbound vehicle turning right, and the other pedestrian collision involved a northbound vehicle turning left, and one cyclist collision involved a westbound right turning vehicle and westbound through bicycle. A protected intersection may reduce these collisions. Weather conditions do not affect collisions at this location.

		Number	%
Total C	Collisions	30	100%
	Fatality	0	0%
Classification	Non-Fatal Injury	8	27%
	Property Damage Only	22	73%
	Angle	1	3%
Initial Impact Type	Rear end	16	53%
Initial Impact Type	Sideswipe	11	37%
	SMV Other	2	7%
	Dry	24	80%
Road Surface Condition	Wet	2	7%
Road Surface Condition	Loose Snow	1	3%
	Slush	3	10%
Pedestrian Involved		0	0%
Cyclists Involved		0	0%

Table 6: Carlina	Avenue at	Churchill Avenue	Collision Summary
rable of caring	nivenue ut	chui chini / Wehue	complete summary

The Carling Avenue at Churchill Avenue intersection had a total of 30 collisions during the 2018-2022 time period, with 22 involving property damage only and the remaining eight having non-fatal injuries. The collision types are most represented by rear end with 16 collisions, followed by eleven sideswipe, two SMV other, and the remaining one angle collisions. The collision rates have been decreasing since the peak of nine collisions in 2018, with only one being noted during 2022. The detailed collision records outline that the rear end collisions are predominantly due to the congested conditions along Carling Avenue. Weather conditions do not affect collisions at this location. No further examination is required as part of this study.

2.3 Planned Conditions

2.3.1 Changes to the Area Transportation Network

2.3.1.1 Transportation Master Plan

The active transportation projects identify separated cycling facilities and/or bike lanes on Clyde Avenue from Carling Avenue to Laperriere Avenue and sidewalk along Tillbury Avenue from Cole Avenue to David Shentow Park. Since these projects have not been scheduled and the implementation of the projects will be paced by available funding, these projects are assumed beyond the study horizon years and will not be included in the report analysis.

2.3.1.2 Construction and infrastructure projects

The construction and infrastructure projects identify transit priority along Carling Avenue and includes a dedicated westbound shared bus/bike lane across the frontage of the site. It is anticipated that by the buildout year 2025, the curbside bus lanes will be implemented, and it will be included in the report analysis. The Carling Avenue transit priority measures plan is included in Appendix E.



The City has identified the intersection of Carling Avenue at Churchill Avenue is to be improved to a protected intersection over the next 2-3 years. Additionally, the eastbound and westbound left turns at the intersection of Carling Avenue and Clyde Avenue/Cole Avenue have recently been modified to fully protected left-turn movements.

2.3.2 Other Study Area Developments

At the time of this report, the following development applications were available for the adjacent properties.

1619-1655 Carling Avenue

The proposed development application includes a site plan for two residential towers, 16-storeys and 18-storeys are proposed for the site with a total of 418 residential units and over 8,000 sq. ft. of commercial/retail space. The development is expected to generate approximately 116 new vehicle trips during the peak. The site is currently under construction, and it will be included in the future conditions. (Parsons, 2022)

1640-1660 Carling Avenue

The proposed development application includes a zoning by-law application and plan of subdivision to redevelop the previous Canadian Tire site with six new residential towers with an estimated 1,700 total units. A new local road will be included through the site and the site is anticipated to proceed through three phases. Phase 1, which consists of 810 units, buildings 5 and 6, is assumed to be constructed by 2026. Phase 2, which consists of 691 units, buildings 2, 3 and 4 is assumed to be constructed by 2031, and Phase 3, which consists of 214 units and building 1 is assumed to be constructed by 2036. The development is expected to generate approximately 391 to 508 new vehicle trips during the peak hours, and a reduction of 100 to 277 vehicle trips with the previous uses being removed. (Parsons, 2022)

1705 Carling Avenue

The proposed development application includes a site plan for replacing an existing motel and restaurant with a 9-storey retirement facility with 158 units and a 22-storey residential high-rise. The development is expected to generate less than 25 vehicle trips during peak hours. The site is currently under construction, and it will be included in the future conditions. (Novatech, 2020)

3 Study Area and Time Periods

3.1 Study Area

The following intersections will be included in this study:

- Carling Avenue at:
 - o Clyde Avenue/Cole Avenue
 - o Churchill Avenue
- Tillbury Avenue at:
 - o Churchill Avenue
 - Cole Avenue

The boundary roads will be Carling Avenue and Tillbury Avenue. No TRANS screenlines within the area and no screenline analysis will be performed as part of the study.

3.2 Time Periods

As the proposed development is composed of residential units and ground floor retail, the AM and PM peak hours will be examined.



3.3 Horizon Years

Construction will occur in a single phase estimated to proceed after 2025, upon completion of a future site plan application.

4 Development-Generated Travel Demand

4.1 Mode Shares

Examining the mode shares recommended in the TRANS Trip Generation Manual (2020) for the subject district, derived from the most recent National Capital Region Origin-Destination survey (OD Survey), the existing average district mode shares by land use for Ottawa West have been summarized in Table 7.

Travel Mode	Multi-Unit (High-Rise)		Commercia	Generator
Travel Wode	AM	PM	AM	PM
Auto Driver	28%	33%	55%	50%
Auto Passenger	11%	11%	11%	16%
Transit	41%	26%	11%	11%
Cycling	3%	7%	0%	5%
Walking	16%	23%	23%	18%
Total	100%	100%	100%	100%

Table 7: TRANS Trip Generation Manual Recommended Mode Shares – Ottawa West

4.2 Trip Generation

This TIA has been prepared using the vehicle and person trip rates for the residential dwellings using the TRANS Trip Generation Manual (2020) and the vehicle trip rates and derived person trip rates for commercial component from the ITE Trip Generation Manual 11th Edition (2021) using the City-prescribed conversion factor of 1.28. Table 8 summarizes the person trip rates for the proposed residential land uses for each peak period and the person trip rates for the non-residential land uses by peak hour.

Land Use	Land Use Code	Peak Period	Vehicle Trip Rate	Person Trip Rates
Multi Linit (Llinh Dian)	221 & 222	AM	-	0.80
Multi-Unit (High-Rise)	(TRANS)	PM	-	0.90
	,			
	Land Use	Peak	Vehicle Trip	Person Trip
Land Use	Land Use Code	Peak Hour	Vehicle Trip Rate	Person Trip Rates
Land Use Strip Retail Plaza			•	•

Table 8: Trip Generation Person Trip Rates

Using the above person trip rates, the total person trip generation has been estimated. Table 9 summarizes the total person trip generation.

Tuble 9. Total Residential Person Trip Generation							
Land Use	Units	4	AM Peak Perio	d	F	PM Peak Perio	d
Lanu Ose	Units	In	Out	Total	In	Out	Total
Multi-Unit (High-Rise)	370	92	204	296	193	140	333
Land Use	CEA		AM Peak Hour		PM Peak Hour		
Land Use	GFA	In	Out	Total	In	Out	Total
Strip Retail Plaza (<40k)	3,846 sq.ft	7	5	12	16	17	32

Table 9: Total Residential Person Trip Generation



Internal capture rates from the ITE Trip Generation Handbook 3rd Edition have been assigned to the development's retail component for mixed-use developments. The rates summarized in Table 10 represent the percentage of trips to/from retail use based on the residential component.

Table 10: Internal Capture Rates				
Land Use	AM		PM	
Land Ose	In	Out	In	Out
Residential to/from Strip Retail Plaza (<40k)	17%	14%	10%	26%

Pass-by reductions applied to the retail trip generation at a rate of 40% have been included using the recommended value presented in the ITE Trip Generation Manual 11th Edition (2021) for the most similar land use with a recommended rate, "Retail (40k - 150k sq. ft.)".

Using the above mode share targets, the internal capture and pass-by rates, and the person trip rates, the person trips by mode have been projected. Trip generation by peak hour has been forecasted using the prescribed peak period conversion factors presented in the TRANS Trip Generation Manual (2020) for the residential component. Table 11 summarizes the residential trip generation and the non-residential trip generation by mode and peak hour.

		Tab	le 11: Trip	o Generati	on by Mod	le				
-	Fravel Mode	AN	AM Peak Hour				PM Peak Hour			
	i avei woue	Mode Share	In	Out	Total	Mode Share	In	Out	Total	
	Auto Driver	28%	12	27	39	33%	28	20	48	
e) it	Auto Passenger	11%	5	11	16	11%	9	7	16	
- L' sis	Transit	41%	21	46	67	26%	24	17	41	
Multi-Unit (High-Rise)	Cycling	3%	2	3	5	7%	7	5	11	
ΞÏ	Walking	16%	9	19	28	23%	23	17	40	
	Total	100%	49	106	155	100%	91	66	156	
)k)	Auto Driver	55%	1	0	1	50%	1	0	1	
Strip Retail Plaza (<40k)	Auto Passenger	11%	1	0	1	16%	3	2	5	
za (Transit	11%	1	0	1	11%	2	2	4	
Pla	Cycling	0%	0	0	0	5%	1	1	2	
ail I	Walking	23%	1	1	2	18%	3	3	6	
Ret	Internal Capture	varies	-1	-1	-2	varies	-2	-4	-6	
ip I	Pass-by	40%	-2	-2	-4	40%	-6	-5	-11	
Str	Total	100%	4	1	5	100%	9	8	15	
	Auto Driver	-	13	27	40	-	29	20	49	
	Auto Passenger	-	6	11	17	-	12	9	21	
Total	Transit	-	22	46	68	-	26	19	45	
To	Cycling	-	2	3	5	-	8	6	13	
	Walking	-	10	20	30	-	26	20	46	
	Total	-	53	107	160	-	100	74	171	

As shown above, a total of 40 AM and 49 PM new peak hour two-way vehicle trips are projected as a result of the proposed development.

4.3 Trip Distribution

To understand the travel patterns of the subject development, the OD Survey has been reviewed to determine the travel, and these patterns were applied based on the build-out of Ottawa West. Table 12 below summarizes the distributions.



able 12: OD Survey Distribution – Ottawa We		
To/From	% of Trips	
North	20%	
South	35%	
East	30%	
West	15%	
Total	100%	

4.4 Trip Assignment

Using the distribution outlined above, turning movement splits, and access to major transportation infrastructure, the trips generated by the site have been assigned to the study area road network. Table 13 summarizes the proportional assignment to the study area roadways, and Figure 12 illustrates the new site generated volumes and Figure 13 illustrates the pass-by volumes.

Given that the development is anticipated to generate a total of 40 AM and 49 PM new peak hour two-way vehicle trips, it does not require further analysis for future conditions, as identified in Table 14. A breakdown of the existing trips to be removed will not be provided.

	Table 13: Trip Assignment			
To/From	Via			
North	10% Churchill Ave (N), 10% Carling Ave (E)			
South	10% Cole Ave (S), 15% Carling Ave (W), 10% Carling Ave (E)			
East	30% Carling Ave (E)			
West	15% Carling Ave (W)			
Total	100%			


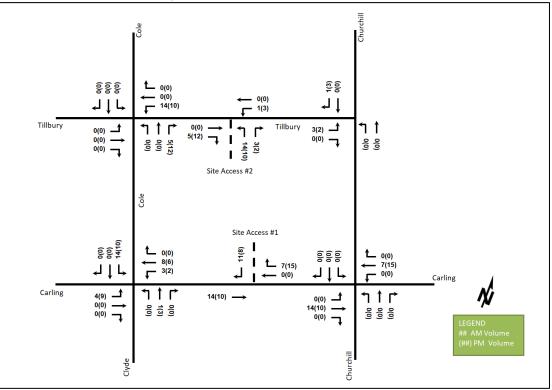


Figure 12: New Site Generation Auto Volumes



Figure 13: Pass-By Auto Volumes

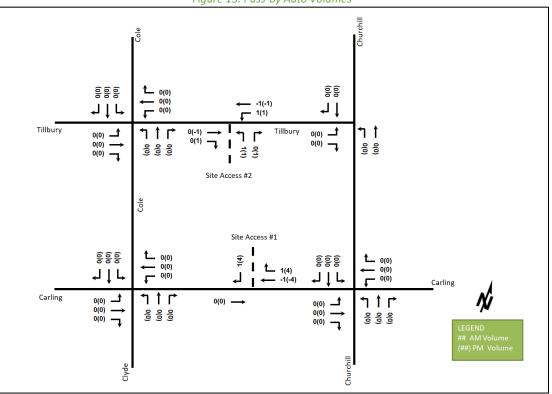

5 Exemption Review

Table 14 summarizes the exemptions for this TIA.

Table 14: Exemption Review				
Module	Element	Explanation	Exempt/Required	
Site Design and TDM				
Development Design	4.1.2 Circulation and Access	Only required for site plan and zoning by- law applications	Required	
Development Design	4.1.3 New Street Networks	Only required for plans of subdivision	Exempt	
Parking	4.2.1 Parking Supply	Only required for site plan and zoning by- law applications	Required	
Boundary Street Design		All applications	Required	
Transportation Demand Management	All Elements	Only required when the development generates more than 60 person-trips	Required	
Network Impact				
Background Network Travel Demand	All Elements	Only required when one or more other Network Impact Modules are triggered	Exempt	
Demand Rationalization		Only required when one or more other Network Impact Modules are triggered	Exempt	
Neighbourhood Traffic Calming	4.6.1 Adjacent Neighbourhoods	If the development meets all of the following criteria along the route(s) site generated traffic is expected to utilize	Exempt	



Module	Element	Explanation	Exempt/Required
		between an arterial road and the site's access:	
		 Access to Collector or Local; "Significant sensitive land use presence" exists, where there is at least two of the following adjacent to the subject street segment: School (within 250m walking distance); Park; Retirement / Older Adult Facility (i.e. long-term care and retirement homes); Licenced Child Care Centre; Community Centre; or 50%, or greater, of adjacent property along the route(s) is occupied by residential lands and a minimum of 10 occupied residential units are present on the route. Application is for Zoning By-Law Amendment or Draft Plan of Subdivision; At least 75 site-generated auto trips; Site Trip Infiltration is expected. Site traffic will increase peak hour vehicle volumes along the route by 50% or more. 	
Transit	4.7.1 Transit Route Capacity4.7.2 Transit Priority Requirements	Only required when the development generates more than 75 transit trips Only required when the development generates more than 75 auto trips	Exempt Exempt
Network Concept		Only required when proposed development generates more than 200 person-trips during the peak hour in excess of equivalent volume permitted by established zoning	Exempt
Intersection Design	4.4.1-2/4.9.1 Intersection Control	Only required when the development generates more than 75 auto trips	Exempt
	4.4.3/4.9.2 Intersection Design	Only required when the development generates more than 75 auto trips	Exempt



6 Development Design

6.1 Design for Sustainable Modes

The proposed development includes a mixed-use building with two accesses, a right-in/right-out access to Carling Avenue and a full movement access to Tillbury Avenue. A total of 374 bicycle parking spaces are proposed, including four exterior spaces, 148 spaces on the ground floor, and 222 underground spaces. Four surface bicycle parking spaces are located on the southwest side of the proposed building, closer to the commercial units. Hard surface connections are provided from the building entrances to the boundary streets of Carling Avenue and Tillbury Avenue. An existing 2.0-metre sidewalk along Carling Avenue will be adjusted, and a cycle track is proposed along the frontage of Carling Avenue. The walking distance from the proposed entrance to the nearby transit stops is approximately 205 metres.

The infrastructure TDM checklist is provided in Appendix F.

6.2 Circulation and Access

The access on Carling Avenue (Access #1) will operate as a right-in/right-out access, and the access on Tillbury Avenue (Access #2) will operate as a full movement access. Access #1 is 16.4 metres wide measured at the curb line, and it does not meet the private approach by-law maximum width requirements of 9.0 metres due to the larger radii required to support larger truck movements. Access #2 is 6.0 metres wide. The surface parking will be located in proximity to the Access #2 and the parking garage ramp will be oriented towards Access #2. Accesses will connect to both underground and surface parking. The garbage truck is expected to enter the site via the Access #1 and exit via the Access #2, with garbage collection occurring on the internal drive aisle.

The garbage truck and move-in truck turning movements can be accommodated on site. The turning templates are provided in Appendix G.

7 Parking

7.1 Parking Supply

The site plan proposes 203 vehicle parking spaces, including 152 residential vehicle parking, 36 visitor vehicle parking spaces, and 15 retail vehicle parking. Among these parking spaces, 15 retail vehicle parking spaces are located at grade, and all other parking spaces are located within the parking garage. A total of 374 bicycle parking spaces are proposed, including 370 residential bicycle parking and four retail bicycle parking. Among these bicycle parking spaces, four are located at grade, 198 are on the ground floor, and 50 are underground.

From the zoning by-law, the minimum vehicle parking provision for the site is 161 resident parking spaces, 36 visitor parking spaces and no parking requirements for the retail. The minimum bicycle parking provision for the residents is 185 spaces and for the retail is two spaces.

Although the proposed residential vehicle parking spaces are nine spaces less than the requirement, the proposed residential bicycle parking spaces are 185 spaces more than the requirement. The proposed residential vehicle parking is considered to be sufficient given the site is adjacent to the bus lanes along Carling Avenue. The proposed visitor vehicle parking meets the zoning by-law requirements, while the retail vehicle parking exceeds those requirements. The proposed bicycle parking for both the residential and retail exceed the zoning by-law requirements.



8 Boundary Street Design

Table 15 summarizes the MMLOS analysis for the boundary streets of Carling Avenue and Tillbury Avenue. A cycle track is expected to be along the frontage on Carling Avenue, and it will be considered in the future condition. The existing and future conditions for Tillbury Avenue will be the same and is considered in one row. The boundary street analysis for Carling Avenue is based on the land-use designation of "Arterial Main Street" and Tillbury Avenue is based on the land-use designation Area". The MMLOS worksheets have been provided in Appendix H.

Table 10. Boundary officer mini-boo minarysis								
Segment	Pedestrian LOS		Bicycle LOS		Transit LOS		Truck LOS	
	PLOS	Target	BLOS	Target	TLOS	Target	TrLOS	Target
Carling Avenue (Existing)	D	C	F	С	D	С	А	D
Carling Avenue (Future)	В	С	А	С	В	С	А	D
Tillbury Avenue (Existing/Future)	В	С	Α	D	N/A	N/A	N/A	N/A

Table 15: Boundary Street MMLOS Analysis

The pedestrian LOS targets will not be met along the segment of Carling Avenue for the existing condition, but they will be met in future conditions as the boulevard width will be increased.

The bicycle LOS target will not be met along the segment of Carling Avenue for the existing conditions. Once the cycle track is implemented, the bicycle LOS will improve from F to A.

The transit LOS target is not met along the segment of Carling Avenue for the existing condition, but it will be met in the future condition once the shared bus/bike lanes are implemented.

9 Transportation Demand Management

9.1 Context for TDM

The mode shares used within the TIA represent the unmodified district mode shares and represent a conservative assessment in the context of the future Carling Avenue bus lanes. Overall, the modal shares are likely to be achieved and supporting TDM measures should be provided to encourage shifts towards sustainable modes.

The subject site within a design priority area. The total bedroom count within the development is subject to the final unit breakdown and layout selections by purchasers. No age restrictions are noted.

9.2 Need and Opportunity

The subject site has been assumed to rely predominantly on auto travel and transit and those assumptions have been carried through the analysis. As the unmodified district mode shares have been applied, and as they are considered conservative for analysis purposes, the risks of failing to meet mode share targets are low.

9.3 TDM Program

The "suite of post occupancy TDM measures" has been summarized in the TDM checklists for both the residential and non-residential land uses. The checklist is provided in Appendix F. The key TDM measures recommended include:

- Display area walking, cycling, and transit maps with route schedules
- Contract with providers to install on-site bikeshare (or other micromobility alternatives) and carshare spaces
- Inclusion of a 1-year Presto card for first time new dwelling unit rental, with a set time frame for this offer (e.g. 6-months) from the initial opening of the site



- Unbundle parking cost from purchase or rental costs
- Provide a multimodal travel option information package to new residents

10 Access Intersection Design

10.1 Location and Design of Access

The accesses will be located approximately at the existing access on Carling Avenue and existing residential driveway on Tillbury Avenue. Access on Carling Avenue (Access #1) is 9.0 meters wide at the property line and 16.4 meters wide at the curb line. The width of Access #1 complies with the private approach by-law maximum width requirement of 9.0 meters at the property line; however, it does not comply at the curb line due to the larger radii required to accommodate larger truck movements. Access on Tillbury Avenue (Access #2) is 6.0 metres wide. The internal aisle through the surface parking is 6.7 metres wide. Access #1 will operate as a right-in/right-out access, and the Access #2 will operate as a full movement access. Both accesses meet the private approach by-law maximum number of private approaches permitted.

The TAC Geometric Design Guidelines throat length requirements for an apartment of this size on an arterial road is 40.0 metres, as measured from the end of the corner radii. Access #1 will have a throat length of 13.0 meters from the end of the corner radii to the commercial garbage room, a throat length of 17.0 meters from the end of the corner radii to the loading/move-in room, and 50.0 meters from the end of the corner radii to the surface parking. The throat length is provided for general traffic into the site, and only loading and garbage is within the measured throat length. The placement of the underground garage and surface parking reduce the possible conflicts in this area and the drive aisle provides two-way travel to be accommodated. Therefore, the proposed site configuration and throat length is considered supportable for Access #1. Access #2 will have a throat length of 18.5 metres, and no throat length requirement for access on a local road.

Section 25(1)(p) of the Private Approach By-law requires a 3.0 metres off-set between the end of the curb return and the property line. Access #1 has a 1.4-metre offset from the property line. Due to truck movements, the curb radius ends near the adjacent parcel's property line at 1655 Carling Avenue. It is noted that the adjacent parcel access is proposed to be located approximately 70 meters east of Access #1, providing sufficient separation. Therefore, it is recommended that this access be approved by the City.

Access #1 will comply with the City of Ottawa standard drawing SC36.1.

11 Summary of Improvements Indicated and Modifications Options

The following summarizes the analysis and results presented in this TIA report:

Proposed Site and Screening

- The proposed development concept consists of a mixed-use building including 370 residential units, 3,846 square feet retail space, 203 vehicle parking spaces, and 374 bicycle parking spaces
- The existing site includes approximately 2,000 sq. ft. of a single dwelling unit and a 24,772 sq. ft. commercial plaza with surface parking spaces
- The site proposed two accesses, one located at the existing Carling Avenue access and the other replacing the residential driveway on Tillbury Avenue
- Construction will occur in a single phase estimated to proceed after 2025, upon completion of a future site plan application

TIA Screening and Exemptions



- The TIA Screening form indicated a full TIA was required due to trip generation, location, and safety triggers
- The exemption review for the TIA did not require new street networks, background network travel demand, demand rationalization, neighbourhood traffic calming, transit review, network concept review, intersection control review or intersection design review

Existing Conditions

- Carling Avenue is an arterial road, Churchill Avenue is a major collector road, and Clyde Avenue, Cole Avenue, and Tillbury Avenue are local roads in the study area
- Sidewalks are provided along both sides of Carling Avenue, Churchill Avenue north of Carling Avenue, and a section of Cole Avenue, with sidewalks on a single side on various local road
- Cycletracks are provided along Churchill Avenue north of Carling Avenue with suggested bike routes through the communities to the north and south of Carling Avenue
- Carling Avenue is designated a spine route
- Within the study area, a total of three pedestrian collisions and five cyclist collisions are noted within the study area, including two pedestrian collisions and two cyclist collisions at Carling Avenue at Clyde Avenue/Cole Avenue, one pedestrian collision and one cyclist collision on Carling Avenue westbound between Clyde Avenue/Cole Avenue and Churchill Avenue, one cyclist collision on Churchill Avenue North between Tillbury Avenue and Carling Avenue, and one cyclist collision at Cole Avenue at Tillbury Avenue
- Within the study area, the intersection of Carling Avenue at Clyde Avenue/Cole Avenue and Carling Avenue at Churchill Avenue are noted to have experienced higher collisions than other intersections
- The pedestrian collision at Carling/Clyde involved a northbound vehicle turning right, and the other pedestrian collision involved a northbound vehicle turning left, and one cyclist collision involved a westbound right turning vehicle and westbound through bicycle. A protected intersection may reduce these collisions
- The detailed collision records for Carling Avenue at Clyde Avenue/Cole Avenue intersection outline that turning movement collisions are predominantly due to the eastbound and westbound left-turn movements interacting with the opposing westbound and eastbound through movements
- The eastbound and westbound left turns at the intersection of Carling Avenue and Clyde Avenue/Cole Avenue have been modified to fully protected left-turn movements, which may help reduce turning movement collisions
- At Carling Avenue at Churchill Avenue intersection, the collision rates have been decreasing since the peak of nine collisions in 2018, with only one being noted during 2022
- The collisions along the frontage do not appear to be related to the existing accesses, and may be a function of loading activities or stoppings on the curb side lane of Carling Avenue
- No further collision examination is required as part of this study

Planned Conditions

- Separated cycling facilities and/or bike lanes on Clyde Avenue from Carling Avenue to Laperriere Avenue and sidewalk along Tillbury Avenue from Cole Avenue to David Shentow Park in the active transportation projects lists will not be included in the report analysis because these projects have not been scheduled
- The construction and infrastructure projects identify transit priority along Carling Avenue and include a dedicated westbound bus lane across the frontage of the site, which will be included in the report analysis



- The City has identified the intersection of Carling Avenue at Churchill Avenue is to be improved to a protected intersection over the next 2-3 years
- The eastbound and westbound left-turns at the intersection of Clyde Avenue/Cole Avenue have recently been modified to fully protected left-turn movements

Development Generated Travel Demand

- The proposed development is forecasted to produce 160 two-way people trips during the AM peak hour and 171 two-way people trips during the PM peak hour
- Of the forecasted people trips, 40 two-way trips will be vehicle trips during the AM peak hour and 49 twoway trips will be vehicle trips during the PM peak hour
- Of the forecasted people trips, 68 two-way trips will be transit trips during the AM peak hour and 45 twoway trips will be transit trips during the PM peak hour
- Of the forecasted trips, 20% are anticipated to travel north, 35% to the south, 30% to the east, and 15% to the west

Development Design

- The site proposed two accesses, one located at the existing Carling Avenue access and the other replacing the residential driveway on Tillbury Avenue
- The accesses will operate as right-in/right-out along Carling Avenue and full movements on Tillbury Avenue, with surface parking located near Tillbury Avenue and the underground parking ramp oriented towards Tillbury Avenue
- Access #1 is 16.4 metres wide measured at the curb line due to the larger radii required to support larger truck movements, and Access #2 is 6.0 metres wide
- A total of 374 bicycle parking spaces are proposed, including four exterior spaces, 148 spaces on the ground floor, and 222 underground spaces
- Hard surface connections are provided from the building entrances to the boundary streets of Carling Avenue and Tillbury Avenue and surround the site
- An existing 2.0-metre sidewalk along Carling Avenue will be adjusted, and a cycle track is proposed the frontage on Carling Avenue
- The walking distance from the proposed entrance to the nearby transit stops is approximately 205 metres
- The garbage truck is expected to enter the site via the Access #1 and exit via the Access #2, with garbage collection occurring on the internal drive aisle
- The garbage truck and move-in truck turning movements can be accommodated on site

Parking

- The site plan proposes 203 vehicle parking spaces, including 152 residential vehicle parking, 36 visitor vehicle parking spaces, and 15 retail vehicle parking
- A total of 374 bicycle parking spaces are proposed, including 370 residential bicycle parking and four retail bicycle parking
- Although the proposed residential vehicle parking spaces are nine spaces less than the requirement, the proposed residential bicycle parking spaces are 185 spaces more than the requirement, and the proposed residential vehicle parking is considered to be sufficient given the site is adjacent to the bus lanes along Carling Avenue



- The proposed visitor vehicle parking meets the zoning by-law requirements, while the retail vehicle parking exceeds those requirements
- The proposed bicycle parking for both the residential and retail exceed the zoning by-law requirements

Boundary Street Design

- The pedestrian LOS target will not be met along the segment of Carling Avenue for the existing conditions, but it will be met in the future condition
- The bicycle LOS target will not be met along the segment of Carling Avenue for the existing conditions, but it will be met in the future condition
- The transit LOS target is not met along the segment of Carling Avenue for the existing condition, but it will be met in the future condition with shared bus/bike lane provided

TDM

- Supportive TDM measures to be included within the proposed development should include:
 - Display area walking, cycling, and transit maps with route schedules
 - Contract with providers to install on-site bikeshare (or other micromobility alternatives) and carshare spaces
 - Inclusion of a 1-year Presto card for first time new townhome purchase, with a set time frame for this offer (e.g. 6-months) from the initial opening of the site
 - Unbundle parking cost from purchase or rental costs
 - Provide a multimodal travel option information package to new residents

Access Intersection Design

- Access #1 is 9.0 meters wide at the property line and 16.4 meters wide at the curb line. While Access #1 meets the 9.0-meter width requirement at the property line, it exceeds this limit at the curb line because of the larger turning radius required to support larger truck movements
- Access #2 is 6.0 metres wide, and the internal aisle through the surface parking is 6.7 metres wide
- Both accesses meet the private approach by-law maximum number of private approaches permitted
- Access #1 will have a throat length of 50.0 meters from the end of the corner radii to the surface parking, 17.5 meters from the end of the corner radii to the loading/move-in room and 13.0 meters from the end of the corner radii to the commercial garbage room
- Although loading and garbage vehicles are included within the 50.0-meter throat length, the design of the underground garage and surface parking helps minimize conflicts in this area, and the drive aisle supports two-way traffic. Therefore, the throat length is considered suitable for Access #1
- Access #2 will have a throat length of 18.5 metres, and no throat length requirement for access on a local road
- Although Access #1 does not meet Section 25(1)(p) of the Private Approach By-law, the adjacent parcel access is proposed to be located approximately 70 meters east of Access #1, providing sufficient separation. Therefore, it is recommended that this access be approved by the City
- Access #1 will comply with the City of Ottawa standard drawing SC36.1



12 Conclusion

It is recommended that, from a transportation perspective, the proposed development applications proceed.

Prepared By:

Julhichan

Yu-Chu Chen Transportation Engineering-Intern

Reviewed By:



Andrew Harte, P.Eng. Senior Transportation Engineer



Appendix A

TIA Screening Form and PM Certification Form





City of Ottawa 2017 TIA Guidelines Step 1 - Screening Form

Date:	30-Jun-23
Project Number:	2023-083
	1657-1673 Carling Avenue and
Project Reference:	386 Tillbury Avenue

1.1 Description of Proposed Development		
Municipal Address	1657-1673 Carling Avenue, 386 Tillbury Avenue	
Description of Location	Approximatly 65 metres east of Carling Avenue a Clyde Avenue/Cole Avenue intersection	
Land Use Classification	Arterial Mainstreet (AM10) for the Carling Avenue parcels and Residential Fourth Density (R4UC) for the Tillbury Avenue parcel	
Development Size	25-storey mixed-use building	
Accesses	Access is proposed via Tillbury Avenue	
Phase of Development	Single	
Buildout Year	2025	
TIA Reguirement	Full TIA Required	

1.2 Trip Generation Trigger	
Land Use Type	Townhomes or apartments
Development Size	295 Units
Trip Generation Trigger	Yes

1.3 Location Triggers		
Does the development propose a new driveway to a boundary street that is		
designated as part of the City's Transit Priority, Rapid Transit or Spine	No	
Bicycle Networks?		
Is the development in a Design Priority Area (DPA) or Transit-oriented Development (TOD) zone?	Yes	
Location Trigger	Yes	

1.4. Safety Triggers		
Are posted speed limits on a boundary street 80 km/hr or greater?	No	
Are there any horizontal/vertical curvatures on a boundary street limits sight lines at a proposed driveway?	No	
Is the proposed driveway within the area of influence of an adjacent traffic signal or roundabout (i.e. within 300 m of intersection in rural conditions, or within 150 m of intersection in urban/ suburban conditions)?	No	
Is the proposed driveway within auxiliary lanes of an intersection?	No	
Does the proposed driveway make use of an existing median break that serves an existing site?	No	
Is there is a documented history of traffic operations or safety concerns on the boundary streets within 500 m of the development?	Yes	High collisions at the intersections of Carling Avenue at Clyde Avenue/Cole Avenue and Carling Avenue at Churchill Avenue
Does the development include a drive-thru facility?	No	
Safety Trigger	Yes	



TIA Plan Reports

On 14 June 2017, the Council of the City of Ottawa adopted new Transportation Impact Assessment (TIA) Guidelines. In adopting the guidelines, Council established a requirement for those preparing and delivering transportation impact assessments and reports to sign a letter of certification.

Individuals submitting TIA reports will be responsible for all aspects of development-related transportation assessment and reporting, and undertaking such work, in accordance and compliance with the City of Ottawa's Official Plan, the Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines.

By submitting the attached TIA report (and any associated documents) and signing this document, the individual acknowledges that s/he meets the four criteria listed below.

CERTIFICATION

- 1. I have reviewed and have a sound understanding of the objectives, needs and requirements of the City of Ottawa's Official Plan, Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines;
- 2. I have a sound knowledge of industry standard practice with respect to the preparation of transportation impact assessment reports, including multi modal level of service review;
- 3. I have substantial experience (more than 5 years) in undertaking and delivering transportation impact studies (analysis, reporting and geometric design) with strong background knowledge in transportation planning, engineering or traffic operations; and
- 4. I am either a licensed¹ or registered² professional in good standing, whose field of expertise [check $\sqrt{}$ appropriate field(s)] is either transportation engineering $\sqrt{}$ or transportation planning \Box .

^{1,2} License of registration body that oversees the profession is required to have a code of conduct and ethics guidelines that will ensure appropriate conduct and representation for transportation planning and/or transportation engineering works.

City Of Ottawa Infrastructure Services and Community Sustainability Planning and Growth Management 110 Laurier Avenue West, 4th fl. Ottawa, ON K1P 1J1 Tel. : 613-580-2424 Fax: 613-560-6006 Ville d'Ottawa Services d'infrastructure et Viabilité des collectivités Urbanisme et Gestion de la croissance 110, avenue Laurier Ouest Ottawa (Ontario) K1P 1J1 Tél.: 613-580-2424 Télécopieur: 613-560-6006 Dated at <u>Ottawa</u> this <u>20</u> day of <u>September</u>, 2018. (City)

Name:

Andrew Harte

(Please Print)

Professional Title:

Professional Engineer

Signature of Individual certifier that s/he meets the above four criteria

Office Contact Information (Please Print)

Address: 6 Plaza Court

City / Postal Code: Ottawa / K2H 7W1

Telephone / Extension: (613) 697-3797


E-Mail Address: Andrew.Harte@CGHTransportation.com





Turning Movement Counts



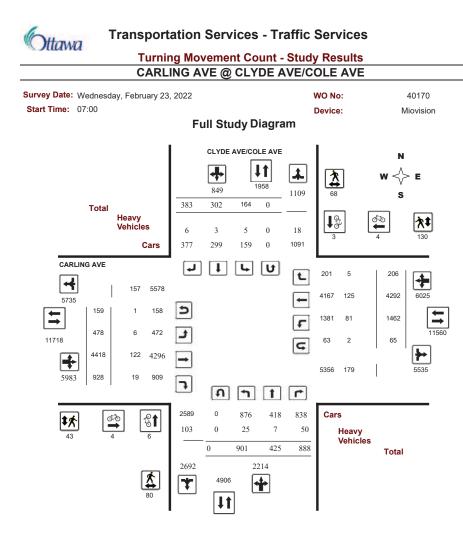



Transportation Services - Traffic Services

Turning Movement Count - Study Results


CARLING AVE @ CLYDE AVE/COLE AVE Survey Date: Wednesday, February 23, 2022 WO No: Start Time: 07:00 Device: Miovision **Full Study Peak Hour Diagram** CLYDE AVE/COLE AVE Ν [≵] w E * S Total Heavy ক∿ ₩ ☆‡ Vehicles Cars CARLING AVE U t 8 924 -ţ1 Full Study F t Peak Hour: G 15:45 16:45 ₽ + A Cars ₫ **\$** Heavy Vehicles Total * |

It


November 3, 2022

Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram CARLING AVE @ CLYDE AVE/COLE AVE

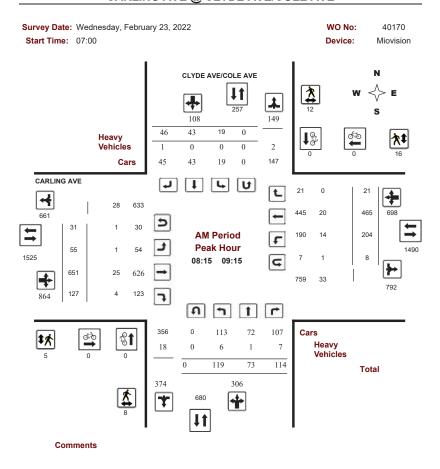

Transportation Services - Traffic Services
Turning Movement Count - Peak Hour Diagram
CARLING AVE @ CLYDE AVE/COLE AVE

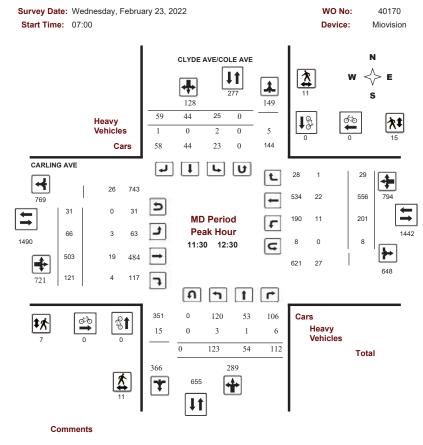

2022-Nov-03


Ottawa

2022-Nov-03



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram CARLING AVE @ CLYDE AVE/COLE AVE

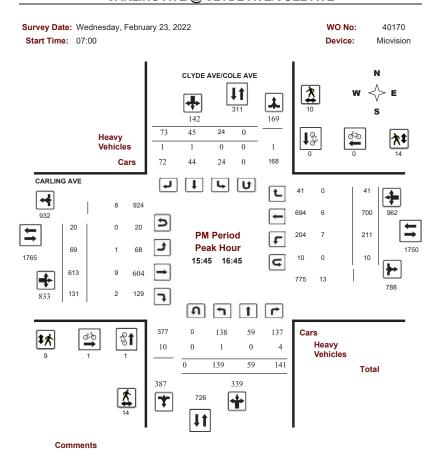

-	
0	
	tawa

Transportation Services - Traffic Services

Turning Movement Count - Study Results CARLING AVE @ CLYDE AVE/COLE AVE Survey Date: Wednesday, February 23, 2022 WO No: Start Time: 07:00 Device: Miovision Full Study Summary (8 HR Standard) Survey Date: Wednesday, February 23, **Total Observed U-Turns** AADT Factor Northbound: 0 Southbound: 0 1.00 Eastbound: Westbound: 65 CLYDE AVE/COLE AVE CARLING AVE Northbound Southbound Eastbound Westbound SB WB NB STR EB STR Grand LT ST Period LT ST RT LT ST RT RT LT ST RT TOT TOT TOT TOT тот TOT Total 07:00 08:00 08:00 09:00 09:00 10:00 11:30 12:30 12:30 13:30 15:00 16:00 16.00 17.00 17:00 18:00 Sub Total U Turns Total FQ 12Hr 1 39 Note: These values are calculated by multiplying the totals by the appropriate expansion factor AVG 12Hr Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor. 1 00 AVG 24Hr 774 1617 299 **1546** 1690 10894 7815 375 10971 21865 27443 Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. 1.31

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.

6	Ha	AV7		Tra	ans	por	tati	on	Ser	vic	es -	Tra	affic	: Se	rvio	ces				
M.	ЛИЛ	wu									Cou									
					С	AR	LING	3 A\	/E ()) CI	LYD	E A '	VE/	COL	ΕA	VE				
Surv	ey Dat	e: W	/edne	esday,	Febru	uary 2	3, 202	22						wo	No:			4	0170	
Star	t Time	: 07	7:00											Dev	ice:			Mi	ovisior	ı
							F	ull S	stud	v 1;	5 Mi	nute) Inc	rem	ent	s				
			CL	YDE A	VE/C	OLE	AVE						CAF	LING	AVE					
		N	orthbo	und		So	outhbou	nd			E	astboui	nd		W	estbour	nd			
Time	Period	LT	ST	RT	N TOT	LT	ST	RT	S TOT	STR TOT	LT	ST	RT	Е ТОТ	LT	ST	RT	W TOT	STR TOT	Gran Tota
07:00	07:15	8	6	20	34	0	6	2	8	42	5	105	15	128	28	67	3	100	228	270
07:15 07:30	07:30 07:45	14 9	3	4	21 31	4	2	7	13 12	34 43	9	123 147	22 15	158 172	34 34	63 82	5 0	102 118	260 290	294 333
07:45	07.45	9 18	8	11	37	5	4	10	21	43 58	9 12	147	15	1/2	46	88	0	134	314	333
00:80	08:15	27	9	10	46	2	5	11	18	64	15	145	29	191	53	106	2	161	352	416
08:15	08:30	31	11	18	60	3	10	11	24	84	18	175	34	237	52	112	3	171	408	492
08:30	08:45	33	24	31	88	8	11	17	36	124	12	180	34	233	38	111	6	157	390	514
08:45	09:00	32	22	28	82	4	13	10	27 21	109	13 12	163	34	216	62	132	7	202	418	527
09:00 09:15	09:15 09:30	23 23	16 4	37 28	76 55	4	9 6	8 15	21	97 77	12 21	133 150	25 25	178 198	52 52	110 97	5	168 157	346 355	443 432
09:30	09:45	23	2	25	48	4	9	7	20	68	18	133	23	177	35	102	5	143	320	388
09:45	10:00	13	8	32	53	3	3	8	14	67	10	113	22	150	44	101	7	153	303	370
11:30	11:45	25	14	25	64	6	8	12	26	90	20	126	28	180	66	130	5	203	383	473
11:45	12:00	26	20	33	79	3	11	23	37	116	14	136	26	185	48	150	6	205	390	506
12:00 12:15	12:15 12:30	31 41	10 10	31 23	72 74	14 2	11 14	12 12	37 28	109 102	18 14	123 118	36 31	183 173	43 44	153 123	13 5	210 176	393 349	502 451
12:15	12:30	35	9	31	74	2	14	12	31	102	24	110	26	162	44	123	4	202	364	451
12:45	13:00	32	16	25	73	7	12	7	26	99	18	161	32	216	56	127	7	193	409	508
13:00	13:15	30	17	38	85	9	14	13	36	121	14	95	28	141	40	141	5	188	329	450
13:15	13:30	27	6	36	69	4	8	7	19	88	12	137	28	182	46	132	3	185	367	455
15:00	15:15	35	22	31	88	11	7	4	22	110	11	117	23	154	46	164	9	220	374	484
15:15 15:30	15:30 15:45	41 25	16 28	50 28	107 81	5	20 3	12 12	37 19	144 100	9 18	179 154	49 28	240 202	41 42	167 179	5	215 225	455 427	599 527
15:45	16:00	30	12	32	74	4 9	10	12	31	100	10	169	39	202	42 51	179	8	225	427	571
16:00	16:15	40	20	46	106	7	9	24	40	146	16	140	30	192	51	180	5	238	430	576
16:15	16:30	32	7	32	71	4	15	20	39	110	21	159	35	219	55	173	11	243	462	572
16:30	16:45	37	20	31	88	4	11	17	32	120	15	145	27	196	54	168	17	241	437	557
16:45	17:00	33	12	23	68	7	12	13	32	100	18	129	30	182	35	179	9	224	406	506
17:00 17:15	17:15 17:30	38 38	26 8	33 25	97 71	3	10 13	13 18	26 37	123 108	16 23	150 127	42 31	210 193	45 49	156 178	10 11	219 238	429 431	552 539
17:15	17:30	38 26	22	33	81	0 11	8	10	37	108	23	127	34	193	49 36	1/8	10	238	394	539
17:45	18:00	27	12	21	60	3	12	7	22	82	11	103	32	149	39	128	9	180	329	411
Total:		901	425	888	2214	164	302	383	849	3063	478	4418	928	5983	1462	4292	206	6025	12008	15,07

Note: U-Turns are included in Totals.



Transportation Services - Traffic Services

Turning Movement Count - Study Results CARLING AVE @ CLYDE AVE/COLE AVE

- Start Time		y, February 23,					
Start Time	J. 07.00				Device:	N	liovision
			Full Study	Cyclist Vo			
	CLI	DE AVE/COLE	AVE		CARLING AVE		
Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	Grand Total
07:00 07:15	0	0	0	0	1	1	1
07:15 07:30	0	0	0	0	0	0	0
07:30 07:45	0	0	0	0	0	0	0
07:45 08:00	1	0	1	1	0	1	2
08:00 08:15	0	1	1	0	0	0	1
08:15 08:30	0	0	0	0	0	0	0
08:30 08:45	0	0	0	0	0	0	0
08:45 09:00	0	0	0	0	0	0	0
09:00 09:15	0	0	0	0	0	0	0
09:15 09:30	0	0	0	0	0	0	0
09:30 09:45	0	0	0	0	0	0	0
09:45 10:00	2	0	2	0	1	1	3
11:30 11:45	0	0	0	0	0	0	0
11:45 12:00	0	0	0	0	0	0	0
12:00 12:15	0	0	0	0	0	0	0
12:15 12:30	0	0	0	0	0	0	0
12:30 12:45	0	0	0	0	0	0	0
12:45 13:00	0	0	0	1	1	2	2
13:00 13:15	0	0	0	0	0	0	0
13:15 13:30	0	0	0	0	0	0	0
15:00 15:15	0	0	0	0	0	0	0
15:15 15:30	0	0	0	0	0	0	0
15:30 15:45	0	0	0	0	0	0	0
15:45 16:00	1	0	1	0	0	0	1
16:00 16:15	0	0	0	0	0	0	0
16:15 16:30	0	0	0	1	0	1	1
16:30 16:45	0	0	0	0	0	0	0
16:45 17:00	1	0	1	0	0	0	1
17:00 17:15	0	0	0	0	0	0	0
17:15 17:30	1	0	1	1	0	1	2
17:30 17:45	0	0	0	0	0	0	0
17:45 18:00	0	2	2	0	1	1	3
Total	6	3	9	4	4	8	17

November 3, 2022

Start Time: Original Start String Product of the string of the strin	40170 Miovision	E	E/COLE AV					
Start Time: 07:00 Device: Miovision Start Time: 07:00 Device: Miovision CLYDE AVE/COLE AVE CARLING AVE Time Period (B Approach (C or W Crossing) Total B Approach (N or S Crossing) Total Grant 07:00 0 3 2 2 4 07:15 1 1 2 1 3 4 07:15 1 1 2 1 3 4 07:15 1 1 2 1 3 4 07:15 1 1 2 1 3 4 07:15 1 1 2 1 3 4 08:00 1 1 2 1 5 6 09:00 09:15 2 0 2 1 2 3 09:00 09:15 2 0 2 1 2 3 <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th>								
Time Period NB Approach (c or W Crossing) SB Approach (c or W Crossing) Total EB Approach (N or S Crossing) Total CARLING AVE 07:00 07:15 1 1 2 1 3 4 07:00 07:15 1 1 2 1 3 4 07:00 07:15 1 1 2 1 3 4 07:00 07:45 1 1 2 1 3 4 08:00 08:15 1 2 3 0 4 4 08:00 08:15 1 2 6 1 5 6 09:00 09:15 2 0 2 1 0 1 09:30 0 0 1 1 1 2 3 09:45 0:00 1 1 1 1 2 3 09:30 0 0 0 1 1 1 2 <	Miovision		WO NO:		22	y, February 23, 20	Wednesday	Survey Date:
DI Study Pedestrian Volume CALINE AVECOLE AVE CARLING AVE CARLING AVE Time Perid NB Approach (For W Crossing) SB Approach (S or W Crossing) Total EB Approach (N or S Crossing) Total C and (N or S Crossing) Total Grad 07.00 0 3 2 2 4 6 6 6 6 6 6 7	MIGNISION		Device:				07:00	Start Time:
CLYDE AVE/COLE AVE CARLING AVE Time Period NB Approach (E or W Crossing) SB Approach (E or W Crossing) Total EB Approach (N or S Crossing) No al Gran 07:00 0 3 2 4 6 7 7 9 6				v Dodootrion		-		
Time Period NBApproach (E or W Crossing) SB Approach (N or S Crossing) WB Approach (N or S Crossing) Total Gran 07:10 07:15 1 1 2 1 3 4 07:10 07:15 1 1 2 1 3 4 07:10 07:15 1 1 2 1 2 3 07:15 1 1 2 1 3 4 4 07:15 1 1 2 1 3 4 4 08:15 08:15 1 2 6 1 5 6 08:15 08:30 4 2 6 1 4 5 09:00 0 5 5 1 4 5 9 09:00 0 0 1 1 1 2 3 09:00 0 1 1 1 1 2 3 09:00 <				y reuestitali				
Time Pend (E or W Crossing) Total (N or S Crossing) Nor S Crossing) Total (N or S Crossing) Total 2 4 07:15 1 1 2 1 3 4 2 3 3 2 2 4 3 4 3 3 3 2 2 4 3			CARLING AVE		AVE	LYDE AVE/COLE	C	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Grand Tota	Total			Total			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	6	4	3	1	2	1	1	7:00 07:15
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	7	4	2	2	3	3	0	7:15 07:30
08:00 08:15 1 2 3 0 4 4 08:15 1 2 6 1 5 6 08:30 08:45 2 5 7 2 7 9 08:45 09:00 0 5 5 1 4 5 09:00 09:15 2 0 2 1 0 1 09:15 2 0 2 1 0 1 1 09:30 09:45 0:00 0 1 1 1 2 3 09:45 10:00 1 1 1 1 2 3 09:45 10:00 1 1 1 1 2 3 11:45 12:00 2 2 4 0 4 4 12:00 12:15 1 1 2 4 5 9 12:16 12:00 2	5	3	2	1	2	1	1	7:30 07:45
D8:15 08:30 4 2 6 1 5 6 D8:30 08:45 2 5 7 2 7 9 D8:30 08:45 2 5 7 2 7 9 D8:45 09:00 0 5 5 1 4 5 D9:00 09:15 2 0 2 1 0 1 D9:15 0 0 0 1 0 1 D9:15 0 0 1 0 1 D9:15 0 0 1 0 1 D9:15 0 0 1 1 2 3 D9:45 10 0 1 1 1 2 D9:45 10:0 0 1 1 1 2 D9:45 10:0 0 1 1 1 1 D9:45 10:0 2 3 5 0 1 1 D1:15 1 1 1 <td< td=""><td>6</td><td>4</td><td>3</td><td>1</td><td>2</td><td>1</td><td>1</td><td>7:45 08:00</td></td<>	6	4	3	1	2	1	1	7:45 08:00
0330 0345 2 5 7 2 7 9 03845 $09:00$ 0 5 5 1 4 5 $09:00$ $09:15$ 2 0 2 1 0 1 $09:30$ 00 0 0 1 0 1 $09:30$ 00 0 0 1 0 1 $09:30$ $09:45$ 2 0 2 1 2 3 $09:45$ 2 0 2 1 2 3 $11:30$ $11:45$ 5 6 11 3 5 8 $11:45$ $12:00$ 2 2 4 0 4 4 $12:00$ $12:15$ 1 1 2 4 5 9 $12:15$ 1 1 2 4 5 9 $12:15$ 1 1 2 4 1 4 5 $13:00$ 3 2 5 0 1 1 $12:45$ $12:00$ 2 2 4 1 4 5 $13:00$ 3 1 4 1 4 5 $15:00$ 5 1 6 1 15 16 $15:15$ 10 5 8 3 2 5 $16:00$ 3 1 4 1 4 5 $16:50$ 7 2 9 4 8 12 $16:15$ 1 2	7	-		-	-			
03.45 09.00 0 5 5 1 4 5 09.00 09.15 2 0 2 1 0 1 09.15 2 0 2 1 0 1 09.15 2 0 2 1 2 3 09.30 0.45 2 0 2 1 2 3 09.45 10.00 0 1 1 1 2 3 09.45 10.00 0 1 1 1 2 3 11.45 5 6 11 3 5 8 11.45 5 6 11 3 5 8 11.45 5 6 11 3 4 12.00 12.45 2 6 8 1 3 12.45 2 6 8 1 3 4 12.45 2 6 8 1 3 4 12.45 2 6 8 1 3 4 12.45 2 6 8 1 3 4 12.45 2 2 4 1 4 5 13.00 3 1 4 1 4 5 15.15 10 5 15 2 21 23 15.15 10 5 15 16 1 12 15.45 2 0 2 2 10 12 15.4	12	-						
3900 9915 2 0 2 1 0 1 3915 9930 0 0 0 1 0 1 3930 9945 2 0 2 1 2 3 3930 9945 1000 0 1 1 1 2 3 3945 1000 0 1 1 1 1 2 3 1145 5 6 111 3 5 8 1145 1200 2 2 4 0 4 4 1200 1215 1 1 2 4 5 9 1215 1200 2 2 4 0 4 4 1200 1245 2 6 8 1 3 4 1230 1245 2 6 8 1 3 4 1245 2 6 8 1 3 4 1300 3 1 4 1 4 5 1315 1330 3 1 4 1 4 5 1515 10 5 15 2 21 23 1515 1530 5 1 6 1 15 1530 55 2 0 2 2 10 12 1545 2 0 2 2 10 12 1545 1 2 3 1 0 1 <td>16</td> <td>-</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	16	-						
99:15 $09:30$ 0 0 0 1 0 1 $99:30$ $09:45$ 2 0 2 1 2 3 $99:45$ $10:00$ 0 1 1 1 1 2 3 $99:45$ $10:00$ 0 1 1 1 1 2 3 $19:45$ $10:00$ 0 1 1 1 1 2 3 $11:45$ 5 6 11 3 5 8 $11:45$ 5 6 11 3 5 9 $12:15$ 1 1 2 4 5 9 $12:15$ 1 1 2 4 5 9 $12:15$ 1 1 2 4 5 9 $12:15$ 1 1 2 4 1 4 5 $12:30$ $12:45$ 2 6 8 1 3 4 $12:30$ $12:45$ 2 2 4 1 4 5 $13:00$ 3 1 4 1 4 5 $13:00$ 3 1 4 1 4 5 $15:00$ 5 1 6 1 15 16 $15:30$ 5 1 6 1 15 16 $15:30$ 5 1 4 1 4 5 $16:30$ 3 5 8 3 2 5 $16:30$ 1 <	10	-			-		-	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	3							
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	1				-		-	
11:3011:45561135811:4512:0022404412:0012:1511245912:1512:3032501112:3012:4526813412:4513:0023505513:1613:0023505513:1513:0031414515:15105152212315:1615:5105152212315:1616:55161151615:3015:42022101215:4516:0031414516:5016:15729481216:5116:0031410116:45123101116:45123101116:45120201117:4031432517:1517:3020201117:3017:45213123	5	-				-		
11:4512:0022404412:0012:15111245912:15111245912:1511245912:1511245912:15112501112:3012:4526813412:24513:0023505513:0013:1522414515:0015:15105152212315:1515:305161151615:30141451615:305161151615:3051414516:001414516:0035832516:3035832516:3012310117:0032521317:017:45213123	19				-		-	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	8	-	-	-		-	-	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	11	-						
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	6	-				-	-	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	12				-		-	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	10				-			
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	9	-			-			
15:15 15:30 5 1 6 1 15 16 15:30 15:45 2 0 2 2 10 12 15:45 16:00 3 1 4 1 4 5 16:00 16:15 7 2 9 4 8 12 16:15 16:30 3 5 8 3 2 5 16:30 1 2 3 1 0 1 16:45 1 2 3 1 0 1 16:45 1 2 3 1 0 1 17:00 3 2 5 2 1 3 17:00 1 4 3 2 5 17:15 17:30 2 0 2 0 1 17:30 17:45 2 1 3 1 2 3	9	-	4	1		1	3	3:15 13:30
15:30 15:45 2 0 2 2 10 12 15:45 16:00 3 1 4 1 4 5 16:00 16:15 7 2 9 4 8 12 16:01 16:15 7 2 9 4 8 12 16:15 16:30 3 5 8 3 2 5 16:30 16:45 1 2 3 1 0 1 16:45 1 2 3 1 0 1 1 16:45 1 2 3 1 0 1 1 17:00 3 2 5 2 1 3 1 2 5 17:00 1 4 3 2 5 5 1 1 1 17:30 17:45 2 1 3 1 2 3 3	38	23	21	2	15	5	10	5:00 15:15
15:45 16:00 3 1 4 1 4 5 16:00 16:15 7 2 9 4 8 12 16:15 16:30 3 5 8 3 2 5 16:30 16:45 1 2 3 1 0 1 16:45 17:00 3 2 5 2 1 3 17:00 17:15 3 1 4 3 2 5 17:00 1 4 3 2 5 1 17:00 1 2 0 2 0 1 1 17:30 17:45 2 1 3 1 2 3	22	16	15	1	6	1	5	5:15 15:30
16:00 16:15 7 2 9 4 8 12 16:15 16:30 3 5 8 3 2 5 16:30 1 2 3 1 0 1 16:45 1 2 3 1 0 1 16:45 1 2 5 2 1 3 16:45 1 2 5 2 1 3 16:45 1 2 5 2 1 3 17:00 7:15 3 1 4 3 2 5 17:15 17:30 2 0 2 0 1 1 17:30 17:45 2 1 3 1 2 3	14	12	10	2	2	0	2	5:30 15:45
16:15 16:30 3 5 8 3 2 5 16:30 16:45 1 2 3 1 0 1 16:45 1 2 3 1 0 1 16:45 77:00 3 2 5 2 1 3 17:00 77:15 3 1 4 3 2 5 17:15 17:30 2 0 2 0 1 1 17:30 17:45 2 1 3 1 2 3	9	5	4	1	4	1	3	5:45 16:00
16:30 16:45 1 2 3 1 0 1 16:45 1 2 3 1 0 1 16:45 17:00 3 2 5 2 1 3 17:00 17:15 3 1 4 3 2 5 17:15 17:30 2 0 2 0 1 1 17:30 17:45 2 1 3 1 2 3	21	12	8	4	9	2	7	6:00 16:15
16:45 17:00 3 2 5 2 1 3 17:00 17:15 3 1 4 3 2 5 17:15 17:30 2 0 2 0 1 1 17:00 17:45 2 1 3 1 2 3	13	5	2	3	8	5	3	6:15 16:30
17:00 17:15 3 1 4 3 2 5 17:15 17:30 2 0 2 0 1 1 17:30 17:45 2 1 3 1 2 3	4	1	0	1	3	2	1	6:30 16:45
T7:15 T7:30 2 0 2 0 1 1 17:30 17:45 2 1 3 1 2 3	8	3	1	2	5	2	3	6:45 17:00
17:30 17:45 2 1 3 1 2 3	9	5	2	3	4	1	3	7:00 17:15
	3	1	1	0	2	0	2	7:15 17:30
	6	-			-			
1/145 16:00 5 4 9 0 0 0	9	0	0	0	9	4	5	7:45 18:00



Transportation Services - Traffic Services

Turning Movement Count - Study Results CARLING AVE @ CLYDE AVE/COLE AVE

Survey Da	ite: W	/edne	esday,	Febru	ary 2	3, 202	22						wo	No:			4	0170	
Start Tim	e: 0 ⁻	7:00											Dev	ice:			Mie	ovisior	ı
						- F	ull S	Stud	y He	avv	Veł	nicle	s						
		CL	YDE A	VE/C	OLE /								LING	AVE					
	N	orthbo	und		Sc	outhbou	ind			F	astbour	hd		W	estbour	hd			
Time Period		ST	RT	N	LT	ST	RT	S	STR	LT	ST	RT	E	LT	ST	RT	w	STR	Grand
07:00 07:15	LT	0	4	тот 4	0	0	0	TOT 0	TOT 4	0	0	0	TOT 5	3	2	0	тот 9	TOT 14	Total 9
	-	0	1	4 9	0	0	0	1	4	0	2	0	5 13	2	3	0	9 13	26	9 18
07:15 07:30 07:30 07:45		1	2	9		0	1	3	10	0	7	<u> </u>	15	2	2	0	13	33	22
	-			_	0	0	0			0	6 4	1	_	3	3	0			
07:45 08:00	-	1	1	7	0		-	1	8 7	-		0	8		2	0	12 12	20 23	14 15
08:00 08:15	-		1	-	-	0	0		10	1	6	-	11	3	-				
08:15 08:30	-	0	3	10	0	0	0	0		0	7	1	13	5	4	0	21	34	22
08:30 08:45	-	1	3	8	0	0	0	2	10	1	3	0	10	2	4	0	12	22	16
08:45 09:00	-	0	1	8	0	0	1	1	9	0	6	1	17	3	6	0	16	33	21
09:00 09:15		0	-	6	0	0	0	-	6 14	-	9	2	19		6	0	19 18	38 28	22 21
09:15 09:30	-		7	13	-	0	1	1		0	3	1	10	4	4	-			
9:30 09:45		0	3	13	0	0	0	2	15	0	6	2	17	5 2	6	2	22	39	27
09:45 10:00	-		3	5	0			2	7	-	3		8	_			13	21	14
11:30 11:45	-	0	1	7	0	0	0	1	8	1	3	3	12	2	4	0	10	22	15
11:45 12:00		1	0	2	0	0	0	2	4	1	8	1	15	0	5	0	13	28	16
12:00 12:15		0	3	8	1	0	0	3	11	1	2	0	9	3	4	1	14	23	17
12:15 12:30	-	0	_	8	1	0	1	2	10	0	6	0	16	6	9	0	24	40	25
12:30 12:45	-	0	3	10	0	0	0	0	10	0	4	2	20	2	11	0	20	40	25
12:45 13:00	-	0	1	5	0	0	0	0	5	0	1	0	7	4	6	0	12	19	12
13:00 13:15	-	0	1	5	0	0	0	1	6	0	4	0	10	3	5	1	14	24	15
13:15 13:30	-	0	1	4	1	0	0	1	5	0	4	1	9	2	4	0	12 10	21 16	13
15:00 15:15	-		_				-	-		-	-	-	-						11
15:15 15:30	-	0	0	2	0	0	0	0	2	0	3	0	7	2	4	0	9	16	9
15:30 15:45	-	0	3	5	0	0	0	0	5	0	3	0	6	2	3	0	11	17	11
15:45 16:00	-	0	0	4	0	1	0	2	6	1	3	1	6	2	1	0	6 7	12	9
16:00 16:15	-	0	2	5	0	0	1	1	6	0	2	1	5	2	1	0	-	12	9
16:15 16:30	-	0	1	4	0	0	0	0	4	0	-	0	6		3	0	8	14	9
16:30 16:45	-	0	1	2	0	0	0	0	2	0	2	0	3	1	1	0	5	8	5
16:45 17:00	-	1	1	3	0	1	0	2	5	0	1	0	5	0	4	0	8	13	9
17:00 17:15		0	0	3	0	0	0	0	3	0	3	1	6	2	2	0	7	13	8
17:15 17:30	-	0	0	0	0	0	0	0	0	0	3	0	4	0	1	0	4	8	4
17:30 17:45	-	0	1	4	1	0	0	1	5	0	2	0	2	3	0	0	7	9	7
17:45 18:00	-	0	0	1	1	1	0	2	3	0	2	0	5	0	3	0	6	11	7
Total: None	25	7	50	185	5	3	6	32	217	6	122	19	305	81	125	5	392	697	457

November 3, 2022

6	0110	Trans	portation	Services -	Traffic Se	ervices	
	awa	1	urning Mov	ement Cou	nt - Study I	Results	
			ARLING AV				
Survey D	Date: Wedne	esday, Febr	uary 23, 2022		wo) No:	40170
Start Ti	me: 07:00				De	vice:	Miovision
•••••	01.00		E O	4			MIOVISION
				tudy 15 Mir			
			CLYDE AVE/C	OLE AVE	CAI	RLING AVE	
	Time	Period	Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
	07:00	07:15	0	0	3	2	5
	07:15	07:30	0	0	4	0	4
	07:30	07:45	0	0	1	2	3
	07:45	08:00	0	0	6	0	6
	08:00	08:15	0	0	2	0	2
	08:15	08:30	0	0	10	4	14
	08:30	08:45	0	0	7	2	9
	08:45	09:00	0	0	6	1	7
	09:00	09:15	0	0	8	1	9
	09:15	09:30	0	0	2	1	3
	09:30	09:45	0	0	3	1	4
	09:45	10:00	0	0	5	1	6
	11:30	11:45	0	0	6	2	8
	11:45	12:00	0	0	9	1	10
	12:00	12:15	0	0	6	1	7
	12:15	12:30	0	0	10	4	14
	12:30	12:45	0	0	2	2	4
	12:45	13:00	0	0	5	3	8
	13:00	13:15	0	0	4	2	6
	13:15	13:30	0	0	5	4	9
	15:00	15:15	0	0	3	1	4
	15:15	15:30	0	0	3	2	5
	15:30	15:45	0	0		0	2
	15:45	16:00	0	0	1		-
	16:00	16:15	0	0	6	2 4	8
	16:15	16:30	0	0	4 9		8
	16:30 16:45	16:45 17:00	0	0	5	2	11 6
	16:45	17:00	0	0	2	8	10
	17:00	17:15	0	0	12	0	10
	17:15	17:30	0	0	5	5	12
	17:30	17:45	0	0	3	5	7
				0	159		
	10	otal	0	U	139	65	224


Transportation Services - Traffic Services Turning Movement Count - Full Study Peak Hour Diagram CARLING AVE @ CHURCHILL AVE

Survey Date: Tuesday, April 25, 2 Start Time: 07:00	2017	WO No:36955Device:Miovision
Total Heavy Vehicles Cars	CHURCHILL AVE Image: 610 Image: 936 326 243 31 336 0 14 1 10 0 26 229 30 326 0 300	$ \begin{array}{cccc} \overbrace{16}^{\bullet} & & \bigvee & \bigvee \\ \overbrace{16}^{\bullet} & & & \swarrow \\ \overbrace{0}^{\bullet} & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline & & & & & & & \\ \hline \end{array} $
CARLING AVE 40 830 870 40 830 40 830 6 0 6 2493 167 11 156 2493 1352 32 132 1623 98 1 97	↓ ↓ ↓ ↓ ♪ AM Period ↓ ♪ Peak Hour: ↓ 08:00 09:00 ↓ ↓ ↓ ↓ ↓	140 14 154 585 25 610 83 2 21 0 1677 43
	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Cars Heavy Vehicles Total
Comments		



Turning Movement Count - Full Study Peak Hour Diagram

CARLING AVE @ CHURCHILL AVE

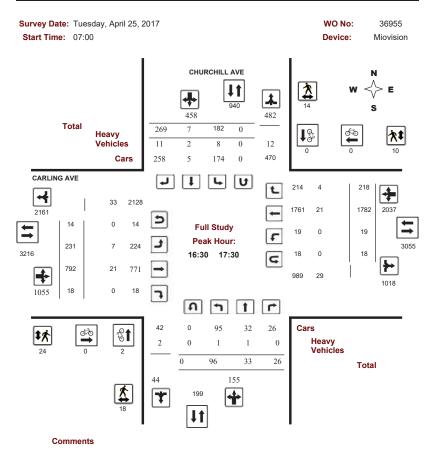




Survey Date: Tuesday, April 25, 2017 WO No: 36955 Start Time: 07:00 Device: Miovision CHURCHILL AVE Ν <} E **I**t w ♣ * 827 30 s 444 383 Total 202 228 14 0 13 ক্⊅ • Heavy Vehicles 11 0 15 10 0 22 191 368 Cars 218 14 0 CARLING AVE F Ŧ 4 U 186 9 t 195 + 4 40 1068 809 1077 783 26 + 1108 5 ţ 14 0 14 **MD** Period ţţ 33 2 35 F Peak Hour: t 170 6 164 2028 2016 38 11:45 12:45 G 38 0 ₩ 686 35 -651 + 904 47 951 7 38 1 37 908 £ 1 1 1 84 0 53 18 24 Cars ₫ 81 **\$** 4 0 Heavy 3 0 1 Vehicles 13 Ω 57 18 25 0 Total 87 100 \$ + * 187 23 **I**t Comments



Turning Movement Count - Full Study Peak Hour Diagram


CARLING AVE @ CHURCHILL AVE

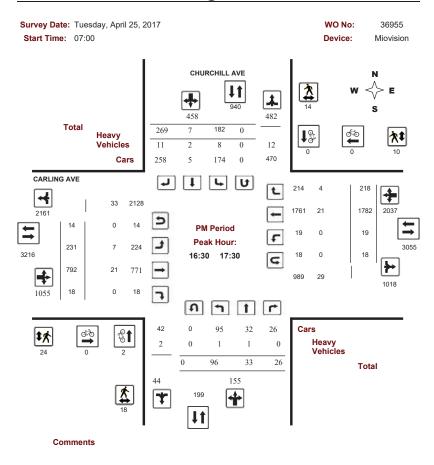



Transportation Services - Traffic Services Turning Movement Count - Full Study Diagram

CARLING AVE @ CHURCHILL AVE

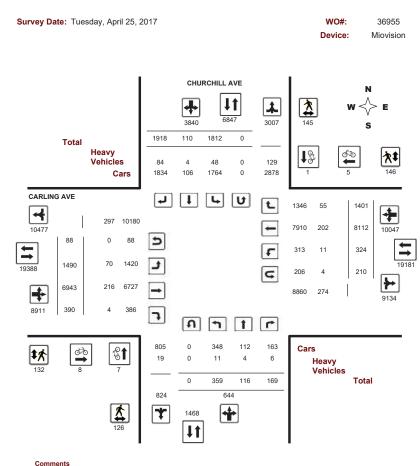

2019-Sep-04

Ittawa



Transportation Services - Traffic Services

Turning Movement Count - Full Study Summary Report

CARLING AVE @ CHURCHILL AVE

Survey Da	ate: 1	Fuesda	ay, Ap	oril 25,	2017				Total (Obser	ved U	Turn	5				AAD	T Fact	or
								Northbou	0			hbound	. 0				.90		
								Eastbou	nd: 8	8	Wes	tbound	210)					
								F	ull St	udy									
_			-	URCH	ILL AV				_			-	ARLIN	G AV					
	Ν	lorthbo	ound		S	Southb	ound				Eastbo	ound			Westb	ound			
Period	LT	ST	RT	NB TOT	LT	ST	RT	SB TOT	STR TOT	LT	ST	RT	EB TOT	LT	ST	RT	WB TOT	STR TOT	Grano Tota
07:00 08:00	14	6	9	29	252	11	180	443	472	144	1213	76	1433	55	416	118	589	2022	2494
08:00 09:00	11	5	11	27	336	31	243	610	637	167	1352	98	1617	85	610	154	849	2466	3103
09:00 10:00	24	5	25	54	224	19	212	455	509	171	790	77	1038	47	618	151	816	1854	2363
11:30 12:30	54	16	23	93	204	10	237	451	544	164	637	34	835	35	823	188	1046	1881	2425
12:30 13:30	46	11	30	87	188	13	241	442	529	192	749	51	992	45	713	185	943	1935	2464
15:00 16:00	38	18	21	77	220	12	259	491	568	203	709	22	934	24	1403	174	1601	2535	3103
16:00 17:00	87	24	31	142	175	11	276	462	604	239	740	17	996	22	1762	208	1992	2988	3592
17:00 18:00	85	31	19	135	213	3	270	486	621	210	753	15	978	11	1767	223	2001	2979	3600
Sub Total	359	116	169	644	1812	110	1918	3840	4484	1490	6943	390	8823	324	8112	1401	9837	18660	23144
U Turns				0				0	0				88				210	298	298
Total	359	116	169	644	1812	110	1918	3840	4484	1490	6943	390	8911	324	8112	1401	10047	18958	23442
EQ 12Hr	499	161	235	895	2519	153	2666	5338	6233	2071	9651	542	12386	450	11276	1947	13965	26351	32584
Note: These v	alues ar	e calcul	lated by	y multipl	ying the	totals b	by the a	ppropriat	e expans	sion fac	tor.		1	1.39					
AVG 12Hr	449	145	211	806	2267	138	2399	4804	5610	1864	8686	488	11148	405	10148	1753	12569	23717	29327
Note: These v	olumes	are calo	culated	by mult	plying th	ne Equi	valent 1	2 hr. tota	Is by the	AADT	factor.			.90					
AVG 24Hr	588	190	277	1055	2970	180	3143	6293	7348	2442	11378	639	14603	531	13294	2296	16465	31068	38416

Comments:

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. 1.31



Work Order

36955

Transportation Services - Traffic Services W.O. 36955

Turning Movement Count - 15 Minute Summary Report

CARLING AVE @ CHURCHILL AVE

Sur	vey D	ate:		Tues	sday, <i>I</i>	April 2	5, 201	17		٦	[otal	Obser	ved I	U-Turr	IS					
										orthbour	0			uthbour	. `	-				
				.					E	astboun	id: 8	8		estboun	-	210				
					CHIL	LAVE					_		CARL	ING A						
		N	orthbo	und	N	Sou	uthbour	nd	s	OTD	Eas	tbound		Е	We	stboun	d	w	STR	C
Time F	Period	LT	ST	RT	TOT	LT	ST	RT	тот	STR TOT	LT	ST	RT	тот	LT	ST	RT	тот	TOT	Grano Total
07:00	07:15	3	2	2	7	48	2	36	86	93	23	227	16	267	14	81	25	123	390	483
07:15	07:30	1	0	1	2	43	1	40	84	86	26	295	14	337	12	94	32	140	477	563
07:30	07:45	6	1	3	10	76	4	54	134	144	39	328	15	383	15	99	25	148	531	675
07:45	08:00	4	3	3	10	85	4	50	139	149	56	363	31	451	14	142	36	197	648	797
08:00	08:15	4	0	5	9	85	7	67	159	168	29	370	26	426	11	108	35	158	584	752
08:15	08:30	1	1	2	4	73	5	53	131	135	36	330	27	395	24	162	42	235	630	765
08:30	08:45	1	2	2	5	95	9	71	175	180	50	322	18	392	24	165	38	234	626	806
08:45	09:00	5	2	2	9	83	10	52	145	154	52	330	27	410	26	175	39	243	653	807
09:00	09:15	4	2	8	14	86	8	51	145	159	46	211	26	285	9	146	32	196	481	640
09:15	09:30	5	1	3	9	34	4	43	81	90	39	213	26	280	12	147	40	205	485	575
09:30	09:45	6	1	9	16	59	5	58	122	138	44	203	12	263	16	146	42	211	474	612
09:45	10:00	9	1	5	15	45	2	60	107	122	42	163	13	221	10	179	37	236	457	579
11:30	11:45	9	1	7	17	47	0	60	107	124	44	149	7	201	8	196	47	264	465	589
11:45	12:00	15	3	5	23	63	3	58	124	147	41	165	6	217	8	195	45	263	480	627
12:00	12:15	17	6	9	32	54	2	63	119	151	37	146	12	199	12	229	48	296	495	646
12:15	12:30	13	6	2	21	40	5	56	101	122	42	177	9	232	7	203	48	267	499	621
12:30	12:45	12	3	9	24	45	4	51	100	124	50	198	11	260	8	182	54	251	511	635
12:45	13:00	17	3	10	30	46	2	69	117	147	44	164	12	224	18	176	42	243	467	614
13:00	13:15	9	4	6	19	47	5	62	114	133	51	173	14	240	7	197	46	259	499	632
13:15	13:30	8	1	5	14	50	2	59	111	125	47	214	14	278	12	158	43	227	505	630
15:00	15:15	10	3	6	19	53	3	61	117	136	44	186	6	240	9	286	32	334	574	710
15:15	15:30	11	4	5	20	51	7	69	127	147	47	172	5	229	5	317	38	367	596	743
15:30	15:45	6	9	4	19	63	0	70	133	152	68	175	7	254	5	354	48	414	668	820
15:45	16:00	11	2	6	19	53	2	59	114	133	44	176	4	227	5	446	56	510	737	870
16:00	16:15	25	4	9	38	47	2	79	128	166	63	175	4	245	7	394	45	449	694	860
16:15	16:30	26	4	9	39	54	4	63	121	160	57	182	3	243	4	476	50	533	776	936
16:30	16:45	16	6	9	31	45	2	55	102	133	59	194	2	262	6	408	59	481	743	876
16:45	17:00	20	10	4	34	29	3	79	111	145	60	189	8	259	5	484	54	547	806	951
17:00	17:15	38	10	11	59	43	1	68	112	171	67	205	4	278	3	422	54	482	760	931
17:15	17:30	22	7	2	31	65	1	67	133	164	45	204	4	256	5	468	51	527	783	947
17:30	17:45	13	6	1	20	48	0	62	110	130	58	161	3	228	2	440	49	493	721	851
17:45	18:00	12	8	5	25	57	1	73	131	156	40	183	4	229	1	437	69	514	743	899
TOTAL	.: :	359	116	169	644	1812	110	1918	3840	4484	1490	6943	390	8911	324	811	2 14	01 100	47 18958	234
ote: I	J-Turns	are i	nclude	ed in T	otals					(Comme	ent:								



Transportation Services - Traffic Services Work Order Turning Movement Count - Cyclist Volume Report

36955

Count Da	te: Tuesday, A	April 25, 2017				Start Time:	07:00
	c	HURCHILL AVI	E		CARLING AVE		
Time Period	Northbound	Southbound	Street Total	Eastbound	Westbound	Street Total	Grand Tota
07:00 08:00	0	0	0	2	1	3	3
08:00 09:00	1	0	1	0	0	0	1
09:00 10:00	2	1	3	2	0	2	5
11:30 12:30	0	0	0	0	1	1	1
12:30 13:30	0	0	0	3	1	4	4
15:00 16:00	2	0	2	1	1	2	4
16:00 17:00	0	0	0	0	1	1	1
17:00 18:00	2	0	2	0	0	0	2
Total	7	1	8	8	5	13	21

Comment:



Transportation Services - Traffic Services

W.O. 36955

Turning Movement Count - Heavy Vehicle Report

CARLING AVE @ CHURCHILL AVE

urve	y Date	:	Τu	iesda	y, Apr	il 25,	2017													
			сни	RCH	ILL A	/E						CA		IG AVI	E					
	1	Northb	ound		:	Southb	ound	_		-	Eastb	ound		1	Nestbo	ound				
Time I	Period	LT	ST	RT	N TOT	LT	ST	RT	s тот	STR TOT	LT	ST	RT	E TOT	LT	ST	RT	w тот	STR TOT	Grand Total
07:00	08:00	0	0	0	0	6	0	8	14	14	16	22	0	38	1	22	9	33	71	85
00:80	09:00	1	1	1	3	10	1	14	25	28	11	32	1	44	2	25	14	41	85	113
09:00	10:00	2	1	3	6	7	0	9	16	22	9	34	2	45	6	25	5	38	83	105
1:30	12:30	5	0	0	5	10	0	10	20	25	10	29	1	40	2	34	13	49	89	114
2:30	13:30	1	0	1	2	2	0	13	15	17	6	35	0	41	0	31	3	35	76	93
15:00	16:00	0	1	1	2	4	0	11	15	17	7	24	0	31	0	26	5	31	62	79
6:00	17:00	1	0	0	1	2	3	9	14	15	7	23	0	30	0	23	3	26	56	71
17:00	18:00	1	1	0	2	7	0	10	17	19	4	17	0	21	0	16	3	19	40	59
Sub	Total	11	4	6	21	48	4	84	136	157	70	216	4	290	11	202	55	272	562	719
l-Turn	ıs (Heav	vy Veh	nicles)		0				0	0				0				4	4	4
То	tal	11	4	6	0	48	4	84	136	157	70	216	4	290	11	202	55	276	566	723

Note: These volumes consists of bicycles only (no mopeds or motorcycles) and ARE NOT included in the Turning Movement Count Summary.

2019-Sep-04

2019-Sep-04

Page 1 of 1



Transportation Services - Traffic Services

Work Order 36955

Turning Movement Count - Pedestrian Volume Report

Count Date	: Tuesday, Ap	ril 25, 2017				Start Time:	07:00
Time Period	NB Approach (E or W Crossing)	SB Approach (E or W Crossing)	Total	EB Approach (N or S Crossing)	WB Approach (N or S Crossing)	Total	Grand Total
07:00 07:15	3	3	6	1	4	5	11
07:15 07:30	3	5	8	6	7	13	21
07:30 07:45	4	2	6	2	5	7	13
07:45 08:00	1	2	3	5	5	10	13
07:00 08:00	11	12	23	14	21	35	58
08:00 08:15	1	2	3	5	3	8	11
08:15 08:30	5	3	8	6	4	10	18
08:30 08:45	4	3	7	8	4	12	19
08:45 09:00	4	8	12	4	7	11	23
00:00 00:80	14	16	30	23	18	41	71
09:00 09:15	3	4	7	7	2	9	16
09:15 09:30	1	5	6	2	7	9	15
09:30 09:45	5	5	10	3	7	10	20
09:45 10:00	1	3	4	0	3	3	7
09:00 10:00	10	17	27	12	19	31	58
11:30 11:45	4	5	9	5	6	11	20
11:45 12:00	2	9	11	1	5	6	17
12:00 12:15	4	7	11	2	6	8	19
12:15 12:30	9	9	18	5	2	7	25
11:30 12:30	19	30	49	13	19	32	81
12:30 12:45	8	5	13	5	9	14	27
12:45 13:00	8	6	14	6	9	15	29
13:00 13:15	9	3	12	6	6	12	24
13:15 13:30	3	4	7	2	6	8	15
12:30 13:30	28	18	46	19	30	49	95
15:00 15:15	2	5	7	2	4	6	13
15:15 15:30	5	6	11	8	4	12	23
15:30 15:45	10	2	12	3	4	7	19
15:45 16:00	1	3	4	3	2	5	9
15:00 16:00	18	16	34	16	14	30	64
16:00 16:15	2	4	6	3	3	6	12
16:15 16:30	5	6	11	3	6	9	20
16:30 16:45	1	7	8	5	3	8	16
16:45 17:00	3	1	° 4	3	3	o 4	8
	11	18	29	3	13	27	56
16:00 17:00 17:00 17:15		4	10	9		13	23
17:00 17:15	6 8	4	10 10	9	4	13	23
17:15 17:30	8 1	2		4	2		
	1	5	8	4	4	8	16
17:45 18:00			5			3	8
17:00 18:00	15	18	33	21	12	33	66

Comment:




Transportation Services - Traffic Services


Work Order 36955

Turning Movement Count - 15 Min U-Turn Total Report

CARLING AVE @ CHURCHILL AVE Tuesday, April 25, 2017

Survey Dat	e:	Tuesday, April 25,	2017			
Time F	Period	Northbound U-Turn Total	Southbound U-Turn Total	Eastbound U-Turn Total	Westbound U-Turn Total	Total
07:00	07:15	0	0	1	3	4
07:15	07:30	0	0	2	2	4
07:30	07:45	0	0	1	9	10
07:45	08:00	0	0	1	5	6
08:00	08:15	0	0	1	4	5
08:15	08:30	0	0	2	7	9
08:30	08:45	0	0	2	7	9
08:45	09:00	0	0	1	3	4
09:00	09:15	0	0	2	9	11
09:15	09:30	0	0	2	6	8
09:30	09:45	0	0	4	7	11
09:45	10:00	0	0	3	10	13
11:30	11:45	0	0	1	13	14
11:45	12:00	0	0	5	15	20
12:00	12:15	0	0	4	7	11
12:15	12:30	0	0	4	9	13
12:30	12:45	0	0	1	7	8
12:45	13:00	0	0	4	7	11
13:00	13:15	0	0	2	9	11
13:15	13:30	0	0	3	14	17
15:00	15:15	0	0	4	7	11
15:15	15:30	0	0	5	7	12
15:30	15:45	0	0	4	7	11
15:45	16:00	0	0	3	3	6
16:00	16:15	0	0	3	3	6
16:15	16:30	0	0	1	3	4
16:30	16:45	0	0	7	8	15
16:45	17:00	0	0	2	4	6
17:00	17:15	0	0	2	3	5
17:15	17:30	0	0	3	3	6
17:30	17:45	0	0	6	2	8
17:45	18:00	0	0	2	7	9
Tc	otal	0	0	88	210	298

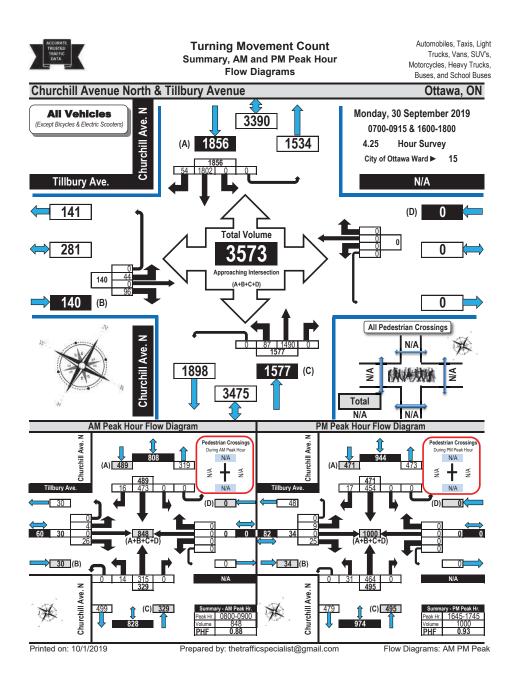

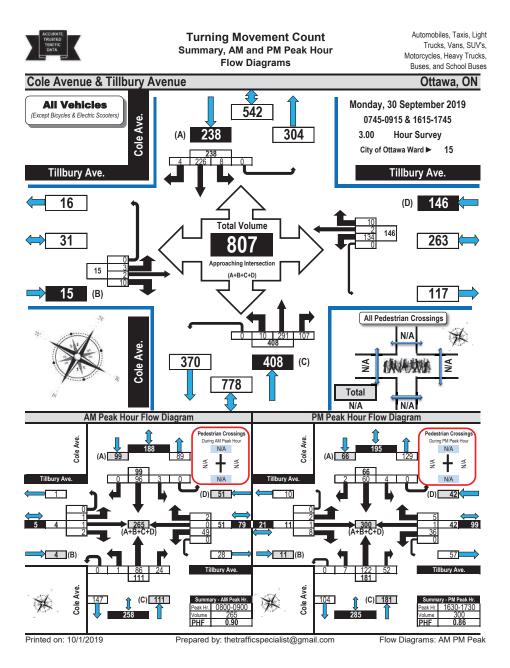

Appendix C

Synchro Intersection Worksheets – Existing Conditions



Lanes, Volumes, T 1: Cole & Carling	ïmings										Exi: AM Pea	sting ak Hou
	≯	-	\mathbf{F}	4	+	*	-	1	1	1	Ļ	~
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBF
Lane Configurations	٦	^		٦	^		1	•	1	٢	ĥ	
Traffic Volume (vph)	86	651	127	212	465	21	119	73	114	19	43	4
Future Volume (vph)	86	651	127	212	465	21	119	73	114	19	43	4
Satd. Flow (prot)	1658	4539	0	1580	4639	0	1610	1745	1427	1658	1595	
Flt Permitted	0.440			0.269			0.693			0.704		
Satd. Flow (perm)	758	4539	0	445	4639	0	1167	1745	1377	1202	1595	
Satd. Flow (RTOR)		44			7				98		40	
Lane Group Flow (vph)	96	864	0	236	540	0	132	81	127	21	99	
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases	5	2		1	6			8			4	
Permitted Phases	2			6			8		8	4		
Detector Phase	5	2		1	6		8	8	8	4	4	
Switch Phase												
Minimum Initial (s)	5.0	10.0		5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	10.4	30.8		10.4	30.8		30.6	30.6	30.6	30.6	30.6	
Total Split (s)	23.0	60.0		23.0	60.0		31.0	31.0	31.0	31.0	31.0	
Total Split (%)	19.2%	50.0%		19.2%	50.0%		25.8%	25.8%	25.8%	25.8%	25.8%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	1.7	2.1		1.7	2.1		3.3	3.3	3.3	3.3	3.3	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	5.4	5.8		5.4	5.8		6.6	6.6	6.6	6.6	6.6	
Lead/Lag	Lead	Lag		Lead	Lag		Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	
Recall Mode	None	C-Max		None	C-Max		None	None	None	None	None	
Act Effct Green (s)	73.5	65.2		82.0	69.7		18.7	18.7	18.7	18.7	18.7	
Actuated g/C Ratio	0.61	0.54		0.68	0.58		0.16	0.16	0.16	0.16	0.16	
v/c Ratio	0.18	0.35		0.56	0.20		0.73	0.30	0.43	0.11	0.35	
Control Delay	8.4	16.3		26.8	10.9		69.9	45.9	17.4	42.0	29.6	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Delay	8.4	16.3		26.8	10.9		69.9	45.9	17.4	42.0	29.6	
LOS	A	В		С	В		E	D	В	D	С	
Approach Delay		15.5			15.8			44.6			31.7	
Approach LOS		В			В			D			С	
Queue Length 50th (m)	6.6	37.7		31.9	14.3		29.9	17.1	6.0	4.3	12.3	
Queue Length 95th (m)	14.2	57.3		58.7	25.3		49.0	30.2	22.6	11.1	27.0	
Internal Link Dist (m)		55.6			276.6			99.8			61.7	
Turn Bay Length (m)	24.0			120.0			98.0		5.0	20.0		
Base Capacity (vph)	649	2485		475	2695		237	354	358	244	356	
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	
Reduced v/c Ratio	0.15	0.35		0.50	0.20		0.56	0.23	0.35	0.09	0.28	
Intersection Summary Cycle Length: 120												
Actuated Cycle Length: 120 Offset: 84 (70%), Reference Natural Cycle: 80		e 2:EBTL a	and 6:WB	TL, Start	of Green							
Control Type: Actuated-Coo	ordinated											

Synchro 11 Report Page 1

Lanes, Volumes, Timings	Existing
1: Cole & Carling	AM Peak Hour

	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases		
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	3.0
Total Split (s)	6.0	6.0
Total Split (%)	5%	5%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	Max	Max
Act Effct Green (s)	max	
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach Delay Approach LOS		
Approach Delay Approach LOS Queue Length 50th (m)		
Approach Delay Approach LOS Queue Length 50th (m) Queue Length 95th (m)		
Approach Delay Approach LOS Queue Length 50th (m) Queue Length 95th (m) Internal Link Dist (m)		
Approach Delay Approach LOS Queue Length 50th (m) Queue Length 95th (m) Internal Link Dist (m) Turn Bay Length (m)		
Approach Delay Approach LOS Queue Length 50th (m) Queue Length 95th (m) Internal Link Dist (m) Turn Bay Length (m) Base Capacity (vph)		
Approach Delay Approach LOS Queue Length 50th (m) Queue Length 95th (m) Internal Link Dist (m) Turn Bay Length (m) Base Capacity (vph) Starvation Cap Reducth		
Approach Delay Approach LOS Queue Length 50th (m) Queue Length 95th (m) Internal Link Dist (m) Turn Bay Length (m) Base Capacity (vph) Starvation Cap Reductn Spillback Cap Reductn		
Approach Delay Approach LOS Queue Length 50th (m) Queue Length 95th (m) Internal Link Dist (m) Turn Bay Length (m) Base Capacity (vph) Starvation Cap Reductn Spillback Cap Reductn Storage Cap Reductn		
pproach Delay pproach LOS Queue Length 50th (m) Queue Length 95th (m) turn Bay Length (m) tase Capacity (vph) tarvation Cap Reductn pillback Cap Reductn		

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing

Lanes, Volumes, Timings 1: Cole & Carling	Existin AM Peak Ho
Maximum v/c Ratio: 0.73	
Intersection Signal Delay: 21.0	Intersection LOS: C
Intersection Capacity Utilization 64.3%	ICU Level of Service C
Analysis Period (min) 15	
Splits and Phases: 1: Cole & Carling	6 4 31s
23 s 60 s	

	≯		~	-	-	. 🔍	•	†	1	- \	1	
ane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	S
ane Configurations	1	*††	LDIX	5	4†î ₂	WBR	1	1	NDIX	5	1	
raffic Volume (vph)	173	1352	98	106	610	154	11	5	11	336	31	1
uture Volume (vph)	173	1352	98	106	610	154	11	5	11	336	31	-
atd. Flow (prot)	1595	4701	0	1658	4440	0	1551	1392	0	1642	1413	
It Permitted	0.950		•	0.950		, in the second s	0.575	1002	Ŭ	0.413		
atd. Flow (perm)	1578	4701	0	1653	4440	0	926	1392	0	700	1413	
atd. Flow (RTOR)		11	-		58	-		12	-		270	
ane Group Flow (vph)	192	1611	0	118	849	0	12	18	0	373	304	
urn Type	Prot	NA	•	Prot	NA	, in the second s	Perm	NA	Ŭ	Perm	NA	
rotected Phases	5	2		1	6			8			4	
ermitted Phases	Ū	-			Ŭ		8			4		
etector Phase	5	2		1	6		8	8		4	4	
witch Phase	0	_			5		0	5		-		
finimum Initial (s)	5.0	10.0		5.0	10.0		10.0	10.0		10.0	10.0	
linimum Split (s)	11.1	34.1		11.1	34.1		40.0	40.0		40.0	40.0	
otal Split (s)	25.0	50.0		25.0	50.0		40.0	40.0		40.0	40.0	
otal Split (%)	20.8%	41.7%		20.8%	41.7%		33.3%	33.3%		33.3%	33.3%	
ellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
II-Red Time (s)	2.4	2.4		2.4	2.4		3.5	3.5		3.5	3.5	
ost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
otal Lost Time (s)	6.1	6.1		6.1	6.1		6.8	6.8		6.8	6.8	
ead/Lag	Lead	Lag		Lead	Lag		Lag	Lag		Lag	Lag	
ead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
lecall Mode	None	C-Max		None	C-Max		None	None		None	None	
ct Effct Green (s)	17.4	49.1		13.7	45.4		23.9	23.9		33.2	33.2	
ctuated q/C Ratio	0.14	0.41		0.11	0.38		0.20	0.20		0.28	0.28	
/c Ratio	0.83	0.84		0.62	0.50		0.20	0.06		1.93	0.52	
Control Delay	85.7	31.8		64.3	27.9		33.5	19.2		464.8	9.6	
ueue Delay	0.0	0.0		04.5	0.0		0.0	0.0		0.0	0.0	
otal Delay	85.7	31.8		64.3	27.9		33.5	19.2		464.8	9.6	
OS	F	01.0 C		64.5 E	21.5 C		00.0 C	13.2 B			A	
pproach Delay	1	37.5		L	32.4		U	25.0		1	260.4	
pproach LOS		57.5 D			52.4 C			23.0 C			200.4 F	
Queue Length 50th (m)	42.1	123.4		26.9	52.6		2.1	1.0		~135.3	6.0	
Queue Length 95th (m)	#79.3	#163.8		44.1	65.6		7.0	6.7		#193.6	30.2	
nternal Link Dist (m)	#19.5	276.6		44.1	94.1		7.0	108.6		#193.0	70.1	
	66.5	270.0		65.0	94.1			100.0		19.5	70.1	
urn Bay Length (m) ase Capacity (vph)	251	1928		261	1714		256	393		19.5	586	
tarvation Cap Reductn	251	1926		201	0		250	393		193	000	
pillback Cap Reductn	0	0		0	0		0	0		0	0	
torage Cap Reductin	0	0		0	0		0	0		0	0	
leduced v/c Ratio	0.76	0.84		0.45	0.50		0.05	0.05		1.93	0.52	
	0.70	0.04		0.40	0.00		0.05	0.05		1.95	0.52	
ntersection Summary												_
ctuated Cycle Length: 120												

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing

Lanes, Volumes, Timings	Existing
2: Churchill & Carling	AM Peak Hour

Lane Group	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases	-	
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	5.0	5.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	Max	Max
Act Effct Green (s)	IVIdX	IVIdX
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		
intersection Summary		

Lanes, Volumes, Timings 2: Churchill & Carling		Existing AM Peak Hou
Maximum v/c Ratio: 1.93		
Intersection Signal Delay: 79.4	Intersection LOS: E	
Intersection Capacity Utilization 79.0%	ICU Level of Service D	
Analysis Period (min) 15		
~ Volume exceeds capacity, queue is theoretically in	nfinite.	
Queue shown is maximum after two cycles.		
# 95th percentile volume exceeds capacity, queue n	nay be longer.	
Queue shown is maximum after two cycles.		
Queue shown is maximum after two cycles. Splits and Phases: 2: Churchill & Carling		

Ø1	•102 (R)		2 🕈 Ø4
25 s	50 s	5 s	40 s
	← Ø6 (R)		2 1 Ø8
25 s	50 s	5 s	40 s

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing

HCM 2010 TWSC	Existing
3: Cole & Tillbury	AM Peak Hour

Intersection												
Int Delay, s/veh	2.2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Vol, veh/h	1	1	2	49	0	2	1	86	24	3	96	0
Future Vol, veh/h	1	1	2	49	0	2	1	86	24	3	96	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage	e, # -	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	1	1	2	54	0	2	1	96	27	3	107	0
Major/Minor	Minor2			Minor1			Major1			Major2		
Conflicting Flow All	226	238	107	227	225	110	107	0	0	123	0	0
Stage 1	113	113	-	112	112	-	-	-	-	-	-	-
Stage 2	113	125		115	113		-			-		
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52	-	-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	729	663	947	728	674	943	1484	-	-	1464	-	-
Stage 1	892	802	-	893	803	-	-	-	-	-	-	-
Stage 2	892	792	-	890	802	-	-	-	-	-	-	-
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	725	661	947	724	672	943	1484	-	-	1464	-	-
Mov Cap-2 Maneuver	725	661	-	724	672	-	-	-	-	-	-	-
Stage 1	891	800	-	892	802	-	-	-	-	-	-	-
Stage 2	889	791	-	885	800	-	-	-	-	-	-	-
Approach	EB			WB			NB		_	SB	_	
HCM Control Delay, s	9.5			10.3			0.1			0.2		
HCM LOS	A			B			0.1			0.2		
Minor Lane/Major Mvm	nt	NBL	NBT	NBR	EBLn1V	VBI n1	SBL	SBT	SBR			
Capacity (veh/h)		1484	-	-	799	731	1464	-	-			
HCM Lane V/C Ratio		0.001				0.078	0.002					
HCM Control Delay (s)		7.4	0	-	9.5	10.3	7.5	0	-		_	
HCM Lane LOS		A	Ă	-	A	B	A	Ă				
HCM 95th %tile Q(veh))	0	-	-	0	0.3	0	-	-		_	
	,											

HCM 2010 TWSC	Existing
4: Churchill & Tillbury	AM Peak Hour

Intersection		_	_		_	
Int Delay, s/veh	0.6					
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	۰Y			ન	- î>	
Traffic Vol, veh/h	4	26	14	315	473	16
Future Vol, veh/h	4	26	14	315	473	16
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-		-
Veh in Median Storage		-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	4	29	16	350	526	18
Major/Minor	Minor2		Major1	N	Major2	
Conflicting Flow All		535		0	viaj012 -	0
Stage 1	917 535	535	544	-	-	-
Stage 2	382	-	-			-
	6.42	6.22	4.12		-	-
Critical Hdwy	6.4Z	0.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-		-
Critical Hdwy Stg 2		3.318	-	-		-
Follow-up Hdwy				-	-	-
Pot Cap-1 Maneuver	302		1025			
Stage 1	587	-	-	-	-	-
Stage 2	690		-	-		-
Platoon blocked, %				-		-
Mov Cap-1 Maneuver	296	545	1025	-	-	-
Mov Cap-2 Maneuver	296	-	-	-		-
Stage 1	576	-				-
Stage 2	690	-	-	-		-
Approach	EB		NB		SB	
HCM Control Delay, s	12.9		0.4		0	
HCM LOS	12.3 B		0.4		0	
	D					
Minor Lane/Major Mvm	nt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)		1025	-		-	-
HCM Lane V/C Ratio		0.015	-	0.068		-
HCM Control Delay (s)		8.6	0	12.9	-	-
HCM Lane LOS		Α	Α	В		-
HCM 95th %tile Q(veh))	0	-	0.2	-	-

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing

Lanes, Volumes, T 1: Cole & Carling	imings										Exi: PM Pea	sting ak Hour
	۶	-	\mathbf{r}	4	+	•	-	1	1	1	Ļ	~
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBF
Lane Configurations	۲	*††		٦	^		1	•	1	٦	¢Î	
Traffic Volume (vph)	89	613	131	221	700	41	139	59	141	24	45	73
Future Volume (vph)	89	613	131	221	700	41	139	59	141	24	45	73
Satd. Flow (prot)	1658	4592	0	1642	4713	0	1658	1745	1469	1658	1556	(
Flt Permitted	0.327			0.283			0.603			0.714		
Satd. Flow (perm)	567	4592	0	484	4713	0	1039	1745	1415	1218	1556	C
Satd. Flow (RTOR)		44			9				128		53	
Lane Group Flow (vph)	99	827	0	246	824	0	154	66	157	27	131	C
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases	5	2		1	6			8			4	
Permitted Phases	2			6			8		8	4		
Detector Phase	5	2		1	6		8	8	8	4	4	
Switch Phase												
Minimum Initial (s)	5.0	10.0		5.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	10.4	30.8		10.4	30.8		30.6	30.6	30.6	30.6	30.6	
Total Split (s)	28.0	70.0		28.0	70.0		36.0	36.0	36.0	36.0	36.0	
Total Split (%)	20.0%	50.0%		20.0%	50.0%		25.7%	25.7%	25.7%	25.7%	25.7%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	1.7	2.1		1.7	2.1		3.3	3.3	3.3	3.3	3.3	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	5.4	5.8		5.4	5.8		6.6	6.6	6.6	6.6	6.6	
Lead/Lag	Lead	Lag		Lead	Lag		Lag	Lag	Lag	Lag	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes	Yes	Yes	Yes	
Recall Mode	None	C-Max		None	C-Max		None	None	None	None	None	
Act Effct Green (s)	87.5	78.8		96.9	83.8		24.1	24.1	24.1	24.1	24.1	
Actuated g/C Ratio	0.62	0.56		0.69	0.60		0.17	0.17	0.17	0.17	0.17	
v/c Ratio	0.24	0.32		0.55	0.29		0.86	0.22	0.45	0.13	0.42	
Control Delay	9.6	16.8		13.2	14.7		94.2	49.7	16.2	47.8	33.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Delay	9.6	16.8		13.2	14.7		94.2	49.7	16.2	47.8	33.2	
LOS	A	В		В	В		F	D	В	D	С	
Approach Delay		16.1			14.3			53.9			35.7	
Approach LOS		В			В			D			D	
Queue Length 50th (m)	8.3	41.3		22.9	39.2		41.5	15.7	6.8	6.3	18.8	
Queue Length 95th (m)	15.9	58.3		37.4	53.2		#70.6	28.7	26.7	14.7	37.3	
Internal Link Dist (m)		55.6			276.6			99.8			61.7	
Turn Bay Length (m)	24.0			120.0			98.0		5.0	20.0		
Base Capacity (vph)	571	2603		525	2823		218	366	398	255	368	
Starvation Cap Reductn	0	0		0	0		0	0	0	0	0	
Spillback Cap Reductn	0	0		0	0		0	0	0	0	0	
Storage Cap Reductn	0	0		0	0		0	0	0	0	0	
Reduced v/c Ratio	0.17	0.32		0.47	0.29		0.71	0.18	0.39	0.11	0.36	
Intersection Summary Cycle Length: 140 Actuated Cycle Length: 140												
Offset: 93 (66%), Reference Natural Cycle: 75 Control Type: Actuated-Coc	ed to phase	2:EBTL a	and 6:WB	TL, Start	of Green							

Synchro 11 Report Page 1

Lanes, Volumes, Timings	Existing
1: Cole & Carling	PM Peak Hour

Lane Group	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases	-	-
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	3.0	3.0
Total Split (s)	6.0	6.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	0.0	0.0
Lost Time Adjust (s)		
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	Max	Max
Act Effct Green (s)	man	max
Actuated g/C Ratio		
v/c Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Base Capacity (vph) Starvation Cap Reductn		
Base Capacity (vph) Starvation Cap Reductn Spillback Cap Reductn		
Base Capacity (vph) Starvation Cap Reductn Spillback Cap Reductn Storage Cap Reductn		
Base Capacity (vph) Starvation Cap Reductn Spillback Cap Reductn		

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing

Lanes, Volumes, Timings 1: Cole & Carling		Existing PM Peak Hou
Maximum v/c Ratio: 0.86		
Intersection Signal Delay: 22.2	Intersection LOS: C	
Intersection Capacity Utilization 65.3%	ICU Level of Service C	
Analysis Period (min) 15		
# 95th percentile volume exceeds capacity, queue	e may be longer.	
Queue shown is maximum after two cycles.		
Splits and Phases: 1: Cole & Carling	T	

🕈 Ø1	🚽 🍊 Ø2 (R)	— 0 • 04
28 s	70 s	6 s 36 s
	🖉 🖉 Ø6 (R)	● _p < † _{øs}
28 s	70 s	6 s 36 s

	≯	-	\mathbf{r}	1	-		1	1	1	- \	↓	~
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SB
Lane Configurations	1	4 4 1>		<u> </u>	^		<u> </u>	4Î		۲.	¢Î	
Traffic Volume (vph)	245	792	18	37	1782	218	96	33	26	182	7	26
Future Volume (vph)	245	792	18	37	1782	218	96	33	26	182	7	26
Satd. Flow (prot)	1642	4699	0	1658	4663	0	1658	1604	0	1626	1399	(
Flt Permitted	0.950			0.950			0.292			0.714		
Satd. Flow (perm)	1639	4699	0	1640	4663	0	502	1604	0	1210	1399	(
Satd. Flow (RTOR)		3			20			29			299	
Lane Group Flow (vph)	272	900	0	41	2222	0	107	66	0	202	307	(
Turn Type	Prot	NA		Prot	NA		Perm	NA		Perm	NA	
Protected Phases	5	2		1	6			8			4	
Permitted Phases		=			-		8	-		4		
Detector Phase	5	2		1	6		8	8		4	4	
Switch Phase	· ·	-			Ŭ		· ·	Ű				
Minimum Initial (s)	5.0	10.0		5.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	11.1	34.1		11.1	34.1		40.0	40.0		40.0	40.0	
Total Split (s)	25.0	50.0		25.0	50.0		40.0	40.0		40.0	40.0	
Total Split (%)	20.8%	41.7%		20.8%	41.7%		33.3%	33.3%		33.3%	33.3%	
Yellow Time (s)	3.7	3.7		3.7	3.7		3.3	3.3		3.3	3.3	
All-Red Time (s)	2.4	2.4		2.4	2.4		3.5	3.5		3.5	3.5	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.1	6.1		6.1	6.1		6.8	6.8		6.8	6.8	
Lead/Lag	Lead	Lag		Lead	Lag		Lag	Lag		Lag	Lag	
Lead-Lag Optimize?	Yes	Yes		Yes	Yes		Yes	Yes		Yes	Yes	
Recall Mode	None	C-Max		None	C-Max		None	None		None	None	
	24.5	64.2		8.4	45.8		25.7	25.7		25.7	25.7	
Act Effct Green (s)												
Actuated g/C Ratio	0.20 0.81	0.54 0.36		0.07 0.35	0.38 1.24		0.21	0.21 0.18		0.21 0.78	0.21 0.57	
Control Delay	66.3	18.6		60.8	145.8		134.0	22.6		64.1	9.0	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	_
Total Delay	66.3	18.6		60.8	145.8		134.0	22.6		64.1	9.0	
LOS	E	В		E	F		F	С		E	A	_
Approach Delay		29.7			144.3			91.5			30.8	
Approach LOS		С			F			F			С	_
Queue Length 50th (m)	60.0	44.3		9.4	~244.9		~25.8	7.1		45.4	1.5	
Queue Length 95th (m)	#122.4	65.6		20.4	#274.1		#54.2	17.4		67.2	23.9	
Internal Link Dist (m)		276.6			94.1			108.6			70.1	
Turn Bay Length (m)	66.5			65.0						19.5		
Base Capacity (vph)	335	2516		261	1793		138	464		334	603	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.81	0.36		0.16	1.24		0.78	0.14		0.60	0.51	
Intersection Summary Cycle Length: 120 Actuated Cycle Length: 120 Offset: 92 (77%), Referenc)											

Control Type: Actuated-Coordinated

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing

Lanes, Volumes, Timings	Existing
2: Churchill & Carling	PM Peak Hour

Lane Group	Ø3	Ø7
Lane Configurations		
Traffic Volume (vph)		
Future Volume (vph)		
Satd. Flow (prot)		
Flt Permitted		
Satd. Flow (perm)		
Satd. Flow (RTOR)		
Lane Group Flow (vph)		
Turn Type		
Protected Phases	3	7
Permitted Phases	Ŭ	
Detector Phase		
Switch Phase		
Minimum Initial (s)	1.0	1.0
Minimum Split (s)	5.0	5.0
Total Split (s)	5.0	5.0
Total Split (%)	4%	4%
Yellow Time (s)	2.0	2.0
All-Red Time (s)	2.0	2.0
Lost Time Adjust (s)	0.0	0.0
Total Lost Time (s)		
Lead/Lag	Lead	Lead
Lead-Lag Optimize?	Yes	Yes
Recall Mode	Max	Max
	IVIAX	IVIAX
Act Effct Green (s)		
Actuated g/C Ratio		
Control Delay		
Queue Delay		
Total Delay		
LOS		
Approach Delay		
Approach LOS		
Queue Length 50th (m)		
Queue Length 95th (m)		
Internal Link Dist (m)		
Turn Bay Length (m)		
Base Capacity (vph)		
Starvation Cap Reductn		
Spillback Cap Reductn		
Storage Cap Reductn		
Reduced v/c Ratio		
Intersection Summary		
interested on ourmainly		

Lanes, Volumes, Timings 2: Churchill & Carling		Existing PM Peak Hou
Maximum v/c Ratio: 1.24		
Intersection Signal Delay: 95.4	Intersection LOS: F	
Intersection Capacity Utilization 110.0%	ICU Level of Service H	
Analysis Period (min) 15		
~ Volume exceeds capacity, queue is theoretically	infinite.	
Queue shown is maximum after two cycles.		
# 95th percentile volume exceeds capacity, queue	may be longer.	
Queue shown is maximum after two cycles.		

Ø1	∎ → Ø2 (R)	● ₂ ↓ ≥ Ø4
25 s	50 s	5 s 40 s
	← Ø6 (R)	● ₂ ↑ _{Ø8}
25 s	50 s	5 s 40 s

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing

HCM 2010 TWSC	Existing
3: Cole & Tillbury	PM Peak Hour

Intersection												
Int Delay, s/veh	2.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		4			4			4			4	
Traffic Vol, veh/h	2	1	8	36	1	5	7	122	52	4	60	2
Future Vol, veh/h	2	1	8	36	1	5	7	122	52	4	60	2
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length		-	-	-	-		-	-	-	-	-	-
Veh in Median Storage	e, # -	0	-	-	0		-	0	-	-	0	-
Grade, %		0	-	-	0		-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	2	1	9	40	1	6	8	136	58	4	67	2
Major/Minor	Minor2			Minor1			Major1		1	Major2		
Conflicting Flow All	261	286	68	262	258	165	69	0	0	194	0	0
Stage 1	76	76	-	181	181	-	-	-	-	-	-	-
Stage 2	185	210	-	81	77	-	-	-	-	-	-	-
Critical Hdwy	7.12	6.52	6.22	7.12	6.52	6.22	4.12	-	-	4.12	-	-
Critical Hdwy Stg 1	6.12	5.52	-	6.12	5.52		-	-	-	-	-	-
Critical Hdwy Stg 2	6.12	5.52	-	6.12	5.52		-	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	3.518	4.018	3.318	2.218	-	-	2.218	-	-
Pot Cap-1 Maneuver	692	623	995	691	646	879	1532	-	-	1379	-	-
Stage 1	933	832	-	821	750		-	-	-	-	-	-
Stage 2	817	728		927	831		-			-		
Platoon blocked, %								-	-		-	-
Mov Cap-1 Maneuver	682	617	995	679	640	879	1532	-	-	1379	-	-
Mov Cap-2 Maneuver	682	617	-	679	640	-	-	-	-	-	-	-
Stage 1	927	830	-	816	746		-				-	
Stage 2	806	724	-	915	829	-	-	-	-	-	-	-
Approach	EB			WB			NB			SB		
HCM Control Delay, s	9.2			10.5			0.3			0.5		
HCM LOS	A			В								
Minor Lane/Major Mvm	nt	NBL	NBT	NBR	EBLn1V		SBL	SBT	SBR			
Capacity (veh/h)		1532			873	697	1379					
HCM Lane V/C Ratio		0.005	-	-	0.014		0.003	-	-			
HCM Control Delay (s)		7.4	0		9.2	10.5	7.6	0				
HCM Lane LOS		A	A	-	A	В	Α	A	-			
HCM 95th %tile Q(veh)	0	-	-	0	0.2	0	-	-			

HCM 2010 TWSC	Existing
4: Churchill & Tillbury	PM Peak Hour

Intersection						
Int Delay, s/veh	0.8					
			ND	NDT	007	000
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	M	07		4	₽	47
Traffic Vol, veh/h	9	25	31	464	454	17
Future Vol, veh/h	9	25	31	464	454	17
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Stop	Stop	Free	Free	Free	Free
RT Channelized	-	None	-	None	-	None
Storage Length	0	-	-	-	-	-
Veh in Median Storage		-	-	0	0	-
Grade, %	0	-	-	0	0	-
Peak Hour Factor	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2
Mvmt Flow	10	28	34	516	504	19
Major/Minor N	Minor2		Major1	Ν	Major2	
Conflicting Flow All	1098	514	523	0	-	0
Stage 1	514	-	-	-	-	-
Stage 2	584		-		-	
Critical Hdwy	6.42	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	-	-	-	-	
Critical Hdwy Stg 2	5.42	-	-	-	-	-
Follow-up Hdwy	3.518	3.318	2.218		-	-
Pot Cap-1 Maneuver	235	560	1043	-	-	-
Stage 1	600	-	-	-	-	
Stage 2	557	-	-	-	-	-
Platoon blocked, %				-	-	-
Mov Cap-1 Maneuver	224	560	1043		-	-
Mov Cap-2 Maneuver	224	-	-		-	-
Stage 1	572	-	-	-	-	-
Stage 2	557			-	-	
Approach	EB		NB		SB	
HCM Control Delay, s	14.9		0.5		0	
HCM LOS	14.9 B		0.5		U	
	D					
Minor Lane/Major Mvm	ıt	NBL	NBT	EBLn1	SBT	SBR
Capacity (veh/h)		1043	-	401	-	-
LIONIL V/O D-E-		0.033	-	0.094	-	-
HCM Lane V/C Ratio				44.0	-	
HCM Control Delay (s)		8.6	0	14.9		-
		8.6 A	0 A	14.9 B	-	-

Scenario 1 1657-1673 Carling Avenue And 386 Tillbury Avenue 11:59 pm 05/18/2023 Existing



Collision Data



Accident Date	Accident Year	Accident Time	Location	Environment Condition	Light	Traffic Control	Traffic Control Condition	Classification Of Accident	Initial Impact Type	Road Surface Condition	# Vehicles	# Motorcycles	# Bicycles	# Pedestrians
1/9/2018	2018	21:41	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	07 - Dark	01 - Traffic signal	0	03 - P.D. only	04 - Sideswipe	04 - Slush	0	0	0	0
1/10/2018 1/13/2018	2018 2018	21:16 10:12	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear 05 - Drifting Snow	07 - Dark 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	05 - Turning movement 04 - Sideswipe	02 - Wet 06 - Ice	0	0	0	0
2/1/2018	2018	7:07	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	03 - Snow	03 - Dawn	01 - Traffic signal	ō	03 - P.D. only	04 - Sideswipe	03 - Loose snow	0	0	0	0
2/6/2018	2018	18:13	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	07 - Dark	01 - Traffic signal	0	03 - P.D. only	05 - Turning movement	02 - Wet	0	0	0	0
2/9/2018	2018	12:58	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	02 - Wet	0	0	0	0
5/12/2018 5/18/2018	2018 2018	14:30 11:37	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	05 - Turning movement 04 - Sideswipe	01 - Dry 01 - Dry	0	0	0	0
5/31/2018	2018	8:11	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	05 - Turning movement	01 - Dry	0	0	0	0
6/29/2018	2018	15:48	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	01 - Dry	0	0	0	0
8/13/2018	2018	16:20	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	0	0
8/17/2018 8/11/2018	2018 2018	10:38 12:51	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear 01 - Clear	01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	05 - Turning movement	02 - Wet 01 - Dry	0	0	0	0
10/24/2018	2018	12:51	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	05 - Turning movement 05 - Turning movement	01 - Dry 01 - Dry	0	0	0	0
10/19/2018	2018	9:19	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	0	0
10/27/2018	2018	22:36	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	03 - Snow	07 - Dark	01 - Traffic signal	0	03 - P.D. only	04 - Sideswipe	02 - Wet	0	0	0	0
11/16/2018	2018 2018	7:23	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	03 - Snow	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	02 - Angle 07 - SMV other	03 - Loose snow	0	0	0	0
11/23/2018 1/3/2019	2018	13:08 11:46	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	02 - Non-fatal injury 03 - P.D. only	07 - SMV other 03 - Rear end	01 - Dry 01 - Dry	0	0	0	1
1/25/2019	2019	10:49	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	ō	03 - P.D. only	04 - Sideswipe	04 - Slush	ō	0	ō	ō
1/21/2019	2019	20:49	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	03 - Snow	07 - Dark	01 - Traffic signal	0	03 - P.D. only	02 - Angle	05 - Packed snow	0	0	0	0
2/6/2019 5/21/2019	2019 2019	16:17 18:53	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	02 - Rain 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 02 - Non-fatal injury	04 - Sideswipe 05 - Turning movement	02 - Wet 01 - Dry	0	0	0	0
6/25/2019	2019	18:53	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	02 - Non-fatal injury 02 - Non-fatal injury	05 - Turning movement 05 - Turning movement	01 - Dry 02 - Wet	0	0	0	0
6/12/2019	2019	9:14	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	03 - Rear end	01 - Dry	0	0	0	0
6/10/2019	2019	19:51	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	1	0
8/17/2019	2019	16:38	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	04 - Sideswipe	02 - Wet	0	0	0	0
10/17/2019 1/31/2020	2019 2020	6:50 17:53	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	02 - Rain 01 - Clear	03 - Dawn 07 - Dark	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 02 - Non-fatal injury	04 - Sideswipe 07 - SMV other	02 - Wet 01 - Dry	0	0	0	0
3/12/2020	2020	12:00	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-ratar injury 03 - P.D. only	99 - Other	01 - Dry 01 - Dry	0	0	0	1
2/22/2020	2020	2:05	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	07 - Dark	01 - Traffic signal	ō	02 - Non-fatal injury	04 - Sideswipe	01 - Dry	0	0	0	0
2/28/2020	2020	15:40	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	01 - Dry	0	0	0	0
2/26/2020	2020	19:34	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	03 - Snow	07 - Dark	01 - Traffic signal	0	02 - Non-fatal injury	05 - Turning movement	04 - Slush	0	0	0	0
4/21/2020 7/16/2020	2020	12:31 13:21	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	03 - Snow 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	02 - Angle 05 - Turning movement	02 - Wet 01 - Dry	0	0	0	0
10/7/2020	2020	11:33	CARLING AVE @ CLYDE AVE/COLE AVE (0000584)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	03 - Rear end	01 - Dry 01 - Dry	0	0	0	0
9/29/2020	2020	19:44	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	07 - Dark	01 - Traffic signal	0	02 - Non-fatal injury	05 - Turning movement	01 - Dry	0	0	0	0
10/27/2020	2020	11:59	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	05 - Turning movement	01 - Dry	0	0	0	0
5/31/2021	2021	11:00	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	03 - Rear end	01 - Dry	0	0	0	0
6/7/2021 9/12/2021	2021 2021	17:50 18:16	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 02 - Non-fatal injury	05 - Turning movement 05 - Turning movement	01 - Dry 01 - Dry	0	0	1	0
10/19/2021	2021	13:14	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight	01 - Traffic signal	ō	03 - P.D. only	04 - Sideswipe	01 - Dry	ő	0	ō	ō
12/9/2021	2021	16:33	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	05 - Dusk	01 - Traffic signal	0	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	0	0
12/14/2021	2021	17:01	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	07 - Dark	01 - Traffic signal	0	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	0	0
2/17/2022 2/14/2022	2022 2022	17:37 8:15	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	03 - Snow 01 - Clear	07 - Dark	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	05 - Turning movement 03 - Rear end	04 - Slush 01 - Dry	0	0	0	0
3/15/2022	2022	6:41	CARLING AVE @ CLYDE AVE/COLE AVE (0006984) CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	01 - Clear	01 - Daylight 03 - Dawn	01 - Traffic signal	0	02 - Non-fatal iniury	05 - Turning movement	02 - Wet	0	0	0	0
5/21/2022	2022	21:30	CARLING AVE @ CLYDE AVE/COLE AVE (0006984)	02 - Rain	07 - Dark	01 - Traffic signal	0	02 - Non-fatal injury	03 - Rear end	02 - Wet	ō	0	0	ō
1/16/2018	2018	18:18	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	07 - Dark	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	04 - Slush	0	0	0	0
2/27/2018	2018	11:26	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	04 - Sideswipe	01 - Dry	0	0	0	0
3/27/2018 7/23/2018	2018 2018	10:50 18:59	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	02 - Non-fatal injury 02 - Non-fatal injury	07 - SMV other 03 - Rear end	01 - Dry 01 - Dry	0	0	0	0
9/4/2018	2018	8:30	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-racar injury 03 - P.D. only	04 - Sideswipe	01 - Dry	0	0	0	0
9/5/2018	2018	8:46	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	01 - Dry	0	0	0	0
8/27/2018	2018	12:02	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	04 - Sideswipe	01 - Dry	0	0	0	0
10/12/2018 12/25/2018	2018 2018	10:20 12:19	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 02 - Non-fatal injury	03 - Rear end 03 - Rear end	01 - Dry	0	0	0	0
1/2/2018	2018	22:19	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear 03 - Snow	01 - Daylight 07 - Dark	01 - Traffic signal	0	02 - Non-ratal Injury 03 - P.D. only	03 - Rear end 07 - SMV other	01 - Dry 03 - Loose snow	0	0	0	0
1/29/2019	2019	14:45	CARLING AVE @ CHURCHILL AVE (0002149)	03 - Snow	01 - Daylight	01 - Traffic signal	ō	03 - P.D. only	04 - Sideswipe	04 - Slush	ő	0	0	ō
4/9/2019	2019	14:52	CARLING AVE @ CHURCHILL AVE (0002149)	03 - Snow	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	04 - Sideswipe	02 - Wet	0	0	0	0
5/28/2019	2019	17:48	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	04 - Sideswipe	01 - Dry	0	0	0	0
6/18/2019 9/24/2019	2019 2019	16:50 15:15	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	03 - Rear end 04 - Sideswipe	01 - Dry 01 - Dry	0	0	0	0
9/15/2019	2019	14:40	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	01 - Dry	0	0	0	0
2/18/2020	2020	8:11	CARLING AVE @ CHURCHILL AVE (0002149)	03 - Snow	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	04 - Slush	0	0	0	0
2/3/2020	2020	17:19	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	05 - Dusk	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	02 - Wet	0	0	0	0
7/14/2020 7/6/2020	2020	12:15 13:40	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	02 - Non-fatal injury 02 - Non-fatal injury	03 - Rear end 03 - Rear end	01 - Dry 01 - Dry	0	0	0	0
8/22/2020	2020	13:39	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-racar injury 03 - P.D. only	04 - Sideswipe	01 - Dry	0	0	0	0
10/14/2020	2020	9:12	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	02 - Non-fatal injury	03 - Rear end	01 - Dry	0	0	0	0
11/18/2020	2020	10:13	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	01 - Dry	0	0	0	0
2/23/2021 2/12/2021	2021 2021	11:37	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	04 - Sideswipe	01 - Dry	0	0	0	0
3/5/2021	2021	10:45 17:49	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 01 - Traffic signal	0	03 - P.D. only 03 - P.D. only	04 - Sideswipe 03 - Rear end	01 - Dry 01 - Dry	0	0	0	0
7/18/2021	2021	22:34	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	07 - Dark	01 - Traffic signal	ō	02 - Non-fatal injury	04 - Sideswipe	01 - Dry	0	0	0	0
9/20/2021	2021	7:20	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	01 - Daylight	01 - Traffic signal	0	03 - P.D. only	02 - Angle	01 - Dry	0	0	0	0
12/8/2021	2021	16:00	CARLING AVE @ CHURCHILL AVE (0002149)	01 - Clear	05 - Dusk	01 - Traffic signal	0	03 - P.D. only	03 - Rear end	01 - Dry	0	0	0	0
2/23/2022 8/2/2018	2022 2018	15:36 17:43	CARLING AVE @ CHURCHILL AVE (0002149) CARLING AVE WB btwn CHURCHILL AVE N & COLE AVE (3ZA4T0)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	01 - Traffic signal 10 - No control	0	03 - P.D. only 03 - P.D. only	03 - Rear end 05 - Turning movement	01 - Dry 01 - Dry	0	0	0	0
1/21/2018	2018	17:43	CARLING AVE WB DIWH CHORCHILL AVE N & COLE AVE (32A410) CARLING AVE WB DIWH CHURCHILL AVE N & COLE AVE (32A410)	03 - Snow	01 - Daylight 07 - Dark	10 - No control	0	02 - Non-fatal iniury	07 - SMV other	01 - Dry 03 - Loose snow	0	0	n	1
2/4/2019	2019	17:31	CARLING AVE WB bitwn CHURCHILL AVE N & COLE AVE (324410)	03 - Snow	07 - Dark	10 - No control	ō	03 - P.D. only	03 - Rear end	03 - Loose snow	ő	0	ō	ō
8/27/2019	2019	15:05	CARLING AVE WB btwn CHURCHILL AVE N & COLE AVE (3ZA4T0)	01 - Clear	01 - Daylight	10 - No control	ō	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	0	0
9/26/2019	2019	13:48	CARLING AVE WB btwn CHURCHILL AVE N & COLE AVE (3ZA4T0)	01 - Clear	01 - Daylight	10 - No control	0	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	0	0
9/21/2020 10/29/2021	2020 2021	20:32 17:22	CARLING AVE WB btwn CHURCHILL AVE N & COLE AVE (_3ZA4T0) CARLING AVE WB btwn CHURCHILL AVE N & COLE AVE (_3ZA4T0)	01 - Clear 01 - Clear	07 - Dark 01 - Daylight	10 - No control 10 - No control	0	03 - P.D. only 02 - Non-fatal injury	03 - Rear end 04 - Sideswipe	01 - Dry 01 - Dry	0	0	0	0
3/10/2020	2021	21:00	CHURCHILL AVE N bitwn CARLING AVE & TILLBURY AVE (3ZB0D9)	01 - Clear	07 - Dark	10 - No control	ő	02 - Non-racar injury 03 - P.D. only	03 - Rear end	01 - Dry	0	ő	Ū.	ő
11/20/2020	2020	15:29	CHURCHILL AVE N btwn CARLING AVE & TILLBURY AVE (3ZBOD9)	01 - Clear	01 - Daylight	10 - No control	0	02 - Non-fatal injury	04 - Sideswipe	01 - Dry	0	0	1	0
2/26/2018	2018	21:51	CHURCHILL AVE @ TILLBURY AVE (0006777)	01 - Clear	07 - Dark	02 - Stop sign	0	03 - P.D. only	05 - Turning movement	01 - Dry	0	0	0	0
11/21/2020	2020	18:03 16:30	CHURCHILL AVE @ TILLBURY AVE (0006777) COLE AVE @ TILLBURY AVE (0006782)	01 - Clear 01 - Clear	07 - Dark 01 - Davlight	02 - Stop sign 02 - Stop sign	0	02 - Non-fatal injury 02 - Non-fatal injury	03 - Rear end 05 - Turning movement	01 - Dry 01 - Dry	0	0	0	0
1/24/2019	2019	16:30	COLE AVE @ TILLBURY AVE (0006/82) CARLING AVE EB btwn CHURCHILL AVE N & CLYDE AVE (3ZA4T9)	01 - Clear 01 - Clear	01 - Daylight 01 - Daylight	U2 - Stop sign 10 - No control	0	02 - Non-fatal injury 03 - P.D. only	05 - Turning movement 04 - Sideswipe	01 - Dry 05 - Packed snow	0	0	1	0
3/16/2018	2018	17:56	COLE AVE bitwin CARLING AVE & TILLBURY AVE (3ZBOPM)	01 - Clear	01 - Daylight	10 - No control	ő	03 - P.D. only	02 - Angle	01 - Dry	ő	0	ő	0



Traffic Control: Tra	ffic signal						Total Collisions:	30	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2016-Mar-04, Fri,11:19	Clear	Rear end	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2016-May-19, Thu,13:41	Clear	Rear end	P.D. only	Dry	West	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2016-Jul-08, Fri,14:38	Clear	Sideswipe	P.D. only	Dry	East	Turning right	Truck - open	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Feb-10, Fri,09:52	Clear	Rear end	P.D. only	Dry	East	Slowing or stopping	g Pick-up truck	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Jul-19, Wed,16:45	Clear	Angle	P.D. only	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Turning left	Automobile, station wagon	Other motor vehicle	
2017-Aug-16, Wed,15:00	Clear	Turning movement	P.D. only	Dry	East	Going ahead	Delivery van	Other motor vehicle	0
					East	Turning right	Automobile, station wagon	Other motor vehicle	
2017-Sep-20, Wed, 19:20	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jan-16, Tue,18:18	Clear	Rear end	P.D. only	Slush	South	Going ahead	Automobile, station wagon	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Feb-27, Tue,11:26	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Truck - closed	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Mar-27, Tue,10:50	Clear	SMV other	Non-fatal injury	Dry	South	Turning left	Automobile, station wagon	Curb	0
2018-Jul-23, Mon,18:59	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
				-	East	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Aug-27, Mon,12:02	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Pick-up truck	Other motor vehicle	0
u , , ,		·	-	,	West	Stopped	Automobile, station wagon	Other motor vehicle	



Traffic Control: Traf	fic signal						Total Collisions:	30	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	r Vehicle type	First Event	No. Peo
2018-Sep-04, Tue,08:30	Clear	Sideswipe	P.D. only	Dry	West	Changing lanes	Truck - dump	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Sep-05, Wed,08:46	Clear	Rear end	P.D. only	Dry	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Oct-12, Fri,10:20	Clear	Rear end	P.D. only	Dry	East	Turning left	Truck - dump	Other motor vehicle	0
					East	Turning left	Delivery van	Other motor vehicle	
2018-Dec-25, Tue,12:19	Clear	Rear end	Non-fatal injury	Dry	South	Turning left	Automobile, station wagon	Other motor vehicle	0
					South	Turning left	Automobile, station wagon	Other motor vehicle	
2019-Jan-02, Wed,22:19	Snow	SMV other	P.D. only	Loose snow	East	Going ahead	Automobile, station wagon	Snowbank/drift	0
2019-Jan-29, Tue,14:45	Snow	Sideswipe	P.D. only	Slush	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
2019-Apr-09, Tue,14:52	Snow	Sideswipe	Non-fatal injury	Wet	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-May-28, Tue,17:48	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Jun-18, Tue,16:50	Clear	Rear end	P.D. only	Dry	North	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Sep-15, Sun,14:40	Clear	Rear end	P.D. only	Dry	North	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					North	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Sep-24, Tue,15:15	Clear	Sideswipe	P.D. only	Dry	South	Unknown	Unknown	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2020-Feb-03, Mon,17:19	Clear	Rear end	P.D. only	Wet	West	Going ahead	Pick-up truck	Other motor vehicle	0
					West	Stopped	Automobile, station wagon	Other motor vehicle	



	0	HURCHILL AVE							
Traffic Control: Tra	ffic signal						Total Collisions:	30	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2020-Feb-18, Tue,08:11	Snow	Rear end	P.D. only	Slush	East	Unknown	Unknown	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2020-Jul-06, Mon,13:40	Clear	Rear end	Non-fatal injury	Dry	West	Going ahead	Pick-up truck	Other motor vehicle	0
					West	Stopped	Pick-up truck	Other motor vehicle	
2020-Jul-14, Tue,12:15	Clear	Rear end	Non-fatal injury	Dry	East	Slowing or stopping	g Delivery van	Other motor vehicle	0
					East	Going ahead	Passenger van	Other motor vehicle	
2020-Aug-22, Sat,13:39	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2020-Oct-14, Wed,09:12	Clear	Rear end	Non-fatal injury	Dry	East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	
2020-Nov-18, Wed,10:13	Clear	Rear end	P.D. only	Dry	South	Going ahead	Pick-up truck	Other motor vehicle	0
					South	Going ahead	Automobile, station wagon	Other motor vehicle	
Location: CARLII	NG AVE @ CL	YDE AVE/COLE A	VE						
Traffic Control: Tra	ffic signal						Total Collisions:	53	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Peo
2016-Feb-12, Fri,09:41	Clear	Turning movement	Non-fatal injury	Wet	West	Turning left	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2016-Aug-02, Tue,10:00	Clear	Turning movement	Non-fatal injury	Dry	East	Turning left	Passenger van	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2016-Oct-08, Sat,15:20	Clear	SMV other	P.D. only	Dry	East	Turning right	Truck and trailer	Pole (utility, power)	0
	Clear	SMV other	Non-fatal injury	Dry	North	Turning right	Automobile, station wagon	Pedestrian	1
2016-Nov-28, Mon,08:41									
2016-Nov-28, Mon,08:41 2017-May-18, Thu,08:36	Clear	Turning movement	Non-fatal injury	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0



Traffic Control: Tra	ffic signal						Total Collisions:	53	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2017-Jun-27, Tue,14:30	Clear	Turning movement	P.D. only	Dry	West	Turning left	Unknown	Other motor vehicle	0
					East	Turning right	Automobile, station wagon	Other motor vehicle	
2017-Jun-28, Wed,17:55	Clear	Sideswipe	P.D. only	Dry	East	Unknown	Unknown	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Jul-07, Fri,15:43	Clear	Rear end	P.D. only	Dry	South	Slowing or stopping	g Motorcycle	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Jul-20, Thu,15:48	Clear	Angle	Non-fatal injury	Dry	East	Going ahead	Passenger van	Other motor vehicle	0
					South	Turning left	Municipal transit bus	Other motor vehicle	
2017-Jul-26, Wed,08:34	Clear	Turning movement	Non-fatal injury	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Sep-21, Thu,16:00	Clear	Rear end	Non-fatal injury	Dry	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2017-Sep-22, Fri,15:43	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Truck - dump	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Oct-14, Sat,13:15	Clear	Turning movement	P.D. only	Dry	North	Turning right	Delivery van	Other motor vehicle	0
					South	Turning left	Automobile, station wagon	Other motor vehicle	
2017-Oct-26, Thu,16:59	Clear	Turning movement	P.D. only	Dry	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					South	Going ahead	Automobile, station wagon	Other motor vehicle	
2017-Nov-30, Thu,14:31	Clear	Rear end	P.D. only	Wet	North	Turning right	Automobile, station wagon	Other motor vehicle	0
					North	Turning right	Pick-up truck	Other motor vehicle	
2018-Jan-09, Tue,21:41	Clear	Sideswipe	P.D. only	Slush	South	Unknown	Unknown	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2018-Jan-10, Wed,21:16	Clear	Turning movement	P.D. only	Wet	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Turning left	Automobile, station wagon	Other motor vehicle	



Traffic Control: Tra	ffic signal						Total Collisions:	53	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	r Vehicle type	First Event	No. Peo
2018-Jan-13, Sat,10:12	Drifting Snow	Sideswipe	P.D. only	Ice	West	Slowing or stopping	g Automobile, station wagon	Skidding/sliding	0
					West	Turning left	Automobile, station wagon	Other motor vehicle	
2018-Feb-01, Thu,07:07	Snow	Sideswipe	P.D. only	Loose snow	West	Turning left	School bus	Other motor vehicle	0
					West	Changing lanes	Pick-up truck	Other motor vehicle	
2018-Feb-06, Tue,18:13	Clear	Turning movement	P.D. only	Wet	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Turning left	Pick-up truck	Other motor vehicle	
2018-Feb-09, Fri,12:58	Clear	Rear end	P.D. only	Wet	West	Slowing or stopping	g Truck - dump	Other motor vehicle	0
					West	Turning right	Automobile, station wagon	Other motor vehicle	
2018-May-12, Sat,14:30	Clear	Turning movement	P.D. only	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-May-18, Fri,11:37	Clear	Sideswipe	P.D. only	Dry	East	Changing lanes	Truck - closed	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-May-31, Thu,08:11	Clear	Turning movement	Non-fatal injury	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Jun-29, Fri,15:48	Clear	Rear end	P.D. only	Dry	East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	0
					East	Slowing or stopping	g Automobile, station wagon	Other motor vehicle	
2018-Aug-11, Sat,12:51	Clear	Turning movement	P.D. only	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Aug-13, Mon,16:20	Clear	Turning movement	P.D. only	Dry	East	Turning left	Pick-up truck	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Aug-17, Fri,10:38	Clear	Turning movement	P.D. only	Wet	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
					East	Going ahead	Truck - closed	Other motor vehicle	



Traffic Control: Trai	fic signal						Total Collisions:	53	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2018-Oct-19, Fri,09:19	Clear	Turning movement	P.D. only	Dry	West	Turning left	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Oct-24, Wed,12:43	Clear	Turning movement	P.D. only	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Oct-27, Sat,22:36	Snow	Sideswipe	P.D. only	Wet	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2018-Nov-16, Fri,07:23	Snow	Angle	Non-fatal injury	Loose snow	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Automobile, station wagon	Other motor vehicle	
					South	Going ahead	Pick-up truck	Other motor vehicle	
2018-Nov-23, Fri,13:08	Clear	SMV other	Non-fatal injury	Dry	North	Turning left	Automobile, station wagon	Pedestrian	1
2019-Jan-03, Thu,11:46	Clear	Rear end	P.D. only	Dry	South	Going ahead	Automobile, station wagon	Other motor vehicle	0
					South	Stopped	Automobile, station wagon	Other motor vehicle	
					South	Stopped	Automobile, station wagon	Other motor vehicle	
2019-Jan-21, Mon,20:49	Snow	Angle	P.D. only	Packed snow	East	Turning right	Automobile, station wagon	Skidding/sliding	0
					North	Turning left	Automobile, station wagon	Other motor vehicle	
2019-Jan-25, Fri,10:49	Clear	Sideswipe	P.D. only	Slush	North	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					North	Going ahead	Delivery van	Other motor vehicle	
2019-Feb-06, Wed,16:17	Rain	Sideswipe	P.D. only	Wet	West	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-May-21, Tue,18:53	Clear	Turning movement	Non-fatal injury	Dry	West	Turning left	Pick-up truck	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Jun-10, Mon,19:51	Clear	Turning movement	P.D. only	Dry	West	Turning right	Unknown	Cyclist	0
					West	Going ahead	Bicycle	Other motor vehicle	



Traffic Control: Tra	ffic signal						Total Collisions:	53	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuver	Vehicle type	First Event	No. Ped
2019-Jun-12, Wed,09:14	Clear	Rear end	Non-fatal injury	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Jun-25, Tue,07:07	Clear	Turning movement	Non-fatal injury	Wet	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
					North	Stopped	Pick-up truck	Other motor vehicle	
2019-Aug-17, Sat,16:38	Clear	Sideswipe	P.D. only	Wet	East	Going ahead	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2019-Oct-17, Thu,06:50	Rain	Sideswipe	P.D. only	Wet	West	Going ahead	Unknown	Other motor vehicle	0
					West	Turning left	Automobile, station wagon	Other motor vehicle	
2020-Jan-31, Fri,17:53	Clear	SMV other	Non-fatal injury	Dry	North	Turning left	Automobile, station wagon	Pedestrian	1
2020-Feb-22, Sat,02:05	Clear	Sideswipe	Non-fatal injury	Dry	West	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Passenger van	Other motor vehicle	
2020-Feb-26, Wed,19:34	Snow	Turning movement	Non-fatal injury	Slush	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Automobile, station wagon	Other motor vehicle	
2020-Feb-28, Fri,15:40	Clear	Rear end	P.D. only	Dry	East	Slowing or stopping	Automobile, station wagon	Other motor vehicle	0
					East	Stopped	Automobile, station wagon	Other motor vehicle	
2020-Mar-12, Thu,12:00	Clear	Other	P.D. only	Dry	East	Stopped	Automobile, station wagon	Debris falling off vehicle	0
					East	Slowing or stopping	Pick-up truck	Other	
2020-Apr-21, Tue,12:31	Snow	Angle	P.D. only	Wet	North	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2020-Jul-16, Thu,13:21	Clear	Turning movement	P.D. only	Dry	West	Turning left	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Pick-up truck	Other motor vehicle	
2020-Sep-29, Tue,19:44	Clear	Turning movement	Non-fatal injury	Dry	East	Turning left	Pick-up truck	Other motor vehicle	0
					West	Going ahead	Pick-up truck	Other motor vehicle	



Traffic Control: Tra	ffic signal						Total Collisions:	53	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2020-Oct-07, Wed,11:33	Clear	Rear end	Non-fatal injury	Dry	West	Going ahead	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Automobile, station wagon	Other motor vehicle	
2020-Oct-27, Tue,11:59	Clear	Turning movement	Non-fatal injury	Dry	East	Turning left	Automobile, station wagon	Other motor vehicle	0
					West	Going ahead	Pick-up truck	Other motor vehicle	
Location: CARLI	NG AVE EB bi	wn CHURCHILL A	VE N & CLYDE A	VE					
Traffic Control: No	control						Total Collisions:	: 1	
Date/Day/Time	Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	r Vehicle type	First Event	No. Ped
2017-Mar-27, Mon,15:30	Clear	Sideswipe	P.D. only	Wet	East	Changing lanes	Automobile, station wagon	Other motor vehicle	0
					East	Going ahead	Passenger van	Other motor vehicle	
Traffic Control: No	-	twn CHURCHILL A					Total Collisions	: 8	
Traffic Control: No	-	twn CHURCHILL A	VE N & COLE A	Surface	Veh. Dir	Vehicle Manoeuve	Total Collisions		No. Peo
Location: CARLII Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55	control			Surface Cond'n			Total Collisions	: 8	No. Peo 0
Traffic Control: No Date/Day/Time	control Environment	Impact Type	Classification	Surface	Veh. Dir	Vehicle Manoeuve	Total Collisions	First Event	
Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55	control Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir East	Vehicle Manoeuve Going ahead	Total Collisions or Vehicle type Automobile, station wagon	E 8 First Event Other motor vehicle	No. Pec 0 0
Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55	control Environment Clear	Impact Type Rear end	Classification P.D. only	Surface Cond'n Dry	Veh. Dir East East	Vehicle Manoeuve Going ahead Turning right	Total Collisions: Total Collisions: Total Collisions: Automobile, station wagon Automobile, station wagon	E 8 First Event Other motor vehicle Other motor vehicle	0
Traffic Control: No Date/Day/Time	control Environment Clear	Impact Type Rear end	Classification P.D. only	Surface Cond'n Dry	Veh. Dir East East West	Vehicle Manoeuve Going ahead Turning right Changing lanes	Total Collisions or Vehicle type Automobile, station wagon Automobile, station wagon Automobile, station wagon	 8 First Event Other motor vehicle Other motor vehicle Other motor vehicle 	0
Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55 2017-May-04, Thu,16:47	control Environment Clear Clear	Impact Type Rear end Sideswipe	Classification P.D. only P.D. only	Surface Cond'n Dry Dry	Veh. Dir East East West West	Vehicle Manoeuve Going ahead Turning right Changing lanes Going ahead	Total Collisions r Vehicle type Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon	E 8 First Event Other motor vehicle Other motor vehicle Other motor vehicle Other motor vehicle	0
Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55 2017-May-04, Thu,16:47 2018-Aug-02, Thu,17:43	control Environment Clear Clear	Impact Type Rear end Sideswipe	Classification P.D. only P.D. only	Surface Cond'n Dry Dry	Veh. Dir East East West West	Vehicle Manoeuve Going ahead Turning right Changing lanes Going ahead Going ahead	Total Collisions: r Vehicle type Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon	 8 First Event Other motor vehicle 	0
Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55 2017-May-04, Thu,16:47	control Environment Clear Clear Clear	Impact Type Rear end Sideswipe Turning movement	Classification P.D. only P.D. only P.D. only	Surface Cond'n Dry Dry Dry	Veh. Dir East East West West West West	Vehicle Manoeuve Going ahead Turning right Changing lanes Going ahead Going ahead Turning right Going ahead	Total Collisions Total Collisions Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon	 8 First Event Other motor vehicle 	0 0 0 0
Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55 2017-May-04, Thu,16:47 2018-Aug-02, Thu,17:43 2019-Jan-21, Mon,19:30	control Environment Clear Clear Clear Snow	Impact Type Rear end Sideswipe Turning movement SMV other	Classification P.D. only P.D. only P.D. only Non-fatal injury	Surface Cond'n Dry Dry Dry Loose snow	Veh. Dir East East West West West West	Vehicle Manoeuve Going ahead Turning right Changing lanes Going ahead Going ahead Turning right Going ahead	Total Collisions Total Collisions Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon	 8 First Event Other motor vehicle Pedestrian 	0 0 0 1
Traffic Control: No Date/Day/Time 2016-Oct-07, Fri,14:55 2017-May-04, Thu,16:47 2018-Aug-02, Thu,17:43 2019-Jan-21, Mon,19:30	control Environment Clear Clear Clear Snow	Impact Type Rear end Sideswipe Turning movement SMV other	Classification P.D. only P.D. only P.D. only Non-fatal injury	Surface Cond'n Dry Dry Dry Loose snow	Veh. Dir East East West West West West West	Vehicle Manoeuve Going ahead Turning right Changing lanes Going ahead Going ahead Turning right Going ahead Slowing or stopping	Total Collisions: r Vehicle type Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon Automobile, station wagon g Automobile, station wagon	 8 First Event Other motor vehicle 	0 0 0 1



IG AVE WB b	twn CHURCHILL A	AVE N & COLE AVI	Ε					
Traffic Control: No control Total Collisions: 8								
Environment	Impact Type	Classification	Surface Cond'n	Veh. Dir	Vehicle Manoeuve	er Vehicle type	First Event	No. Ped
Clear	Turning movement	P.D. only	Dry	West	Turning right	Automobile, station wagon	Other motor vehicle	0
				West	Going ahead	Truck - closed	Other motor vehicle	
Clear	Rear end	P.D. only	Dry	West	Going ahead	Passenger van	Other motor vehicle	0
				West	Going ahead	Automobile, station wagon	Other motor vehicle	
	control Environment Clear	Control Impact Type Clear Turning movement	Control Environment Impact Type Classification Clear Turning movement P.D. only	Control Environment Impact Type Classification Surface Cond'n Clear Turning movement P.D. only Dry	ControlEnvironmentImpact TypeClassificationSurface Cond'nVeh. Dir Cond'nClearTurning movementP.D. onlyDryWest WestClearRear endP.D. onlyDryWest	Environment Impact Type Classification Surface Cond'n Veh. Dir Vehicle Manoeuver Clear Turning movement P.D. only Dry West Turning right West Going ahead Clear Rear end P.D. only Dry West Going ahead	Total CollisionsEnvironmentImpact TypeClassificationSurface Cond'nVeh. Dir Vehicle Manoeuver Vehicle typeClearTurning movementP.D. onlyDryWestTurning rightAutomobile, station wagon WestClearRear endP.D. onlyDryWestGoing aheadTruck - closed	Total Collisions: 8 Environment Impact Type Classification Surface Cond'n Veh. Dir Vehicle Manoeuver Vehicle type First Event Clear Turning movement P.D. only Dry West Turning right Automobile, station wagon Other motor vehicle Clear Rear end P.D. only Dry West Going ahead Truck - closed Other motor vehicle Clear Rear end P.D. only Dry West Going ahead Passenger van Other motor vehicle

Appendix E

Carling Avenue Transit Priority Measures Plan








TDM Checklist



TDM-Supportive Development Design and Infrastructure Checklist City of Ottawa Version 1.0 (30 June 2017) City of Ottawa

TDM-Supportive Development Design and Infrastructure Checklist: Non-Residential Developments (office, institutional, retail or industrial)

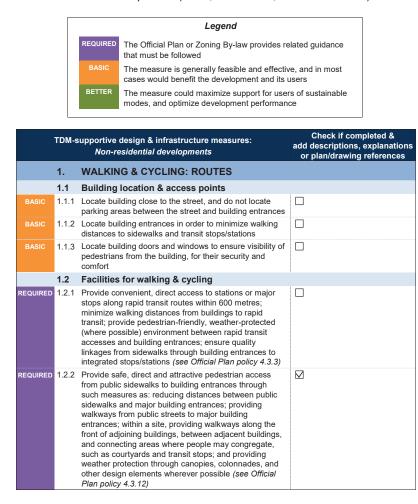

TDM-Supportive Development Design and Infrastructure Checklist Version 1.0 (30 June 2017)

City of Ottawa

	TDM-s	supportive design & infrastructure measures: Non-residential developments	Check if completed & add descriptions, explanations or plan/drawing references
REQUIRED	1.2.3	Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (see Official Plan policy 4.3.10)	
REQUIRED	1.2.4	Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (see Official Plan policy 4.3.10)	
REQUIRED	1.2.5	Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and on- road cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (see Official Plan policy 4.3.11)	
BASIC	1.2.6	Provide safe, direct and attractive walking routes from building entrances to nearby transit stops	
BASIC	1.2.7	Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible	
BASIC	1.2.8	Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility	
	1.3	Amenities for walking & cycling	
BASIC	1.3.1	Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails	
BASIC	1.3.2	Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)	

 TDM-Supportive Development Design and Infrastructure Checklist
 City of Ottawa

 Version 1.0 (30 June 2017)
 City of Ottawa

	TDM-s	upportive design & infrastructure measures: Non-residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	2.	WALKING & CYCLING: END-OF-TRIP FACILI	TIES
	2.1	Bicycle parking	
REQUIRED	2.1.1	Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see Official Plan policy 4.3.6)	
REQUIRED	2.1.2	Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well- used areas (see Zoning By-law Section 111)	
REQUIRED	2.1.3	Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see Zoning By-law Section 111)	
BASIC	2.1.4	Provide bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met), plus the expected peak number of customer/visitor cyclists	
BETTER	2.1.5	Provide bicycle parking spaces equivalent to the expected number of commuter and customer/visitor cyclists, plus an additional buffer (e.g. 25 percent extra) to encourage other cyclists and ensure adequate capacity in peak cycling season	
	2.2	Secure bicycle parking	
REQUIRED	2.2.1	Where more than 50 bicycle parking spaces are provided for a single office building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see Zoning By-law Section 111)	
BETTER	2.2.2	Provide secure bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met)	
	2.3	Shower & change facilities	
BASIC	2.3.1	Provide shower and change facilities for the use of active commuters	
BETTER	2.3.2	In addition to shower and change facilities, provide dedicated lockers, grooming stations, drying racks and laundry facilities for the use of active commuters	
	2.4	Bicycle repair station	
BETTER	2.4.1	Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)	

TDM-Supportive Development Design and Infrastructure Checklist Version 1.0 (30 June 2017)

City of Ottawa


	TDM-s	upportive design & infrastructure measures: Non-residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	3.	TRANSIT	
	3.1	Customer amenities	
BASIC	3.1.1	Provide shelters, lighting and benches at any on-site transit stops	
BASIC	3.1.2	Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	
BETTER	3.1.3	Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building	
	4.	RIDESHARING	
	4.1	Pick-up & drop-off facilities	
BASIC	4.1.1	Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	
	4.2	Carpool parking	
BASIC	4.2.1	Provide signed parking spaces for carpools in a priority location close to a major building entrance, sufficient in number to accommodate the mode share target for carpools	
BETTER	4.2.2	At large developments, provide spaces for carpools in a separate, access-controlled parking area to simplify enforcement	
	5.	CARSHARING & BIKESHARING	
	5.1	Carshare parking spaces	
BETTER	5.1.1	Provide carshare parking spaces in permitted non- residential zones, occupying either required or provided parking spaces (see Zoning By-law Section 94)	
	5.2	Bikeshare station location	
BETTER	5.2.1	Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	

TDM-Supportive Development Design and Infrastructure Checklist Version 1.0 (30 June 2017) City of Ottawa

	TDM-s	supportive design & infrastructure measures: Non-residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	6.	PARKING	
	6.1	Number of parking spaces	
REQUIRED	6.1.1	Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	
BASIC	6.1.2	Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	
BASIC	6.1.3	Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly (see Zoning By-law Section 104)	
BETTER	6.1.4	Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking (see Zoning By-law Section 111)	
	6.2	Separate long-term & short-term parking areas	
BETTER	6.2.1	Separate short-term and long-term parking areas using signage or physical barriers, to permit access controls and simplify enforcement (i.e. to discourage employees from parking in visitor spaces, and vice versa)	
	7.	OTHER	
	7.1	On-site amenities to minimize off-site trips	
BETTER	7.1.1	Provide on-site amenities to minimize mid-day or mid-commute errands	

TDM-Supportive Development Design and Infrastructure Checklist Version 1.0 (30 June 2017) City of Ottawa

TDM-Supportive Development Design and Infrastructure Checklist: *Residential Developments (multi-family or condominium)*



	TDM-s	supportive design & infrastructure measures: Residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	1.	WALKING & CYCLING: ROUTES	
	1.1	Building location & access points	
BASIC	1.1.1	Locate building close to the street, and do not locate parking areas between the street and building entrances	
BASIC	1.1.2	Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations	
BASIC	1.1.3	Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort	
	1.2	Facilities for walking & cycling	
EQUIRED	1.2.1	Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather-protected (where possible) environment between rapid transit accesses and building entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations (see Official Plan policy 4.3.3)	
EQUIRED	1.2.2	Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and other design elements wherever possible (see Official Plan policy 4.3.12)	

TDM-Supportive Development Design and Infrastructure Checklist Version 1.0 (30 June 2017)

Check if completed & TDM-supportive design & infrastructure measures: add descriptions, explanations Residential developments or plan/drawing references REQUIRED 1.2.3 Provide sidewalks of smooth, well-drained walking \square surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (see Official Plan policy 4.3.10) REQUIRED 1.2.4 Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (see Official Plan policy 4.3.10) REQUIRED 1.2.5 Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and onroad cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (see Official Plan policy 4.3.11) 1.2.6 Provide safe, direct and attractive walking routes from building entrances to nearby transit stops 1.2.7 Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible 1.2.8 Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility 1.3 Amenities for walking & cycling BASIC 1.3.1 Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails BASIC 1.3.2 Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)

TDM-Supportive Development Design and Infrastructure Checklist Version 1.0 (30 June 2017)

City of Ottawa

	TDM-s	upportive design & infrastructure measures: Residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	2.	WALKING & CYCLING: END-OF-TRIP FACILI	TIES
	2.1	Bicycle parking	
EQUIRED	2.1.1	Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see Official Plan policy 4.3.6)	
EQUIRED	2.1.2	Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well- used areas (see Zoning By-law Section 111)	
EQUIRED	2.1.3	Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see Zoning By-law Section 111)	
BASIC	2.1.4	Provide bicycle parking spaces equivalent to the expected number of resident-owned bicycles, plus the expected peak number of visitor cyclists	
	2.2	Secure bicycle parking	
EQUIRED	2.2.1	Where more than 50 bicycle parking spaces are provided for a single residential building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see Zoning By-law Section 111)	
BETTER	2.2.2	Provide secure bicycle parking spaces equivalent to at least the number of units at condominiums or multi-family residential developments	
	2.3	Bicycle repair station	
BETTER	2.3.1	Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)	
	3.	TRANSIT	
	3.1	Customer amenities	
BASIC	3.1.1	Provide shelters, lighting and benches at any on-site transit stops	
BASIC	3.1.2	Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	
BETTER	3.1.3	Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building	

City of Ottawa

TDM-Supportive Development Design and Infrastructure Checklist Version 1.0 (30 June 2017) City of Ottawa

	TDM-s	upportive design & infrastructure measures: Residential developments	Check if completed & add descriptions, explanations or plan/drawing references
	4.	RIDESHARING	
	4.1	Pick-up & drop-off facilities	
BASIC	4.1.1	Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	
	5.	CARSHARING & BIKESHARING	
	5.1	Carshare parking spaces	
BETTER	5.1.1	Provide up to three carshare parking spaces in an R3, R4 or R5 Zone for specified residential uses (see Zoning By-law Section 94)	
	5.2	Bikeshare station location	
BETTER	5.2.1	Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	
	6.	PARKING	
	6.1	Number of parking spaces	
REQUIRED	6.1.1	Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	
BASIC	6.1.2	Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	
BASIC	6.1.3	Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly (see Zoning By-law Section 104)	
BETTER	6.1.4	Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking (see Zoning By-law Section 111)	
	6.2	Separate long-term & short-term parking areas	
BETTER	6.2.1	Provide separate areas for short-term and long-term parking (using signage or physical barriers) to permit access controls and simplify enforcement (i.e. to discourage residents from parking in visitor spaces, and vice versa)	

TDM Measures Checklist Version 1.0 (30 June 2017)

City of Ottawa

TDM Measures Checklist:

Non-Residential Developments (office, institutional, retail or industrial)

	Legend
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance
*	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

	TDM	measures: Non-residential developments	Check if proposed & add descriptions
	1.	TDM PROGRAM MANAGEMENT	
	1.1	Program coordinator	
BASIC ★	1.1.1	Designate an internal coordinator, or contract with an external coordinator	
	1.2	Travel surveys	
BETTER	1.2.1	Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	
	2.	WALKING AND CYCLING	
	2.1	Information on walking/cycling routes & destination	ations
BASIC	2.1.1	Display local area maps with walking/cycling access routes and key destinations at major entrances	
	2.2	Bicycle skills training	·
		Commuter travel	
BETTER ★	2.2.1	Offer on-site cycling courses for commuters, or subsidize off-site courses	
	2.3	Valet bike parking	
		Visitor travel	
BETTER	2.3.1	Offer secure valet bike parking during public events when demand exceeds fixed supply (e.g. for festivals, concerts, games)	

TDM Measures Checklist Version 1.0 (30 June 2017)

City of Ottawa

	TDM	measures: Non-residential developments	Check if proposed & add descriptions
	3.	TRANSIT	
	3.1	Transit information	
BASIC	3.1.1	Display relevant transit schedules and route maps at entrances	
BASIC	3.1.2	Provide online links to OC Transpo and STO information	
BETTER	3.1.3	Provide real-time arrival information display at entrances	
	3.2	Transit fare incentives	
		Commuter travel	
BETTER	3.2.1	Offer preloaded PRESTO cards to encourage commuters to use transit	
BETTER ★	3.2.2	Subsidize or reimburse monthly transit pass purchases by employees	
		Visitor travel	
BETTER	3.2.3	Arrange inclusion of same-day transit fare in price of tickets (e.g. for festivals, concerts, games)	
	3.3	Enhanced public transit service	
		Commuter travel	
BETTER	3.3.1	Contract with OC Transpo to provide enhanced transit services (e.g. for shift changes, weekends)	
		Visitor travel	
BETTER	3.3.2	Contract with OC Transpo to provide enhanced transit services (e.g. for festivals, concerts, games)	
	3.4	Private transit service	
		Commuter travel	
BETTER	3.4.1	Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for shift changes, weekends)	
		Visitor travel	
BETTER	3.4.2	Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for festivals, concerts, games)	

TDM Measures Checklist Version 1.0 (30 June 2017)

City of Ottawa

	TDM	measures: Non-residential developments	Check if proposed & add descriptions		
	4.	RIDESHARING			
	4.1	Ridematching service			
		Commuter travel			
BASIC ★	4.1.1	Provide a dedicated ridematching portal at OttawaRideMatch.com			
	4.2	Carpool parking price incentives			
		Commuter travel			
BETTER	4.2.1	Provide discounts on parking costs for registered carpools			
	4.3	Vanpool service			
		Commuter travel			
BETTER	4.3.1	Provide a vanpooling service for long-distance commuters			
	5.	CARSHARING & BIKESHARING			
	5.1	Bikeshare stations & memberships			
BETTER	5.1.1	Contract with provider to install on-site bikeshare station for use by commuters and visitors			
		Commuter travel			
BETTER	5.1.2	Provide employees with bikeshare memberships for local business travel			
	5.2	Carshare vehicles & memberships			
		Commuter travel			
BETTER	5.2.1	Contract with provider to install on-site carshare vehicles and promote their use by tenants			
BETTER	5.2.2	Provide employees with carshare memberships for local business travel			
	6.	PARKING			
	6.1	Priced parking			
		Commuter travel			
BASIC ★	6.1.1	Charge for long-term parking (daily, weekly, monthly)			
BASIC	6.1.2	Unbundle parking cost from lease rates at multi-tenant sites			
		Visitor travel			
		Charge for short-term parking (hourly)			

TDM Measures Checklist

City of Ottawa

TDM Measures Checklist Version 1.0 (30 June 2017)

TDM Measures Checklist:

Residential Developments (multi-family, condominium or subdivision)

	Legend
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance
*	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

	TDM	measures: Residential developments	Check if proposed & add descriptions		
	1.	TDM PROGRAM MANAGEMENT			
	1.1	Program coordinator			
BASIC ★	1.1.1	Designate an internal coordinator, or contract with an external coordinator			
	1.2	Travel surveys			
BETTER	1.2.1	Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress			
	2.	WALKING AND CYCLING			
	2.1	Information on walking/cycling routes & des	tinations		
BASIC	2.1.1	Display local area maps with walking/cycling access routes and key destinations at major entrances (multi-family, condominium)			
	2.2	Bicycle skills training			
BETTER	2.2.1	Offer on-site cycling courses for residents, or subsidize off-site courses			

I Divi weasures checklist	
Version 1.0 (30 June 2017)	

	TDM	measures: Non-residential developments	Check if proposed & add descriptions
	7.	TDM MARKETING & COMMUNICATIONS	
	7.1	Multimodal travel information	
		Commuter travel	
ASIC ★	7.1.1	Provide a multimodal travel option information package to new/relocating employees and students	
		Visitor travel	
TTER ★	7.1.2	Include multimodal travel option information in invitations or advertising that attract visitors or customers (e.g. for festivals, concerts, games)	
	7.2	Personalized trip planning	
		Commuter travel	
	7.2.1	Offer personalized trip planning to new/relocating employees	
	7.3	Promotions	
		Commuter travel	
TTER	7.3.1	Deliver promotions and incentives to maintain awareness, build understanding, and encourage trial of sustainable modes	
	8.	OTHER INCENTIVES & AMENITIES	
	8.1	Emergency ride home	
		Commuter travel	
	8.1.1	Provide emergency ride home service to non-driving commuters	
	8.2	Alternative work arrangements	
	_	Commuter travel	
ISIC ★	8.2.1	Encourage flexible work hours	
TER	8.2.2	Encourage compressed workweeks	
ITER ★	8.2.3	Encourage telework	
	8.3	Local business travel options	
		Commuter travel	
ISIC ★	8.3.1	Provide local business travel options that minimize the need for employees to bring a personal car to work	
	8.4	Commuter incentives	
		Commuter travel	
TER	8.4.1	Offer employees a taxable, mode-neutral commuting allowance	
	8.5	On-site amenities	
		Commuter travel	
TER	851	Provide on-site amenities/services to minimize	

TDM Measures Checklist Version 1.0 (30 June 2017)

City of Ottawa

	TDM measures: Residential developments		Check if proposed & add descriptions		
	3.	TRANSIT			
	3.1	Transit information			
BASIC	3.1.1	Display relevant transit schedules and route maps at entrances (multi-family, condominium)	\square		
BETTER	3.1.2	Provide real-time arrival information display at entrances (<i>multi-family, condominium</i>)			
	3.2	Transit fare incentives			
BASIC ★	3.2.1	Offer PRESTO cards preloaded with one monthly transit pass on residence purchase/move-in, to encourage residents to use transit			
BETTER	3.2.2	Offer at least one year of free monthly transit passes on residence purchase/move-in			
	3.3	Enhanced public transit service			
BETTER ★	3.3.1	Contract with OC Transpo to provide early transit services until regular services are warranted by occupancy levels (<i>subdivision</i>)			
	3.4	Private transit service			
BETTER	3.4.1	Provide shuttle service for seniors homes or lifestyle communities (e.g. scheduled mall or supermarket runs)			
	4.	CARSHARING & BIKESHARING			
	4.1	Bikeshare stations & memberships			
BETTER	4.1.1	Contract with provider to install on-site bikeshare station (<i>multi-family</i>)			
BETTER	4.1.2	Provide residents with bikeshare memberships, either free or subsidized (multi-family)			
	4.2	Carshare vehicles & memberships			
BETTER	4.2.1	Contract with provider to install on-site carshare vehicles and promote their use by residents			
BETTER	4.2.2	Provide residents with carshare memberships, either free or subsidized			
	5.	PARKING			
	5.1	Priced parking			
BASIC ★	5.1.1	Unbundle parking cost from purchase price (condominium)			
BASIC ★	5.1.2	Unbundle parking cost from monthly rent (multi-family)			

TDM Measures Checklist

Version 1.0 (30 June 2017)

City of Ottawa

TDM	measures: Residential developments	Check if proposed & add descriptions
6.	TDM MARKETING & COMMUNICATIONS	;
6.1	Multimodal travel information	
BASIC ★ 6.1.1	Provide a multimodal travel option information package to new residents	
6.2	Personalized trip planning	
BETTER ★ 6.2.1	Offer personalized trip planning to new residents	





Turing Templates





<i>Ni</i>		Notes:	
, Y		11500	
$\overline{\mathbf{X}}$			
"			
			\bigcirc
	800	8400	
	HSU		
		m	
	Width Track	:	2600 2600
			6.0 40.0
		0 0	
AME	h		
	90 61		
N			
\bigotimes			
11			
	01 ISSUED FOR	REVIEW	EW 09/10/2024
	REV: DESCRIPTION: STATUS:		BY: DATE:
		CGH Transpor	rtation
par 30, 4r-27017		🧧 6 Plaza Court	
part 3		Ottawa, ON K2H 7W1 (343) 999-9117	
		(343) 777-7117	J
	CLIENT: Inside	e Edge Properties	
	464 Bar Ottawo	nk Street, Suite 200	,
1	K2P 1Z3		
part 1, 4r-27017 lot 1			
PIN 04012-0104		1675 Carling Ave	e /
part 2, 4r-27017	386 T	illbury Ave	
		ng Movement An	
	SCALE AT A3:	Garbage Loading	CHECKED:
	NTS PROJECT NO:	09/10/2024 EW DRAWING NO:	REVISION:
	2023-083	001	02

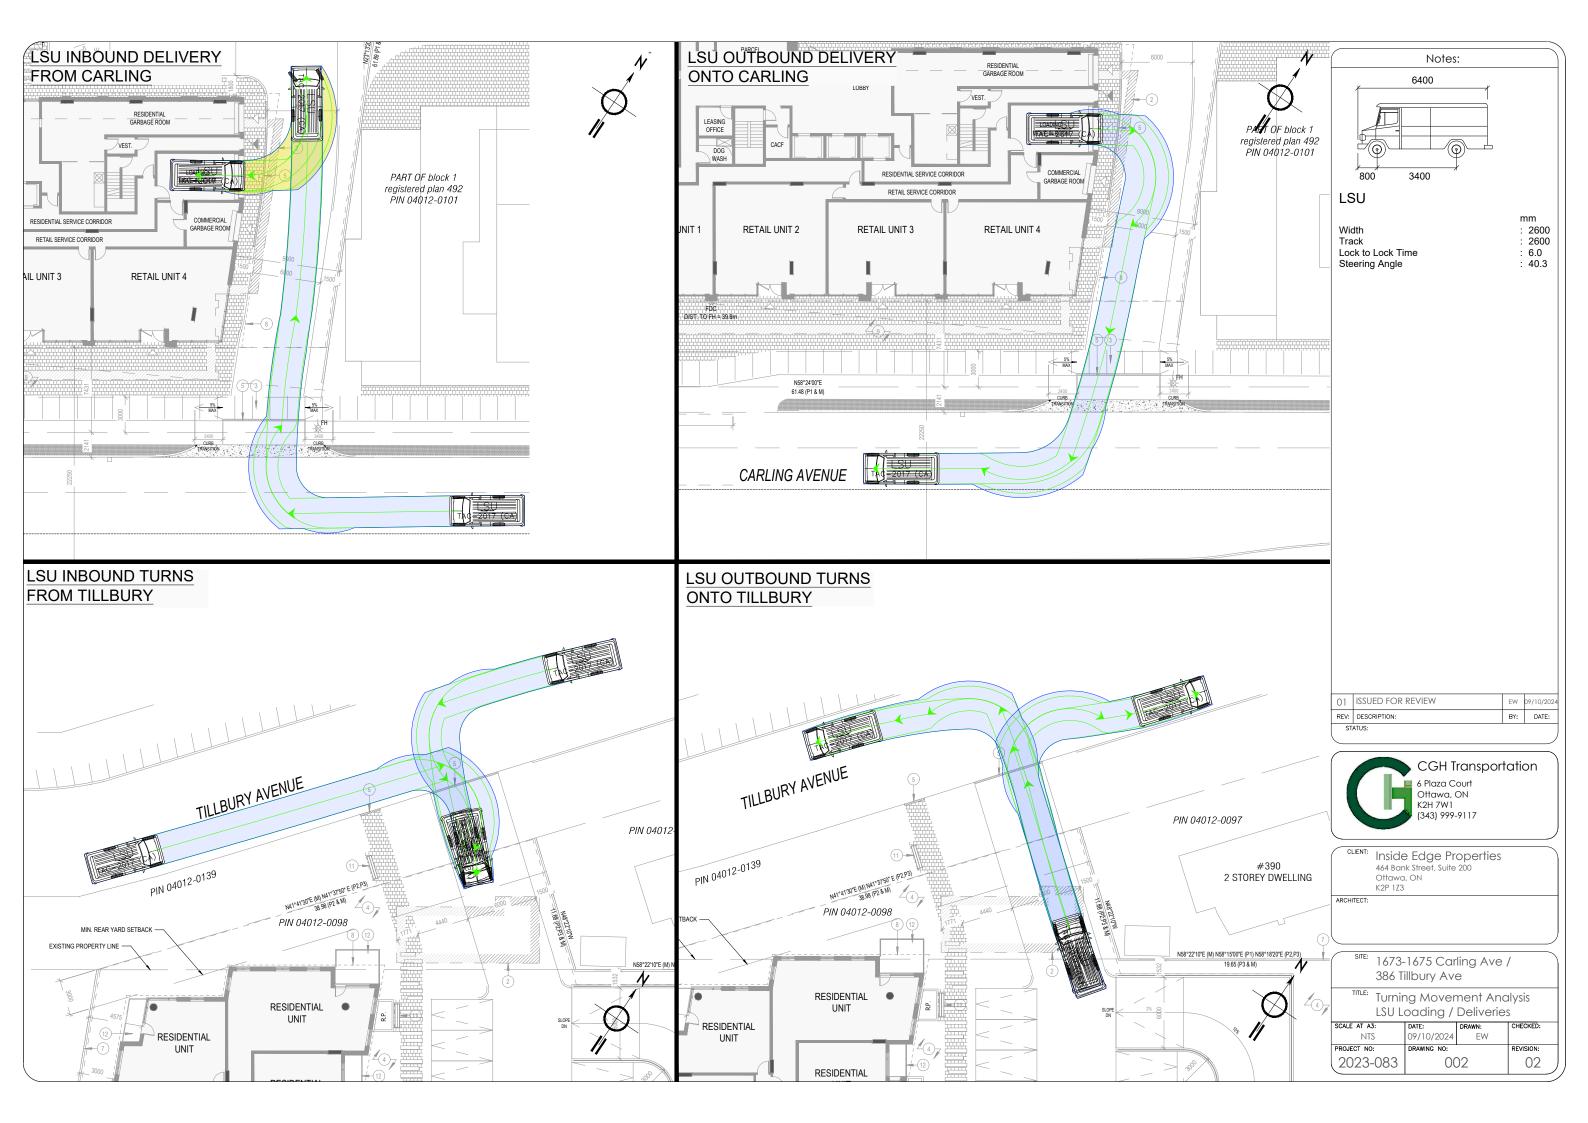

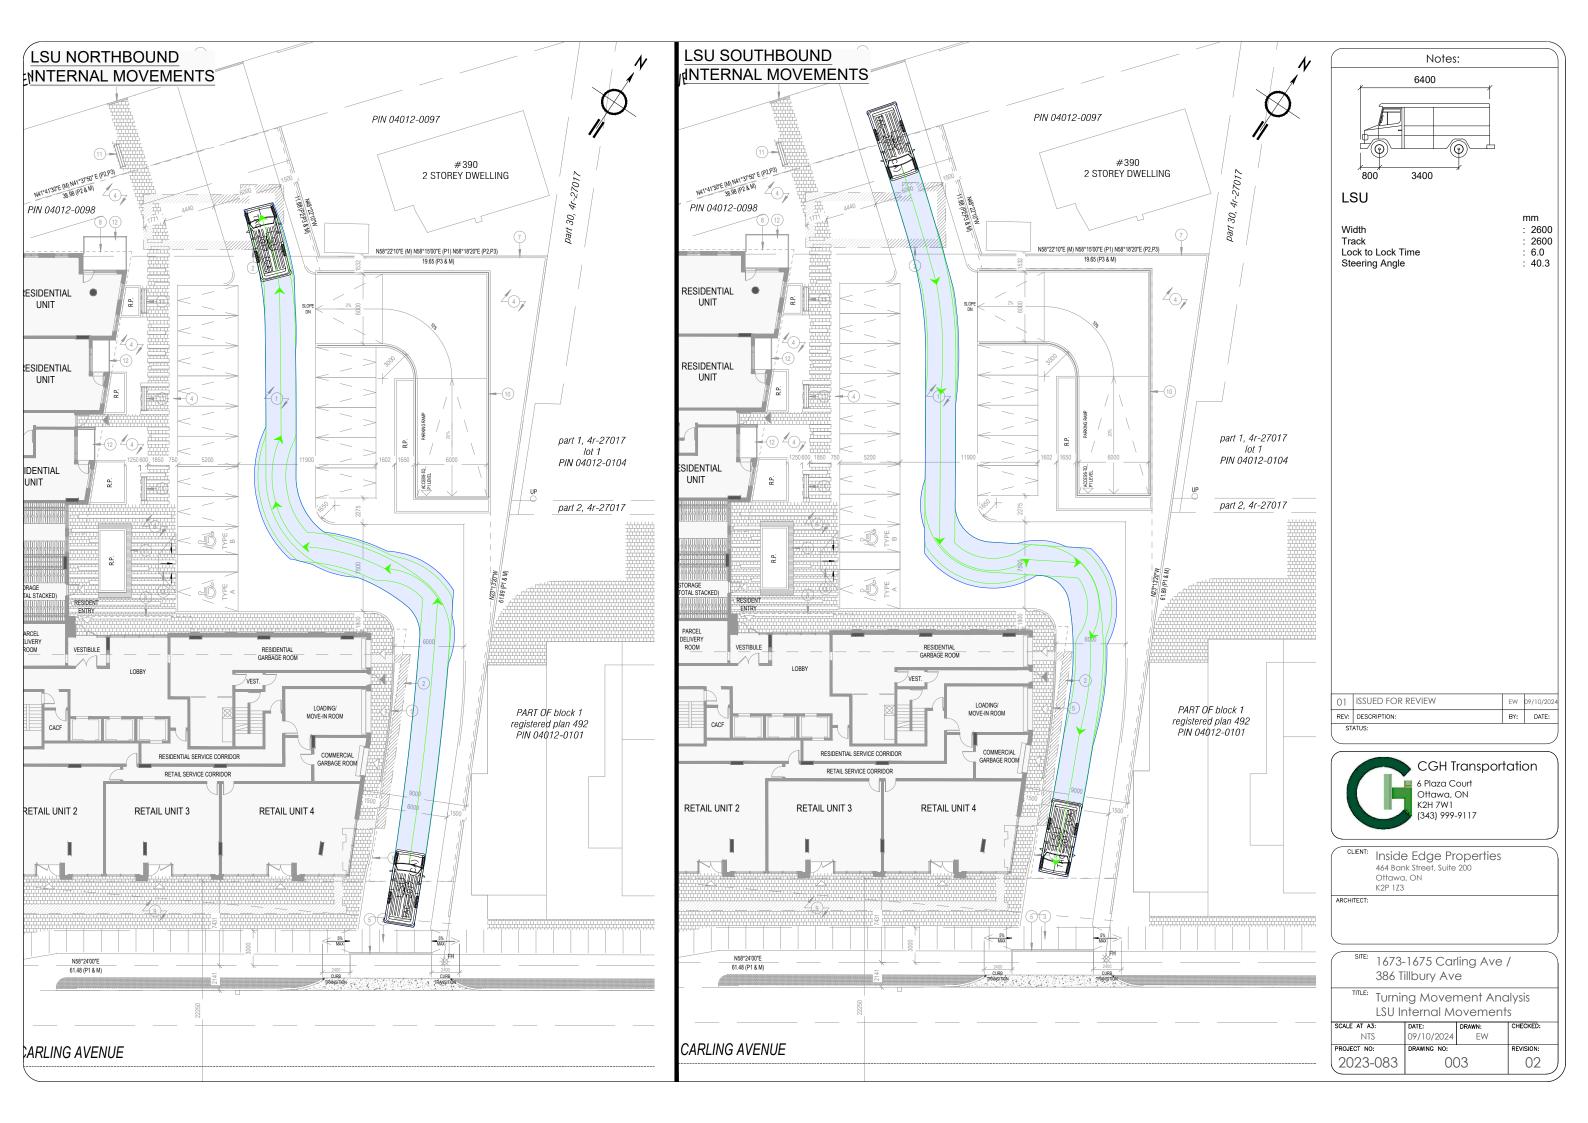



MMLOS Analysis



Multi-Modal Level of Service - Segments Form

Consultant Scenario Comments	CGH Transportation Inc Existing/Future		Project Date	2023-083 9/23/2023	
					T ''''
SEGMENTS			Carling Existing	Carling Future	Tillbury Existing/Future
	Sidewalk Width Boulevard Width		≥ 2 m < 0.5	≥ 2 m 0.5 - 2 m	1.8 m < 0.5 m
	Avg Daily Curb Lane Traffic Volume		≤ 3000	≤ 3000	≤ 3000
Pedestrian	Operating Speed On-Street Parking		> 60 km/h no	> 60 km/h no	> 30 to 50 km/h yes
est	Exposure to Traffic PLoS	-	D	В	В
Ped	Effective Sidewalk Width Pedestrian Volume				
	Crowding PLoS Level of Service		-	-	-
	Type of Cycling Facility		Mixed Traffic	Physically Separated	Mixed Traffic
	Number of Travel Lanes		≥ 6 lanes total		≤ 2 (no centreline)
	Operating Speed		≥ 60 km/h		≤ 40 km/h
	# of Lanes & Operating Speed LoS		F	-	A
Bicycle	Bike Lane (+ Parking Lane) Width	_			
icy	Bike Lane Width LoS	F	-	-	-
<u> </u>	Bike Lane Blockages Blockage LoS		-	-	-
	Median Refuge Width (no median = < 1.8 m)		< 1.8 m refuge		
	No. of Lanes at Unsignalized Crossing		≤ 3 lanes		
	Sidestreet Operating Speed		>60 to <65 km/h		
	Unsignalized Crossing - Lowest LoS Level of Service		D F	A	-
	Facility Type		Mixed Traffic	Bus lane	
Transit	Friction or Ratio Transit:Posted Speed	D	Vt/Vp ≥ 0.8	Cf ≤ 60	
μ	Level of Service		D	В	-
	Truck Lane Width		≤ 3.5 m	≤ 3.5 m	
nch	Travel Lanes per Direction	Α	> 1	> 1	
Truck	Level of Service		A	A	-