MULTI-STOREY RESIDENTIAL BUILDING 1806 SCOTT STREET, OTTAWA, ON. FOUNDATION INVESTIGATION AND DESIGN REPORT

Project No.: CCO-23-1093

Prepared for:

Gabriela Godinez-Laverty 2851944 Ontario Inc. 14 Breadner Blvd. Trenton, ON K8V1E2

Prepared by:

McIntosh Perry 104-215 Menten Place Ottawa, ON K2H 9C1

January 2023



TABLE OF CONTENTS

1.0	INTRODUCTION	1
2.0	PROJECT UNDERSTANDING	
3.0	SITE DESCRIPTION	
3.1	Site Geology	
4.0	FIELD PROCEDURES.	2
5.0	LABORATORY TEST PROCEDURES	3
6.0	SUBSURFACE CONDITIONS	4
6.1	Subsurface	4
6.	3.1.1 Fill (Granular)	4
6.	5.1.2 Sand and Gravel	5
6.	5.1.3 Bedrock	5
6.2	Chemical Analysis	6
6.3	Groundwater	7
7.0	DISCUSSIONS AND RECOMM ENDATIONS	7
7.1	General	7
7.2	Overview	7
7.3	Site Preparation	8
7.4	Foundations	9
7.	7.4.1 Rock Anchors	10
7.	7.4.2 Frost Protection	11
7.5	Seismic Ste Classification	11
7.6	Engineered Fill	12
7.7	Slabs-on-Grade	12
7.8	Lateral Earth Pressure	13
7.9	Flexible Pavement	13
7.10	O Sidewalks and Hard Surfacing	14
7.11	1 Cement Type and Corrosion Potential	15

8.0	CONSTRUCTION CONSIDERATIONS	15
9.0	GROUNDWATER SEEPAGE	16
10.0	SITE SERVICES	16
11.0	OLOSURE	17
12.0	REFERENCES	18
UST C	FTABLES	
	-1. Borehole Information Summary	
TABLE 6	-1. FILL GRAIN-SZE DISTRIBUTION SUMMARY	4
	-2. SAND AND GRAVEL GRAIN-SIZE DISTRIBUTION SUMMARY	
	-3. BEDROCK CORE RECOVERY SUMMARY	
TABLE 6	-4. Bedrock Strength Summary	6
	-5. OHEMICAL ANALYSIS SUMMARY	
TABLE 7	-1: Rock Bearing Resistance	.10
	-2. LATERAL PRESSURE PARAMETERS FOR GRANULAR A AND B AND HORIZONTAL BACKFILL	
TABLE 7	-3: HEAVY AND LIGHT DUTY PAVEMENT STRUCTURES	.13

APPENDICES

Appendix A – Limitations of Report

Appendix B – Ste Location

Appendix C – Borehole Records

Appendix D – Laboratory Test Results

Appendix E – Seismic Hazard Calculation

McINTOSH PERRY

ii

Foundation Investigation and Design Recommendation Report 1806 Scott Street, Ottawa – Multi-Storey Residential Building

1.0 INTRODUCTION

This report presents the factual findings of a geotechnical engineering investigation conducted for the proposed development site at 1806 Scott Street, Ottawa, ON. The proposed development involves the construction of a four-storey residential apartment building.

The report involves the methodology and findings of the geotechnical engineering investigation which consists of five (5) exploratory subsurface boreholes, laboratory testing procedures, and subsurface soil stratigraphy of the Proposed Ste. The report will also include the anticipated geotechnical engineering conditions influencing the design and construction of the proposed development, and recommendations for the foundation design.

2.0 PROJECT UNDERSTANDING

It is understood that the proposed building would be a four-storey structure with a full basement, and there is no underground parking facility planned. The building plan includes a residential rental apartment.

3.0 SITE DESCRIPTION

The Proposed Ste is located at the southwest corner of Scott Street and Pockhurst Road, in The City of Ottawa. Currently, the site contains a two-storey building, paved vehicle parking areas to the north and east, and a fenced-in backyard (lawn). The surrounding area of the building is flat with residential buildings to the south and west, and roads on the north and east of the property site. The Proposed Ste location is shown in Figure 1. Appendix A.

3.1 Site Geology

A desk-top study using the published physiography maps of the area (Ontario Geological Survey or OGS) [1] indicates the Ste is located on clay plains, and the surficial geology indicates a range from stone-poor, sandy silt to silty sand-textured till on Paleozoic terrain. The bedrock geology of the area consists of sandstone, shale, and dolostone of the Shadow Lake Formation from the Smcoe group.

Based on published physiography maps of the area (Ontario Geological Survey, OGS) [1], the site is located within the Till Plains which is drumlin that is caused by streamlined movement of glacial ice sheets across rock debris, or till. The Surficial geology maps of southern Ontario indicate the site is found on Till Plains comprising of stone-poor, sandy silty to silty sand-textured till on Paleozoic terrain [2].

The Paleozoic geology formation is Gull River of Smcoe Group, with identifying lithology of limestone, dolostone, shale, and sandstone bedding. The bedrock formation within this area is identified as Shadow Lake Formation, containing the Ottawa and Smcoe group with limestone, dolostone, shale, arkose, and sandstone [2].

4.0 FIELD PROCEDURES

The staff of McIntosh Perry Consulting Engineers (McIntosh Perry) conducted a site investigation prior to the planned drill date to mark the proposed borehole locations. Additionally, requisitions were submitted to Ontario One Call (ON1Call) for utility clearance and coordinated with The Client regarding the intended geotechnical exploration drill date.

The geotechnical investigation was continuously supervised and monitored by McIntosh Perry staff in accordance with Ontario Regulations (O. Reg.)[3], and applicable standards and procedures (American Society for Testing and Materials, ASTM) [4]. The drilling operation was performed by Marathon Environmental and Geotechnical drilling Ltd. from Ottawa. The boreholes were drilled using a geo-probe rubber track drill rig: A combination machine that performed both the Standard Penetration Testing (SPT) and rock coring operations. The drill was advanced using a 100 mm casing for wash boring/rock coring, and a 200 mm hollow stem helical auger during the drilling operation.

Boreholes 22-1, and 4 were drilled using the rock coring method to advance through overburden soil and to core the bedrock, whereas boreholes 22-2, and 5 were terminated at the casing refusal at the inferred surface of the bedrock, and the borehole 22-3 was drilled using the hollow stem helical auger and terminated at auger refusal at the inferred rock surface.

The auger/casing was incrementally advanced below ground surface (bgs), while overburden soil samples were intermittently taken at 0.75 m intervals. Each soil sample was retrieved with a 51 mm outside diameter (OD) Standard Penetration Test (SPT) sampler (SS) in accordance with ASTM D1586, SPT test procedures [4].

The soil samples retrieved from the SS sampler were examined, hermetically sealed in plastic bags, labeled, and packaged for transportation. The rock core samples were examined, measured, labeled, and packaged in protective rock core boxes for transportation to McIntosh Perry Geotechnical laboratory Ottawa (MP Geotech lab) in accordance with ASTM D 4220-95 Preserving and Transporting Soil Samples [4].

The five (5) boreholes BH22-1 to 5 were advanced into the subsurface to depths ranging from 0.7 to 6.5 m below ground surface, the bedrock was cored in boreholes BH22-1 and 4, from a depth of 1.3 to 6.4 m and 1.3 to 6.5 m below ground surface respectively. The borehole information summary is shown in Table 4-1.

					,		
Borehole		Coordinates (Geodetic)			Во	rehole	Termination
ID	Drilled Date	Latitude	Longitude	Surface 日. (m)	Depth (m)	日evation 日. (m)	Type
BH22-1	2022-08-11	45°23'58.51"N	75°44'37.50"W	62.7	6.4	56.4	Intended
BH22-2	2022-08-11	45°23'58.80"N	75°44'36.99"W	62.7	0.7	62.0	Refusal
BH22-3	2022-08-12	45°23'58.60"N	75°44'36.67"W	62.7	1.3	61.4	Refusal
BH22-4	2022-08-12	45°23'58.15"N	75°44'36.50"W	62.9	6.5	56.5	Intended
BH22-5	2022-08-11	45°23'58.09"N	75°44'36.73"W	62.7	1.4	61.3	Refusal

Table 4-1. Borehole Information Summary

At the end of the drilling operations, all boreholes were backfilled with auger cuttings, Bentonite hole-plug, and asphalt cold patch as required and restored to their original surface condition. A monitoring standpipe piezometer was installed within borehole BH22-4. The Borehole locations on the proposed property are shown in Figure 2. Appendix A.

5.0 LABORATORY TEST PROCEDURES

All soil and rock core samples received at the MP Geotech lab were logged, and soil descriptions were verified by additional tactile examination in the laboratory. Representative soil and rock core samples from specific soil layers and depths corresponding to the foundation design requirements were identified and submitted to MP Geotech lab for detailed soil and rock core analysis.

Two (2) grain-size distribution sieve analysis and five (5) rock core Unconfined Compressive Strength (UCS) was carried out on representative soil and rock core samples at the MP Geotech lab.

All laboratory tests to determine the index properties were performed in accordance with ASTM test procedures. The relevant test procedures adopted are listed below.

- ASTM C136/LS-602 Seve Analysis of Fine and Coarse Aggregates
- ASTM D7012 Unconfined Compressive Strength of Intact Rock Cores

Analytical and corrosivity testing was conducted on one (1) representative soil sample for the following analysis: pH level, electrical resistivity, chloride, and sulphate concentration levels.

All remaining samples are stored at MP Geotech lab for 90 days after the final report is submitted, thereafter the soil samples are disposed of according to MP Geotech lab policies. Unless The Client notifies MP Geotech lab in writing.

6.0 SUBSURFACE CONDITIONS

6.1 Subsurface

The site stratigraphy consisted of several layers, these layers were identified fill (including asphalt surface), native sand and grave, and bedrock. The notable subsurface layers encountered in the five (5) boreholes were subdivided into three (3) distinct strata and were identified according to the Unified Soil Classification System (USCS) [3] as;

- 1. Fill
- 2. Sand and Gravel
- Bedrock

The borehole logs show a cross-section view of the subsurface soil stratigraphy of the location. The Borehole logs and bedrock cores are shown in Appendix C, and Appendix D.

6.1.1 Fill (Granular)

A cohesionless fill comprising of granular material was observed in boreholes BH22-1 and 3, which underlie the ≈ 75 mm thick paved asphalt layer. The fill layer consisted of sand and gravel with fractions of fine materials of silt and clay. The soil characteristics of the fill appeared brown, dry to moist, with SPT N-index values for this layer ranging from $\approx 17-29$ blows/0.3 m, indicating an approximate compactness condition of compact to a dense layer of fill, according to table 3.1 of the CFEM [3].

One (1) representative sample from the fill layer was subjected to grain size distribution sieve analysis, the fill constituent percentage in weight contained $\approx 47\%$ gravel, 34% Sand, and fractions of fine material of clay and silt. The fill layer's grain-size distribution summary is shown in Table 6-1.

Table 6-1. Fill Grain-Size Distribution Summary

		Constit	uent Materia	als in percent	weight	
Borehole	Sample	Gravel (%)	Sand (%)	Fines		
				SIt (%)	Gay (%)	
BH22-3	GS-1	47	34	19		

The grain-size distribution curve of the fill material was compared to a USCS granular type specifications envelope, and the distribution curves of the tested sample approximately conformed to The USCS Granular B Type I Specification (see Figure 3, Appendix D).

Some organic fill like topsoil and growth medium was encountered at the surface in boreholes BH22-2, BH22-4, and BH22-5.

6.1.2 Sand and Gravel

A cohesionless layer of expectedly native soil comprising sand and gravel material was observed in borehole BH22-5. This layer consisted predominately of sand and gravel with fractions of fine materials of silt and clay. The soil characteristics of the fill appeared brown, dry to moist, with SPT N-index values for this layer $\approx 6-56$ blows/0.3 m, indicating an approximate compactness condition of loose to a very dense layer of fill, according to table 3.1 of the CFEM [3].

One (1) representative sample from the sand and gravel layer was subjected to grain size distribution sieve analysis, in which constituent percentage in weight contained $\approx 57\%$ gravel, 34% Sand, and fractions of fine materials of silt and clay. The fill layer's grain-size distribution summary is shown in Table 6-2, and the grain-size distribution curve for the fill material is shown in Figure 4, Appendix D.

Table 6-2. Sand and Gravel Grain-Size Distribution Summary

6.1.3 Bedrock

Bedrock was cored in boreholes BH21-1 and 4 and inferred in the remainder at casing/auger refusal. The bedrock depth ranged from $\approx 0.7 - 1.4$ m below the existing ground surface which corresponds to a range of elevations from \blacksquare . 62.0 m to \blacksquare 61.3 m.

Confirmation of bedrock was attained by coring boreholes BH22-1, and 4 from a depth of \approx 1.3 to 6.4 m bgs., and 1.3 to 6.5 m bgs. respectively. The bedrock was identified as a sedimentary rock with horizontal beddings of sandstone, shale, and dolostone with planar joints.

The rock core (RC) samples recovered from bedrock were carefully recorded based on the length of each run and the samples encountered were evaluated for Total Core Recovery (TCR), and Rock Quality Designation (RQD). The rock core sample recovery quantity and quality results are shown in Table 6-3.

Length of RC RC Total Core Theoretical Borehole Depth Sample Length of Recovered Recovery **RQD** (%) # (m) # RC(m) (m) (%) BH22-1 0.81 3 1.30 0.69 94 69 BH22-1 4 2.11 1.25 1.25 100 96 BH22-1 100 97 5 3.40 1.50 1.50 BH22-1 1.52 6 4.88 1.39 97 93 BH22-4 4 1.32 0.10 0.10 100 0 5 0.71 63 BH22-4 1.42 0.56 84 BH22-4 2.13 1.47 1.37 97 81 6 BH22-4 7 1.12 1.04 89 3.61 85 BH22-4 8 4.72 1.60 1.55 100 98

Table 6-3. Bedrock Core Recovery Summary

Five (5) samples of bedrock core were tested for UCS at the MP Geotech lab, and the resulting bedrock strength summary is shown in Table 6-4, the laboratory results and bedrock core images are shown in Appendix D.

rasio o il Boarock Grongin Gillinary								
Borehole	Core No.	Run No.	Depth (m)	UCS (MPa)				
BH22-1	1	1	1.3 - 2.1	257				
BH22-1	2	2	2.1 - 3.4	181				
BH22-4	3	2	1.3 - 2.1	187				
BH22-4	4	3	2.1 - 3.6	203				
BH22-4	5	4	3.6 - 4.7	237				

Table 6-4. Bedrock Strength Summary

6.2 Chemical Analysis

One (1) representative soil sample BH22-5 / SS-2 was sent for soil chemical analysis testing for the following; pH level, resistivity level, chloride, and sulphate concentration. The corresponding test results indicate the following levels and concentrations shown in Table 6-5. The laboratory test result "Certificate of Analysis" is shown in Appendix C.

Table 6-5. Chemical Analysis Summary

		DEDILL		Chemical	Analysis	
BOREHOLE	SAMPLE	DEPTH (m)	pH (pH units)	Resistivity (Ohm.cm)	Chloride (ppm)	sulphate (ppm)
BH22-5	SS-2	0.6 - 1.2	7.79	7170	< 5	32

6.3 Groundwater

Groundwater (GW) was not encountered in the open boreholes; however, a single standpipe piezometer was installed in borehole BH22-4 within the layer of the bedrock. The last groundwater measurement was done on October 24, 2022, and no groundwater was observed in the standpipe piezometer. Groundwater level is expected to fluctuate seasonally and may be encountered in the future.

7.0 DISCUSSIONS AND RECOMMENDATIONS

7.1 General

This section of the report provides engineering recommendations on the geotechnical design aspect of the project based on the project requirements and our interpretation of the subsurface soil information. The recommendations presented herein are subject to the limitations noted in Appendix A "Limitations of Report" which forms an integral part of this document.

The foundation engineering recommendations presented in this section have been developed following Part 4 of the 2015 National Building Code of Canada (NBCC) and 2012 Ontario Building Code (OBC) extending the Limit State Design approach.

7.2 Overview

It is understood that the proposed apartment building is a four-storey mid-rise structure with one underground basement level. The finished floor elevation is \Box . 62.90 based on the site plan issued November 23, 2022.

For the current project, the following list summarizes some key geotechnical details that were considered in the suggested geotechnical recommendations:

 Shallow bedrock is either sampled or inferred across the site. It is concluded provision of shallow spread and strip footing is adequate for the proposed mid-rise structure.

- The proposed structure can be designed using a seismic Ste Class C provided that the boundary zones
 of the shear walls and all column loads are extended to and supported on the bedrock, confirmed by
 geotechnical staff upon completion of excavation.
- The contractor shall submit the excavation plan for geotechnical review. The plan shall be prepared based on the final site layout, depth of excavation, and offset from adjacent buildings to ensure the protection of those building are considered.
- Based on the observed RQD, if rock excavation is needed hoe ramming and line drilling shall be
 adequate for leveling the rock surface. Rock blasting is not envisioned based on the proximity of the
 existing structure. If blasting is required, a blasting plan including health and safety and monitoring
 programs shall be submitted by the contractor.
- No major issues are expected with groundwater management during construction even if excavations
 are advanced below the rock surface. One standpipe piezometer was installed in borehole BH22-4 and
 it was read two months after the initial installation and no water was encountered in the monitoring
 well. The chance of water seepage into the excavation is low. Based on the current information on
 design requirements, an application for Permits to Take Water (PTTW) is not required.

7.3 Site Preparation

The expected subgrade is bedrock. All fill, topsoil, and sandy silt overburden shall be removed from the footing subgrade. All loose rock pieces shall be removed, and the subgrade shall be approved by a geotechnical staff. The contractor shall use the information on the rock RQD and unconfined compressive strength to design the proper rock excavation methodology.

Upon completion of the excavation, depending on the subgrade condition, subgrade grouting or poured mud slab may be required. The mud slab shall provide a minimum of 15 MPa compressive strength at 28-day age testing.

The foundation design recommendations provided in this report are based on the assumption of flat subgrade. This report does not support the construction of step footings unless confirmed by the geotechnical engineer upon site review. This condition is put in place to ensure proper subgrade preparation for individual strip or spread footings. This disclaimer does not apply to the construction of elevator pit lower than the other footings.

7.4 Foundations

Bearing resistance is calculated for the bedrock surface.

Provided there are no continuous soil-filled seams or mud seams present at shallow depth in the bedrock below the founding level, footings can be supported on the bedrock surface, or a platform of lean concrete of compressive strength of greater than 15 MPa extending down to the bedrock surface.

The Ultimate Limit States (ULS) factored bearing resistance was estimated using the Rock Mass Rating (RMR) method by Bieniawski (1989). The RMR method was utilized to determine the required parameters for bearing capacity resistance at ULS conditions for the bedrock.

Based on the bedrock cores quality and uniaxial compressive strength tests, the following ratings are estimated:

- The lower bond compressive strength of intact rock rating: The uniaxial compressive strength was taken as 180 MPa, which results in rating = 12,
- RQD rating: The RQD of the rock core is 63 at the surface (falls at the lower boundary value), which
 results in rating = 13,
- Joint spacing rating: The joint spacing for the rock core samples is occasionally less than 50 mm, which gives an estimated rating = 5,
- Joint condition: The joint condition was observed to be slightly rough, and the rating is estimated to be = 12,
- Groundwater rating: the groundwater elevation was not observed in the monitoring well. Therefore, the estimated rating for water condition = 4; and
- Orientation rating: Horizontal to 25° joints; therefore, a fair to favorable rating was estimated = -2.

The RMR for the rock approximately equals (44) which can be classified to have fair rock quality.

Assuming the above-noted conditions are provided, the estimated factored ULS bearing resistance is 1350 kPa for a minimum of 2 m depth below the existing ground surface which equals to the rock at approximately \Box 60.7 m or below the weathered rock surface, whichever is lower. It is understood the elevator pit will be dug over 1.5 m deeper than the rest of the footings.

The provided factored bearing resistance at ULSis based on the uniaxial compressive strength of the rock. The size of the selected footing shall be determined by a structural engineer. The selected size of the footing shall have adequate compressive strength to provide resistance to the structural loads from the building and to avoid failure in concrete material under the applied pressure. Shallow footings shall not be smaller than 0.6 m in their smaller dimension.

Provided the bedrock surface is properly cleaned of soil and weathered material at the time of construction, the settlement of footing size using the above factored bearing resistance should be negligible. The bearing capacities are calculated for a flat subgrade.

Table 7-1: Rock Bearing Resistance

Footing Type	ULS(kPa)
Spread Footings	1,350

The ultimate bearing capacity will govern the design. The serviceability limit state as defined by allowable settlements is not applicable for this project on rock subgrade.

Highly weathered or fractured bedrock, which includes bedrock that can be excavated using hydraulic excavating equipment with only moderate effort, would need to be removed and replaced with concrete.

The rock bearing surface should be inspected by qualified geotechnical personnel of McIntosh Perry to confirm that the surface has been acceptably cleaned of soil, and that weathered, or excessively fractured bedrock has been removed.

7.4.1 Rock Anchors

It is expected that the foundations may be required to resist uplift forces related to unbalanced lateral loads. The uplift forces may be resisted using grouted anchors in the bedrock. The presence of fractured rock conditions and groundwater should be considered carefully by the specialty contractor and may require post-grouting to ensure adequate anchor resistance is obtained.

In designing grouted rock anchors, consideration should be given to four potential anchor failure modes:

- 1. Failure of the steel tendon or top anchorage;
- 2. Failure of the grout/tendon bond;
- 3. Failure of the rock/grout bond; and,
- 4. Failure within the rock mass, or rock cone bull-out.

Potential failure modes "1 and 2" are structural and are required to be addressed by the structural engineer.

For potential failure mode "3", a static proof test in tension during construction, as per OBC 2012, will be required to assist the unfactored ULS bond strength at the concrete-rock interface. A resistance factor of 0.4

may be used to estimate the factored ULS. As a general guide, the ULS for limestone ranges between 1.0 to 1.4 MPa as per Post-Tensioning Institution (PTI) Recommendations for Prestressed Pock and Soil Anchors, 1996.

For potential failure mode "4", the resistance should be calculated based on the buoyant weight of the potential mass of rock that could be mobilized by the anchor. This is typically considered as the mass of rock and surface shear resistance within a cone or wedge for a line of closely spaced anchors having an apex at the tip of the anchor that forms an angle between 600 to 900. For a group of anchors or for a line of closely spaced anchors, the resistance must consider the potential overlap between the rock masses mobilized by individual anchors.

As stated earlier, proof tests should be performed to confirm the pull-out capacity. The proof tests should be carried out to 1.5 times the anchor service loads, and at least 10 percent of the anchors should be tested. The testing procedure should be in accordance with either OPSS 942 or the PTI (1996) for proof testing.

The installation and testing of the anchors should be observed by a geotechnical engineer. Care must be taken during grouting to ensure that the grout is injected from the bottom of the anchor hole to bond the entire length of the grout area. It is also suggested that the anchor holes be thoroughly flushed with water to remove debris, scum/sludge, and rock flour prior to grouting.

7.4.2 Frost Protection

Based on the subsurface investigation results, the encountered bedrock subgrade is of low frost susceptibility. Frost penetration depth is 1.5 m below the surface for the subject site. Frost penetration depth is estimated based on the OPSD 3090.101, Foundation Frost Penetration Depths for Southern Ontario.

All perimeter and exterior foundation elements, or interior foundation elements in unheated areas should be provided with a minimum of 1.8 m of earth cover or equivalent thermal rigid insulation for frost protection purposes.

7.5 Seismic Site Classification

Seismic hazard calculations are provided in Appendix E for a combination of probabilities and spectral responses. The provided values are for reference only and the designers shall verify these values for their design.

Seismic site classification is completed based on NBCC (2015) and OBC (2012) Section 4.1.8.4 and Table 4.1.8.4.A. This classification system is based on the average soil properties in the upper 30 m and accounts for site-specific shear wave velocity of soil and rock, standard penetration resistance, and plasticity parameters of cohesive soils. Based on the investigation results the site can be classified as Seismic Site Class (C) for this bedrock subgrade.

7.6 Engineered Fill

Footings shall be installed on the bedrock. Any over-excavation shall be leveled by lean concrete of a minimum 15 MPa at 28 days strength or matching the strength of the structural footings.

The proposed engineered fill, beyond the footings' influence zone, can be any material conforming to granular criteria as outlined in OPSS 1010. Material conforming to 'Granular' criteria is considered free draining and compactable and can be utilized as the engineered fill. This can apply to the backfill beyond foundation walls and engineered fill in between the footings. The engineered fill shall be compacted to a minimum of 98% SPMDD.

All fill material should be placed in horizontal lifts of uniform thickness of no more than 300 mm before compaction at appropriate moisture content determined by the Proctor test. The requirement for fill material and compaction may be addressed with a note on the structural drawing for foundation or grading drawing, and with a Non-Standard Special Provision (NSSP). Any topsoil, organics, or loose sand should be removed before placing engineered fill material.

The existing fill and/or native soil does not qualify as backfill or grading fill material.

As long as all structural elements are beading on bedrock subgrade, there is no restriction on grade raise.

7.7 Slabs-on-Grade

Sab-on-grades are considered free-floating (not attached to the foundation walls) and should be supported on a minimum of 200 mm of Granular A bedding compacted to 100% Standard Proctor Maximum Dry Density (SPMDD).

The rest of the fill, above the rock and below the slab can be filled with 'Granular' material as per the OPSS 1010 and compacted to a minimum of 98% SPMDD. If the slab on grade is to carry structural loads, the grading fill shall be Granular B Type II and compacted to a minimum of 100% SPMDD.

Subgrade preparation and compaction efforts shall be approved under the supervision of a geotechnical representative from McIntosh Perry.

If for the design of any portions of the slab-on-grade, the modulus of subgrade reaction (k) is required, the following recommendation can be used for structural modeling. The modulus of the subgrade reaction is a multi-function complex correlation that varies with the subgrade material, grade-raise fill material, and the flexural stiffness of the structural slab. However, simplified assumptions were made to estimate the spring modulus for slab-on-grade on compacted Granular A. To estimate the modulus of subgrade reaction, through a simplistic approach, a 2 m square section of the concrete slab-on-grade under the applied loads. Since the

modulus of subgrade reaction is needed for the ultimate failure design of the slab, it is assumed the failure can occur at a 25 mm deformation. Considering these assumptions, a subgrade reaction modulus of 10,000 kN/m2/m can be used for the design of the interior slab-on-grade. This k-value is only valid for the construction of slab-on-grade on compacted Granular A bedding. This value shall not be used for the native subgrade.

7.8 Lateral Earth Pressure

Free-draining material should be used as backfill material for foundation walls. If proper drainage is provided, "at rest" condition may be assumed for the calculation of earth pressure on foundation walls. The following parameters are recommended for the granular backfill.

Expected Value Pressure Parameter Granular Other OPSS1010 Granular В 'Granular' Α Unit Weight Above groundwater 22.5 21.7 21.7 (γ) kN/m^3 Below groundwater 12.7 11.9 11.9 Angle of Internal Friction (φ) 35° 32° 31° Coefficient of Active Earth Pressure (k_a) 0.27 0.32 0.31 Coefficient of Passive Earth Pressure (k_n) 3.69 3.23 3.12 Coefficient of Earth Pressure at Rest (k_o) 0.43 0.47 0.48

Table 7-2. Lateral Pressure parameters for Granular A and B and Horizontal Backfill

The native sandy silt is not suitable for backfilling foundation walls.

7.9 **Hexible Pavement**

For most of the site, the pavement structure is most likely to be placed on engineered fill material overlaying the bedrock or the existing fill or the native sand and gravel. All fill and organic material shall be removed from the proposed pavement site and replaced with engineered fill. The existing non-organic material can act as the pavement subgrade if verified by visual confirmation and proof rolling.

The pavement structure proposed in this design considers the very low traffic volume of lightweight passenger vehicles. It is understood moving trucks and firetrucks traffic will be limited to the public road. The light-duty pavement structure design specifications are given in Table 7-3.

Material Thickness (mm) Superpave 12.5 mm, PG 58-34 Surface 50 OPSS Granular A Base 150 Sub-base OPSSGranular B Type II 450

Table 7-3: Pavement Structure for the Parking Lot

It is understood there is a provision of permeable pavement options. Permeable asphalt or concrete surface course is not recommended due to complications associated with maintenance of such pavement. These pavement options are prone to salt, de-icer, freeze-thaw cycles and requires trained staff for maintenance. The only plausible permeable pavement option recommended in this report are the stone pavers (concrete paver blocks).

To facilitate rapid drainage, a permeable pavement structure is proposed in Table 6-4. Subdrain pipe shall be placed on subdrain trench imbedded within or below the subbase with positive drainage to the storm catch basins. All subdrains shall receive a non-woven sock. Pavers are expected to received periodic maintenance for adjustment and leveling depending on the applied traffic load.

	Material	Thickness (mm)				
Surface	Concrete Paver	min. 80				
Bedding	Loose Sand	25				
Drainage	OPSS Granular O	100				
Base	OPSS Granular A	150				
Sub-base	OPSSGranular B Type II	450				

Table 7-4: Permeable Pavement Structure Alternative

The base and sub-base materials, i.e., Granular A for the base and Granular B Type II for the sub-base, shall be in accordance with OPSSMUNI 1010. Both base and sub-base should be compacted to 100% SPM DD. Asphalt layers should be compacted to comply with OPSS 310.

7.10 Sidewalks and Hard Surfacing

The width and extent of the sidewalks will be defined as per the architectural drawings. The designer shall provision adequate slope, based on applicable codes, to provide appropriate runoff discharge. Expansion, construction, and dummy joints shall be spaced as required by the applicable standards. Sidewalks can be categorized under residential/commercial use, and therefore, the concrete sidewalks should have a thickness of 125 mm. Requirements of OPSD 310.010 'Concrete Sidewalk', OPSD 310.020 'Concrete Sidewalks Adjacent to Curb and Gutter', and OPSD 310.030 'Concrete Sidewalk Ramps at the intersection' are recommended for the construction of the concrete sidewalk. A minimum of 150 mm bedding of OPSS Granular A compacted to 100% SPM DD is required for the concrete sidewalk panels.

7.11 Cement Type and Corrosion Potential

One soil sample was submitted to Parcel laboratories for testing of chemical properties relevant to exposure of concrete elements to sulphate attacks as well as potential soil corrosivity effects on buried metallic structural elements. Test results are presented in Table 6-5.

The potential for sulphate attack on concrete structures is moderate to low. Therefore, Type GU Portland cement may be adequate to protect buried concrete elements in the subsurface conditions encountered.

Based on electrical resistivity results and chloride content, the corrosion potential for buried steel elements is within the nonaggressive range.

8.0 CONSTRUCTION CONSIDERATIONS

Any organic material and loose sand of any kind should be removed from the footprint of the footings and all structurally load-bearing elements. Ste preparation and requirements of engineered fill placement are noted in previous sections. Refer to relevant sections for material and compaction requirements.

The Occupational Health and Safety Act (OHSA) of Ontario indicated that side slopes in the sandy silt could be classified as Type 4 soil and sloped no steeper than 3H:1V or be shored for any excavation deeper than 1.2 m. If space restrictions exist, the excavations can be carried out within temporary retaining systems, which is fully braced to resist lateral earth pressure.

As noted in the previous sections, all grade adjustments due to over-excavation, within the shallow footing influence zone, shall be done using lean concrete of minimum 15 MPa mature strength.

Foundation walls should be backfilled with free-draining material with granular material conforming to OPSS 1010 Granular criteria. The native soil is not suitable for backfill due to its high fine content.

A geotechnical engineer or technician should attend the site to confirm the native subgrade, type of fill material, and level of compaction. All bearing surfaces should be inspected by experienced geotechnical personnel prior to placing the footings to ensure the excavated subgrade is in the reported and recommended condition.

Pock excavation through blasting is not recommended. At the contractor or owner's discretion, vibration monitoring may be carried out during the excavation and construction phases to ensure that the vibration levels at the existing surrounding structures and utilities are maintained below tolerable levels.

Installation of weeping tiles is necessary below the lowest habitable elevation.

9.0 GROUNDWATER SEEPAGE

The groundwater is expected below the rock excavation depth. However, the weathered rock at higher elevations may collect and outlet the surface runoff after major precipitation events, snow melt, or generally wet seasons with higher groundwater tables. The monitoring well is kept on-site for future reference.

Under the new regulations (O.Reg 63/16 and O.Reg 387/04), a Permit To Take Water (PTTW) is required from the Ministry of the Environment, Conservation, and Parks (MOECP) if a volume of water greater than 400,000 liters per day is pumped from the excavation under normal operation, but less than 50,000 liters per day, the water taking will not require a PTTW, but will need to be registered in the Environmental Activity and Sector Registry (EASR) as a prescribed activity. Since the excavations will likely be above the groundwater level, it is considered unlikely that a PTTW would be required. The site designer shall decide on the permit application based on the expected excavation volume.

The design of the dewatering system should be the responsibility of the contractor. An outlet(s) should be identified, which the contractor can use to dispose of the pumped groundwater and incident precipitation. In order for pumped groundwater to be discharged to a city sewer, the groundwater quality needs to meet the Sewer Use By-law limits, and a separate approval is required.

10.0 SITE SERVICES

At the subject site, the burial depth of water-bearing utility lines is typically 2.2 m below the ground surface. If this depth is not achievable, equivalent thermal insulation should be provided. The contractor should retain a professional engineer to provide detailed drawings for excavation and temporary support of the excavation walls during construction.

Excavation will proceed through the topsoil and native shallow deposits. Excavating of overburden soil shall be performed using conventional hydraulic excavating equipment. Cobbles or boulders larger than 300 mm in diameter, if encountered, should be removed from the side slopes for worker safety.

The Occupational Health and Safety Act (OHSA) of Ontario indicated that side slopes in the sandy silt could be classified as Type 4 soil and sloped no steeper than 3H:1V or be shored. If space restrictions exist, the excavations can be carried out within trench boxes for utility installation, which is fully braced to resist lateral earth pressure.

Due to the potential for long-term settlement of topsoil and organic materials and the effects of this settlement on service lines sensitive to level change, the existing topsoil, and organic materials are not considered suitable for the support of site services. Utilities should be supported on a minimum of 150 mm bedding of Granular A compacted to a minimum of 98% of SPM DD. Utility cover can be Granular A or Granular B type II compacted to

96% SPM DD. All covers are to be compacted to 100% SPM DD if they are intersecting structural elements. The engineer designing utilities shall ensure the proposed utility pipes can tolerate compaction loads.

11.0 CLOSURE

We trust this geotechnical investigation report meets the requirements of your project. The "Limitations of Report" presented in Appendix A are an integral part of this report. Please contact the undersigned should you have any questions or concerns.

McIntosh Perry Consulting Engineers Ltd.

Mizral Hameem, B.Eng. ET.
Engineering Intern
m.hameem@McIntoshPerry.com

N'eem Tavakkoli, M.Eng., P.Eng. Senior Geotechnical Engineer n.tavakkoli@mcintoshperry.com



12.0 REFERENCES

- [1] Ontario Geological Survey, The Physiography of Southern Ontario, 3rd Edition, 1984.
- [2] "Google Earth Pro," Google LLC, 2021. [Online]. [Accessed 07 October 2022].
- [3] Government of Ontario, "Ontario Regulation 213/91," 01 January 2022. [Online]. Available: https://www.ontario.ca/laws/regulation/910213#BK42. [Accessed 09 May 2022].
- [4] A. International, American Society for Testing and Materials.
- [5] Canadian Geotechnical Society, Canadian Foundation Engineering Manual, Calgary: Queen's Printer, 2006.
- [6] Ontario Ministry of Natural Resources (OMNR), Ontario Geological Survey, Special Volume 2, "The Physiography of Southern Ontario", 3rd Edition, 1984.
- [7] Canadian Standards Association (CSA), Concrete Materials and Methods of Concrete Construction, A23.1, 2009.
- [8] Government of Canada, National Building Code of Canada (NBCC), "Seismic Harard Calculatin" (online),, National Research Council of Canada, 2010.
- [9] Government of Ontario, Ontario Building Code (OBC), (online), 2012.
- [10] Government of Ontario, "Occupational Health and Safety Act," Queen's Printer for Ontario, Toronto, 2021.
- [11] Ontario Provincial Standard Specification, OPSS, 2017.

1806 SCOTT STREET, OTTAWA, ONTARIO. GEOTECHNICAL AND FOUNDATION REPORT

APPENDIX A LIMITATIONS OF REPORT

LIMITATIONS OF REPORT

McIntosh Perry Consulting Engineers Ltd. (McIntosh Perry) carried out the field work and prepared the report. This document is an integral part of the Foundation Investigation and Design report presented.

The conclusions and recommendations provided in this report are based on the information obtained at the borehole locations where the tests were conducted. Subsurface and groundwater conditions between and beyond the boreholes may differ from those encountered at the specific locations where tests were conducted and conditions may become apparent during construction, which were not detected and could not be anticipated at the time of the site investigation. The benchmark level used and borehole elevations presented in this report are primarily to establish relative differenced in elevations between the borehole locations and should not be used for other purposes such as to establish elevations for grading, depth of excavations or for planning construction.

The recommendations presented in this report for design are applicable only to the intended structure and the project described in the scope of the work, and if constructed in accordance with the details outlined in the report. Unless otherwise noted, the information contained in this report does not reflect on any environmental aspects of either the site or the subsurface conditions.

The comments or recommendation provided in this report on potential construction problems and possible construction methods are intended only to guide the designer. The number of boreholes advanced at this site may not be sufficient or adequate to reveal all the subsurface information or factors that may affect the method and cost of construction. The contractors who are undertaking the construction shall make their own interpretation of the factual data presented in this report and make their conclusions, as to how the subsurface conditions of the site may affect their construction work.

The boundaries between soil strata presented in the report are based on information obtained at the borehole locations. The boundaries of the soil strata between borehole locations are assumed from geological evidences. If differing site conditions are encountered, or if the Client becomes aware of any additional information that differs from or is relevant to the McIntosh Perry findings, the Client agrees to immediately advise McIntosh Perry so that the conclusions presented in this report may be re-evaluated.


Under no circumstances shall the liability of McIntosh Perry for any claim in contract or in tort, related to the services provided and/or the content and recommendations in this report, exceed the extent that such liability is covered by such professional liability insurance from time to time in effect including the deductible therein, and which is available to indemnify McIntosh Perry. Such errors and omissions policies are available for inspection by the Client at all times upon request, and if the Client desires to obtain further insurance to protect it against any risks beyond the coverage provided by such policies, McIntosh Perry will co-operate with the Client to obtain such insurance.

McIntosh Perry prepared this report for the exclusive use of the Client. Any use which a third party makes of this report, or any reliance on or decision to be made based on it, are the responsibility of such third parties. McIntosh Perry accepts no responsibility and will not be liable for damages, if any, suffered by any third party as a result of decisions made or actions taken based on this report.

1806 SCOTT STREET, OTTAWA, ONTARIO. GEOTECHNICAL AND FOUNDATION REPORT

APPENDIX B SITE LOCATION



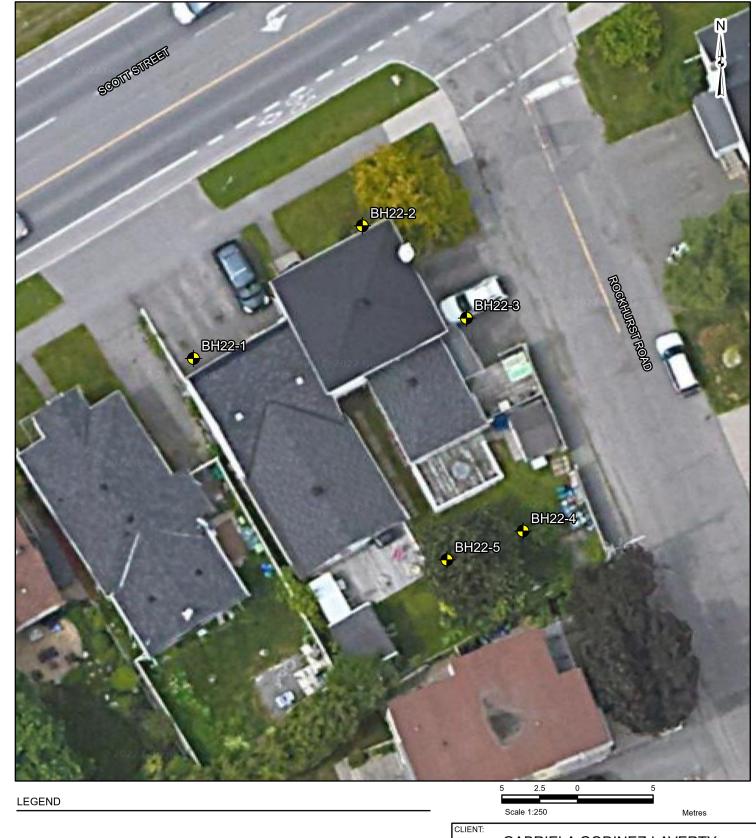

Borehole Locations

REFERENCE

GIS data provided by the Ontario Ministry of Northern Development, Mines, Natural Resources and Forestry, 2022.

GABRIELA GODINEZ-LAVERTY

GEOTECHNICAL INVESTIGATION 1806 SCOTT STREET

TITLE:

BOREHOLE LOCATIONS

McINTOSH PERRY 115 Walgreen Road, RR3, Carp, ON K0A1L0 Tel: 613-836-2184 Fax: 613-836-3742 www.mcintoshperry.com

PROJECT N	FIGURE:	
Date	Sep., 27, 2022	2
GIS	АН	
Checked By	МН	

1806 SCOTT STREET, OTTAWA, ONTARIO. GEOTECHNICAL AND FOUNDATION REPORT

APPENDIX C BOREHOLE LOGS

EXPLANATION OF TERMS USED IN REPORT

N-VALUE: THE STANDARD PENETRATION TEST (SPT) N-VALUE IS THE NUMBER OF BLOWS REQUIRED TO CAUSE A STANDARD 51mm O.D SPLIT BARREL SAMPLER TO PENETRATE 0.3m INTO UNDISTURBED GROUND IN A BOREHOLE WHEN DRIVEN BY A HAMMER WITH A MASS OF 63.5 kg, FALLING FREELY A DISTANCE OF 0.76m. FOR PENETRATIONS OF LESS THAN 0.3m N-VALUES ARE INDICATED AS THE NUMBER OF BLOWS FOR THE PENETRATION ACHIEVED. AVERAGE N-VALUE IS DENOTED THUS $\overline{\rm N}$.

DYNAMIC CONE PENETRATION TEST: CONTINUOUS PENETRATION OF A CONICAL STEEL POINT (51mm O.D. 60° CONE ANGLE) DRIVEN BY 475J IMPACT ENERGY ON 'A' SIZE DRILL RODS. THE RESISTANCE TO CONE PENETRATION IS MEASURED AS THE NUMBER OF BLOWS FOR EACH 0.3m ADVANCE OF THE CONICAL POINT INTO THE UNDISTURBED GROUND.

SOILS ARE DESCRIBED BY THEIR COMPOSITION AND CONSISTENCY OR DENSENESS.

CONSISTENCY: COHESIVE SOILS ARE DESCRIBED ON THE BASIS OF THEIR UNDRAINED SHEAR STRENGTH (c,) AS FOLLOWS:

Γ	C _u (kPa)	0 – 12	12 – 25	25 – 50	50 – 100	100 – 200	>200
-		VERY SOFT	SOFT	FIRM	STIFF	VERY STIFF	HARD

DENSENESS: COHESIONLESS SOILS ARE DESCRIBED ON THE BASIS OF DENSENESS AS INDICATED BY SPT N VALUES AS FOLLOWS:

N (BLOWS/0.3m)	0 – 5	5 – 10	10 – 30	30 – 50	>50
	VERY LOOSE	LOOSE	COMPACT	DENSE	VERY DENSE

ROCKS ARE DESCRIBED BY THEIR COMPOSION AND STRUCUTRAL FEATURES AND/OR STRENGTH.

RECOVERY: SUM OF ALL RECOVERED ROCK CORE PIECES FROM A CORING RUN EXPRESSED AS A PERCENT OF THE TOTAL LENGTH OF THE CORING RUN.

MODIFIED RECOVERY: SUM OF THOSE INTACT CORE PIECES, 100mm+ IN LENGTH EXPRESSED AS A PERCENT OF THE LENGTH OF THE CORING RUN. THE ROCK QUALITY DESIGNATION (RQD), FOR MODIFIED RECOVERY IS:

RQD (%)	0 – 25	25 – 50	50 – 75	75 – 90	90 – 100
•	VERY POOR	POOR	FAIR	GOOD	EXCELLENT

JOINT AND BEDDING:

SPACING	50mm	50 – 300mm	0.3m – 1m	1m – 3m	>3m
JOINTING	VERY CLOSE	CLOSE	MOD. CLOSE	WIDE	VERY WIDE
BEDDING	VERY THIN	THIN	MEDIUM	THICK	VERY THICK

ABBREVIATIONS AND SYMBOLS

FIELD SAMPLING MECHANICALL PROPERTIES OF SOIL

SS	SPLIT SPOON	TP	THINWALL PISTON	m _v	kPa ¯'	COEFFICIENT OF VOLUME CHANGE
WS	WASH SAMPLE	OS	OSTERBERG SAMPLE	C _c	1	COMPRESSION INDEX
ST	SLOTTED TUBE SAM	MPLE RC	ROCK CORE	Cs	1	SWELLING INDEX
BS	BLOCK SAMPLE	PH	TW ADVANCED HYDRA	ULICALLY c _a	1	RATE OF SECONDARY CONSOLIDATION
CS	CHUNK SAMPLE	PM	TW ADVANCED MANUA	LLY c _v	m²/s	COEFFICIENT OF CONSOLIDATION
TW	THINWALL OPEN	FS	FOIL SAMPLE	Н	m	DRAINAGE PATH
				T _v	1	TIME FACTOR
		STRESS AN	ID STRAIN	U	%	DEGREE OF CONSOLIDATION
u_w	kPa	PORE WATER P	RESSURE	σ'ν	, kPa	EFFECTIVE OVERBURDEN PRESSURE
r _u	1	PORE PRESSUR	RE RATIO	σ' _p	kPa	PRECONSOLIDATION PRESSURE
σ	kPa	TOTAL NORMAL	. STRESS	$\tau_{\rm f}$	kPa	SHEAR STRENGTH
σ'	kPa	EFFECTIVE NOR	RMAL STRESS	c'	kPa	EFFECTIVE COHESION INTERCEPT
τ	kPa	SHEAR STRESS		Φ,	_°	EFFECTIVE ANGLE OF INTERNAL FRICTION
$\sigma_1, \sigma_2, \sigma_3$	σ_3 kPa	PRINCIPAL STR	ESSES	\mathbf{c}_{u}	kPa	APPARENT COHESION INTERCEPT
ε	%	LINEAR STRAIN		Φ_{u}	_°	APPARENT ANGLE OF INTERNAL FRICTION
$\varepsilon_1, \varepsilon_2, \varepsilon_3$	3 %	PRINCIPAL STR	AINS	τ_{R}	kPa	RESIDUAL SHEAR STRENGTH
E	kPa	MODULUS OF L	NEAR DEFORMATION	τ_{r}	kPa	REMOULDED SHEAR STRENGTH
G	kPa	MODULUS OF S	HEAR DEFORMATION	St	1	SENSITIVITY = c_u / τ_r
u	1	COEFFICIENT O	F FRICTION			•

PHYSICAL PROPERTIES OF SOIL

$P_{\rm s}$	kg/m ³	DENSITY OF SOLID PARTICLES	е	1,%	VOID RATIO	e_{min}	1,%	VOID RATIO IN DENSEST STATE
γ_{s}	kN/m³	UNIT WEIGHT OF SOLID PARTICLES	n	1,%	POROSITY	I_D	1	DENSITY INDEX = $\frac{e_{\text{max}} - e}{e_{\text{max}} - e_{\text{min}}}$
$P_{\rm w}$	kg/m ³	DENSITY OF WATER	W	1,%	WATER CONTENT	D	mm	GRAIN DIAMETER
Y_{w}	kN/m ³	UNIT WEIGHT OF WATER	sr	%	DEGREE OF SATURATION	D_n	mm	N PERCENT – DIAMETER
Ρ	kg/m ³	DENSITY OF SOIL	W_L	%	LIQUID LIMIT	C_{u}	1	UNIFORMITY COEFFICIENT
r	kN/m ³	UNIT WEIGHT OF SOIL	W_P	%	PLASTIC LIMIT	h	m	HYDRAULIC HEAD OR POTENTIAL
P_{d}	kg/m ³	DENSITY OF DRY SOIL	Ws	%	SHRINKAGE LIMIT	q	m³/s	RATE OF DISCHARGE
γ_{d}	kN/m ³	UNIT WEIGHT OF DRY SOIL	I _P	%	PLASTICITY INDEX = $(W_L - W_L)$	V	m/s	DISCHARGE VELOCITY
P_{sat}	kg/m ³	DENSITY OF SATURATED SOIL	ار	1	LIQUIDITY INDEX = $(W - W_P)/I_P$	i	1	HYDAULIC GRADIENT
$\gamma_{\rm sal}$	kN/m ³	UNIT WEIGHT OF SATURATED SOIL	Ic	1	CONSISTENCY INDEX = (W _L -W) / 1 _P	k	m/s	HYDRAULIC CONDUCTIVITY
P'	kg/m³	DENSITY OF SUBMERED SOIL	e _{,max}	1,%	VOID RATIO IN LOOSEST STATE	j	kN/m ³	SEEPAGE FORCE
γ	kN/m ³	UNIT WEIGHT OF SUBMERGED SOIL						

PROJECT: Four Storey Building CLIENT: Babriela Godinez-Laverty

PROJECT LOCATION: 1806 Scott Street, Ottawa, ON.

Date: Aug-11-2022 Method: Wash Bore - NQ

Diameter: 100 mm

DATUM: MTM Zone 9

ENCL NO.: 1 BH Location: N 5029128 E 364006

													E 36400					NCL NO.:	<u>.</u>
	SOIL PROFILE		S	SAMPL	ES				DYN/ RESI	AMIC CO STANCI	ONE PE	NETRA	TION	PI	LASTIC	NATUR MOISTU CONTE	RAL JRE	LIQUID	Remarks
ELEV DEPTH	DESCRIPTION	STRATA PLOT	NUMBER	TYPE	"N" BLOWS 0.3 m	GROUND WATER CONDITIONS	⁸ DEРТН	ELEVATION	SHE Field	EAR ST d. Shear V ick Triaxia	FRENC ane (x) &	60 GTH (k Sensitivi Unconfi	80 Pa)	- W _F	WATI	w o- ER CON	TENT (W _L "%) 70 80 90	and Grain Size Distribution (%) Unit Weight (kN/m Pocket Penetro. (k
0 62.7	Paved Driveway — ASPHALT: 75mm	0)	_		-		0.0	ш				1	+	1 10	1 1	+0 00		1 1	GR SA SI C
6 2.9	FILL: Silty Sand and Gravel, brown, dry, compact		1	ss	17			62	- - - - -										
⁰ 61.4			2	SS	46		- <u>1.</u> 0 - -		- - -										Spoon bouncing @ 1.3 m bgs.
1.3	BEDROCK Sedimentary, horizontal thin laminated bedding, with calcite, mudstone, siltstone, horizontal bedding with moderate joints		3	RC	RQD = 69%		- - - - 2.0	61	-										Run 1: TCR 94%, UCS = 257 MPa
			4	RC	RQD = 96%		- - - - - - - - - - - - - - - - -	60	-										Run 2: TCR 100%, UCS 181 MPa
0			5	RC	RQD = 97%			59 58	-										Run 3: TCR 100%
o 56.4			6	RC	RQD = 93%	l	5.0	57	-										_Run 4: TCR 97%
6.4																			
	End of Borehole - Borehole terminated at intended depth @ 6.4 m bgs.																		

PROJECT: Four Storey Building

Date: Aug-11-2022

CLIENT: Babriela Godinez-Laverty

Method: Wash Bore

PROJECT LOCATION: 1806 Scott Street, Ottawa, ON.

Diameter: 100 mm

DATUM: MTM Zone 9

BH Location: N 5029137 E 364017 ENCL NO.: 2

	SOIL PROFILE		s	AMPL	ES.	~		DYN/ RESI	AMIC CO STANCE	NE PEN	NETRAT	ION	PI	ASTIC	NA ⁻	TURAL STURE NTENT	LIQU	JID	Remarks
ELEV DEPTH	DESCRIPTION	STRATA PLOT	NUMBER	TYPE	"N" BLOWS 0.3 m	GROUND WATER CONDITIONS	⁶ DЕРТН	SHE Field	EAR ST d. Shear Vick Triaxial	RENG	TH (kP Sensitivity Unconfine	2a)	w _P	WAT	TER C	w -o ONTE	NT (%)	W _L	and Grain Size Distribution (%) Unit Weight (kN. Pocket Penetro.
62.7	Grass Cover TOPSOIL: Silty Sand with		ž	F	7	ס ס	0.0		20 4	0 6	0 8	0	10	20 30 	40	50 6	0 70 8	30 90	GR SA SI
62:9 0.2 62.0	Organic, dark brown, moist, loose FILL: Silty sand with gravel, moist, loose		4	SS	18		-										 		Spoon
0.7	End of Borehole				00mr	ì													bouncing (0.7 m bgs
	- Refusal on inferred bedrock																		0.7 III bgs
	- Refusal on Interred bedrock																		

PROJECT: Four Storey Building

CLIENT: Babriela Godinez-Laverty

PROJECT LOCATION: 1806 Scott Street, Ottawa, ON.

Date: Aug-12-2022

Method: Hollow Stem Augers

Diameter: 200 mm DATUM: MTM Zone 9

BH Location: N 5029131 E 364024 ENCL NO.: 3

	SOIL DDOCILE		^	A NADI	EC			Т	DYNA	MIC CC	NE PEN	IETRAT	ION							
	SOIL PROFILE	_	S	AMPL		TER			RESIS		NE PEN PLOT 0 6		- 0	PI LI	ASTIC MIT	, N C	ATURAL OISTURI ONTENT	LIQ LI	UID MIT	Remarks and Grain Size
LEV EPTH	DESCRIPTION	STRATA PLOT	NUMBER	TYPE	BLOWS 0.3 m	GROUND WATER CONDITIONS	⁶ DЕРТН	ELEVATION	Field.		RENG ane (x) &			W _P		TER	w —o—	NT (%)	w _L —	Distributio (%) Unit Weight (kN Pocket Penetro
	Paved Driveway	ST	N	≽	ž	R 00	°DE		2	0 4	0 6	8 0	0	10	20 30	40	50 6	0 70	80 90	GR SA SI
6 2.9	ASPHALT: 75 mm FILL: Sandy Gravel, some silt and clay, brown, dry to moist, compact to dense	\bigotimes	1	SS	29			62	-											47 34 ([·]
61.4		$\overset{\times}{\otimes}$	2	SS ,	50/ I00mn	1	- - <u>1.</u> 0 -	-						-						Auger
1.3	End of Borehole														Ιį		į		H	grinding @ 1.3 m bgs.
	- Auger Refusal on inferred bedrock																			
																	- !	!		

PROJECT: Four Storey Building
CLIENT: Babriela Godinez-Laverty

PROJECT LOCATION: 1806 Scott Street, Ottawa, ON.

Date: Aug-12-2022 Method: Wash Bore - NQ

Diameter: 100 mm

DATUM: MTM Zone 9

BH Location: N 5029117 E 364028 ENCL NO.: 4

													36402	•			EIV	ICL NO.:	. 4
	SOIL PROFILE		s	AMPL	.ES	_			DYN/ RESI	AMIC CO STANC	ONE PEN	NETRAT	ΓΙΟΝ	PL	ASTIC	NATUR MOISTU	ים בי	IQUID	Remarks
ELEV DEPTH	DESCRIPTION Grass Cover	STRATA PLOT	NUMBER	ТҮРЕ	"N" BLOWS 0.3 m	GROUND WATER	CONDITIONS	ELEVATION		EAR ST d. Shear Vick Triaxia	RENG	TH (kl Sensitivit Unconfir	¥	W _P	WATE	CONTE W ——o-	NT ΓENT (%	W _L	and Grain Size Distribution (%) Unit Weight (kN/m Pocket Penetro. (k
0.0	TOPSOIL: Silty Sand with	<u>x 1//</u>		-			0.0		-					l i	i i	 	11	 	1
62.3 0.7	Organic, dark brown, moist, loose FILL: Silty Sand and Gravel, grey,	\(\frac{1}{2}\)	1	SS	6				-						 				
61.6	moist, very dense		2	SS	63		- 1.0 - -	62	-										-
1.3	BEDROCK	X	4	RC	\0mm/				-					i	i	i		i	Run 1: TCR
0	Sedimentary, horizontal thin laminated bedding, with calcite, mudstone, siltstone, horizontal bedding with moderate joints		5	RC	RQD = 0% RQD = 63%		- - - 2.0	61	- - - - - -										100% —Run 2: TCR 84%, UCS = 187 MPa
0			6	RC	RQD = 81%		5.0 - - - - - - - -	60	- - - - - - - - - - - -										Run 3: TCR 97%, UCS = 203 MPa
0							4.0	59	-					 		 			
			7	RC	RQD = 85%				- - - - - -					 					Run 4: TCR 89%, UCS : 237 MPa
° 56.5			8	RC	RQD = 98%		5.0	58 57	- - - - - -										Run 5: TCR 100%
6.5	End of Borehole													į	į	1	ļį	ĺ	
	- Standpipe installed - Borehole terminated at intended depth @ 6.5 m bgs.																		
						Ь			1		1	<u> </u>		\vdash	\perp				1

PROJECT: Four Storey Building

CLIENT: Babriela Godinez-Laverty

Diameter: 100 mm

PROJECT LOCATION: 1806 Scott Street, Ottawa, ON.


Diameter: 100 mm


DATUM: MTM Zone 9

DESCRIPTION Second Second	DESCRIPTION	DESCRIPTION DESCR		SECT LOCATION. 1800 Scott Street, Of							ВН	Locati	on:	N 5029	9115 E	364023	3				ENC	L NO.:	5	
DESCRIPTION	DESCRIPTION	DESCRIPTION DESCR		SOIL PROFILE		S	SAMPL	.ES			D R	YNAMI(ESISTA	CON	NE PEN	IETRAT	ION	Р	ASTIC	NA	TURAL	LIQ	UID	Rem	arks
9.9 TOPSOIL: Silty Sand with Qrganic, dark brown, moist, loose Silty Sand, some gravel, dark brown, moist, loose Sandy Gravel, trace silty and clay, brown, moist, compact 1.3	69.9 TOPSOIL: Silty Sand with 02.3 Qrganic, dark brown, moist, loose 62.3 Silty Sand, some gravel, dark brown, moist, loose Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 63 Sandy Gravel, trace silty and clay, brown, moist, compact 64 Sandy Gravel, trace silty and clay, brown, moist, compact 65 Sandy Gravel, trace silty and clay, brown, moist, compact 66 Sandy Gravel, trace silty and clay, brown, moist, compact 67 Sandy Gravel, trace silty and clay, brown, moist, compact 68 Sandy Gravel, trace silty and clay, brown, moist, compact 69 Sandy Gravel, trace silty and clay, brown, moist, compact 69 Sandy Gravel, trace silty and clay, brown, moist, compact 60 Sandy Gravel, trace silty and clay, brown, moist, compact 60 Sandy Gravel, trace silty and clay, brown, moist, compact 60 Sandy Gravel, trace silty and clay, brown, moist, compact 60 Sandy Gravel, trace silty and clay, brown, moist, compact 61 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 63 Sandy Gravel, trace silty and clay, brown, moist, compact 64 Sandy Gravel, trace silty and clay, brown, moist, compact 65 Sandy Gravel, trace silty and clay, brown, moist, compact 67 Sandy Gravel, trace silty and clay, brown, moist, compact 68 Sandy Gravel, trace silty and clay, brown, moist, compact 69 Sandy Gravel, trace silty and clay, brown, moist, compact 60 Sandy Gravel, trace silty and clay, brown, moist, compact 60 Sandy Gravel, trace silty and clay, brown, moist, compact 69 Sandy Gravel, trace silty and clay, brown, moist, compact 60 Sandy Gravel, trace silty and clay, brown, moist, compact 61 Sandy Gravel, trace silty and clay, brown, moist, compact 61	69.9 TOPSOIL: Silty Sand with 02.3 Qrganic, dark brown, moist, loose 62.3 Silty Sand, some gravel, dark brown, moist, loose Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 62 Sandy Gravel, trace silty and clay, brown, moist, compact 61.3 Splitspoon 61.3 La Borehole		DESCRIPTION		NUMBER	ТУРЕ	"N" BLOWS 0.3 m	GROUND WATER CONDITIONS	⁵ DЕРТН		20 HEAR Field. She Quick Tr	40 STF ear Van	RENG ne (x) & S	0 8 TH (kP Sensitivity Unconfine	0 (a)	LI W _F	WAT	ER C	W -0	NT (%)	MIT W _L ───	and Grain Distr (%) Unit Wei Pocket P	n Size ibution ght (kN/i enetro.
1.3 Solity Sand, some gravel, dark shown, moist, loose Sandy Gravel, trace silty and clay, brown, moist, compact 2 SS 56 Solity Sand, some gravel, dark shown, moist, loose Sandy Gravel, trace silty and clay, brown, moist, compact 2 SS 56 Solity So	G2.3 Sity Sand, some gravel, dark of one of the strength of th	62.3 Silty Sand, some gravel, dark brown, moist, loose 5.4 Sandy Gravel, trace silty and clay, brown, moist, compact 62.5 Sandy Gravel, trace silty and clay, brown, moist, compact 62.5 Sandy Gravel, trace silty and clay, brown, moist, compact 62.5 Splitspoon 62.5 Splitspoon 62.5 Splitspoon 62.5 Splitspoon 64.3 Splitspoon 65.5 Splits	69.8	TOPSOIL: Silty Sand with						D.0 -	ŧ						ij	Ħ		†				
brown, moist, compact 2 SS 56	brown, moist, compact	brown, moist, compact	62:3	Qrganic, dark brown, moist, loose Silty Sand, some gravel, dark brown, moist, loose	i	1	SS	6		- - - - -	-													
1.4 End of Borehole Splitspoon bouncing @ 1.4 m bgs.	1.4 End of Borehole Omm bouncing @ 1.4 In a bo	1.4 End of Borehole Omm bouncing @ 1.4 In a bo		brown, moist, compact	0.0					ŀ	52 - - - -												57 34	(
End of Borehole	End of Borehole	End of Borehole			0.	3	SS		ļ	_	+						-	1 1		-		+ +		
			¯1.4	End of Borehole				Ommi															bound 1.4 m	ing @

1806 SCOTT STREET, OTTAWA, ONTARIO. GEOTECHNICAL AND FOUNDATION REPORT

APPENDIX D LABORATORY TEST RESULTS



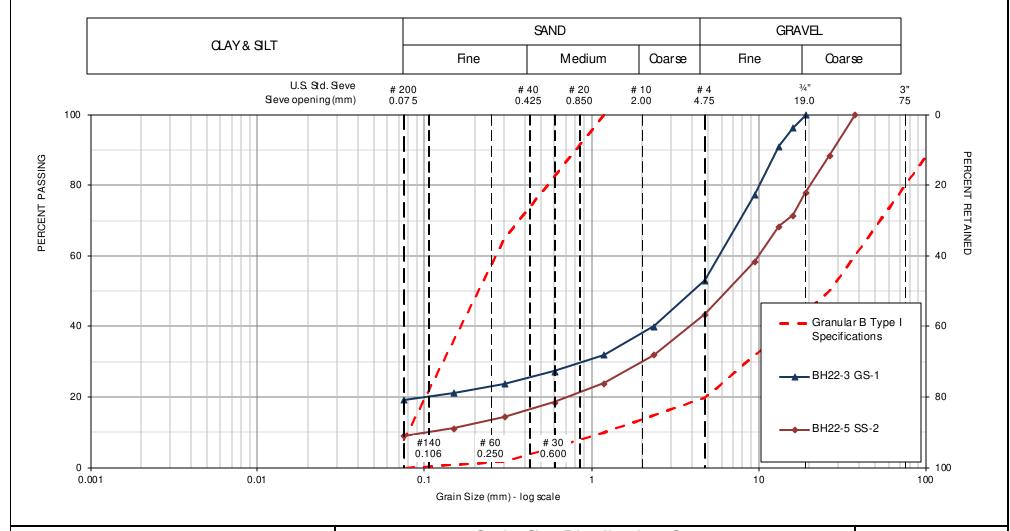

McINTOSH	PERRY
----------	-------

Grain-Size Distribution Curve	Figure No. 3
FIII 1806 Scott Street, Ottawa.	CCO-23-1093

BH22-1 Rock Core





- Mechanical Breaks
- Joints

McINTOSH PERRY

115 Walgreen Road, RR3, Carp, ON K0A 1L0 Tel: 613-836-2194 Fax: 613-836-3742 www.mcintoshperry.com Olient: Gabriela Godinez-Lavery Project Name: 1806 Scott St. Project Location: Ottawa, ON.

Project No.: 000-23-1093

Figure No.: 4

BH22-1 Run 1 (1.3 - 2.1 m)





115 Walgreen Road, RR3, Carp, ON K0A 1L0 Tel: 613-836-2194 Fax: 613-836-3742 www.mcintoshperry.com Olient: Gabriela Godinez-Lavery Project Name: 1806 Scott St. Project Location: Ottawa, ON.


Project No.: 000-23-1093

BH22-1 Run 2 (2.1 - 3.4 m)



115 Walgreen Road, RR3, Carp, ON K0A 1L0 Tel: 613-836-2194 Fax: 613-836-3742 www.mcintoshperry.com Glient: Gabriela Godinez-Lavery Project Name: 1806 Scott St. Project Location: Ottawa, ON.

Project No.: 000-23-1093

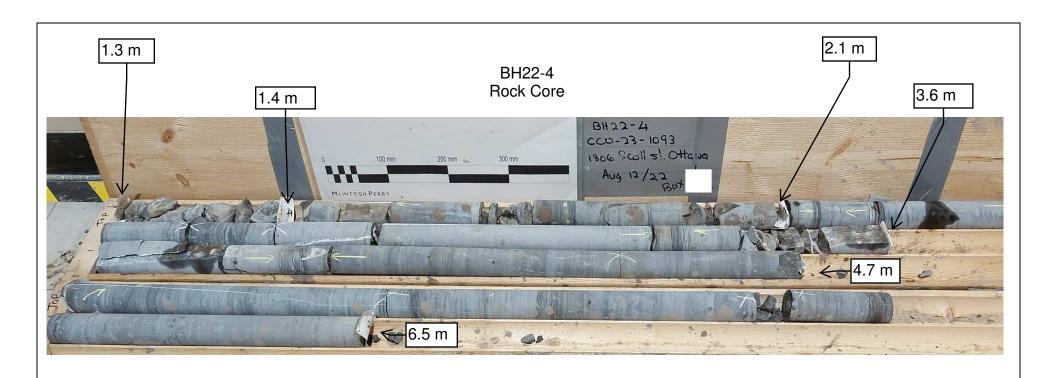



Mechanical Breaks

Joints


McINTOSH PERRY

115 Walgreen Road, RR3, Carp, ON K0A 1L0
Tel: 613-836-2194 Fax: 613-836-3742
www.mcintoshperry.com

Olient: Gabriela Godinez-Lavery Project Name: 1806 Scott St. Project Location: Ottawa, ON.

Project No.: 000-23-1093

BH22-4 Run 2 (1.3 - 2.1 m)

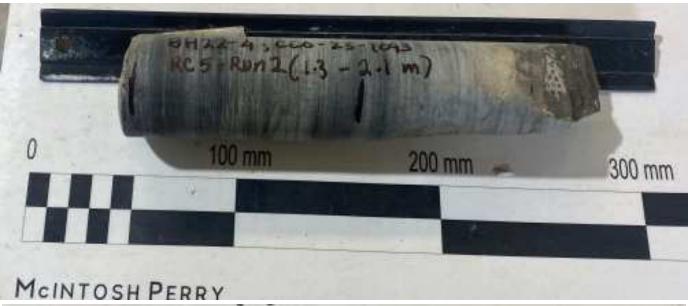



115 Walgreen Road, RR3, Carp, ON K0A 1L0 Tel: 613-836-2194 Fax: 613-836-3742 www.mcintoshperry.com Client: Gabriela Godinez-Lavery Project Name: 1806 Scott St. Project Location: Ottawa, ON.

Project No.: 000-23-1093

BH22-4 Run 3 (2.1 - 3.6 m)






115 Walgreen Road, RR3, Carp, ON K0A 1L0 Tel: 613-836-2194 Fax: 613-836-3742 www.mcintoshperry.com Client: Gabriela Godinez-Lavery Project Name: 1806 Scott St. Project Location: Ottawa, ON.

Project No.: 000-23-1093

BH22-4 Run 4 (3.6 - 4.7 m)

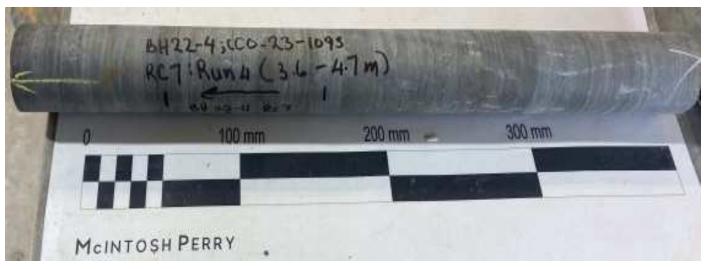



115 Walgreen Road, RR3, Carp, ON K0A 1L0 Tel: 613-836-2194 Fax: 613-836-3742 www.mcintoshperry.com Client: Gabriela Godinez-Lavery Project Name: 1806 Scott St. Project Location: Ottawa, ON.

Project No.: 000-23-1093

<u>Unconfined Compressive Strength of Intact Rock Cores</u> <u>ASTM D7012 Method C</u>

Project No.:		CCO2	3-1093		D	Date Issued:		Aug 18,2	022		
Lab No.:		OL-22	070		Report No			1 of 2			
Project Name: 1806 Scott St. Ottawa											
Core No.:			1	Moisture Co	Moisture Condition:			Dry as received			
Borehole Loc	atio	n:	BH22-1	RC / Run:	RC-3	/ Run-1	De	epth (ft):	1.3m-2.1m		
Date Sample	d:		Aug 11,2022	Received:	Aug :	12,2022	Те	sted:	Aug 17,2022		
Core No.:			2	Moisture Co	onditi	on:		Dry	as received		
Borehole Loc	atio	n:	BH22-1	RC / Run:	RC-4	/ Run-2	De	pth (ft):	2.1m-3.4m		
Date Sampled: Aug 11,2022		Received:	Aug 12,2022		Tested:		Aug 17,2022				
Core No.:			3	Moisture Co	Moisture Condition			Dry	as received		
Borehole Loc	atio	n:	BH22-4	RC / Run:	RC-5 / Run-2		Run-2 Depth		1.3m-2.1m		
Date Sample	d:		Aug 11,2022	Received:	Aug :	Aug 12,2022		sted:	Aug 17,2022		
Core No. :				1	1		2		3		
Diameter (m	m)			47.4		47.5		5	47.4		
Thickness/He	eight	t (mm		98.3			97.3		97.3		
Density (Kg/m³)			2752			270	9	2687			
Compressive Strength (Mpa)			256.9		180.6		.6	187.3			
Mass of Core (g)			477.38		467.54		54	465.2			
Description o	of Fa	ilure		2 & 3		2			3		

Remarks:	Туре	2 - Relatively well-formed cone o	on one end, vertical c	racks running through end, no well	
_	form	ed cone on other end.			
	Туре	3 - Columnar Vertical cracking thr	ough both ends, no v	vell-formed cones.	
·					
-		111			
Reviewed E	Зу:	Ym M.L.	Date:	Aug 18,2022	
		Jason Hopwood-Jones			

<u>Unconfined Compressive Strength of Intact Rock Cores</u> <u>ASTM D7012 Method C</u>

Project No.:	:	CCO23-1093					Date Issu	ed:	Aug 18,2022	
Lab No.:		OL-22	070				Report N	o.:	2 of 2	
Project Nan	ne:	1806	Scott St. Ottawa							
Core No.:			4		Moisture Co	ond	ition:		Dry	as received
Borehole Lo	Borehole Location: BH22-4				RC / Run:	RC	-6 / Run-3	D	epth (ft):	2.1m-3.6m
Date Sampl	ed:		Aug 11,2022		Received:	Au	g 12,2022	Te	ested:	Aug 17,2022
Core No.:			5		Moisture Co	ond	ition:		Dry	as received
Borehole Lo	catio	n:	BH22-4		RC / Run:	RC	-7 / Run-4	D	epth (ft):	3.6m-4.7m
Date Sampl	ed:		Aug 11,2022		Received:	Au	g 12,2022	Te	ested:	Aug 17,2022
Core No.:					Moisture Co	ond	ition:			
Borehole Lo	catio	n:			RC / Run:			D	epth (ft):	
Date Sampled:				Received:	Teste			ested:		
Core No. :					4			5		
Diameter (n	nm)				47.6		47.6			
Thickness/H	leight	t (mm)		98			98.2		
Density (Kg	/m³)				2694		2738		38	
Compressiv	e Stre	ength ((Мра)		203.3		236.7		5.7	
Mass of Cor	re (g)				469.98			477	.48	
Description	of Fa	ilure			3			2 &	. 3	
Remarks:	Туре	2 - Re	latively well-form	ed	cone on one e	end,	vertical cr	acks r	unning thro	ough end, no well
	form	ed con	e on other end.							
	Туре	3 - Col	umnar Vertical cr	ack	ing through b	oth	ends, no w	ell-fo	rmed cones	5.
			a. 11/2.						Aug 18,	2022
Reviewed	By:		119			-	Date:			
		Jason	Hopwood-Jones	S						

Laboratory Manager



300 - 2319 St. Laurent Blvd Ottawa, ON, K1G 4J8 1-800-749-1947 www.paracellabs.com

Certificate of Analysis

McIntosh Perry Consulting Eng. (Nepean)

215 Menten Place, Unit 104 Nepean, ON K2H 9C1

Attn: Jason Hopwood-Jones

Client PO: CCO 23-1093

Project: 1806 Scott St.

Custody: 67079

Report Date: 24-Aug-2022

Order Date: 17-Aug-2022

Order #: 2234332

This Certificate of Analysis contains analytical data applicable to the following samples as submitted:

Paracel ID Client ID

2234332-01 BH22-5 SS-2 2'-4'

Approved By:

Alex Enfield, MSc

Lab Manager



Certificate of Analysis

 Client:
 McIntosh Perry Consulting Eng. (Nepean)
 Order Date: 17-Aug-2022

 Client PO:
 CCO 23-1093
 Project Description: 1806 Scott St.

Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
Anions	EPA 300.1 - IC, water extraction	23-Aug-22	24-Aug-22
pH, soil	EPA 150.1 - pH probe @ 25 °C, CaCl buffered ext.	23-Aug-22	23-Aug-22
Resistivity	EPA 120.1 - probe, water extraction	23-Aug-22	23-Aug-22
Solids, %	Gravimetric, calculation	22-Aug-22	22-Aug-22



Certificate of Analysis

Client: McIntosh Perry Consulting Eng. (Nepean)

Client PO: CCO 23-1093

Report Date: 24-Aug-2022

Order Date: 17-Aug-2022

Project Description: 1806 Scott St.

Summary of Criteria Exceedances

(If this page is blank then there are no exceedances)
Only those criteria that a sample exceeds will be highlighted in red

Regulatory Comparison:

Paracel Laboratories has provided regulatory guidelines on this report for informational purposes only and makes no representations or warranties that the data is accurate or reflects the current regulatory values. The user is advised to consult with the appropriate official regulations to evaluate compliance. Sample results that are highlighted have exceeded the selected regulatory limit. Calculated uncertainty estimations have not been applied for determining regulatory exceedances.

Sample	Analyte	MDL / Units	Result	-	-

Certificate of Analysis

Client: McIntosh Perry Consulting Eng. (Nepean)

Report Date: 24-Aug-2022 Order Date: 17-Aug-2022

Project Description: 1806 Scott St.

Client PO: CCO 23-1093

	Client ID:	BH22-5 SS-2 2'-4'	-	-	-		
	Sample Date:	11-Aug-22 09:30	-	-	-	-	-
	Sample ID:	2234332-01	-	-	-		
	Matrix:	Soil	-	-	-		
	MDL/Units						
Physical Characteristics					•		
% Solids	0.1 % by Wt.	95.9	•	-	•	=	-
General Inorganics		•				•	•
рН	0.05 pH Units	7.79	•	•	•	=	-
Resistivity	0.1 Ohm.m	71.7	-	-	-	-	-
Anions							
Chloride	5 ug/g	<5	-	-	-	-	-
Sulphate	5 ug/g	32	-	-	-	-	-



Certificate of Analysis

Client: McIntosh Perry Consulting Eng. (Nepean)

Report Date: 24-Aug-2022 Order Date: 17-Aug-2022

Client PO: CCO 23-1093

Project Description: 1806 Scott St.

Method Quality Control: Blank

Analyte	Result	Reporting Limit	Units	%REC	%REC Limit	RPD	RPD Limit	Notes
Anions								
Chloride	ND	5	ug/g					
Sulphate	ND	5	ug/g					
General Inorganics								
Resistivity	ND	0.10	Ohm.m					



Project Description: 1806 Scott St.

Report Date: 24-Aug-2022

Order Date: 17-Aug-2022

Certificate of Analysis

Client: McIntosh Perry Consulting Eng. (Nepean)

Client PO: CCO 23-1093

Method Quality Control: Duplicate

momou quanty control papieute									
Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Anions									
Chloride	ND	5	ug/g	ND			NC	20	
Sulphate	34.2	5	ug/g	31.5			8.2	20	
General Inorganics									
рН	7.90	0.05	pH Units	7.86			0.5	10	
Resistivity	24.6	0.10	Ohm.m	24.6			0.1	20	
Physical Characteristics									
% Solids	85.9	0.1	% by Wt.	85.7			0.2	25	



Certificate of Analysis

Client: McIntosh Perry Consulting Eng. (Nepean)

Report Date: 24-Aug-2022 Order Date: 17-Aug-2022

Client PO: CCO 23-1093

Project Description: 1806 Scott St.

Method Quality Control: Spike

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Anions									
Chloride	106	5	ug/g	ND	106	82-118			
Sulphate	129	5	ug/g	31.5	97.8	80-120			



Report Date: 24-Aug-2022

Order Date: 17-Aug-2022

Project Description: 1806 Scott St.

Certificate of Analysis

Client: McIntosh Perry Consulting Eng. (Nepean)

Client PO: CCO 23-1093

Qualifier Notes: Login Qualifiers :

Received at temperature > 25C

Applies to Samples: BH22-5 SS-2 2'-4'

Sample Data Revisions:

None

Work Order Revisions / Comments:

None

Other Report Notes:

n/a: not applicable ND: Not Detected

MDL: Method Detection Limit

Source Result: Data used as source for matrix and duplicate samples

%REC: Percent recovery.

RPD: Relative percent difference.

NC: Not Calculated

Soil results are reported on a dry weight basis unlesss otherwise noted.

Where %Solids is reported, moisture loss includes the loss of volatile hydrocarbons.

Any use of these results implies your agreement that our total liabilty in connection with this work, however arising, shall be limited to the amount paid by you for this work, and that our employees or agents shall not under any circumstances be liable to you in connection with this work.

1806 SCOTT STREET, OTTAWA, ONTARIO. GEOTECHNICAL AND FOUNDATION REPORT

APPENDIX E SEISMIC HAZARD CALCULATION

McINTOSH PERRY

2010 National Building Code Seismic Hazard Calculation

INFORMATION: Eastern Canada English (613) 995-5548 français (613) 995-0600 Facsimile (613) 992-8836 Western Canada English (250) 363-6500 Facsimile (250) 363-6565

Site: 45.400N 75.744W User File Reference: 1806 Scott Street

Requested by: McIntosh Perry Consulting Engineering Ltd.

Probability of exceedance per annum	0.000404	0.001	0.0021	0.01
Probability of exceedance in 50 years	2 %	5 %	10 %	40 %
Sa (0.2)	0.632	0.384	0.247	0.089
Sa (0.5)	0.307	0.185	0.121	0.043
Sa (1.0)	0.137	0.087	0.055	0.017
Sa (2.0)	0.046	0.028	0.018	0.006
PGA (g)	0.322	0.200	0.122	0.038

Notes: Spectral (Sa(T), where T is the period in seconds) and peak ground acceleration (PGA) values are given in units of g (9.81 m/s²). Peak ground velocity is given in m/s. Values are for "firm ground" (NBCC2015 Site Class C, average shear wave velocity 450 m/s). NBCC2015 and CSAS6-14 values are highlighted in yellow. Three additional periods are provided - their use is discussed in the NBCC2015 Commentary. Only 2 significant figures are to be used. These values have been interpolated from a 10-km-spaced grid of points. Depending on the gradient of the nearby points, values at this location calculated directly from the hazard program may vary. More than 95 percent of interpolated values are within 2 percent of the directly calculated values.

References

National Building Code of Canada 2015 NRCC no. 56190; Appendix C: Table C-3, Seismic Design Data for Selected Locations in Canada

Structural Commentaries (User's Guide - NBC 2015: Part 4 of Division B) Commentary J: Design for Seismic Effects

Geological Survey of Canada Open File 7893 Fifth Generation Seismic Hazard Model for Canada: Grid values of mean hazard to be used with the 2015 National Building Code of Canada

See the websites www.EarthquakesCanada.ca and www.nationalcodes.ca for more information





2022-10-05 20:11 UT