

Phase II Environmental Site Assessment Update 1657-1673 Carling Avenue and 386 Tillbury Avenue Ottawa, Ontario

Prepared for Inside Edge Properties

Report: PE6046-2 May 29, 2023



TABLE OF CONTENTS

EXEC	UTIVI	E SUMMARY	iii
1.0	INTR	ODUCTION	1
	1.1	Site Description	1
	1.2	Property Ownership	1
	1.3	Current and Proposed Future Uses	2
	1.4	Applicable Site Condition Standard	2
2.0	BACk	GROUND INFORMATION	3
	2.1	Physical Setting	3
	2.2	Past Investigations	
3.0	SCOF	PE OF INVESTIGATION	4
	3.1	Overview of Site Investigation	4
	3.2	Media Investigated	4
	3.3	Phase I Conceptual Site Model	5
	3.4	Deviations from Sampling and Analysis Plan	8
	3.5	Impediments	8
4.0	INVE:	STIGATION METHOD	9
	4.1	Subsurface Investigation	9
	4.2	Soil Sampling	
	4.3	Field Screening Measurements	9
	4.4	Groundwater Monitoring Well Installation	10
	4.5	Groundwater Sampling	10
	4.6	Analytical Testing	11
	4.7	Residue Management	12
	4.8	Elevation Surveying	12
	4.9	Quality Assurance and Quality Control Measures	12
	5.1	Geology	12
	5.2	Groundwater Elevations, Flow Direction, and Hydraulic Gradient	
	5.3	Fine-Coarse Soil Texture	13
	5.4	Soil: Field Screening	13
	5.5	Soil Quality	14
	5.6	Groundwater Quality	
	5.7	Quality Assurance and Quality Control Results	16
	5.8	Phase II Conceptual Site Model	16
6.0		CLUSIONS	
7.0	STAT	EMENT OF LIMITATIONS	23



List of Figures

Figure 1 - Key Plan Drawing PE6046-3 – Test Hole Location Plan & Groundwater Contour Plan Drawing PE6046-4 – Analytical Testing Plan – Soil & Groundwater

List of Appendices

Appendix 1 Sampling and Analysis Plan Phase II Environmental Site Assessment, Pinchin (2018) Laboratory Certificates of Analysis



EXECUTIVE SUMMARY

Assessment

An updated Phase II ESA was conducted for the property addressed 1657-1673 Carling Avenue and 386 Tillbury Avenue in Ottawa, Ontario. The purpose of the Phase II ESA Update was to update the findings of the 2018 Phase II ESA prepared by Pinchin, in general accordance with O.Reg. 153/04. The 2018 Phase II ESA is considered to have addressed the APECs identified in the more recent 2023 Phase I ESA prepared by Paterson.

The 2018 subsurface investigation consisted of three (3) boreholes, all which were instrumented with groundwater monitoring wells. The general soil profile encountered during the field program consisted of asphalt underlain by silty sand fill material, underlain silty sand with trace clay and gravel, followed by bedrock.

Three (3) soil samples were submitted for laboratory analysis of volatile organic compounds (VOCs) and petroleum hydrocarbons (PHCs, Fractions F_1 - F_4). No VOC parameter concentrations, including benzene, toluene, ethylbenzene, and xylenes (BTEX), or PHCs (F_1 - F_4) were identified in any of the soil samples analysed. As such, the soil results comply with MECP Table 7 Residential Standards.

Groundwater samples from monitoring wells MW1, MW2, and MW3 were collected during the April 17, 2018, sampling event. Groundwater samples were analyzed for VOCs and PHCs. Concentrations of VOCs, with the exception of benzene, and PHCs were not detected above the laboratory detection limits. Benzene was detected in the groundwater sample analyzed from MW1 but complied with the applicable standard. The groundwater results comply with the MECP Table 7 Standards.

During the current field program, groundwater samples were collected from MW2 and MW3 on May 16, 2023 (MW1 could not be located). No free product or petroleum hydrocarbon sheen was noted on the purge water during the groundwater sampling event.

Groundwater samples were analyzed for VOCs and PHCs. Concentrations of VOCs, including BTEX parameters, and PHCs were not detected above the laboratory detection limits. The groundwater results comply with the MECP Table 7 Standards.



Recommendations

It is our understanding that the Phase II ESA Property will be redeveloped with a 24storey residential building with ground-floor commercial space. Due to the change in land use to a more sensitive land use (commercial to residential), a record of site condition (RSC) will be required as per O.Reg 154/03.

Based on the findings of the Phase II ESA, all analyzed soil and groundwater samples comply with the MECP Table 7 Standards for a residential land use. No further environmental investigation is recommended at this time.

Excess soil requiring off-site disposal during construction must be managed in accordance with Ontario Regulation 406/19 – On-site and Excess Soil Management.

Monitoring Wells

If the monitoring wells installed on the Phase II ESA Property are not going to be used in the future, or will be destroyed during site redevelopment, they should be abandoned according to Ontario Regulation 903. The wells will be registered with the MECP under this regulation.



1.0 INTRODUCTION

At the request of Inside Edge Properties, Paterson Group (Paterson) prepared a Phase II Environmental Site Assessment Update for the properties located at 1657 to 1673 Carling Avenue and 386 Tillbury Avenue (the Phase II ESA Property) in the City of Ottawa, Ontario. The purpose of this Phase II ESA was to update the findings of the 2018 Phase II ESA, prepared by others, which is considered to have addressed the areas of potential environmental concern (APECs) identified during the Phase I ESA conducted by Paterson in May 2023, given no new APECs were identified. The findings of the 2018 Phase II ESA are discussed in this report.

1.1 Site Description

Address:	1657-1673 Carling Avenue, and 386 Tillbury Avenue, Ottawa, Ontario
Location:	The site is located on the north side of Carling Avenue, approximately 80 m east of Cole Avenue, in the City of Ottawa, Ontario. Refer to Figure 1 - Key Plan in the Figures section following the text.
Legal Description:	Part of Lot 2 of Registered Plan 492 and Part of Block 4, Registered Plan 310595, in the City of Ottawa.
PINs:	04012-0100 and 04012-0098
Latitude and Longitude:	45°22' 47.7" N, 74° 45' 56.99" W
Site Description:	
Configuration:	Irregular
Area:	3,890 m ² (approximately)
Zoning:	AM10 – Arterial Mainstreet Zone (Mixed use)

1.2 Property Ownership

Paterson was engaged to conduct this Phase II ESA by Mr. Jordan R. Bianconi from Inside Edge Properties. The head office is located at 464 Bank Street, Ottawa Ontario. Mr. Bianconi can be reached by telephone at (613) 482-8324.

1.3 Current and Proposed Future Uses

The Phase II ESA Property is currently occupied by a commercial portion (1657-1673 Carling Avenue) and a residential portion (386 Tillbury Avenue). It is our understanding that the Phase II ESA Property will be redeveloped for residential land use. Due to the change in land use to a more sensitive land use (commercial to residential), a record of site condition (RSC) will be required as per O.Reg 154/03.

1.4 Applicable Site Condition Standard

The site condition standards for the property were obtained from Table 7 of the document entitled "Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act", prepared by the Ontario Ministry of Environment, Conservation and Parks (MECP), April 2011. The MECP selected Table 7 Standards are based on the following considerations:

- **Coarse-grained soil conditions**
- Generic site conditions for shallow soils
- □ Non-potable groundwater conditions
- Residential land use

Section 35 of O.Reg. 153/04 does apply to the Phase II ESA Property in that the property does not rely upon potable groundwater.

Section 41 of O.Reg. 153/04 does not apply to the Phase II ESA Property, as the property is not within 30 m of an environmentally sensitive area.

Section 43.1 of O.Reg. 153/04 applies to the Phase II ESA Property because the property is a Shallow Soil property.

The intended use of the Phase II ESA Property is residential; therefore, the residential standards have been selected for the purpose of this Phase II ESA Update.



2.0 BACKGROUND INFORMATION

2.1 Physical Setting

The Phase II ESA Property is situated a mixed-used area and is comprised of two parcels of land: 1657-1673 Carling Avenue (commercial land use) and 386 Tillbury Avenue (residential land use) in the City of Ottawa, Ontario. The commercial building, fronting Carling Avenue, occupies the southern portion of the site. The residential building occupies the parcel of land fronting onto Tillbury Avenue. The remainder of the Phase II ESA Property exists as a paved parking lot associated with the commercial building or landscaped vegetation around the dwelling.

Two (2) catch basins along the eastern side of the property were noted as well as four (4) drains along the southern property boundary, which drain into the municipal stormwater sewers. Waste and grease waste bins were noted on the northwest corner of the commercial part of the site.

The southern portion of the Phase II ESA Property is situated below the grade of Carling Avenue and the adjacent property to the west and is at the same grade as the abutting property to the east. The Phase II ESA Property gradually slopes down toward the north in the direction of the subject residential dwelling, where the property is slightly above the grade of Tillbury Avenue. The regional topography appears to slope down in a north/north-westerly direction toward the Ottawa River.

Site drainage on the commercial portion consists of sheet flow to on-site catch basins, while the residential property consists of infiltration on the landscaped areas and sheet flow to a catch basin located along Tillbury Avenue.

2.2 Past Investigations

Paterson completed a Phase I ESA in May 2023 for the Phase II ESA Property, which included a review of the following reports prepared by other consultants:

- "Phase II-Environmental Site Assessment, 1657-1673 Carling Avenue, Ottawa, Ontario," prepared by Pinchin, dated May 4, 2018.
- □ "Phase I-Environmental Site Assessment, 1657-1673 Carling Avenue, Ottawa, Ontario," prepared by Pinchin, dated November 11, 2021.
- "Phase I Environmental Site Assessment, 1657-1673 Carling Avenue, and 386 Tillbury Avenue, Ottawa Ontario," prepared by Paterson, dated May 15, 2023.



Based on the findings of the Phase I ESA, four (4) potentially contaminating activities (PCAs) were determined to result in areas of potential environmental concern (APECs) on the Phase II ESA Property:

- APEC 1: Resulting from former storage of heavy equipment on the northern portion of the Phase II ESA Property (PCA Other).
- APEC 2: Resulting from the use of road salt across the Phase II ESA Property (PCA Other).
- □ APEC 3: Resulting from the former presence of a UST and historical groundwater impacts on the adjacent property (PCA 28/Other).
- APEC 4: Resulting from the former retail fuel outlet and automotive service garage on the adjacent property (PCA 28/52).

The rationale for identifying the above APECs is based on a review of fire insurance plans, aerial photographs, field observations, personal interviews, and review of previous reports. A Phase II ESA update was recommended in general accordance with O.Reg. 153/04, to support the filing of municipal applications and ultimately a Record of Site Condition.

3.0 SCOPE OF INVESTIGATION

3.1 Overview of Site Investigation

The initial subsurface investigation was conducted in April 2018 (by Pinchin) and in May 2023 (by Paterson). The field program consisted of drilling three (3) boreholes to address the APECs identified on the Phase II ESA Property. All of the boreholes (MW1 through MW3), which were supervised by Pinchin, were cored into the bedrock and completed with monitoring well installations. Boreholes were drilled to a maximum depth of 7.6 m below ground surface (mbgs).

The current investigation consisted of a groundwater sampling program as discussed further below.

3.2 Media Investigated

During the subsurface investigation, soil samples and groundwater samples were obtained and submitted for laboratory analysis. The rationale for sampling and analyzing this media is based on the Contaminants of Potential Concern (CPCs) identified in the Phase I ESA.



Contaminants of potential concern on the Phase II ESA Property include benzene, toluene, ethylbenzene, and xylenes (BTEX), petroleum hydrocarbons (PHCs, F₁-F₄), and volatile organic compounds (VOCs). These CPCs may be present in the soil and/or groundwater beneath the Phase II ESA Property.

3.3 Phase I Conceptual Site Model

Geological and Hydrogeological Setting

According to the Geological Survey of Canada website, the bedrock in the area of the Phase I Property is reported to consist of limestone interbedded with dolomite of the Gull River Formation. Overburden consists of plain till with a drift thickness ranging from 1 to 3 metres.

The 2018 subsurface investigation confirmed the reported geological setting. The groundwater beneath the Phase I Property at that time was determined to flow in a southeasterly direction, although due to recent construction in the immediate area, the groundwater flow beneath the Phase I Property is expected to have changed.

Existing Buildings and Structures

The portion of the Phase I Property addressed 1657-1673 Carling Avenue is occupied by a 2-storey commercial building, fronting onto Carling Avenue. The commercial building was constructed circa 1976 with a slab-on-grade foundation and is finished on the exterior with brick and metal siding as well as a flat tar-and-gravel style roof. The ground level is occupied by 2 restaurants, a wellness and health clinic, a hearing clinic, commercial office (employment agency) and a beauty salon, while the upper level is used as commercial office space.

The residential portion of the Phase I Property, addressed 386 Tillbury Avenue, is occupied by a vacant 2-storey single family dwelling with a half-grade basement level. The subject dwelling was constructed circa 2009 with a poured concrete foundation. The exterior of the dwelling is finished in brick and vinyl siding and a sloped shingle style roof. Both on-site buildings are heated by natural gas-fired equipment.

Subsurface Structures and Utilities

The Phase I Property is situated in a municipally serviced area. Underground utilities include stormwater, sanitary and municipal water services, and natural gas that enter and/or exit the Phase I Property along Carling Avenue and Tillbury Avenue.



Two (2) on-site stormwater catch basins are situated along the eastern side as well as four (4) drains along the southern side of the commercial portion of the Phase I Property. Two groundwater monitoring wells were observed on-site.

Areas of Natural Significance

No areas of natural significance were identified in the Phase I Study Area.

Water Bodies

No natural water bodies were identified in the Phase I Study Area.

Drinking Water Wells

There are no potable water wells on the Phase I Property. While historical well records were identified for several properties within the Phase I Study Area, these wells are no longer considered to be operation given the area is provided with municipal services.

Well records for 3 monitoring wells installed during the 2018 Pinchin investigation were identified. Based on site observations only 2 of the 3 wells remain present and viable.

Well records for monitoring wells were identified at several properties within the Phase I Study Area.

Neighbouring Land Use

Neighbouring land use in the Phase I Study Area consists of commercial land use along both the north and south sides of Carling Avenue to the east and west of the Phase I Property. Land use north of Carling Avenue is residential.

Potentially Contaminating Activities and Areas of Potential Environmental Concern

As per Section 7.1 of the Phase I ESA report, six (6) PCAs and the resultant APECs are summarized in Table 1, along with their respective locations and contaminants of potential concern (COPCs).



Area of Potential Environmental Concern	Location of Area of Potential Environmental Concern	Potentially Contaminating Activity	Location of PCA (on-site or off- site)		Media Potentially Impacted (Groundwater Soil, and/or Sediment)
APEC 1 Former storage of heavy equipment	Northern portion of Phase I Property	PCA - Other	On-site	BTEX VOCs PHCs	Soil and groundwater
APEC 2 ¹ Application of road salt for the safety of vehicular or pedestrian traffic under conditions of snow or ice	Northern half of the commercial portion of the Phase I Property	PCA - Other	On-site	EC SAR	Soil
APEC 3 Former off-site UST and historical groundwater impacts	Northern half of the commercial portion of the Phase I Property	PCA 28 – Gasoline and Associated Products Storage in Fixed Tanks PCA - Other	Off-site	BTEX VOCs PHCs	Groundwater
APEC 4 Former retail fuel outlet and automotive service garage	Southwestern portion of the Phase I Property	PCA 28 – Gasoline and associated products storage in fixed tanks PCA 52 – Storage, maintenance, fuelling and repair of equipment, vehicles, and material used to maintain transportation systems.	Off-site	BTEX VOC PHCs	Groundwater

¹ – In accordance with Section 49.1 of Ontario Regulation 153/04 standards are deemed to be met if an applicable site condition standard is exceeded at a property solely because the qualified person has determined that a substance has been applied to surfaces for the safety of vehicular or pedestrian traffic under conditions of snow or ice or both. The exemption outlined in Section 49.1 is being relied upon with respect to the Phase I property.



As previously discussed in Section 7.1 of the Phase I ESA report and shown on Drawing PE5197-2-Surrouding Land Use Plan, the remaining off-site PCAs are not considered to represent APECs on the Phase I ESA Property.

Contaminants of Potential Concern

Based on the APECs identified on the Phase I Property, the following COPCs were identified with respect to the soil on the Phase I Property:

- Benzene, Toluene, Ethylbenzene, Xylenes (BTEX);
- □ Volatile Organic Compounds (VOCs);
- Petroleum Hydrocarbons fractions 1 through 4 (PHCs F₁-F₄);
- Electrical Conductivity (EC); and,
- **G** Sodium Adsorption Ratio (SAR).

The following CPCs were identified with respect to the groundwater beneath the Phase I Property:

- Benzene, Toluene, Ethylbenzene, Xylenes (BTEX);
- □ Volatile Organic Compounds (VOCs); and,
- Petroleum Hydrocarbons fractions 1 through 4 (PHCs F₁-F₄).

Assessment of Uncertainty and/or Absence of Information

The information available for review as part of the preparation of this Phase I ESA is considered to be sufficient to conclude that there is an on- and off-site PCA that have resulted in APECs on the Phase I ESA Property.

A variety of independent sources were consulted as part of this assessment, and as such, the conclusions of this report are not affected by uncertainty which may be present with respect to the individual sources.

3.4 Deviations from Sampling and Analysis Plan

A groundwater sample could not be collected from one monitoring well during the 2023 Phase II ESA investigation since the well could not be located. The Sampling and Analysis Plan is included in Appendix 1 of this report.

3.5 Impediments

No physical impediments were encountered during the Phase II ESA field program.



4.0 INVESTIGATION METHOD

4.1 Subsurface Investigation

The initial 2018 Phase II ESA field program consisted of drilling three (3) boreholes (MW1 through MW3) across the Phase II ESA Property. The boreholes were drilled to a maximum depth of 7.6 m below ground surface (bgs) to intercept groundwater.

The boreholes were advanced to 2.7 mbgs using a GeoMachine direct push drill rig operated by Strata Drilling Group (Strata), under the supervision of Pinchin personnel. Strata then used the GeoMachine's down-hole hammer bedrock equipment to advance the monitoring wells to the above-noted depth. The borehole locations are indicated on the attached Drawing PE6046-3 - Test Hole Location Plan.

4.2 Soil Sampling

A total of 8 soil samples were collected at continuous intervals using 3.8 centimetre (cm) inner diameter (ID) direct push soil samplers with dedicated single-use sample liners. The depths at which soil samples were obtained from the boreholes are shown on the borehole logs included with the Pinchin Phase II ESA report appended to this report.

The borehole profiles generally consist of a layer of asphalt overlying a layer of sand and gravel fill, followed by a layer of silty sand with trace clay and gravel then bedrock.

4.3 Field Screening Measurements

Soil vapour readings were collected from the samples recovered by Pinchin. The PID readings were found to be 0 ppm in the soil samples obtained.

These results do not indicate the potential for significant contamination from volatile contaminants. Vapour readings are noted on the borehole logs included in the 2018 Pinchin Phase II ESA report in Appendix 1.

4.4 Groundwater Monitoring Well Installation

Three (3) groundwater monitoring wells were installed on the Phase II ESA Property as part of the subsurface investigation. The monitoring wells consisted of 38 mm diameter, Schedule 40 threaded PVC risers and screens. Monitoring well construction details are listed below in Table 2 and are also presented on the borehole logs in the Pinchin Phase II ESA report provided in Appendix 1.

Borehole locations and elevations were surveyed geodetically by Paterson personnel. Please note that the ground surface elevation for MW1 is approximate because MW1 could not be located during the 2023 Phase II ESA field program.

TABLE 2. Monitoring Well Construction Details								
Well ID	Ground Surface Elevation	Total Depth (m BGS)	Screened Interval (m BGS)	Sand Pack (m BGS)	Bentonite Seal (m BGS)	Casing Type		
MW1	77.61	7.62	4.57-7.62	4.27-7.62	0.09-4.27	Flushmount		
MW2	77.51	6.10	3.05-6.10	2.74-6.10	0.09-2.74	Flushmount		
MW3	77.76	7.01	3.96-7.01	3.66-7.01	0.09-3.66	Flushmount		

4.5 Groundwater Sampling

Groundwater sampling protocols were followed using the MECP document entitled "Guidance on Sampling and Analytical Methods for Use at Contaminated Sites in Ontario", dated May 1996. Groundwater samples were obtained from each monitoring well, using dedicated sampling equipment. Standing water was purged from each well prior to sampling. Samples were stored in coolers to reduce analyte volatilization during transportation. Details of our standard operating procedure for groundwater sampling are provided in the Sampling and Analysis Plan in Appendix 1.



4.6 Analytical Testing

The following Tables 3 and 4 present the submitted soil and groundwater samples as well as analyzed parameters in each media.

TABLE 3: Soil Samples Submitted and Analyzed Parameters							
		Parameters Analyzed			yzed		
Sample ID	Sample Depth / Stratigraphic Unit	PHCs (F ₁ -F ₄)	vocs	Hd	Grain Size	Rationale	
April 10, 201	8						
MW-1, SS-1	0.06-0.76 m Fill				х	Determine grain size of the fill material.	
MW-1, SS-2	0.76-1.52 m Silty Sand	х	х	x	x	Assess the soil quality at the property limits; determine grain size of the native silty sand.	
MW-2, SS-2	0.76-1.52 m Silty Sand	Х	х			Assess the soil quality at the property limits.	
MW-3, SS-4	2.30-2.74 m Silty Sand	Х	х	х		Assess the soil quality at the property limits.	

TABLE 4: Groundwater Samples Submitted and Analyzed Parameters							
		Parameters Analyzed					
Sample ID	Screened Interval	PHCs (F₁-F₄)	vocs	Rationale			
April 17, 2018		•	•				
MW-1	4.57-7.62	x	х	Assess groundwater quality at the property limits.			
MW-2	3.05-6.10	x	х				
MW-3	3.96-7.01	x	Х				
May 16, 2023							
MW2	3.05-6.10	Х	х	Confirm groundwater quality in the previously			
MW3	3.96-7.01	Х	Х	installed monitoring wells.			



Maxxam Analytics Inc. (Maxxam), in Ottawa, Ontario, conducted the soil and groundwater analyses in 2018. Maxxam is accredited by the Standards Council of Canada/Canadian Association for Laboratory Accreditation (SCC/CALA).

Paracel Laboratories (Paracel) of Ottawa performed the laboratory analysis on the groundwater samples submitted for analytical testing in 2023. Paracel is a member of the SCC/CALA and is accredited and certified by SCC/CALA for specific tests registered with the association.

4.7 Residue Management

All soil cuttings, purge water and fluids from equipment cleaning were retained onsite.

4.8 Elevation Surveying

Boreholes were surveyed at geodetic elevations by Paterson personnel in May 2023. Note: an approximate elevation was surveyed for MW1, as it could not be located during the 2023 field program.

4.9 Quality Assurance and Quality Control Measures

A summary of quality assurance and quality control (QA/QC) measures, including sampling containers, preservation, labelling, handling, and custody, equipment cleaning procedures, and field quality control measurements is provided in the Sampling and Analysis Plan in Appendix 1.

5.0 REVIEW AND EVALUATION

5.1 Geology

Site soils beneath the pavement structure consist of silty sand with trace clay and gravel. Bedrock was encountered at depths ranging from approximately 1.5 to 2.7 m below grade.

Groundwater was generally encountered within bedrock at 2.0 to 2.5 mbgs.

Site geology details are provided in the borehole logs provided in the 2018 Phase II ESA report located in Appendix 1.



5.2 Groundwater Elevations, Flow Direction, and Hydraulic Gradient

Groundwater levels were measured during the groundwater sampling events on April 17, 2018, and May 16, 2023, using an electronic water level meter. Groundwater levels are summarized below in Table 5.

TABLE 5: Groundwater Level Measurements								
Borehole Location	Ground Surface Elevation (m)	Water Level Depth (m below grade)	Water Level Elevation (m ASL)	Date of Measurement				
MW1	77.61	2.10	75.51	April 17, 2018				
MW2	77.51	1.95	75.56	April 17, 2018				
		5.51	72.00	May 16, 2023				
MW3	77.76	2.48	75.28	April 17, 2018				
		5.45	72.31	May 16, 2023				

Based on the groundwater elevations measured during the April 2018 sampling event, groundwater contour mapping was completed. Groundwater contours are shown on Drawing PE6046-3.

Based on the contour mapping, groundwater flow at the subject site is in a southeasterly direction. A horizontal hydraulic gradient of approximately 0.012 m/m was calculated.

5.3 Fine-Coarse Soil Texture

Grain-size analysis was completed for the Phase II ESA Property in 2018. Sieve analysis indicated that the fill material on-site is coarse-grained. The underlying silty sand is classified as fine-grained. As such, the more stringent coarse-grained soil standards have been applied.

5.4 Soil: Field Screening

Field screening of the soil samples collected during drilling resulted in vapour readings 0 ppm for each sample. The field screening results of each individual soil sample are provided on the boreholes included in the 2018 Phase II ESA report appended to this report.



5.5 Soil Quality

Three (3) soil samples were submitted for PHCs (F_1 - F_4) and VOCs analyses. The results of the analytical testing are presented in the analytical summary table and laboratory certificate of analysis in the attached 2018 Phase II ESA report (Appendix 1).

No detectable BTEX or PHC (F_1 - F_4) parameters were identified in any of the soil samples analyzed. Therefore, concentrations comply with the MECP Table 7 Residential Standards.

VOC parameters were not detected in any of the soil samples analyzed. Therefore, VOC concentrations comply with the selected MECP Table 7 Residential Standards.

The analytical results for BTEX, PHCs, and VOCs in soil are shown on Drawing PE6046-4 – Analytical Testing Plan.

5.6 Groundwater Quality

Groundwater samples from monitoring wells installed in MW1 through MW3 were submitted for laboratory analysis of PHC fractions (F_1 - F_4) and VOC parameters. The groundwater samples were obtained from the screened intervals noted in Table 2. The results of the analytical testing conducted in 2018 are presented in the analytical table and laboratory analytical certificates included in the 2018 Phase II ESA in Appendix 1.

The analytical results of the 2023 sampling event are presented in Tables 6 and 7. The laboratory certificates of analysis are provided in Appendix 1.

Parameter	MDL (µg/L)	Groundwater Samples (µg/L)		MECP Table 7	
		May 16	5, 2023	Standards	
		MW2-GW	MW3-GW	(µg/L)	
F1 PHCs (C6-C10)	25	nd	nd	420	
-2 PHCs (C10-C16)	100	nd	nd	150	
-3 PHCs (C16-C34)	100	nd	nd	500	
-4 PHCs (C34-C50)	100	nd	nd	500	



Parameter	MDL (µg/L)			MECP Table 7 Standards	
	(*** 5' = /	May 1	16, 2023	μg/L)	
		MW2-GW	MW3-GW		
Acetone	5.0	nd	nd	100000	
Benzene	0.5	nd	nd	0.5	
Bromodichloromethane	0.5	nd	nd	67000	
Bromoform	0.5	nd	nd	5	
Bromomethane	0.5	nd	nd	0.89	
Carbon Tetrachloride	0.2	nd	nd	0.2	
Chlorobenzene	0.5	nd	nd	140	
Chloroform	0.5	nd	nd	2	
Dibromochloromethane	0.5	nd	nd	65000	
Dichlorodifluoromethane	1.0	nd	nd	3500	
1,2-Dichlorobenzene	0.5	nd	nd	150	
1,3-Dichlorobenzene	0.5	nd	nd	7600	
1,4-Dichlorobenzene	0.5	nd	nd	0.5	
1,1-Dichloroethane	0.5	nd	nd	11	
1,2-Dichloroethane	0.5	nd	nd	0.5	
1,1-Dichloroethylene	0.5	nd	nd	0.5	
cis-1,2-Dichloroethylene	0.5	nd	nd	1.6	
trans-1,2-Dichloroethylene	0.5	nd	nd	1.6	
1,2-Dichloropropane	0.5	nd	nd	0.58	
cis-1,3-Dichloropropylene	0.5	nd	nd	ns	
trans-1,3-Dichloropropylene	0.5	nd	nd	ns	
1,3-Dichloropropene, total	0.5	nd	nd	0.5	
Ethylbenzene	0.5	nd	nd	54	
Ethylene dibromide					
(dibromoethane, 1,2-)	0.2	nd	nd	0.2	
Hexane	1.0	nd	nd	5	
Methyl Ethyl Ketone (2- Butanone)	5.0	nd	nd	21000	
Methyl Isobutyl Ketone	5.0	nd	nd	5200	
Methyl tert-butyl ether	2.0	nd	nd	15	
Methylene Chloride	5.0	nd	nd	26	
Styrene	0.5	nd	nd	43	
1,1,1,2-Tetrachloroethane	0.5	nd	nd	1.1	
1,1,2,2-Tetrachloroethane	0.5	nd	nd	0.5	
Tetrachloroethylene	0.5	nd	nd	0.5	
Toluene	0.5	nd	nd	320	
1,1,1-Trichloroethane	0.5	nd	nd	23	
1,1,2-Trichloroethane	0.5	nd	nd	0.5	
Trichloroethylene	0.5	nd	nd	0.5	
Trichlorofluoromethane	1.0	nd	nd	2000	
Vinyl Chloride	0.5	nd	nd	0.5	
m/p-Xylene	0.5	nd	nd	ns	
o-Xylene	0.5	nd	nd	ns	
Xylenes, total	0.5	nd	nd	72	

MDL – Method Detection Limit

nd – not detected above the MDL

ns – no applicable standard



No detectable PHC concentrations were identified in the groundwater samples analyzed. No VOCs, including BTEX parameters, were detected in the groundwater samples analysed. The groundwater results comply with the MECP Table 7 Standards.

The analytical results for BTEX, PHCs, and VOCs in groundwater are shown on Drawing PE6046-4–Analytical Testing Plan.

5.7 Quality Assurance and Quality Control Results

All samples submitted as part of the Phase II ESA activities were handled in accordance with the Analytical Protocol with respect to preservation method, storage requirement, and container type.

As per Subsection 47(3) of O.Reg. 153/04, as amended, under the Environmental Protection Act, a Certificate of Analysis has been received for each sample submitted for analysis and all Certificates of Analysis are appended to this report.

Based on the analytical laboratory results, it is our opinion that the overall quality of the field data collected during this Phase II ESA is considered to be sufficient to meet the overall objectives of this assessment.

5.8 Phase II Conceptual Site Model

The following section has been prepared in accordance with the requirements of O.Reg. 153/04, as amended by the Environmental Protection Act. Conclusions and recommendations are discussed in a subsequent section.



Site Description

Potentially Contaminating Activity and Areas of Potential Environmental Concern

Based on the results of the Phase I ESA completed for the subject site, six (6) PCAs and the resultant APECs are summarized in Table 1 in Section 3.3, along with their respective locations and contaminants of potential concern (COPCs).

Contaminants of Potential Concern

As per Section 3.3, the COPCs in soil and/or groundwater include benzene, toluene, ethylbenzene, and xylenes (BTEX), petroleum hydrocarbons (PHCs, $F_{1-}F_{4}$), and volatile organic compounds (VOCs).

Subsurface Structures and Utilities

The Phase II ESA Property is situated in a municipally serviced area. Underground utilities include stormwater, sanitary, and municipal water services, as well as natural gas lines that enter and/or exit the Phase II ESA Property along Carling Avenue and Tillbury Avenue.

Two (2) on-site stormwater catch basins are situated along the eastern side as well as four (4) drains along the southern side of the commercial portion of the Phase II ESA Property. Two groundwater monitoring wells are also present on-site.

Based on the findings of the Phase II ESA, any former underground utilities are not expected to affect contaminant distribution and transport.

Physical Setting

Site Stratigraphy

The site stratigraphy, from ground surface to the deepest aquifer or aquitard investigated, is illustrated on borehole logs included in the 2018 Phase II ESA report, appended to this report. The stratigraphy consists of:

- A pavement structure, consisting of asphaltic concrete approximately 0.08 m thick, overlying engineered fill extending to a depth of approximately 0.76 mbgs. Groundwater was not encountered in this layer.
- Silty sand containing trace clay and gravel was encountered in all of the boreholes, extending to depths of approximately 1.52 to 2.74 mbgs. Groundwater was encountered in this layer in MW3.



Bedrock was encountered in all of the boreholes at depths ranging from approximately 1.52 to 2.74 mbgs. Groundwater was encountered in this layer at MW1 and MW2.

Hydrogeological Characteristics

Groundwater at the Phase II ESA Property was encountered in the bedrock during the 2023 sampling event. During the 2018 groundwater monitoring event, groundwater flow was measured in a south-easterly direction, with a hydraulic gradient of 0.012 m/m. Groundwater contours are shown on Drawing PE6046-3 – Test Hole Location Plan.

Approximate Depth to Bedrock

Bedrock was encountered during the drilling program at depths ranging from approximately 1.5 to 2.7 mbgs.

Approximate Depth to Water Table

The depth to the water table at the subject site varies between approximately 2.0 to 5.5 mbgs.

Sections 41 and 43.1 of the Regulation

Section 41 of the Regulation does not apply to the Phase II ESA Property, in that the subject property is not within 30 m of an environmentally sensitive area. The Phase II ESA Property is not considered an environmentally sensitive area since the analyzed surface soil pH is between 5 and 9 and the analyzed subsurface pH is between 5 and 11 (see the 2018 Phase II ESA report, attached).

Section 43.1 of the Regulation applies to the Phase II ESA Property as bedrock is located less than 2 m below ground surface across more than 1/3 of the site. However, there are no natural water bodies in the Phase I Study Area.

Fill Placement

The fill material consisted of silty sand and was identified in all of the boreholes, extending to depths of 0.76 mbgs.



Existing Buildings and Structures

The portion of the Phase II ESA Property addressed 1657-1673 Carling Avenue is occupied by a 2-storey commercial building, fronting onto Carling Avenue. The commercial building was constructed circa 1976 with a slab-on-grade foundation and is finished on the exterior with brick and metal siding as well as a flat tar-and-gravel style roof. The ground level is occupied by 2 restaurants, a wellness and health clinic, a hearing clinic, commercial office (employment agency) and a beauty salon, while the upper level is used as commercial office space.

The residential portion of the Phase II ESA Property, addressed 386 Tillbury Avenue, is occupied by a vacant 2-storey single family dwelling with a half grade basement level. The subject dwelling was constructed circa 2009 with a poured concrete foundation. The exterior of the dwelling is finished in brick and vinyl siding and a sloped shingle style roof. Both on-site buildings are heated by natural gas-fired equipment.

Proposed Buildings and Other Structures

Our understanding is that the proposed site development for the Phase II ESA Property will include a 24-storey residential building with ground floor commercial space.

Environmental Condition

Areas Where Contaminants are Present

Based on the analytical results for soil and groundwater, there are no contaminants present on or beneath the Phase II ESA Property.

Types of Contaminants

Based on the analytical results for soil and groundwater, there are no contaminants on or beneath the Phase II ESA Property.

Contaminated Media

Based on the analytical results for soil and groundwater, there is no contaminated media on the Phase II ESA Property.



What Is Known About Areas Where Contaminants Are Present

Based on the findings of the Phase II ESA, soil and groundwater beneath the Phase II ESA Property comply with the MECP Table 7 Standards. There are no contaminants on the Phase II ESA Property.

Distribution and Migration of Contaminants

Based on the findings of the Phase II ESA, distribution and migration of contaminants is not considered to have occurred on the Phase II ESA Property.

Discharge of Contaminants

Based on the findings of the Phase II ESA, soil and groundwater concentrations comply with the selected MECP Table 7 Standards. Discharge of contaminants is not considered to have occurred on the Phase II ESA Property.

Climatic and Meteorological Conditions

In general, climatic and meteorological conditions have the potential to affect contaminant distribution. Two (2) ways by which climatic and meteorological conditions may affect contaminant distribution include the downward leaching of contaminants by means of the infiltration of precipitation, and the migration of contaminants via groundwater levels and/or flow, which may fluctuate seasonally.

Based on the analytical results contaminant distribution is not considered to have occurred on the Phase II ESA Property.

Potential for Vapour Intrusion

Based on the findings of the Phase II ESA, there is no potential for vapour intrusion on the Phase II ESA Property.



6.0 CONCLUSIONS

Assessment

An updated Phase II ESA was conducted for the property addressed 1657-1673 Carling Avenue and 386 Tillbury Avenue in Ottawa, Ontario. The purpose of the Phase II ESA Update was to update the findings of the 2018 Phase II ESA prepared by Pinchin, in general accordance with O.Reg. 153/04. The 2018 Phase II ESA is considered to have addressed the APECs identified in the more recent 2023 Phase I ESA prepared by Paterson.

The 2018 subsurface investigation consisted of three (3) boreholes, all which were instrumented with groundwater monitoring wells. The general soil profile encountered during the field program consisted of asphalt underlain by silty sand fill material, underlain silty sand with trace clay and gravel, followed by bedrock.

Three (3) soil samples were submitted for laboratory analysis of volatile organic compounds (VOCs) and petroleum hydrocarbons (PHCs, Fractions F_1 - F_4). No VOC parameter concentrations, including benzene, toluene, ethylbenzene, and xylenes (BTEX), or PHCs (F_1 - F_4) were identified in any of the soil samples analysed. As such, the soil results comply with MECP Table 7 Residential Standards.

Groundwater samples from monitoring wells MW1, MW2, and MW3 were collected during the April 17, 2018, sampling event. Groundwater samples were analyzed for VOCs and PHCs. Concentrations of VOCs, with the exception of benzene, and PHCs were not detected above the laboratory detection limits. Benzene was detected in the groundwater sample analyzed from MW1 but complied with the applicable standard. The groundwater results comply with the MECP Table 7 Standards.

During the current field program, groundwater samples were collected from MW2 and MW3 on May 16, 2023 (MW1 could not be located). No free product or petroleum hydrocarbon sheen was noted on the purge water during the groundwater sampling event.

Groundwater samples were analyzed for VOCs and PHCs. Concentrations of VOCs, including BTEX parameters, and PHCs were not detected above the laboratory detection limits. The groundwater results comply with the MECP Table 7 Standards.



Recommendations

It is our understanding that the Phase II ESA Property will be redeveloped with a 24-storey residential building with ground-floor commercial space. Due to the change in land use to a more sensitive land use (commercial to residential), a record of site condition (RSC) will be required as per O.Reg 154/03.

Based on the findings of the Phase II ESA, all analyzed soil and groundwater samples comply with the MECP Table 7 Standards for a residential land use. No further environmental investigation is recommended at this time.

Excess soil requiring off-site disposal during construction must be managed in accordance with Ontario Regulation 406/19 – On-site and Excess Soil Management.

Monitoring Wells

If the monitoring wells installed on the Phase II ESA Property are not going to be used in the future, or will be destroyed during site redevelopment, they should be abandoned according to Ontario Regulation 903. The wells will be registered with the MECP under this regulation.



7.0 STATEMENT OF LIMITATIONS

This Phase II Environmental Site Assessment report has been prepared under the supervision of a Qualified Person, in general accordance with O.Reg. 153/04 and CSA Z769-00 (reaffirmed 2022). The conclusions presented herein are based on information gathered from a limited sampling and testing program. The test results represent conditions at specific test locations at the time of the field program.

The client should be aware that any information pertaining to soils and all test hole logs are furnished as a matter of general information only and test hole descriptions or logs are not to be interpreted as descriptive of conditions at locations other than those of the test holes themselves.

Should any conditions be encountered at the subject site and/or historical information that differ from our findings, we request that we be notified immediately in order to allow for a reassessment.

This report was prepared for the sole use of Inside Edge Properties. Notification from Inside Edge Properties and Paterson Group will be required to release this report to any other party.

Paterson Group Inc.

"Martirell

Kelly Martinell, P.Eng.

Kaup Munch

Karyn Munch, P.Eng., QPESA

Report Distribution:

- Inside Edge Properties
- Paterson Group




FIGURES

Figure 1 - Key Plan


Drawing PE6046-3 – Test Hole Location

Drawing PE6046-4 – Analytical Testing Plan – Soil and Groundwater

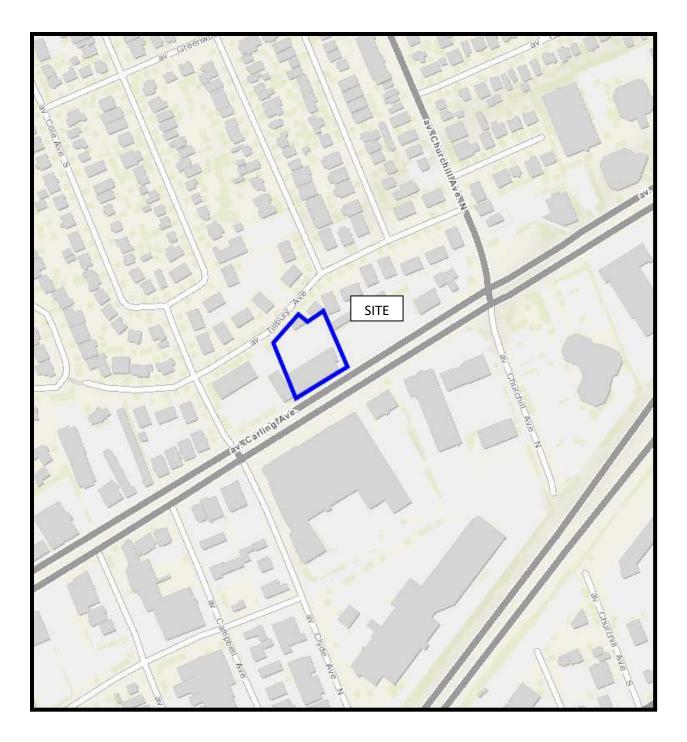


<u>figure 1</u> KEY PLAN



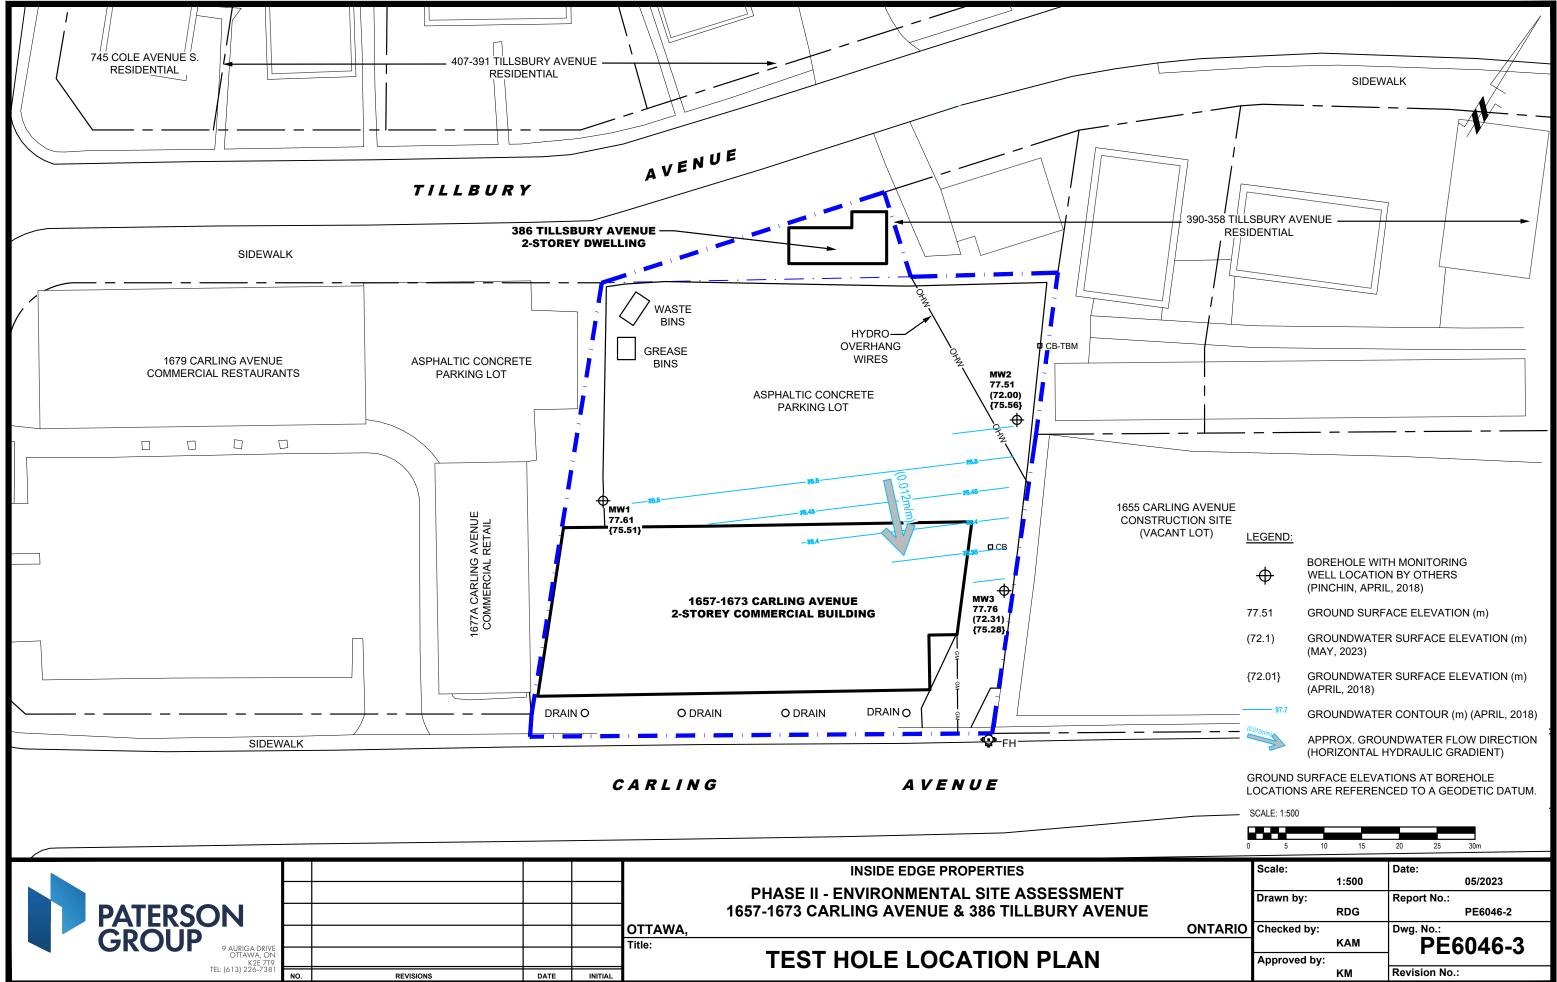

RLING AVENUE RUCTION SITE				
CANT LOT)	LEGEND:			
	¢	BOREHOLE WIT WELL LOCATIO (PINCHIN, APRI	N BY OTHERS	-
	77.51	GROUND SURF	ACE ELEVATIO	DN (m)
	(72.1)	GROUNDWATE (MAY, 2023)	R SURFACE E	LEVATION (m)
	{72.01}	GROUNDWATE (APRIL, 2018)	R SURFACE E	LEVATION (m)
	97.7	GROUNDWATE	R CONTOUR (I	m) (APRIL, 2018)
	(0.012m/m)	APPROX. GROU (HORIZONTAL F		OW DIRECTION RADIENT)
		SURFACE ELEVA IS ARE REFEREN		-
	SCALE: 1:500			
	0 5	10 15	20 25	30m
	Scale:	1:500	Date:	05/2023
	Drawn b	y: RDG	Report No.:	PE6046-2
ONTARI	O Checked	l by: KAM	Dwg. No.:	6046-3
	Approve	•		
		KM	Revision No.	

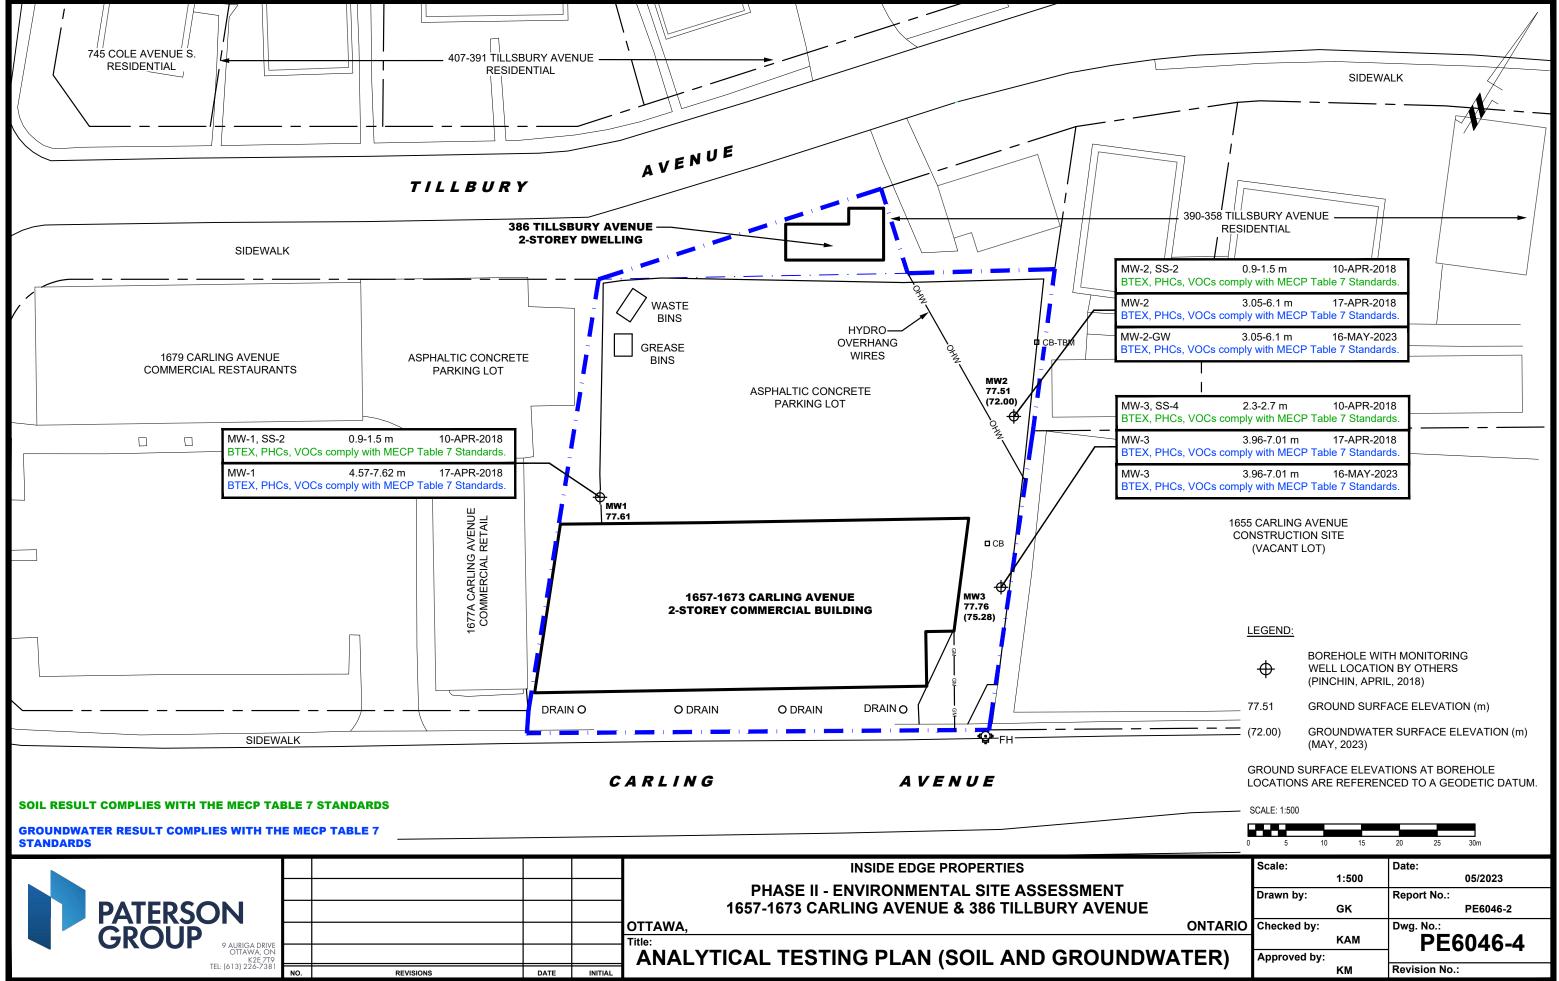

APPENDIX 1

SAMPLING AND ANALYSIS PLAN

PHASE II ENVIRONMENTAL SITE ASSESSMENT, PINCHIN (2018)

LABORATORY CERTIFICATES OF ANALYSIS



Sampling and Analysis Plan

Groundwater Sampling 1657-1673 Carling Ave & 386 Tillbury Ave, Ottawa, Ontario

Prepared for Inside Edge Properties

Report: PE6046-SAP May 2023



TABLE OF CONTENTS

1.0	SAMPLING PROGRAM	1
	ANALYTICAL TESTING PROGRAM	
3.0	STANDARD OPERATING PROCEDURES	1
	3.1 Monitoring Well Sampling Procedure	1
4.0	QUALITY ASSURANCE/QUALITY CONTROL (QA/QC)	2
5.0	DATA QUALITY OBJECTIVES	3
6.0	PHYSICAL IMPEDIMENTS TO SAMPLING & ANALYSIS PLAN	4



1.0 SAMPLING PROGRAM

Paterson Group Inc. (Paterson) was commissioned by Inside Edge Properties to conduct a Phase II Environmental Site Assessment (ESA) Update for the property addressed 1657-1673 Carling Avenue and 386 Tillbury Avenue in Ottawa, Ontario. Based on the Phase I ESA conducted by Paterson, a groundwater sampling program was developed to confirm the results of the previous Phase II ESA conducted by Pinchin in 2018 on the Phase II Property. Monitoring well locations are shown on the Test Hole Location Plan appended to the main report.

2.0 ANALYTICAL TESTING PROGRAM

The analytical testing program for groundwater at the subject site is based on the following general considerations:

- Groundwater monitoring wells should be installed in all boreholes with visual or olfactory evidence of soil contamination, in stratigraphic units where soil contamination was encountered, where those stratigraphic units are at or below the water table (i.e. a water sample can be obtained).
- Groundwater monitoring well screens should straddle the water table at sites where the contaminants of concern are suspected to be LNAPLs.
- At least one groundwater monitoring well should be installed in a stratigraphic unit below the suspected contamination, where said stratigraphic unit is waterbearing.
- Parameters analyzed should be consistent with the Contaminants of Concern identified in the Phase I ESA and with the contaminants identified in the soil samples.

3.0 STANDARD OPERATING PROCEDURES

3.1 Monitoring Well Sampling Procedure

Equipment

- □ Water level metre or interface probe on hydrocarbon/LNAPL sites
- □ Spray bottles containing water and methanol to clean water level tape or interface probe
- Peristaltic pump
- D Polyethylene tubing for peristaltic pump
- □ Flexible tubing for peristaltic pump
- Latex or nitrile gloves (depending on suspected contaminant)



- □ Allen keys and/or 9/16" socket wrench to remove well caps
- Graduated bucket with volume measurements
- □ pH/Temperature/Conductivity combo pen
- □ Laboratory-supplied sample bottles

Sampling Procedure

- □ Locate well and use socket wrench or Allan key to open metal flush mount protector cap. Remove plastic well cap.
- Measure water level, with respect to existing ground surface, using water level meter or interface probe. If using interface probe on suspected NAPL site, measure the thickness of free product.
- □ Measure total depth of well.
- Clean water level tape or interface probe using methanol and water. Change gloves between wells.
- □ Calculate volume of standing water within well and record.
- Insert polyethylene tubing into well and attach to peristaltic pump. Turn on peristaltic pump and purge into graduated bucket. Purge at least three well volumes of water from the well. Measure and record field chemistry. Continue to purge, measuring field chemistry after every well volume purged, until appearance or field chemistry stabilizes.
- Note appearance of purge water, including colour, opacity (clear, cloudy, silty), sheen, presence of LNAPL, and odour. Note any other unusual features (particulate matter, effervescence (bubbling) of dissolved gas, etc.).
- □ Fill required sample bottles. If sampling for metals, attach 75-micron filter to discharge tube and filter metals sample. If sampling for VOCs, use low flow rate to ensure continuous stream of non-turbulent flow into sample bottles. Ensure no headspace is present in VOC vials.
- □ Replace well cap and flushmount casing cap.

4.0 QUALITY ASSURANCE/QUALITY CONTROL (QA/QC)

The QA/QC program for this Phase II ESA is as follows:

- □ All groundwater sampling equipment is dedicated (polyethylene and flexible peristaltic tubing is replaced for each well).
- □ Where groundwater samples are to be analyzed for VOCs, one laboratoryprovided trip blank will be submitted for analysis with every laboratory submission.
- □ Approximately one (1) field duplicate will be submitted for every ten (10) samples submitted for laboratory analysis. A minimum of one (1) field duplicate



per project will be submitted. Field duplicates will be submitted for soil and groundwater samples

□ Where combo pens are used to measure field chemistry, they will be calibrated on an approximately monthly basis, according to frequency of use.

5.0 DATA QUALITY OBJECTIVES

The purpose of setting data quality objectives (DQOs) is to ensure that the level of uncertainty in data collected during the Phase II ESA is low enough that decision-making is not affected, and that the overall objectives of the investigation are met.

The quality of data is assessed by comparing field duplicates with original samples. If the relative percent difference (RPD) between the duplicate and the sample is within 20%, the data are considered to be of sufficient quality so as not to affect decision-making. The RPD is calculated as follows:

$$RPD = \left| \frac{x_1 - x_2}{(x_1 + x_2)/2} \right| \times 100\%$$

Where x_1 is the concentration of a given parameter in an original sample and x_2 is the concentration of that same parameter in the field duplicate sample.

For the purpose of calculating the RPD, it is desirable to select field duplicates from samples for which parameters are present in concentrations above laboratory detection limits, i.e. samples which are expected to be contaminated. If parameters are below laboratory detection limits for selected samples or duplicates, the RPD may be calculated using a concentration equal to one half (0.5 x) the laboratory detection limit.

It is also important to consider data quality in the overall context of the project. For example, if the DQOs are not met for a given sample, yet the concentrations of contaminants in both the sample and the duplicate exceed the MOE site remediation standards by a large margin, the decision-making usefulness of the sample may not be considered to be impaired. The proximity of other samples which meet the DQOs must also be considered in developing the Phase II Conceptual Site Model; often there are enough data available to produce a reliable Phase II Conceptual Site Model even if DQOs are not met for certain individual samples.

These considerations are discussed in the body of the report.



6.0 PHYSICAL IMPEDIMENTS TO SAMPLING & ANALYSIS PLAN

Physical impediments to the Sampling and Analysis plan may include:

- □ The location of underground utilities
- D Poor recovery of split-spoon soil samples
- □ Insufficient groundwater volume for groundwater samples
- Breakage of sampling containers following sampling or while in transit to the laboratory
- Elevated detection limits due to matrix interference (generally related to soil colour or presence of organic material)
- Elevated detection limits due to high concentrations of certain parameters, necessitating dilution of samples in laboratory
- Drill rig breakdowns
- □ Winter conditions
- □ Other site-specific impediments

Site-specific impediments to the Sampling and Analysis plan are discussed in the body of the Phase II ESA report.



Phase II Environmental Site Assessment

1657-1673 Carling Avenue Ottawa, Ontario

Prepared for:

1716621 Ontario Limited

284 Clemow Avenue Ottawa, ON K1S 2B8

Attn: Mr. Michael Lewis

May 4, 2018

Pinchin File: 220409.002





Phase II Environmental Site Assessment 1657-1673 Carling Avenue, Ottawa, Ontario 1716621 Ontario Limited

Issued To:	1716621 Ontario Limited
Contact:	Mr. Michael Lewis
Issued On:	May 4, 2018
Pinchin File:	220409.002
Issuing Office:	1 Hines Road, Suite 200, Kanata, ON K2K 3C7
Primary Pinchin	Scott Mather
Contact:	Director, Eastern Ontario

Author:

Ryan LaRonde, C.E.T Senior Project Technologist 613.592.3387 ext. 1818 rlaronde@pinchin.com

Reviewer:

Matthew Ryan, B.A., CET, EP Operations Manager 613.592.3387 ext. 1810 mryan@pinchin.com

Reviewer:

Scott Mather, P.Eng., QP_{ESA} Director, Eastern Ontario 613.592.3387 ext. 1802 smather@pinchin.com





EXECUTIVE SUMMARY

Pinchin Ltd. (Pinchin) was retained through an Authorization to Proceed signed by Mr. Michael Lewis of 1716621 Ontario Limited (Client) to conduct a Phase II Environmental Site Assessment (ESA) of the property located at 1657-1673 Carling Avenue, Ottawa, Ontario (hereafter referred to as the Site).

The Site is developed with a two-storey multi-tenant commercial building (Site Building).

The purpose of this Phase II ESA was to address potential issues of environmental concern identified during a Phase I ESA conducted by Pinchin in relation to the potential sale of the Site.

The results of the Phase I ESA completed by Pinchin identified the following potential issues of environmental concern:

- A retail fuel outlet (RFO) was evident on the adjacent property located west of the Site in the 1965 and 1976 aerial photographs. Based on the close proximity of this former RFO to the Site, it is Pinchin's opinion that this property could result in potential subsurface impacts at the Site; and
- An RFO has been located approximately 130 m northeast of the Site since at least 1958. Based on the duration of operations, Pinchin's knowledge of the area, and the results of previous subsurface environmental work completed at the Site, it is Pinchin's opinion that this property could result in potential subsurface impacts at the Site.

Based on the above-mentioned findings, Pinchin recommended that a Phase II ESA be conducted at the Site in order to assess for the presence of environmental impacts.

The Phase II ESA was completed at the Site by Pinchin between April 10 and 17, 2018, and consisted of the advancement of three boreholes, all of which were completed as groundwater monitoring wells.

Select "worst case" soil samples collected during the borehole drilling program were submitted for laboratory analysis of petroleum hydrocarbons (PHCs) in the F1 to F4 fraction ranges (F1-F4) and volatile organic compounds (VOCs). Groundwater samples collected from the newly installed were submitted for laboratory analysis of PHCs (F1-F4) and VOCs.

Based on Site-specific information, the soil and groundwater quality was assessed based on the Ontario Ministry of the Environment and Climate Change *Table 7 Standards* for industrial/commercial/community land use and coarse-textured soil.

Reported concentrations in the soil and groundwater samples submitted for analysis of PHCs (F1-F4) and VOCs satisfied the *Table 7 Standards*.





Based on the findings of this Phase II ESA, it is Pinchin's opinion that no further subsurface investigation is required for the Site in relation to the findings of the Phase I ESA.

This Executive Summary is subject to the same standard limitations as contained in the report and must be read in conjunction with the entire report.





TABLE OF CONTENTS

1.0	INTRO	DUCTION	1
	1.1 1.2	Background Scope of Work	
2.0	METH	ODOLOGY	2
	2.1 2.2 2.3 2.4 2.5 2.6 2.7	Borehole Investigation Monitoring Well Installation Groundwater Monitoring and Elevation Survey Sampling and Laboratory Analysis 2.4.1 Soil 2.4.2 Groundwater 2.4.3 Analytical Laboratory QA/QC Protocols Ontario Water Well Records Site Condition Standards	3 3 4 4 5 5 6
3.0	RESU	LTS	7
	3.1 3.2 3.3 3.4	Site Geology and Hydrogeology Soil Headspace Vapour Concentrations Field Observations Analytical 3.4.1 Soil 3.4.2 Groundwater	7 8 8 8
4.0	FINDI	NGS AND CONCLUSIONS	8
5.0	TERM	S AND LIMITATIONS	9





APPENDICES

APPENDIX I	Figures
APPENDIX II	Borehole Logs
APPENDIX III	Summary Tables
APPENDIX IV	Laboratory Certificates of Analysis

FIGURES

Figure 1 - Key Map Figure 2 - Generalized Site and Monitoring Well Location Plan

TABLES

- Table 1 Samples Submitted for Laboratory Analysis
- Table 2 pH and Grain Size Analysis for Soil
- Table 3 Monitoring Well Construction Details
- Table 4 Groundwater Elevation Data
- Table 5 Petroleum Hydrocarbon and Volatile Organic Compound Analysis for Soil
- Table 6 Petroleum Hydrocarbon and Volatile Organic Compound Analysis for Groundwater





1.0 INTRODUCTION

Pinchin Ltd. (Pinchin) was retained through an Authorization to Proceed signed by Mr. Michael Lewis of 1716621 Ontario Limited (Client) to conduct a Phase II Environmental Site Assessment (ESA) of the property located at 1657-1673 Carling Avenue, Ottawa, Ontario (hereafter referred to as the Site). The Site location is shown on Figure 1 (all Figures are provided in Appendix I).

The Site is developed with a two-storey multi-tenant commercial building (Site Building).

The purpose of this Phase II ESA was to address potential issues of environmental concern identified during a Phase I ESA conducted by Pinchin in relation to the potential sale of the Site.

This Phase II ESA was completed in general accordance with the Canadian Standards Association document entitled "*Phase II Environmental Site Assessment, CSA Standard Z769-00 (R2013)*", dated 2000 and reaffirmed in 2013.

1.1 Background

Pinchin completed a Phase I ESA of the Site for the Client, the findings of which were provided in the report entitled "*Phase I Environmental Site Assessment, 1657-1673 Carling Avenue, Ottawa, Ontario*", dated March 22, 2018. The results of the Phase I ESA completed by Pinchin identified the following areas of potential environmental concern (APECs) that could give rise to potential subsurface impacts in connection with the Site:

- A retail fuel outlet (RFO) was evident on the adjacent property located west of the Site in the 1965 and 1976 aerial photographs. Based on the close proximity of this former RFO to the Site, it is Pinchin's opinion that this property could result in potential subsurface impacts at the Site; and
- An RFO has been located approximately 130 m northeast of the Site since at least 1958. Based on the duration of operations, Pinchin's knowledge of the area, and the results of previous subsurface environmental work completed at the Site, it is Pinchin's opinion that this property could result in potential subsurface impacts at the Site.

Based on the above-mentioned findings, it was Pinchin's recommendation that a Phase II ESA be conducted at the Site in order to assess the above-noted APECs for the presence of environmental impacts.





1.2 Scope of Work

The scope of work completed by Pinchin, as outlined in the Pinchin proposal entitled "*Proposal for Phase II Environmental Site Assessment*, *1657-1673 Carling Avenue, Ottawa, Ontario*" submitted to the Client on March 28, 2018, included the following:

- Advancement of three boreholes following the clearance of underground services, all of which were instrumented with a monitoring well;
- Submission of select "worst case" soil samples for laboratory analysis of petroleum hydrocarbons (PHCs) in the F1 to F4 fraction ranges (F1-F4) and volatile organic compounds (VOCs);
- Collection of groundwater samples from each of the newly installed monitoring wells, following well development and purging, for laboratory analysis of PHCs (F1-F4) and VOCs;
- Completion of an elevation survey and depth to groundwater measurements for the newly installed monitoring wells;
- Comparison of the soil and groundwater laboratory analytical results to the applicable regulatory criteria; and
- Preparation of a factual report detailing the findings of the Phase II ESA and recommendations.

2.0 METHODOLOGY

The investigation methodology was conducted in general accordance with the Ontario Ministry of the Environment and Climate Change (MOECC, formerly the Ontario Ministry of the Environment) document entitled *"Guidance on Sampling and Analytical Methods for Use at Contaminated Sites in Ontario"* dated December 1996 (*MOECC Sampling Guideline*), the Association of Professional Geoscientists of Ontario document entitled *"Guidance for Environmental Site Assessments under Ontario Regulation 153/04 (as amended)"*, dated April 2011 (*APGO Guideline*) and Pinchin's standard operating procedures (SOPs).

2.1 Borehole Investigation

Pinchin retained Strata Drilling Group (Strata) to complete the borehole drilling program at the Site on April 10, 2018 following the clearance of underground services in the vicinity of the work area by public utility locators and a private utility locator retained by Pinchin. Strata is licensed by the MOECC in accordance with Ontario Regulation 903 (as amended) to undertake borehole drilling/well installation activities.





The boreholes were advanced to a maximum depth of 2.7 mbgs using a GeoMachine direct push drill rig. The monitoring wells were advanced into the bedrock stratigraphy encountered at the Site, to a maximum depth 7.6 mbgs using the GeoMachine's down-hole hammer bedrock equipment. Soil samples were collected at continuous intervals using 3.8 centimetre (cm) inner diameter (ID) direct push soil samplers with dedicated single-use sample liners. Discrete soil samples were collected from the single-use liners and containerized in laboratory-supplied glass sampling jars.

Subsurface soil conditions were logged on-Site by Pinchin personnel at the time of drilling. Soil samples were examined for visual and olfactory evidence of impacts and a portion of each sample was analyzed in the field for VOC and petroleum-derived vapour concentrations in soil headspace using a photoionization detector (PID).

The locations of the boreholes are shown on Figure 2 and a description of the subsurface stratigraphy encountered during the drilling program is documented in the borehole logs included in Appendix II.

2.2 Monitoring Well Installation

Groundwater monitoring wells were installed in boreholes MW-1 through MW-3 to enable groundwater monitoring and sampling. The monitoring wells were constructed with 3.8 cm inner diameter (ID) flush-threaded Schedule 40 polyvinyl chloride (PVC) risers, followed by a length of 3.8 cm ID No. 10 slot PVC screen that intersected suspected static groundwater level.

Each well screen was sealed at the bottom using a threaded cap and each riser was sealed at the top with a lockable J-plug cap. Silica sand was placed around and above the screened interval to form a filter pack around the well screen. A layer of bentonite was placed above the silica sand and was extended to just below the ground surface. A 10.1 cm ID Schedule 40 PVC outer casing, approximately 20.3 cm in length, was installed in each well around the top of the riser and into the top of the bentonite seal. A bentonite seal was then placed between the riser and outer casing. A protective flush-mount cover was installed at the ground surface over each riser pipe and outer casing and cemented in place.

The locations of the monitoring wells are shown on Figure 2. The monitoring well construction details are shown on the borehole logs included in Appendix II and on Table 3 in Appendix III (all Tables are provided within Appendix III).

2.3 Groundwater Monitoring and Elevation Survey

The water levels within the monitoring wells were measured on April 17, 2018 using an interface probe. The presence/absence of non-aqueous phase liquid (NAPL) was also assessed during groundwater monitoring using the interface probe.





Pinchin completed a relative elevation survey of the newly installed groundwater monitoring wells on April 17, 2018, using a Topcon rotating laser level and laser sensor. A temporary benchmark was used to determine the relative elevation of the top of the monitoring well casings and the ground surface at each well location, and the ground surface elevation at each borehole location. The temporary benchmark used was the top of a catch basin located adjacent to MW-2, which was arbitrarily assigned the elevation of 100.00 metres. These elevation measurements represent a relative (not a geodetic) elevation. A summary of the elevation data is presented in Table 4.

2.4 Sampling and Laboratory Analysis

2.4.1 Soil

One most apparent "worst case" soil sample, based on preferred pathway migration, groundwater depths and contaminant characteristics, recovered from each borehole was submitted for laboratory analysis of PHCs (F1-F4) and VOCs.

In addition, representative soil samples were submitted for pH analysis and grain size distribution analysis to confirm the Site Condition Standards applicable to the Site as provided in the MOECC document entitled "*Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act*", dated April 15, 2011 (*MOECC Standards*). A composite sample of the excess soil generated by the borehole drilling program was also submitted for analysis of leachate concentrations of inorganics, volatile organic compounds, polychlorinated biphenyls, and benzo(a)pyrene in accordance with the Toxicity Characteristic Leaching Procedure (TCLP) procedure as per Ontario Regulation 347 (as amended) and ignitability to characterize the soil cuttings for possible off-Site disposal purposes.

The borehole locations are shown on Figure 2. Table 2 provides a summary of the soil samples submitted for laboratory analysis.

2.4.2 Groundwater

On April 13, 2017, all newly installed groundwater monitoring wells MW-1 through MW-3 were developed by removing three to five well casing volumes, or were purged until dry, in accordance with Pinchin's SOPs.

On April 17, 2018, newly installed groundwater monitoring wells MW-1 through MW-3 were purged and sampled using Pinchin's SOPs. The groundwater samples collected from these monitoring wells were submitted for laboratory analysis of PHCs (F1-F4) and VOCs.





All monitoring well development activities were conducted using dedicated inertial pumps comprised of Waterra polyethylene tubing and foot valves. Following pre-sampling purging with dedicated inertial pumps, sampling for PHCs (F2-F4) was conducted using a peristaltic pump and dedicated polyethylene tubing. Sampling for PHCs (F1) and VOCs was then conducted using dedicated inertial pumps.

The monitoring well locations are shown on Figure 2. Table 2 provides a summary of the groundwater samples submitted for laboratory analysis.

2.4.3 Analytical Laboratory

Selected soil and groundwater samples were delivered to Maxxam Analytics Inc. (Maxxam) in Ottawa, Ontario for analysis. Maxxam is an independent laboratory accredited by the Standards Council of Canada and the Canadian Association for Laboratory Accreditation. Formal chain of custody records of the sample submissions were maintained between Pinchin and the staff at Maxxam.

2.5 QA/QC Protocols

Various quality assurance/quality control (QA/QC) protocols were followed during the Phase II ESA to ensure that representative samples were obtained and that representative analytical data were reported by the laboratory.

Field QA/QC protocols that were employed by Pinchin included the following:

- Soil samples were extracted from the interior of the sampling device (where possible), rather than from areas in contact with the sampler walls to minimize the potential for cross-contamination;
- Soil and groundwater samples were placed in laboratory-supplied glass sample jars;
- The monitoring wells were developed following installation and were purged to remove stagnant water prior to sample collection so that representative groundwater samples could be obtained. Dedicated purging and sampling equipment was used for monitoring well development, purging and sampling to minimize the potential for cross-contamination;
- Soil and groundwater samples were placed in coolers on ice immediately upon collection, with appropriate sample temperatures maintained prior to submission to the laboratory;
- Dedicated and disposable nitrile gloves were used for sample handling;
- Non-dedicated monitoring and sampling equipment was cleaned before initial use and between uses to minimize the potential for cross-contamination by washing with an Alconox[™]/potable water mixture followed by a deionized water rinse; and





• Sample collection and handling procedures were performed in general accordance with the *MOECC Sampling Guideline*, the *APGO Guideline* and Pinchin's SOPs for Phase II ESAs.

Maxxam's internal laboratory QA/QC consisted of the analysis of laboratory duplicate, method blank, matrix spike and spiked blank samples, an evaluation of relative percent difference calculations for laboratory duplicate samples, and an evaluation of surrogate recoveries.

2.6 Ontario Water Well Records

Ontario Regulation 903 (as amended) requires that all wells installed to depths greater than 3.0 mbgs have a water well record completed by a licensed well technician. The owner of the monitoring well must keep the water well record on file for a period of two years and the monitoring wells must be decommissioned as per Ontario Regulation 903 (as amended) if monitoring wells are no longer in use. Strata is a licensed well driller under Ontario Regulation 903 (as amended), and submitted a water well record to the MOECC and the Client to fulfill the requirements of Ontario Regulation 903 (as amended).

2.7 Site Condition Standards

The Site is a commercial property located within the City of Ottawa. It is Pinchin's understanding that potable water for the Site and surrounding area is supplied by the City of Ottawa, with the Ottawa River serving as the water source.

Ontario Regulation 153/04 (as amended) states that a site is classified as an "environmentally sensitive area" if the pH of the surface soil (less than 1.5 mbgs) is less than 5 or greater than 9, the pH of the subsurface soil (greater than 1.5 mbgs) is less than 5 or greater than 11, or if the site is an area of natural significance or is adjacent to or contains land within 30 metres of an area of natural significance. Two representative soil samples collected from the boreholes advanced at the Site were submitted for pH analysis. The pH values measured in the submitted soil samples were within the limits for non-sensitive sites. The Site is also not an area of natural significance and it is not adjacent to, nor does it contain land within 30 metres of, an area of natural significance. As such, the Site is not an environmentally sensitive area.

Two representative soil samples collected from the boreholes advanced at the Site were submitted for 75 micron single-sieve grain size analysis. Based on the results of this analysis, the soil at the Site is interpreted to be coarse-textured for the purpose of selecting the appropriate *MOECC Standards*.

The pH and grain size analytical results are summarized in Table 3.





The results of the borehole drilling program indicated that the overburden was less than two metres thick over more than one-third of the Site area, classifying the Site as a "shallow soil property" as per Ontario Regulation 153/04 (as amended).

Based on the above, the appropriate Site Condition Standards for the Site are:

- "Table 7: Generic Site Condition Standards for Shallow Soils in a Non-Potable Ground Water Condition", provided in the *MOECC Standards* (*Table 7 Standards*) for:
 - Coarse-textured soils; and
 - Industrial/commercial/community property use.

As such, the analytical results have been compared to these *Table 7 Standards*.

3.0 RESULTS

3.1 Site Geology and Hydrogeology

Based on the soil samples recovered during the borehole drilling program, the soil stratigraphy at the drilling locations below the asphalt surface generally consists of fill material comprised of sand and gravel to a depth of approximately 0.9 mbgs.

Native subsurface material underlying the fill material was observed to generally consist of silty sand with trace clay and gravel throughout that extended to the maximum borehole completion depth of 2.7 mbgs. Moist to wet soil conditions were not observed in the overburden soil.

A detailed description of the subsurface stratigraphy encountered during borehole advancement is documented in the borehole logs located in Appendix II.

The water level information obtained during groundwater monitoring is presented in Table 4 and on the borehole logs in Appendix II. The depth to groundwater measured within the monitoring wells ranged from 1.95 mbgs at monitoring well MW-2 to 2.48 mbgs at monitoring well MW-3 on April 17, 2018.

The water table elevations calculated using the water level measurements made on April 17, 2018 show that groundwater flow at the Site is inferred to be towards the southeast; however, Pinchin notes that groundwater conditions may not have been at equilibrium at the time of the water level measurements.

3.2 Soil Headspace Vapour Concentrations

Vapour concentrations measured in the headspace of soil samples collected during the drilling investigation are presented on the borehole logs in Appendix II and were all zero parts per million by volume (ppmv).





3.3 Field Observations

No odours or staining were observed in the soil samples collected during the borehole drilling program.

3.4 Analytical

3.4.1 Soil

As indicated in Table 5, reported concentrations of PHCs (F1-F4) and VOCs in the soil samples submitted for analysis met the *Table 7 Standards*.

The laboratory Certificate of Analysis for the soil samples is provided in Appendix IV.

3.4.2 Groundwater

As indicated in Table 6, reported concentrations in the groundwater samples submitted for analysis of PHCs (F1-F4) and VOCs met the *Table 7 Standards*.

The laboratory Certificate of Analysis for the groundwater samples is provided in Appendix IV.

4.0 FINDINGS AND CONCLUSIONS

Based on the work completed, the following is a summary of the activities and findings of this Phase II ESA:

- Pinchin retained Strata to advance three boreholes at the Site on April 10, 2018. The boreholes were advanced to a maximum depth of 1.83 mbgs using a GeoMachine direct push drill rig. All of the boreholes were instrumented with monitoring wells to enable groundwater monitoring and sampling. It should be noted that the monitoring wells were advanced into the bedrock stratigraphy encountered at the Site, to a maximum depth 7.6 mbgs;
- The soil stratigraphy at the drilling locations generally consists of sand and gravel fill material to a depth of approximately 0.9 mbgs overlying native soil comprised of silty sand with trace clay and gravel throughout that extended to a depth of 2.7 mbgs. The overburden soil was not observed to be moist to wet;
- Groundwater levels at the Site measured on April 17, 2018 varied between 1.95 mbgs (MW-2) and 2.48 mbgs (MW-3). Inferred groundwater flow is expected to be southeast based on the water table elevations obtained from groundwater monitoring;
- Based on Site-specific information, the soil and groundwater quality was assessed based on the *Table 7 Standards* for industrial/commercial/community land use and coarse-textured soils;





- Three "worst case" soil samples based on the results of field screening were submitted for laboratory analysis of PHCs (F1-F4) and VOCs;
- Groundwater samples were collected from monitoring wells MW-1 through MW-3 installed by Pinchin on April 17, 2018 and were submitted for laboratory analysis of PHCs (F1-F4) and VOCs; and
- Reported concentrations in the soil and groundwater samples submitted for analysis of PHCs (F1-F4) and VOCs satisfied their respective *Table 7 Standards*.

Based on the findings of this Phase II ESA, it is Pinchin's opinion that no further subsurface investigation is required for the Site in relation to the findings of the Phase I ESA.

5.0 TERMS AND LIMITATIONS

This Phase II ESA was performed for 1716621 Ontario Limited (Client) in order to investigate potential environmental impacts at 1657-1673 Carling Avenue, Ottawa, Ontario (Site). The term recognized environmental condition means the presence or likely presence of any hazardous substance on a property under conditions that indicate an existing release, past release, or a material threat of a release of a hazardous substance into structures on the property or into the ground, groundwater, or surface water of the property. This Phase II ESA does not quantify the extent of the current and/or recognized environmental condition or the cost of any remediation.

Conclusions derived are specific to the immediate area of study and cannot be extrapolated extensively away from sample locations. Samples have been analyzed for a limited number of contaminants that are expected to be present at the Site, and the absence of information relating to a specific contaminant does not indicate that it is not present.

No environmental site assessment can wholly eliminate uncertainty regarding the potential for recognized environmental conditions on a property. Performance of this Phase II ESA to the standards established by Pinchin is intended to reduce, but not eliminate, uncertainty regarding the potential for recognized environmental conditions on the Site, and recognizes reasonable limits on time and cost.

This Phase II ESA was performed in general compliance with currently acceptable practices for environmental site investigations, and specific Client requests, as applicable to this Site. The scope of work completed by Pinchin, as part of this Phase II ESA, is not sufficient (in and of itself) to meet the requirements for the submission of a Record of Site Condition (RSC) in accordance with Ontario Regulation 153/04 (as amended). If an RSC is an intended end product of work conducted at the Site, further consultation and/or work will be required.





This report was prepared for the exclusive use of the Client, subject to the terms, conditions and limitations contained within the duly authorized proposal for this project. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, is the sole responsibility of such third parties. Pinchin accepts no responsibility for damages suffered by any third party as a result of decisions made or actions conducted.

If additional parties require reliance on this report, written authorization from Pinchin will be required. Pinchin disclaims responsibility of consequential financial effects on transactions or property values, or requirements for follow-up actions and costs. No other warranties are implied or expressed. Furthermore, this report should not be construed as legal advice. Pinchin will not provide results or information to any party unless disclosure by Pinchin is required by law.


Pinchin makes no other representations whatsoever, including those concerning the legal significance of its findings, or as to other legal matters touched on in this report, including, but not limited to, ownership of any property, or the application of any law to the facts set forth herein. With respect to regulatory compliance issues, regulatory statutes are subject to interpretation and these interpretations may change over time.

220409.002 Phase II ESA 1657-1673 Carling Ave Ottawa ON 1716621 ON Inc Template: Master Report for Phase II ESA - Stage 2 PSI, EDR, February 2, 2018



APPENDIX I Figures



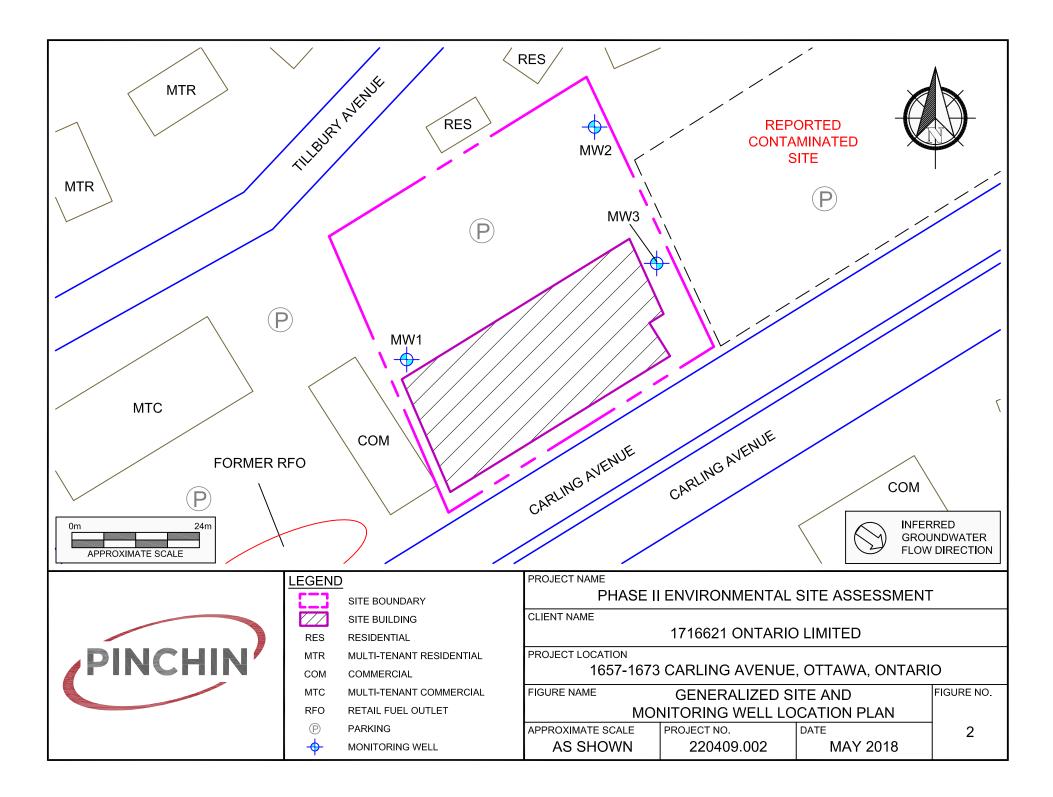

APPENDIX II Borehole Logs

		L	og	of	Boreho	le:	MV	V1				
		Pr	ojec	t #: <mark>2</mark>	20409.002				Logged	By: RL		
- 4	D		ojec	t: Pha	ase II Enviror	nmer	ntal Si	te Assessm	nent			
	P		Client: 1916621 Ontario Ltd.									
		Lo	ocatio	on: 1	657-1673 Ca	rling	Aven	ue, Ottawa	, Ontario			
		Dr	rill Da	ate: A	pril 10, 2018				Project	Manager: RL		
		SUBSURFACE PROFILE	Ξ		-			SA	AMPLE	_		
Depth	Symbol	Description		Measured Depth (m)	Monitoring Well Details	Sampler #	Recovery (%)	Sample ID	Soil Vapour Concentration RKI/PID	Laboratory Analysis		
$ \begin{array}{c c} ft m \\ 0 \hline \pm 0 \end{array} $		Ground Surface	(0.00								
1 1 2	•	Asphalt Sand and Gravel - Fill Brown, moist, no odour.		0.76		1	40	SS1	0ppm	GRAIN SIZE		
3 1 1 4 1		Silty Sand Brown, with trace clay and gravel		1.52	Riser	2	40	SS2	0ppm	GRAIN SIZE, pH, PHCs, VOCs,		
5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 24 25 26 26 27 24 25 26 26 27 26 27 26 27 26 27 26 27 27 26 27 27 26 27 27 26 27 27 27 27 27 26 27 27 27 27 27 27 27 27 27 27		throughout, moist, no odour. Bedrock Refusal on Bedrock. Advanced with Air Rotary. End of Borehole		7.62	Screen Sc							
26 8 27 8 28 8 29 1 30 1 30 1					level measured at 2.10mbgs							
Conti	ractor	r: Strata Drilling Group	F	Pinch	in Ltd.		Gı	ade Elevat	tion: 100.2	88		
Drilliı	ng Me	ethod: Geo Machine 1			nd, Suite 200)	То	o of Casin	a Elevatio	n: 100.180		
	-				N K2K 3C7			eet: 1 of 1	3 — 3 T 4 1 0			

			.00	g of	Boreho	le:	МИ	/2		
	-	PI	roje	ct #: 2	20409.002				Logged	By: RL
	D		roje	ct: Pha	ase II Enviror	mer	tal Si	te Assessn	nent	
			lien	<i>t:</i> 1916	621 Ontario	Ltd.				
		Lo	oca	tion: 1	657-1673 Ca	rling	Aven	ue, Ottawa	, Ontario	
		Di	rill L	Date: A	pril 10, 2018				Project l	Manager: RL
		SUBSURFACE PROFIL	E					S	AMPLE	
Depth	Symbol	Description		Measured Depth (m)	Monitoring Well Details	Sampler #	Recovery (%)	Sample ID	Soil Vapour Concentration RKI/PID	Laboratory Analysis
$\begin{array}{c} ft m \\ 0 \pm 0 \end{array}$		Ground Surface		0.00						
1-1 2-1		Asphalt Sand and Gravel - Fill Brown, moist, no odour.		0.76		1	50	SS1	0ppm	
3 - 1 4 - 1 5 - 1		<i>Silty Sand</i> Brown, with trace clay and gravel		1.52	Riser	2	50	SS2	0ppm	PHCs, VOCs
6 7 8 9 10 11 12 13 14 14 14 14 15 16 17 18 19 20 10 11 14 14 14 15 16 21 22 23 10 10 11 11 12 13 14 14 14 14 14 14 14 14 14 14 14 14 14		throughout, moist, no odour. Bedrock Refusal on Bedrock. Advanced with Air Rotary. End of Borehole		6.10	Water level measured at 1.95mbgs on April 10, 2018					
Cont	ractoi	r: Strata Drilling Group		Pinch	in Ltd.		Gr	ade Eleva	<i>tion:</i> 100.12	26
Drillii	ng Me	thod: Geo Machine	1 Hi	ines Ro	oad, Suite 20	00	То	p of Casin	ng Elevatior	n: 100.011
Well	Casin	g Size: 3.8cm	Ka	anata,	ON K2K 3C7	,	Sh	eet: 1 of 1		

			Lo	g of	Bo	ore	eho	le:	МИ	/3			
	-	F	Proje	ect #: 2	204	09.0	02				Logged	By: RL	
	D	INCHIN 2	Proje	ect: Pha	ase	II Ei	nviron	mer	tal Sit	te Assessn	nent		
			Clien	nt: 1916	62 ⁻	1 On	tario	Ltd.					
			Location: 1657-1673 Carling Avenue, Ottawa, Ontario										
		L	Drill	Date: <mark>/</mark>	April	10,	2018				Project	Manager: RL	
		SUBSURFACE PROFIL	.E		-					S	AMPLE		
Depth	Symbol	Description		Measured Depth (m)		Monitoring	vveli Detalis	Sampler #	Recovery (%)	Sample ID	Soil Vapour Concentration RKI/PID	Laboratory Analysis	
ft m		Ground Surface		0.00		, —	-						
ft m 0 0 0 1 1 2 1		Asphalt Sand and Gravel - Fill Brown, moist, no odour.		0.76	 			1	40	SS1	0ppm		
3 - 1 4 - 1 5 - 1		Silty Sand Brown, with trace clay and gravel			Riser		lite	2	40	SS2	0ppm		
6 7 7		throughout, moist, no odour.					Bentonite	3	60	SS3	0ppm		
8				2.74]₹	7	4	60	SS4	0ppm	PHCs, pH, VOCs	
10 10 11 12 11 12 11 12 11 12 11 12 11 12 11 12 11 12 11 12 11 12 11 12 11 12 11 12 11 12 12		Bedrock Refusal on Bedrock. Advanced with Air Rotary. End of Borehole		7.01	le m at 2.	/ater vvel neasu 4.48m Apr	ured bgs						
30 = 9										:			
		r: Strata Drilling Group		Pinch	nin l	Ltd.			Gr	ade Eleva	<i>tion:</i> 100.3	03	
	-	ethod: Geo Machine og Size: 3.8cm		nes Ro nata, C				0		p of Casin eet: 1 of 1	ng Elevatio	n: 100.293	

APPENDIX III Summary Tables

TABLE 1 SAMPLES SUBMITTED FOR LABORATORY ANALYSIS 1716621 Ontario Limited 1657-1672 Carling Avenue, Ottawa, Ontario

	Samples				P	arar	nete	rs			
Borehole / Monitoring Well ID	Sample ID	Sample Depth Range (mbgs)		PHCs (F1-F4)	VOCs	Нд	Grain Size Analvsis	PLES	PHCs (F1-F4)	VOCs	Rationale/Notes
	MW-1, SS-1	0.5-2.5					•	SAM			
MW-1	MW-1, SS-2	0.9-1.5	S	•	•	•		TER			
	MW-1	6.1	Ψ					IDWA	•	•	
MW-2	MW-2, SS-2	0.9-1.5	SAMPI	•	•			ROUNDW			Assess soil and groundwater qualty at property limits/Confirm applicable MOECC standards.
10100-2	MW-2	4.6	SOIL					GI	•	•	
MW-3	MW-3, SS-4	2.3-2.7		•	•	•					
10100-3	MW-3	5.5							•	•	

Notes:

PHCs (F1-F4) Petroleum Hydrocarbons (Fraction 1 to Fraction 4)

VOCs Volatile Organic Compounds

mbgs Metres Below Ground Surface

MOECC Ontario Ministry of the Environment and Climate Change

TABLE 2 pH AND GRAIN SIZE ANALYSIS FOR SOIL 1716621 Ontario Limited 1657-1672 Carling Avenue, Ottawa, Ontario

			S	ample Designatio	n
			Sample Co	ollection Date (dd	/mm/yyyy)
		MOECC Site	Sa	mple Depth (mbg	ns)
Parameter	Units	Condition Standard	MW-1, SS-1	MW-1, SS-2	MW-3, SS-4
		Selection Criteria	25/10/2017	25/10/2017	25/10/2017
			0.2 - 1.2	2.8 - 3.2	0.2 - 1.2
			Surface	Surface	Sub-Surface
рН		Surface: 5 < pH < 9		7.7	7.9
pri		Subsurface: 5 < pH < 11		1.1	1.5
Sieve #200 <0.075 mm	%	50%	36	NA	NA
Sieve #200 >0.075 mm	%	50%	64	NA	NA
		Grain Size Classification	COARSE	MEDIUM/FINE	NA

Notes:

Environmentally Sensitive Area (Based Upon pH of Surface Soil)

Environmentally Sensitive Area (Based Upon pH of Sub-Surface Soil)

Not Analysed

NA mbgs

BOLD

BOLD

Metres Below Ground Surface

TABLE 3MONITORING WELL CONSTRUCTION DETAILS1716621 Ontario Limited1657-1672 Carling Avenue, Ottawa, Ontario

Well Number	Surveyed TOC Elevation (mREL)	Surveyed Ground Elevation (mREL)	Calculated Difference Between Ground and TOC (m)	Length of Screen (m)
MW-1	100.18	100.29	0.11	3.05
MW-2	100.01	100.13	0.12	3.05
MW-3	100.29	100.36	0.07	3.05

Notes:

Indicates Groundwater Elevation (metres) Relative to Site Benchmark with Assumed Elevation of 100.00 Metres

TOC Indicates Top of Casing

NM Not Measured

m Metres

mREL

TABLE 4GROUNDWATER ELEVATION DATA

1716621 Ontario Limited 1657-1672 Carling Avenue, Ottawa, Ontario

		NAPL Level	Water Level	Water Level		Calculated
		Measurement	Measurement	Measurement	Product	Water Level
	Date	from TOC	from TOC	from Ground	Thickness	Elevation
Well Number	(dd/mm/yyyy)	<i>(m)</i>	<i>(m)</i>	(mbgs)	<i>(m)</i>	(mREL)
MW-1	17/04/2018	ND	1.90	2.10	ND	98.28
MW-2	17/04/2018	ND	1.87	1.95	ND	98.14
MW-3	17/04/2018	ND	2.41	2.48	ND	97.88

Notes:

mREL Indicates Groundwater Elevation (metres) Relative To Site Benchmark with Assumed Elevation of 100.00 Metres

NAPL Non-Aqueous Phase Liquid

ND Not Detected

TOC Indicates Top of Casing

m Metres

mbgs Metres Below Ground Surface

TABLE 5 PETROLEUM HYDROCARBON AND VOLATILE ORGANIC COMPOUND ANALYSIS FOR SOIL 1716621 Ontario Limited

1657-1672 Carling Avenue, Ottawa, Ontario

		Sample Designation							
		Sample Collection Date (dd/mm/yyyy)							
Parameter	MOECC Table 7		Sample Depth (mbgs)						
Parameter	Standards*	MW-1, SS-2	MW-2, SS-2	MW-3, SS-4					
		10/04/2018	10/04/2018	10/04/2018					
		0.9-1.5	0.9-1.5	2.3-2.7					
Petroleum Hydrocarbons F1 (C ₆ - C ₁₀)	55	<10	<10	<10					
Petroleum Hydrocarbons F2 (>C ₁₀ - C ₁₆)	230	<10	<10	<10					
Petroleum Hydrocarbons F3 ($>C_{16} - C_{34}$)	1700	<50	<50	<50					
Petroleum Hydrocarbons F4 ($>C_{34} - C_{50}$)	3300	<50	<50	<50					
Acetone $(2034 - 050)$	16	<0.50	<0.50	<0.50					
Benzene	0.32	<0.020	<0.020	<0.020					
Bromodichloromethane	18	<0.020	<0.020	<0.020					
Bromoform	0.61	<0.050	<0.050	<0.050					
Bromomethane	0.05	<0.050	<0.050	<0.050					
Carbon Tetrachloride	0.03	<0.050	<0.050	<0.050					
Chlorobenzene	2.4	<0.050	<0.050	<0.050					
Chloroform	0.47	<0.050	<0.050	<0.050					
Dibromochloromethane	13	<0.050	<0.050	< 0.050					
1.2-Dichlorobenzene	6.8	<0.050	< 0.050	< 0.050					
1.3-Dichlorobenzene	9.6	<0.050	< 0.050	< 0.050					
1.4-Dichlorobenzene	0.2	<0.050	< 0.050	< 0.050					
1,1-Dichloroethane	17	< 0.050	< 0.050	< 0.050					
1,2-Dichloroethane	0.05	<0.050	< 0.050	< 0.050					
1,1-Dichloroethylene	0.064	< 0.050	< 0.050	< 0.050					
Cis-1,2-Dichloroethylene	55	<0.050	<0.050	< 0.050					
Trans-1.2-Dichloroethylene	1.3	< 0.050	<0.050	< 0.050					
1,2-Dichloropropane	0.16	< 0.050	<0.050	< 0.050					
Ethylbenzene	9.5	<0.020	<0.020	< 0.020					
Ethylene Dibromide	0.05	< 0.050	<0.050	< 0.050					
Methyl Ethyl Ketone	70	< 0.50	<0.50	< 0.50					
Methylene Chloride	1.6	< 0.050	<0.050	< 0.050					
Methyl Isobutyl Ketone	31	<0.50	<0.50	<0.50					
Methyl-t-Butyl Ether	11	< 0.050	<0.050	<0.050					
Styrene	34	< 0.050	<0.050	<0.050					
1,1,1,2-Tetrachloroethane	0.087	<0.050	<0.050	< 0.050					
1,1,2,2-Tetrachloroethane	0.05	<0.050	<0.050	< 0.050					
Toluene	68	<0.020	<0.020	<0.020					
Tetrachloroethylene	4.5	<0.050	<0.050	< 0.050					
1,1,1-Trichloroethane	6.1	<0.050	<0.050	<0.050					
1,1,2-Trichloroethane	0.05	<0.050	<0.050	< 0.050					
Frichloroethylene	0.91	<0.050	<0.050	< 0.050					
/inyl Chloride	0.032	<0.020	<0.020	<0.020					
Total Xylenes	26	<0.020	<0.020	<0.020					
Dichlorodifluoromethane	16	<0.050	<0.050	<0.050					
Hexane(n)	46	<0.050	<0.050	< 0.050					
Trichlorofluoromethane	4	<0.050	<0.050	<0.050					
1,3-Dichloropropene (cis + trans)	0.18	<0.050	<0.050	< 0.050					

MOECC Table 7 Standards*

Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act, April 15, 2011, Table 7 Standards, Coarse-Textured Shallow Soils, Non-Potable Groundwater Condition, for Industrial/Community Property Use.



Exceeds Site Condition Standard

Reportable Detection Limit Exceeds Site Condition Standard

All Units in µg/g Metres Below Ground Surface

TABLE 6 PETROLEUM HYDROCARBON AND VOLATILE ORGANIC COMPOUND ANALYSIS FOR GROUNDWATER 1716621 Ontario Limited

1657-1672 Carling Avenue, Ottawa, Ontario

		Sample Designation						
Parameter	MOECC Table 3	Sample Collection Date (dd/mm/yyyy)						
Parameter	Standards*	MW01	MW02	MW03				
		25/10/2017	25/10/2017	25/10/2017				
Petroleum Hydrocarbons F1 (C ₆ - C ₁₀)	420	<25	<25	<25				
Petroleum Hydrocarbons F2 (>C ₁₀ - C ₁₆)	150	<100	<100	<100				
Petroleum Hydrocarbons F3 (>C ₁₆ - C ₃₄)	500	<200	<200	<200				
Petroleum Hydrocarbons F4 (>C ₃₄ - C ₅₀)	500	<200	<200	<200				
Acetone	100000	<10	<10	<10				
Benzene	0.5	0.31	<0.20	<0.20				
Bromodichloromethane	67000	<0.50	<0.50	< 0.50				
Bromoform	5	<1.0	<1.0	<1.0				
Bromomethane	0.89	<0.50	<0.50	<0.50				
Carbon Tetrachloride	0.2	<0.20	<0.20	<0.20				
Chlorobenzene	140	<0.20	<0.20	<0.20				
Chloroform	2	<0.20	<0.20	<0.20				
Dibromochloromethane	65000	<0.50	<0.20	<0.50				
1,2-Dichlorobenzene	150	<0.50	<0.50	<0.50				
1,3-Dichlorobenzene	7600	<0.50	<0.50	<0.50				
1.4-Dichlorobenzene	0.5	<0.50	<0.50	<0.50				
1,1-Dichloroethane	11	<0.20	<0.20	<0.20				
1,2-Dichloroethane	0.5	<0.50	<0.50	< 0.50				
1,1-Dichloroethylene	0.5	<0.20	<0.20	<0.20				
Cis-1,2-Dichloroethylene	1.6	<0.50	<0.50	< 0.50				
Trans-1,2-Dichloroethylene	1.6	<0.50	<0.50	< 0.50				
1,2-Dichloropropane	0.58	<0.20	<0.20	<0.20				
Cis-1,3-Dichloropropylene	NV	<0.30	<0.30	< 0.30				
Trans-1,3-Dichloropropylene	NV	<0.40	<0.40	<0.40				
Ethylbenzene	54	<0.20	<0.20	<0.20				
Ethylene Dibromide	0.2	<0.20	<0.20	<0.20				
Methyl Ethyl Ketone	21000	<10	<10	<10				
Methylene Chloride	26	<2.0	<2.0	<2.0				
Methyl Isobutyl Ketone	5200	<5.0	<5.0	<5.0				
Methyl-t-Butyl Ether	15	<0.50	<0.50	< 0.50				
Styrene	43	<0.50	<0.50	<0.50				
1,1,1,2-Tetrachloroethane	1.1	<0.50	<0.50	<0.50				
1,1,2,2-Tetrachloroethane	0.5	<0.50	<0.50	< 0.50				
Toluene	320	<0.20	<0.20	<0.20				
Tetrachloroethylene	0.5	<0.20	<0.20	<0.20				
1,1,1-Trichloroethane	23	<0.20	<0.20	<0.20				
1,1,2-Trichloroethane	0.5	<0.50	<0.50	< 0.50				
Trichloroethylene	0.5	<0.20	<0.20	<0.20				
/inyl Chloride	0.5	<0.20	<0.20	<0.20				
m-Xylene & p-Xylene	NV	<0.20	<0.20	<0.20				
p-Xylene	NV	<0.20	<0.20	<0.20				
Fotal Xylenes	72	<0.20	<0.20	<0.20				
Dichlorodifluoromethane	3500	<1.0	<1.0	<1.0				
Dioxane, 1,4-	190000	-	-	-				
Hexane(n)	5	<1.0	<1.0	<1.0				
Frichlorofluoromethane	2000	<0.50	<0.50	<0.50				
1,3-Dichloropropene (cis + trans)	0.5	<0.50	<0.50	<0.50				

Notes:

MOECC Table 3 Standards*

Soil, Ground Water and Sediment Standards for Use Under Part XV.1 of the Environmental Protection Act, April 15, 2011, Table 3 Standards, Coarse-Textured Soils, Non-Potable Groundwater Condition, for All Types of Property Use.



Exceeds Site Condition Standard Reportable Detection Limit Exceeds Site Condition Standard

. All Units in μg/L

Pinchin File: 220409.002

APPENDIX IV Laboratory Certificates of Analysis



Your Project #: PHASE II ESA Site#: 220409.002 Site Location: CARLING AVENUE

Attention: Ryan Laronde

Pinchin Ltd Ottawa 1 Hines Road Suite 200 Kanata, ON K2K 3C7

> Report Date: 2018/04/20 Report #: R5085636 Version: 1 - Final

CERTIFICATE OF ANALYSIS

MAXXAM JOB #: B884738 Received: 2018/04/13, 14:55

Sample Matrix: Soil # Samples Received: 4

		Date	Date		
Analyses	Quantity	Extracted	Analyzed	Laboratory Method	Reference
1,3-Dichloropropene Sum	3	N/A	2018/04/20	OTT SOP-00002	EPA 8260C m
Petroleum Hydrocarbons F2-F4 in Soil (2)	3	2018/04/17	2018/04/18	OTT SOP-00001	CCME CWS
Moisture	3	N/A	2018/04/18	CAM SOP-00445	McKeague 2nd ed 1978
pH CaCl2 EXTRACT (1)	2	2018/04/18	2018/04/18	CAM SOP-00413	EPA 9045 D m
Sieve, 75um (1)	2	N/A	2018/04/18	CAM SOP-00467	Carter 2nd ed m
Volatile Organic Compounds and F1 PHCs	3	N/A	2018/04/20	OTT SOP-00002	EPA 8260C m

Remarks:

Maxxam Analytics' laboratories are accredited to ISO/IEC 17025:2005 for specific parameters on scopes of accreditation. Unless otherwise noted, procedures used by Maxxam are based upon recognized Provincial, Federal or US method compendia such as CCME, MDDELCC, EPA, APHA.

All work recorded herein has been done in accordance with procedures and practices ordinarily exercised by professionals in Maxxam's profession using accepted testing methodologies, quality assurance and quality control procedures (except where otherwise agreed by the client and Maxxam in writing). All data is in statistical control and has met quality control and method performance criteria unless otherwise noted. All method blanks are reported; unless indicated otherwise, associated sample data are not blank corrected.

Maxxam Analytics' liability is limited to the actual cost of the requested analyses, unless otherwise agreed in writing. There is no other warranty expressed or implied. Maxxam has been retained to provide analysis of samples provided by the Client using the testing methodology referenced in this report. Interpretation and use of test results are the sole responsibility of the Client and are not within the scope of services provided by Maxxam, unless otherwise agreed in writing.

Solid sample results, except biota, are based on dry weight unless otherwise indicated. Organic analyses are not recovery corrected except for isotope dilution methods.

Results relate to samples tested.

This Certificate shall not be reproduced except in full, without the written approval of the laboratory.

Reference Method suffix "m" indicates test methods incorporate validated modifications from specific reference methods to improve performance.

* RPDs calculated using raw data. The rounding of final results may result in the apparent difference.

(1) This test was performed by Maxxam Analytics Mississauga

(2) All CCME PHC results met required criteria unless otherwise stated in the report. The CWS PHC methods employed by Maxxam conform to all prescribed elements of the reference method and performance based elements have been validated. All modifications have been validated and proven equivalent following "Alberta Environment's Interpretation of the Reference Method for the Canada-Wide Standard for Petroleum Hydrocarbons in Soil Validation of Performance-Based Alternative Methods September 2003". Documentation is available upon request. Modifications from Reference Method for the Canada-wide Standard for Petroleum Hydrocarbons in Soil-Tier 1 Method: F2/F3/F4 data reported using validated cold solvent extraction instead of Soxhlet extraction.



Your Project #: PHASE II ESA Site#: 220409.002 Site Location: CARLING AVENUE

Attention: Ryan Laronde

Pinchin Ltd Ottawa 1 Hines Road Suite 200 Kanata, ON K2K 3C7

> Report Date: 2018/04/20 Report #: R5085636 Version: 1 - Final

CERTIFICATE OF ANALYSIS

MAXXAM JOB #: B884738 Received: 2018/04/13, 14:55

Encryption Key

Please direct all questions regarding this Certificate of Analysis to your Project Manager. Jonathan Urben, Senior Project Manager Email: jurben@maxxam.ca Phone# (613) 274-0573

Maxxam has procedures in place to guard against improper use of the electronic signature and have the required "signatories", as per section 5.10.2 of ISO/IEC 17025:2005(E), signing the reports. For Service Group specific validation please refer to the Validation Signature Page.



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (SOIL)

Maxxam ID			GLR102	GLR103			GLR103		
Sampling Data			2018/04/10	2018/04/10			2018/04/10		
Sampling Date			12:30	14:00			14:00		
							MW-2,		
	UNITS	Criteria	MW-1, SS-2	MW-2, SS-2	RDL	QC Batch	SS-2	RDL	QC Batch
							Lab-Dup		-
Inorganics	1				1				
Moisture	%	-	14	11	0.2	5487640			
Calculated Parameters			1	1					
1,3-Dichloropropene (cis+trans)	ug/g	0.18	<0.050	<0.050	0.050	5485800			
Volatile Organics									
Acetone (2-Propanone)	ug/g	16	<0.50	<0.50	0.50	5492415			
Benzene	ug/g	0.32	<0.020	<0.020	0.020	5492415			
Bromodichloromethane	ug/g	18	<0.050	<0.050	0.050	5492415			
Bromoform	ug/g	0.61	<0.050	<0.050	0.050	5492415			
Bromomethane	ug/g	0.05	<0.050	<0.050	0.050	5492415			
Carbon Tetrachloride	ug/g	0.21	<0.050	<0.050	0.050	5492415			
Chlorobenzene	ug/g	2.4	<0.050	<0.050	0.050	5492415			
Chloroform	ug/g	0.47	<0.050	<0.050	0.050	5492415			
Dibromochloromethane	ug/g	13	<0.050	<0.050	0.050	5492415			
1,2-Dichlorobenzene	ug/g	6.8	<0.050	<0.050	0.050	5492415			
1,3-Dichlorobenzene	ug/g	9.6	<0.050	<0.050	0.050	5492415			
1,4-Dichlorobenzene	ug/g	0.2	<0.050	<0.050	0.050	5492415			
Dichlorodifluoromethane (FREON 12)	ug/g	16	<0.050	<0.050	0.050	5492415			
1,1-Dichloroethane	ug/g	17	<0.050	<0.050	0.050	5492415			
1,2-Dichloroethane	ug/g	0.05	<0.050	<0.050	0.050	5492415			
1,1-Dichloroethylene	ug/g	0.064	<0.050	<0.050	0.050	5492415			
cis-1,2-Dichloroethylene	ug/g	55	<0.050	<0.050	0.050	5492415			
trans-1,2-Dichloroethylene	ug/g	1.3	<0.050	<0.050	0.050	5492415			
1,2-Dichloropropane	ug/g	0.16	<0.050	<0.050	0.050	5492415			
cis-1,3-Dichloropropene	ug/g	0.18	<0.030	<0.030	0.030	5492415			
trans-1,3-Dichloropropene	ug/g	0.18	<0.040	<0.040	0.040	5492415			
Ethylbenzene	ug/g	9.5	<0.020	<0.020	0.020	5492415			
Ethylene Dibromide	ug/g	0.05	<0.050	<0.050	0.050	5492415			
Hexane	ug/g	46	<0.050	<0.050	0.050	5492415			
Methylene Chloride(Dichloromethane)	ug/g	1.6	<0.050	<0.050	0.050	5492415			

RDL = Reportable Detection Limit

QC Batch = Quality Control Batch

Lab-Dup = Laboratory Initiated Duplicate

Criteria: Ontario Reg. 153/04 (Amended April 15, 2011)

Table 7: Generic Site Condition Standards for Shallow Soils in a Non-Potable Ground Water Condition

Soil - Industrial/Commercial/Community Property Use - Coarse Textured Soil



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (SOIL)

Maxxam ID			GLR102	GLR103			GLR103		
Sampling Data			2018/04/10	2018/04/10			2018/04/10		
Sampling Date			12:30	14:00			14:00		
							MW-2,		
	UNITS	Criteria	MW-1, SS-2	MW-2, SS-2	RDL	QC Batch	SS-2	RDL	QC Batch
							Lab-Dup		
Methyl Ethyl Ketone (2-Butanone)	ug/g	70	<0.50	<0.50	0.50	5492415			
Methyl Isobutyl Ketone	ug/g	31	<0.50	<0.50	0.50	5492415			
Methyl t-butyl ether (MTBE)	ug/g	11	<0.050	<0.050	0.050	5492415			
Styrene	ug/g	34	<0.050	<0.050	0.050	5492415			
1,1,1,2-Tetrachloroethane	ug/g	0.087	<0.050	<0.050	0.050	5492415			
1,1,2,2-Tetrachloroethane	ug/g	0.05	<0.050	<0.050	0.050	5492415			
Tetrachloroethylene	ug/g	4.5	<0.050	<0.050	0.050	5492415			
Toluene	ug/g	68	<0.020	<0.020	0.020	5492415			
1,1,1-Trichloroethane	ug/g	6.1	<0.050	<0.050	0.050	5492415			
1,1,2-Trichloroethane	ug/g	0.05	<0.050	<0.050	0.050	5492415			
Trichloroethylene	ug/g	0.91	<0.050	<0.050	0.050	5492415			
Trichlorofluoromethane (FREON 11)	ug/g	4	<0.050	<0.050	0.050	5492415			
Vinyl Chloride	ug/g	0.032	<0.020	<0.020	0.020	5492415			
p+m-Xylene	ug/g	-	<0.020	<0.020	0.020	5492415			
o-Xylene	ug/g	-	<0.020	<0.020	0.020	5492415			
Total Xylenes	ug/g	26	<0.020	<0.020	0.020	5492415			
F1 (C6-C10)	ug/g	55	<10	<10	10	5492415			
F1 (C6-C10) - BTEX	ug/g	55	<10	<10	10	5492415			
F2-F4 Hydrocarbons					1				
F2 (C10-C16 Hydrocarbons)	ug/g	230	<10	<10	10	5487639	<10	10	5487639
F3 (C16-C34 Hydrocarbons)	ug/g	1700	<50	<50	50	5487639	<50	50	5487639
F4 (C34-C50 Hydrocarbons)	ug/g	3300	<50	<50	50	5487639	<50	50	5487639
Reached Baseline at C50	ug/g	-	Yes	Yes		5487639	Yes		5487639
Surrogate Recovery (%)	0.0								
o-Terphenyl	%	-	112	102		5487639	101		5487639
4-Bromofluorobenzene	%	-	90	94		5492415			
D10-o-Xylene	%	-	95	118		5492415			
D4-1,2-Dichloroethane	%	-	100	98		5492415			
D8-Toluene	%	-	99	99		5492415			
RDL = Reportable Detection Limit	1 **	1	1	1	I		1	I	<u> </u>

QC Batch = Quality Control Batch

Lab-Dup = Laboratory Initiated Duplicate

Criteria: Ontario Reg. 153/04 (Amended April 15, 2011)

Table 7: Generic Site Condition Standards for Shallow Soils in a Non-Potable Ground Water Condition

Soil - Industrial/Commercial/Community Property Use - Coarse Textured Soil



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (SOIL)

Maxxam ID			GLR104			GLR104		
Sampling Date			2018/04/10			2018/04/10		
			15:30			15:30		
						MW-3,		
	UNITS	Criteria	MW-3, SS-4	RDL	QC Batch	SS-4 Lab-Dup	RDL	QC Batch
						Lan-Dup		
Inorganics	1	1						
Moisture	%	-	13	0.2	5487640	16	0.2	5487640
Calculated Parameters	1	1	ſ	1	ſ	[
1,3-Dichloropropene (cis+trans)	ug/g	0.18	<0.050	0.050	5485800			
Volatile Organics	1	1	1	1	1			
Acetone (2-Propanone)	ug/g	16	<0.50	0.50	5492415			
Benzene	ug/g	0.32	<0.020	0.020	5492415			
Bromodichloromethane	ug/g	18	<0.050	0.050	5492415			
Bromoform	ug/g	0.61	<0.050	0.050	5492415			
Bromomethane	ug/g	0.05	<0.050	0.050	5492415			
Carbon Tetrachloride	ug/g	0.21	<0.050	0.050	5492415			
Chlorobenzene	ug/g	2.4	<0.050	0.050	5492415			
Chloroform	ug/g	0.47	<0.050	0.050	5492415			
Dibromochloromethane	ug/g	13	<0.050	0.050	5492415			
1,2-Dichlorobenzene	ug/g	6.8	<0.050	0.050	5492415			
1,3-Dichlorobenzene	ug/g	9.6	<0.050	0.050	5492415			
1,4-Dichlorobenzene	ug/g	0.2	<0.050	0.050	5492415			
Dichlorodifluoromethane (FREON 12)	ug/g	16	<0.050	0.050	5492415			
1,1-Dichloroethane	ug/g	17	<0.050	0.050	5492415			
1,2-Dichloroethane	ug/g	0.05	<0.050	0.050	5492415			
1,1-Dichloroethylene	ug/g	0.064	<0.050	0.050	5492415			
cis-1,2-Dichloroethylene	ug/g	55	<0.050	0.050	5492415			
trans-1,2-Dichloroethylene	ug/g	1.3	<0.050	0.050	5492415			
1,2-Dichloropropane	ug/g	0.16	<0.050	0.050	5492415			
cis-1,3-Dichloropropene	ug/g	0.18	<0.030	0.030	5492415			
trans-1,3-Dichloropropene	ug/g	0.18	<0.040	0.040	5492415			
Ethylbenzene	ug/g	9.5	<0.020	0.020	5492415			
Ethylene Dibromide	ug/g	0.05	<0.050	0.050	5492415			
Hexane	ug/g	46	<0.050	0.050	5492415			

RDL = Reportable Detection Limit

QC Batch = Quality Control Batch

Lab-Dup = Laboratory Initiated Duplicate

Criteria: Ontario Reg. 153/04 (Amended April 15, 2011)

Table 7: Generic Site Condition Standards for Shallow Soils in a Non-Potable Ground Water Condition

Soil - Industrial/Commercial/Community Property Use - Coarse Textured Soil



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (SOIL)

		GLR104			GLR104		
		2018/04/10			2018/04/10		
		15:30					
	<u>.</u>						
UNITS	Criteria	WW-3, SS-4	RDL	QC Batch		RDL	QC Batch
	1.0	(0.050	0.050	F 402 4 1 F			-
-	-						
	-						
-							
-							
ug/g	0.05	<0.050	0.050	5492415			
ug/g	4.5	<0.050	0.050	5492415			
ug/g	68	<0.020	0.020	5492415			
ug/g	6.1	<0.050	0.050	5492415			
ug/g	0.05	<0.050	0.050	5492415			
ug/g	0.91	<0.050	0.050	5492415			
ug/g	4	<0.050	0.050	5492415			
ug/g	0.032	<0.020	0.020	5492415			
ug/g	-	<0.020	0.020	5492415			
ug/g	-	<0.020	0.020	5492415			
ug/g	26	<0.020	0.020	5492415			
ug/g	55	<10	10	5492415			
ug/g	55	<10	10	5492415			
ug/g	230	<10	10	5487639			
	1700	<50	50	5487639			
-	3300	<50	50	5487639			
	-	Yes		5487639			
0.0	I	1			1		
%	-	114		5487639			
%	-	93		5492415			
%	-	115		5492415			
%	-	93		5492415			
	ug/g ug/g	ug/g 1.6 ug/g 70 ug/g 31 ug/g 31 ug/g 31 ug/g 34 ug/g 0.087 ug/g 0.05 ug/g 68 ug/g 6.1 ug/g 0.05 ug/g 0.032 ug/g - ug/g - ug/g 55 ug/g 55 ug/g 3300 ug/g 3300 ug/g - % -	2018/04/10 15:30 UNITS Criteria MW-3, SS-4 ug/g 1.6 <0.050	2018/04/10 15:30 2018/04/10 15:30 UNITS Criteria MW-3, SS-4 RDL ug/g 1.6 <0.050	2018/04/10 15:30 A UNITS Criteria MW-3, SS-4 RDL QC Batch ug/g 1.6 <0.050	Image: symbol	Image: series of the series

QC Batch = Quality Control Batch

Lab-Dup = Laboratory Initiated Duplicate

Criteria: Ontario Reg. 153/04 (Amended April 15, 2011)

Table 7: Generic Site Condition Standards for Shallow Soils in a Non-Potable Ground Water Condition



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (SOIL)

Maxxam ID			GLR104			GLR104				
Sampling Date			2018/04/10			2018/04/10				
Sampling Date			15:30			15:30				
						MW-3,				
	UNITS	Criteria	MW-3, SS-4	RDL	QC Batch	SS-4	RDL	QC Batch		
						Lab-Dup				
D8-Toluene	%	-	102		5492415					
RDL = Reportable Detection Limit										
QC Batch = Quality Control Batch										
Lab-Dup = Laboratory Initiated Duplicate										
Criteria: Ontario Reg. 153/04 (Amended April 15, 2011)										
Table 7: Generic Site Condition Standard	s for Sha	allow Soil	s in a Non-Pot	table G	round Wat	er Condition				
Soil - Industrial/Commercial/Community	Propert	y Use - C	oarse Texture	d Soil						



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

RESULTS OF ANALYSES OF SOIL

Maxxam ID		GLR101		GLR102			GLR104	
Sampling Date		2018/04/10 10:00		2018/04/10 12:30			2018/04/10 15:30	
	UNITS	MW-1, SS-1	QC Batch	MW-1, SS-2	RDL	QC Batch	MW-3, SS-4	QC Batch
Inorganics								
Available (CaCl2) pH	рН			7.67		5489469	7.86	5489469
Miscellaneous Parameters	-							
Grain Size	%	COARSE	5487868	FINE	N/A	5487868		
Sieve - #200 (<0.075mm)	%	36	5487868	70	1	5487868		
Sieve - #200 (>0.075mm)	%	64	5487868	30	1	5487868		
RDL = Reportable Detection	Limit							
QC Batch = Quality Control E	Batch							
N/A = Not Applicable								



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

TEST SUMMARY

Maxxam ID: GLR101 Sample ID: MW-1, SS-1 Matrix: Soil					Collected: 2018/04/10 Shipped: Received: 2018/04/13
Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Analyst
Sieve, 75um	SIEV	5487868	N/A	2018/04/18	Gargi Gireesh
Maxxam ID: GLR102 Sample ID: MW-1, SS-2 Matrix: Soil					Collected: 2018/04/10 Shipped: Received: 2018/04/13
Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Analyst
1,3-Dichloropropene Sum	CALC	5485800	N/A	2018/04/20	Automated Statchk
Petroleum Hydrocarbons F2-F4 in Soil	GC/FID	5487639	2018/04/17	2018/04/18	Fatemeh Habibagahi
Moisture	BAL	5487640	N/A	2018/04/18	Fatemeh Habibagahi
pH CaCl2 EXTRACT	AT	5489469	2018/04/18	2018/04/18	Neil Dassanayake
Sieve, 75um	SIEV	5487868	N/A	2018/04/18	Gargi Gireesh
Volatile Organic Compounds and F1 PHCs	GC/MSFD	5492415	N/A	2018/04/20	Liliana Gaburici
Maxxam ID: GLR103 Sample ID: MW-2, SS-2 Matrix: Soil Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Collected: 2018/04/10 Shipped: Received: 2018/04/13 Analyst
1,3-Dichloropropene Sum	CALC	5485800	N/A	2018/04/20	Automated Statchk
Petroleum Hydrocarbons F2-F4 in Soil	GC/FID	5487639	2018/04/17	2018/04/18	Fatemeh Habibagahi
Moisture	BAL	5487640	N/A	2018/04/18	Fatemeh Habibagahi
Volatile Organic Compounds and F1 PHCs	GC/MSFD	5492415	N/A	2018/04/20	Liliana Gaburici
Maxxam ID: GLR103 Dup Sample ID: MW-2, SS-2 Matrix: Soil					Collected: 2018/04/10 Shipped: Received: 2018/04/13
Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Analyst
Petroleum Hydrocarbons F2-F4 in Soil	GC/FID	5487639	2018/04/17	2018/04/18	Fatemeh Habibagahi
Maxxam ID: GLR104 Sample ID: MW-3, SS-4 Matrix: Soil					Collected: 2018/04/10 Shipped: Received: 2018/04/13
Sample ID: MW-3, SS-4	Instrumentation	Batch	Extracted	Date Analyzed	Shipped:
Sample ID: MW-3, SS-4 Matrix: Soil	Instrumentation CALC	Batch 5485800	Extracted N/A	Date Analyzed 2018/04/20	Shipped: Received: 2018/04/13
Sample ID: MW-3, SS-4 Matrix: Soil Test Description				-	Shipped: Received: 2018/04/13 Analyst
Sample ID: MW-3, SS-4 Matrix: Soil Test Description 1,3-Dichloropropene Sum	CALC	5485800	N/A	2018/04/20	Shipped: Received: 2018/04/13 Analyst Automated Statchk
Sample ID: MW-3, SS-4 Matrix: Soil Test Description I.3-Dichloropropene Sum Petroleum Hydrocarbons F2-F4 in Soil	CALC GC/FID	5485800 5487639	N/A 2018/04/17	2018/04/20 2018/04/18	Shipped: Received: 2018/04/13 Analyst Automated Statchk Fatemeh Habibagahi



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

TEST SUMMARY

Maxxam ID: Sample ID: Matrix:	GLR104 Dup MW-3, SS-4 Soil					Collected: 20 Shipped: Received: 20	
Test Description		Instrumentation	Batch	Extracted	Date Analyzed	Analyst	
Moisture		BAL	5487640	N/A	2018/04/18	Fatemeh Habi	bagahi



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

GENERAL COMMENTS

Each temperature is the average of up to three cooler temperatures taken at receipt

Package 1 2.7°C

Cooler custody seal was present and intact.

Results relate only to the items tested.



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QUALITY ASSURANCE REPORT

QA/QC								
Batch	Init	QC Туре	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limits
5487639	FHB	Matrix Spike [GLR102-01]	o-Terphenyl	2018/04/18		117	%	30 - 130
			F2 (C10-C16 Hydrocarbons)	2018/04/18		87	%	50 - 130
			F3 (C16-C34 Hydrocarbons)	2018/04/18		87	%	50 - 130
			F4 (C34-C50 Hydrocarbons)	2018/04/18		87	%	50 - 130
5487639	FHB	Spiked Blank	o-Terphenyl	2018/04/18		118	%	30 - 130
			F2 (C10-C16 Hydrocarbons)	2018/04/18		87	%	80 - 120
			F3 (C16-C34 Hydrocarbons)	2018/04/18		87	%	80 - 120
			F4 (C34-C50 Hydrocarbons)	2018/04/18		87	%	80 - 120
5487639	FHB	Method Blank	o-Terphenyl	2018/04/18		111	%	30 - 130
			F2 (C10-C16 Hydrocarbons)	2018/04/18	<10		ug/g	
			F3 (C16-C34 Hydrocarbons)	2018/04/18	<50		ug/g	
			F4 (C34-C50 Hydrocarbons)	2018/04/18	<50		ug/g	
5487639	FHB	RPD [GLR103-01]	F2 (C10-C16 Hydrocarbons)	2018/04/18	NC		%	50
			F3 (C16-C34 Hydrocarbons)	2018/04/18	NC		%	50
			F4 (C34-C50 Hydrocarbons)	2018/04/18	NC		%	50
5487640	FHB	RPD [GLR104-01]	Moisture	2018/04/18	16		%	50
5487868	MYG	QC Standard	Sieve - #200 (<0.075mm)	2018/04/18		57	%	53 - 58
			Sieve - #200 (>0.075mm)	2018/04/18		44	%	42 - 47
5487868	MYG	RPD	Sieve - #200 (<0.075mm)	2018/04/18	0.035		%	20
			Sieve - #200 (>0.075mm)	2018/04/18	0.21		%	20
5489469	NYS	Spiked Blank	Available (CaCl2) pH	2018/04/18		100	%	97 - 103
5489469	NYS	RPD	Available (CaCl2) pH	2018/04/18	1.2		%	N/A
5492415	LGA	Spiked Blank	4-Bromofluorobenzene	2018/04/19		101	%	60 - 140
			D10-o-Xylene	2018/04/19		126	%	60 - 130
			D4-1,2-Dichloroethane	2018/04/19		105	%	60 - 140
			D8-Toluene	2018/04/19		105	%	60 - 140
			Acetone (2-Propanone)	2018/04/19		101	%	60 - 140
			Benzene	2018/04/19		117	%	60 - 130
			Bromodichloromethane	2018/04/19		113	%	60 - 130
			Bromoform	2018/04/19		122	%	60 - 130
			Bromomethane	2018/04/19		103	%	60 - 140
			Carbon Tetrachloride	2018/04/19		111	%	60 - 130
			Chlorobenzene	2018/04/19		111	%	60 - 130
			Chloroform	2018/04/19		107	%	60 - 130
			Dibromochloromethane	2018/04/19		122	%	60 - 130
			1,2-Dichlorobenzene	2018/04/19		105	%	60 - 130
			1,3-Dichlorobenzene	2018/04/19		107	%	60 - 130
			1,4-Dichlorobenzene	2018/04/19		104	%	60 - 130
			Dichlorodifluoromethane (FREON 12)	2018/04/19		90	%	60 - 140
			1,1-Dichloroethane	2018/04/19		116	%	60 - 130
			1,2-Dichloroethane	2018/04/19		110	%	60 - 130
			1,1-Dichloroethylene	2018/04/19		113	%	60 - 130
			cis-1,2-Dichloroethylene	2018/04/19		106	%	60 - 130
			trans-1,2-Dichloroethylene	2018/04/19		100	%	60 - 130
			1,2-Dichloropropane	2018/04/19		101	%	60 - 130
			cis-1,3-Dichloropropene	2018/04/19		95	%	60 - 130
			trans-1,3-Dichloropropene	2018/04/19		94 112	%	60 - 130
			Ethylbenzene	2018/04/19		112	%	60 - 130
1			Ethylene Dibromide	2018/04/19		111	%	60 - 130
			Hexane Methylene Chloride(Dichloromethane)	2018/04/19		126 90	% %	60 - 130 60 - 130
				2018/04/19				
			Methyl Ethyl Ketone (2-Butanone)	2018/04/19		108	%	60 - 140



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QA/QC								
Batch	Init	QC Type	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limits
			Methyl Isobutyl Ketone	2018/04/19		106	%	60 - 130
			Methyl t-butyl ether (MTBE)	2018/04/19		113	%	60 - 130
			Styrene	2018/04/19		112	%	60 - 130
			1,1,1,2-Tetrachloroethane	2018/04/19		126	%	60 - 130
			1,1,2,2-Tetrachloroethane	2018/04/19		106	%	60 - 130
			Tetrachloroethylene	2018/04/19		108	%	60 - 130
			Toluene	2018/04/19		111	%	60 - 130
			1,1,1-Trichloroethane	2018/04/19		108	%	60 - 130
			1,1,2-Trichloroethane	2018/04/19		102	%	60 - 130
			Trichloroethylene	2018/04/19		110	%	60 - 130
			Trichlorofluoromethane (FREON 11)	2018/04/19		118	%	60 - 130
			Vinyl Chloride	2018/04/19		129	%	60 - 130
			p+m-Xylene	2018/04/19		112	%	60 - 130
			o-Xylene	2018/04/19		114	%	60 - 130
			F1 (C6-C10)	2018/04/19	42	103	%	80 - 120
5492415	LGA	RPD	Acetone (2-Propanone)	2018/04/20	13		%	50
			Benzene	2018/04/20	5.7		%	50
			Bromodichloromethane Bromoform	2018/04/20	2.2		%	50 50
			Bromoform Bromomethane	2018/04/20 2018/04/20	3.6 8.5		% %	50 50
			Carbon Tetrachloride	2018/04/20	8.5 2.2		%	50 50
			Chlorobenzene	2018/04/20	2.2 5.4		%	50 50
			Chloroform	2018/04/20	5.4 18		%	50
			Dibromochloromethane	2018/04/20	16		%	50
			1,2-Dichlorobenzene	2018/04/20	5.7		%	50
			1,3-Dichlorobenzene	2018/04/20	4.2		%	50
			1,4-Dichlorobenzene	2018/04/20	4.6		%	50
			Dichlorodifluoromethane (FREON 12)	2018/04/20	4.0 6.4		%	50
			1,1-Dichloroethane	2018/04/20	6.6		%	50
			1,2-Dichloroethane	2018/04/20	11		%	50
			1,1-Dichloroethylene	2018/04/20	4.1		%	50
			cis-1,2-Dichloroethylene	2018/04/20	9.0		%	50
			trans-1,2-Dichloroethylene	2018/04/20	6.0		%	50
			1,2-Dichloropropane	2018/04/20	9.3		%	50
			cis-1,3-Dichloropropene	2018/04/20	8.1		%	50
			trans-1,3-Dichloropropene	2018/04/20	8.0		%	50
			Ethylbenzene	2018/04/20	6.4		%	50
			Ethylene Dibromide	2018/04/20	8.5		%	50
			Hexane	2018/04/20	3.1		%	50
			Methylene Chloride(Dichloromethane)	2018/04/20	10		%	50
			Methyl Ethyl Ketone (2-Butanone)	2018/04/20	0.92		%	50
			Methyl Isobutyl Ketone	2018/04/20	2.9		%	50
			Methyl t-butyl ether (MTBE)	2018/04/20	3.1		%	50
			Styrene	2018/04/20	4.8		%	50
			1,1,1,2-Tetrachloroethane	2018/04/20	10		%	50
			1,1,2,2-Tetrachloroethane	2018/04/20	17		%	50
			Tetrachloroethylene	2018/04/20	2.9		%	50
			Toluene	2018/04/20	3.8		%	50
			1,1,1-Trichloroethane	2018/04/20	5.6		%	50
			1,1,2-Trichloroethane	2018/04/20	9.0		%	50
			Trichloroethylene	2018/04/20	7.3		%	50
			Trichlorofluoromethane (FREON 11)	2018/04/20	5.6		%	50



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QA/QC Batch	Init	QC Type	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limit
		/1	Vinyl Chloride	2018/04/20	0.16		%	50
			p+m-Xylene	2018/04/20	2.7		%	50
			o-Xylene	2018/04/20	5.4		%	50
			F1 (C6-C10)	2018/04/20	8.8		%	30
5492415	LGA	Method Blank	4-Bromofluorobenzene	2018/04/20		94	%	60 - 14
	_		D10-o-Xylene	2018/04/20		111	%	60 - 13
			D4-1,2-Dichloroethane	2018/04/20		103	%	60 - 14
			D8-Toluene	2018/04/20		96	%	60 - 14
			Acetone (2-Propanone)	2018/04/20	<0.50		ug/g	
			Benzene	2018/04/20	<0.020		ug/g	
			Bromodichloromethane	2018/04/20	< 0.050		ug/g	
			Bromoform	2018/04/20	< 0.050		ug/g	
			Bromomethane	2018/04/20	< 0.050		ug/g	
			Carbon Tetrachloride	2018/04/20	< 0.050		ug/g	
			Chlorobenzene	2018/04/20	< 0.050		ug/g	
			Chloroform	2018/04/20	<0.050		ug/g	
			Dibromochloromethane	2018/04/20	<0.050		ug/g	
			1,2-Dichlorobenzene	2018/04/20	<0.050		ug/g	
			1,3-Dichlorobenzene	2018/04/20	<0.050		ug/g	
			1,4-Dichlorobenzene	2018/04/20	<0.050		ug/g	
			Dichlorodifluoromethane (FREON 12)	2018/04/20	<0.050		ug/g	
			1,1-Dichloroethane	2018/04/20	<0.050		ug/g ug/g	
			1,2-Dichloroethane	2018/04/20	<0.050		ug/g	
			1,1-Dichloroethylene	2018/04/20	<0.050		ug/g ug/g	
			cis-1,2-Dichloroethylene	2018/04/20	<0.050			
			trans-1,2-Dichloroethylene	2018/04/20	<0.030		ug/g ug/g	
			-		<0.030			
			1,2-Dichloropropane	2018/04/20			ug/g	
			cis-1,3-Dichloropropene	2018/04/20	<0.030		ug/g	
			trans-1,3-Dichloropropene	2018/04/20	<0.040		ug/g	
			Ethylbenzene Ethylbenzene	2018/04/20	<0.020		ug/g	
			Ethylene Dibromide	2018/04/20	<0.050		ug/g	
			Hexane	2018/04/20	< 0.050		ug/g	
			Methylene Chloride(Dichloromethane)	2018/04/20	<0.050		ug/g	
			Methyl Ethyl Ketone (2-Butanone)	2018/04/20	<0.50		ug/g	
			Methyl Isobutyl Ketone	2018/04/20	<0.50		ug/g	
			Methyl t-butyl ether (MTBE)	2018/04/20	< 0.050		ug/g	
			Styrene	2018/04/20	< 0.050		ug/g	
			1,1,1,2-Tetrachloroethane	2018/04/20	< 0.050		ug/g	
			1,1,2,2-Tetrachloroethane	2018/04/20	<0.050		ug/g	
			Tetrachloroethylene	2018/04/20	<0.050		ug/g	
			Toluene	2018/04/20	<0.020		ug/g	
			1,1,1-Trichloroethane	2018/04/20	< 0.050		ug/g	
			1,1,2-Trichloroethane	2018/04/20	<0.050		ug/g	
			Trichloroethylene	2018/04/20	<0.050		ug/g	
			Trichlorofluoromethane (FREON 11)	2018/04/20	<0.050		ug/g	
			Vinyl Chloride	2018/04/20	<0.020		ug/g	
			p+m-Xylene	2018/04/20	<0.020		ug/g	
			o-Xylene	2018/04/20	<0.020		ug/g	
			Total Xylenes	2018/04/20	<0.020		ug/g	
			F1 (C6-C10)	2018/04/20	<10		ug/g	



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QA/QC										
Batch	Init	QC Type	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limits		
			F1 (C6-C10) - BTEX	2018/04/20	<10		ug/g			
N/A = N	lot Applic	able								
Duplicat	te: Paire	d analysis of a sepa	rate portion of the same sample. Used to eval	uate the variance in the measure	ment.					
Matrix S	Spike: As	sample to which a	known amount of the analyte of interest has b	een added. Used to evaluate sam	ple matrix inte	erference.				
QC Standard: A sample of known concentration prepared by an external agency under stringent conditions. Used as an independent check of method accuracy.										
Spiked E	Blank: A b	olank matrix sample	e to which a known amount of the analyte, usu	ually from a second source, has be	en added. Use	ed to evaluate m	ethod accu	racy.		
Method	l Blank: A	A blank matrix cont	aining all reagents used in the analytical proce	dure. Used to identify laboratory	contaminatior	۱.				
Surroga	te: A pur	re or isotopically la	beled compound whose behavior mirrors the a	analytes of interest. Used to evalu	ate extraction	efficiency.				
• •	olicate RP Ice <= 2x	, ,	PD was not calculated. The concentration in th	he sample and/or duplicate was t	oo low to pern	nit a reliable RPD	calculatio	n (absolute		



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

VALIDATION SIGNATURE PAGE

The analytical data and all QC contained in this report were reviewed and validated by the following individual(s).

avisting Carriere

Cristina Carriere, Scientific Service Specialist


Steve Roberts, Ottawa Lab Manager

Maxxam has procedures in place to guard against improper use of the electronic signature and have the required "signatories", as per section 5.10.2 of ISO/IEC 17025:2005(E), signing the reports. For Service Group specific validation please refer to the Validation Signature Page.




6740 Campobello Road, Mississauga, Ontario L5N 2L8 Phone: 905-817-5700 Fax: 905-817-5779 Toll Free: 800-563-6266


	FCD-01191/3	Report Information (if differs from invoice)								CHAIN OF CUSTODY RECOR Project Information (where applicable)								D Page 1 of 1 Turnaround Time (TAT) Required			
Invoice Information		Report In	formation	(if diff	fers fr	om in	voice	2)		_		Proje	ect Info	orma	tion (where	applicabl	le)		Turnaround Time (TAT) Required		
Company Name: Pinchin Ltd.	Compar	iy Name:	1.80		46 <u>11</u>				1		Quotatio	in #:					T. N.		Regular TAT (5-7 days) Most analyses		
Contact Name: Matt Ryan & Ryan LaRonde	Contact	Name:									P.O. #/ A	FE#:							PLEASE PROVIDE ADVANCE NOTICE FOR RUSH PROJEC		
Address: 1 Hines Road, Suite 200, Kanata	ON K2K 3C7 Address	:				5			4,8	40	Project #	1		l i	Phase	II ESA	9. S.		Rush TAT (Surcharges will be applied)		
			NE P.		162	20	1		129		Site Loca	tion:			Carling	Avenue			1 Day 2 Days 3-4 Days		
Phone: 613-291-5656 Fax:	Phone:				Fax:						Site #:				22040	9.002					
Email:mryan@pinchin.com & rlaronde@pinchin.	com Email:								12		Sampled	By:			RML			N.	Date Required: -		
MOE REGULATED DRINKING WATER	OR WATER INTENDED FOR	HUMAN CONSU	JMPTION M	IUST E	BE SUE	вмітт	ED O	N TH	E MA)	XAM	DRINKIN	G WA	TER C	HAIN	OF CUSTOD	Y			Rush Confirmation #:		
Regulation 153	Other Re	gulations			_						Analysis	Requ	lested						LABORATORY USE ONLY		
Table 1 Res/Park Med/ Fine. Lable 2 X Ind/Comm x Coarse Lable 3 Agri/ Uther Agri/ Uther Table 7 FOR RSC (PLEASE CIRCLE) no				UBMITTED	CLE) Metals / Hg / CrVI				NORGANICS	ALS	Metals, HWS - B)							ANALYZE	CUSTODY SEAL Y / N Present Intact Y Y A J J J J J J J		
SAMPLES MUST BE KEPT COOL (< 10 °C) FROM TI			VVAM	ERS SI	(CIR				ILS & I	S MET			- 75m					T ANA			
SAMPLES MOST BE REPT CODE (C10 C) FROM T	DATE SAMPLED (YYYY/MM/DD)	TIME SAMPLED (HH:MM)	MATRIX	# OF CONTAINERS	FIELD FILTERED	BTEX/ PHC F1	PHCs F2 - F4	vocs	REG 153 METALS & INORGANICS	REG 153 ICPMS METALS	REG 153 METALS (Hg, Cr VI, ICPMS	Hd	Texture Size +	PAH				HOLD- DO NOT			
1 MW-1, SS-1	10-Apr	10:00	s	1	500								x						The second s		
2 MW-1, SS-2	10-Apr	12:30	s	5		x	x	х				x	×				6				
3 MW-2, SS-2	10-Apr	2:00	5	3		x	x	х	1		П. н								13-Apr-18 14:55		
4 MW-3, SS-4	10-Apr	3:30	s	4		×	x	x			6 . Ū.	x							Jonathan Urben		
5																		1	II II IN MINNIN II MANNIN MININ NIN INN		
6		1.1.1.1	10.00		10.7					-									B884738		
7					1					R	ECEN	EC) IN	0	TAWA		- I	100	VIV OTT 001		
8					1																
9																		C UNI			
10	CONTRACTOR OF			1.														5			
RELINQUISHED BY: (Signature/Print)	DATE: (YYYY/MM/DD)	TIME: (HH:N	AIM)		RECEI	VED	3Y: (Si	ignat	ure/P	rint)	11114	DA	TE: (Y	YYY/	MM/DD)	TIME: (HH:M	IM)	MAXXAM JOB #		
Ryan LaRonde	13-Apr-18	12:00	Ke	in	v	- :	Je	(y	~	n w	2	018	10	13	16	2 - 8	8-			

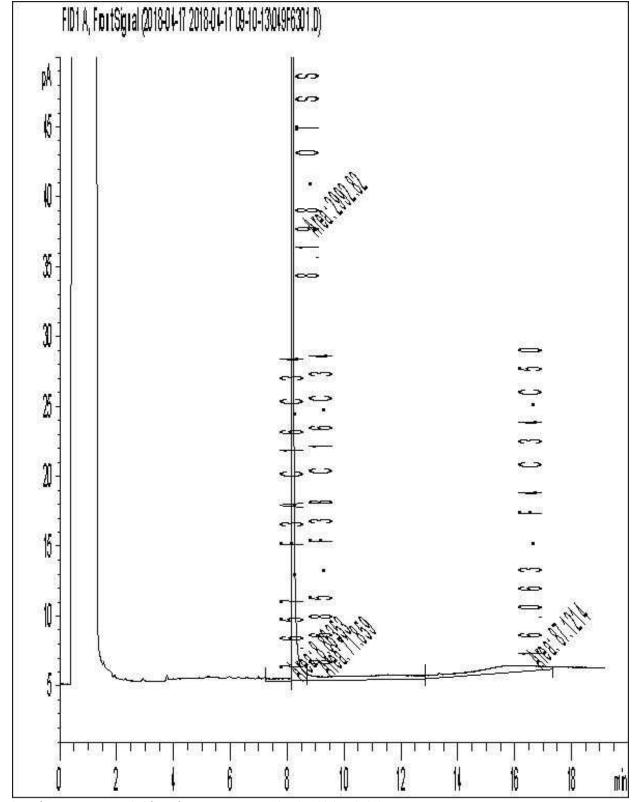


Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.

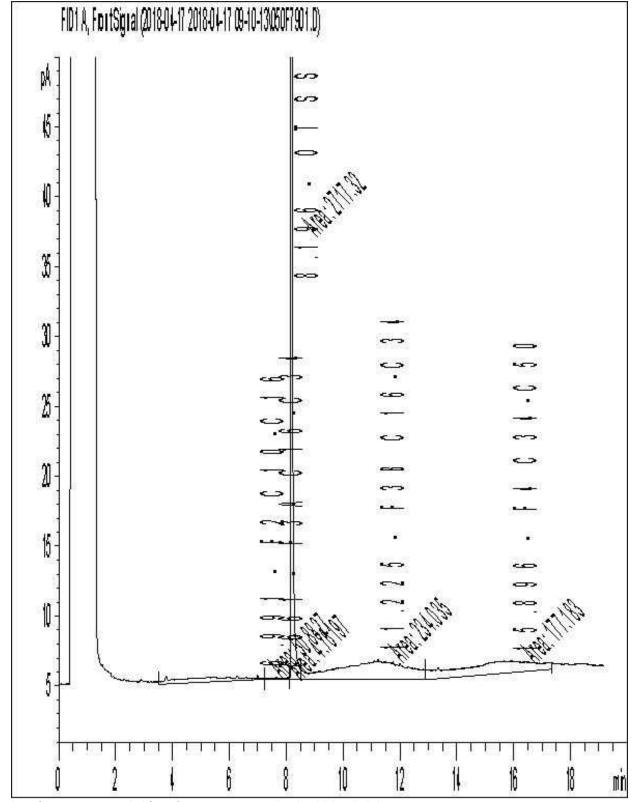

Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.

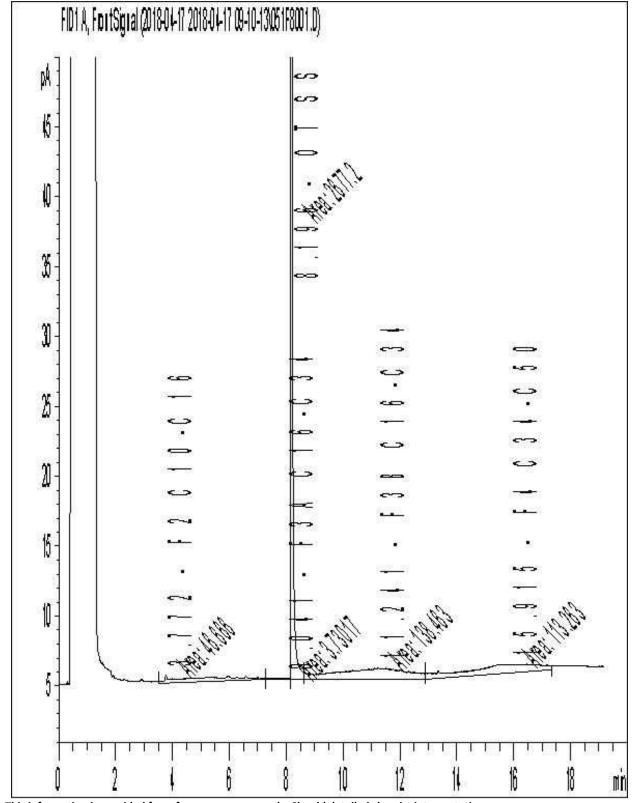

Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.

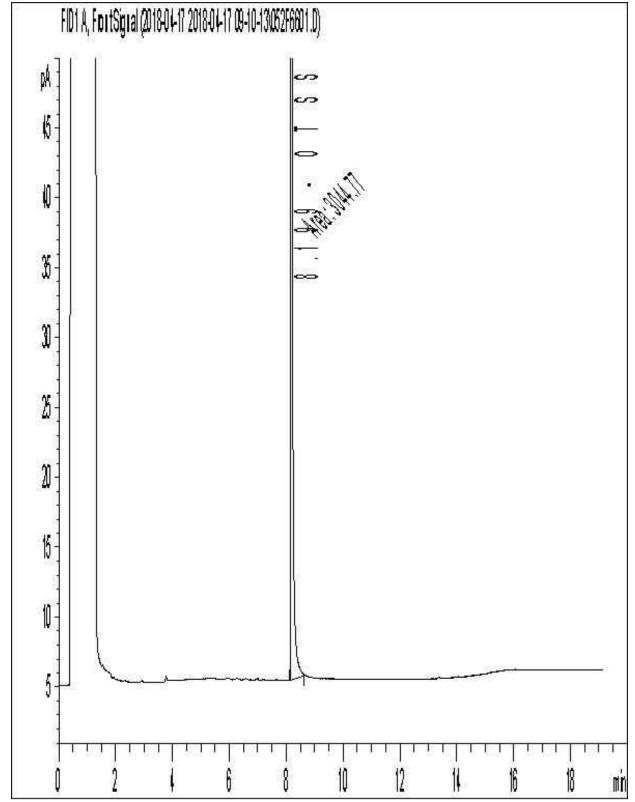

Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.



Your Project #: PHASE II ESA Site#: 220409.002 Site Location: CARLING AVENUE Your C.O.C. #: n/a

Attention: Matthew Ryan

Pinchin Ltd Ottawa 1 Hines Road Suite 200 Kanata, ON K2K 3C7

> Report Date: 2018/04/25 Report #: R5091110 Version: 1 - Final

CERTIFICATE OF ANALYSIS

MAXXAM JOB #: B888596 Received: 2018/04/18, 15:00

Sample Matrix: Water # Samples Received: 3

		Date	Date		
Analyses	Quantity	Extracted	Analyzed	Laboratory Method	Reference
1,3-Dichloropropene Sum	3	N/A	2018/04/20	OTT SOP-00002	EPA 8260C m
Petroleum Hydrocarbons F2-F4 in Water (1)	3	2018/04/19	2018/04/20	OTT SOP-00001	CCME Hydrocarbons
Volatile Organic Compounds and F1 PHCs	3	N/A	2018/04/19	OTT SOP-00002	EPA 8260C m

Remarks:

Maxxam Analytics' laboratories are accredited to ISO/IEC 17025:2005 for specific parameters on scopes of accreditation. Unless otherwise noted, procedures used by Maxxam are based upon recognized Provincial, Federal or US method compendia such as CCME, MDDELCC, EPA, APHA.

All work recorded herein has been done in accordance with procedures and practices ordinarily exercised by professionals in Maxxam's profession using accepted testing methodologies, quality assurance and quality control procedures (except where otherwise agreed by the client and Maxxam in writing). All data is in statistical control and has met quality control and method performance criteria unless otherwise noted. All method blanks are reported; unless indicated otherwise, associated sample data are not blank corrected.

Maxxam Analytics' liability is limited to the actual cost of the requested analyses, unless otherwise agreed in writing. There is no other warranty expressed or implied. Maxxam has been retained to provide analysis of samples provided by the Client using the testing methodology referenced in this report. Interpretation and use of test results are the sole responsibility of the Client and are not within the scope of services provided by Maxxam, unless otherwise agreed in writing.

Solid sample results, except biota, are based on dry weight unless otherwise indicated. Organic analyses are not recovery corrected except for isotope dilution methods.

Results relate to samples tested.

This Certificate shall not be reproduced except in full, without the written approval of the laboratory.

Reference Method suffix "m" indicates test methods incorporate validated modifications from specific reference methods to improve performance.

* RPDs calculated using raw data. The rounding of final results may result in the apparent difference.

(1) All CCME PHC results met required criteria unless otherwise stated in the report. The CWS PHC methods employed by Maxxam conform to all prescribed elements of the reference method and performance based elements have been validated. All modifications have been validated and proven equivalent following "Alberta Environment's Interpretation of the Reference Method for the Canada-Wide Standard for Petroleum Hydrocarbons in Soil Validation of Performance-Based Alternative Methods September 2003". Documentation is available upon request. Modifications from Reference Method for the Canada-wide Standard for Petroleum Hydrocarbons in Soil-Tier 1 Method: F2/F3/F4 data reported using validated cold solvent extraction instead of Soxhlet extraction.



Your Project #: PHASE II ESA Site#: 220409.002 Site Location: CARLING AVENUE Your C.O.C. #: n/a

Attention: Matthew Ryan

Pinchin Ltd Ottawa 1 Hines Road Suite 200 Kanata, ON K2K 3C7

> Report Date: 2018/04/25 Report #: R5091110 Version: 1 - Final

CERTIFICATE OF ANALYSIS

MAXXAM JOB #: B888596 Received: 2018/04/18, 15:00

Encryption Key

Please direct all questions regarding this Certificate of Analysis to your Project Manager. Jonathan Urben, Senior Project Manager Email: jurben@maxxam.ca Phone# (613) 274-0573

Maxxam has procedures in place to guard against improper use of the electronic signature and have the required "signatories", as per section 5.10.2 of ISO/IEC 17025:2005(E), signing the reports. For Service Group specific validation please refer to the Validation Signature Page.

Total Cover Pages : 2 Page 2 of 18



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (WATER)

Maxxam ID			GMK393			GMK393			GMK394		
Sampling Date			2018/04/17			2018/04/17			2018/04/17		
			12:30			12:30			13:30		
COC Number			n/a			n/a			n/a		
	UNITS	Criteria	MW-1	RDL	QC Batch	MW-1 Lab-Dup	RDL	QC Batch	MW-2	RDL	QC Batch
Calculated Parameters											
1,3-Dichloropropene (cis+trans)	ug/L	0.5	<0.50	0.50	5491802				<0.50	0.50	5491802
Volatile Organics										•	
Acetone (2-Propanone)	ug/L	100000	<10	10	5492416	<10	10	5492416	<10	10	5492416
Benzene	ug/L	0.5	0.31	0.20	5492416	0.32	0.20	5492416	<0.20	0.20	5492416
Bromodichloromethane	ug/L	67000	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
Bromoform	ug/L	5	<1.0	1.0	5492416	<1.0	1.0	5492416	<1.0	1.0	5492416
Bromomethane	ug/L	0.89	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
Carbon Tetrachloride	ug/L	0.2	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Chlorobenzene	ug/L	140	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Chloroform	ug/L	2	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Dibromochloromethane	ug/L	65000	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
1,2-Dichlorobenzene	ug/L	150	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
1,3-Dichlorobenzene	ug/L	7600	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
1,4-Dichlorobenzene	ug/L	0.5	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
Dichlorodifluoromethane (FREON 12)	ug/L	3500	<1.0	1.0	5492416	<1.0	1.0	5492416	<1.0	1.0	5492416
1,1-Dichloroethane	ug/L	11	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
1,2-Dichloroethane	ug/L	0.5	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
1,1-Dichloroethylene	ug/L	0.5	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
cis-1,2-Dichloroethylene	ug/L	1.6	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
trans-1,2-Dichloroethylene	ug/L	1.6	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
1,2-Dichloropropane	ug/L	0.58	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
cis-1,3-Dichloropropene	ug/L	0.5	<0.30	0.30	5492416	<0.30	0.30	5492416	<0.30	0.30	5492416
trans-1,3-Dichloropropene	ug/L	0.5	<0.40	0.40	5492416	<0.40	0.40	5492416	<0.40	0.40	5492416
Ethylbenzene	ug/L	54	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Ethylene Dibromide	ug/L	0.2	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Hexane	ug/L	5	<1.0	1.0	5492416	<1.0	1.0	5492416	<1.0	1.0	5492416
Methylene Chloride(Dichloromethane)	ug/L	26	<2.0	2.0	5492416	<2.0	2.0	5492416	<2.0	2.0	5492416
Methyl Ethyl Ketone (2-Butanone)	ug/L	21000	<10	10	5492416	<10	10	5492416	<10	10	5492416
Methyl Isobutyl Ketone	ug/L	5200	<5.0	5.0	5492416	<5.0	5.0	5492416	<5.0	5.0	5492416
Methyl t-butyl ether (MTBE)	ug/L	15	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416

RDL = Reportable Detection Limit

QC Batch = Quality Control Batch

Lab-Dup = Laboratory Initiated Duplicate

Criteria: Ontario Reg. 153/04 (Amended April 15, 2011)

Table 7: Generic Site Condition Standards for Shallow Soils in a Non-Potable Ground Water Condition

Non-Potable Ground Water - All Types of Property Use - Coarse Textured Soil



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (WATER)

Maxxam ID			GMK393			GMK393			GMK394		
Compline Date			2018/04/17			2018/04/17			2018/04/17		
Sampling Date			12:30			12:30			13:30		
COC Number			n/a			n/a			n/a		
	UNITS	Criteria	MW-1	RDL	QC Batch	MW-1 Lab-Dup	RDL	QC Batch	MW-2	RDL	QC Batch
Styrene	ug/L	43	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
1,1,1,2-Tetrachloroethane	ug/L	1.1	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
1,1,2,2-Tetrachloroethane	ug/L	0.5	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
Tetrachloroethylene	ug/L	0.5	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Toluene	ug/L	320	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
1,1,1-Trichloroethane	ug/L	23	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
1,1,2-Trichloroethane	ug/L	0.5	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
Trichloroethylene	ug/L	0.5	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Trichlorofluoromethane (FREON 11)	ug/L	2000	<0.50	0.50	5492416	<0.50	0.50	5492416	<0.50	0.50	5492416
Vinyl Chloride	ug/L	0.5	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
p+m-Xylene	ug/L	-	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
o-Xylene	ug/L	-	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
Total Xylenes	ug/L	72	<0.20	0.20	5492416	<0.20	0.20	5492416	<0.20	0.20	5492416
F1 (C6-C10)	ug/L	420	<25	25	5492416	<25	25	5492416	<25	25	5492416
F1 (C6-C10) - BTEX	ug/L	420	<25	25	5492416	<25	25	5492416	<25	25	5492416
F2-F4 Hydrocarbons											
F2 (C10-C16 Hydrocarbons)	ug/L	150	<100	100	5492212	<100	100	5492212	<100	100	5492212
F3 (C16-C34 Hydrocarbons)	ug/L	500	<200	200	5492212	<200	200	5492212	<200	200	5492212
F4 (C34-C50 Hydrocarbons)	ug/L	500	<200	200	5492212	<200	200	5492212	<200	200	5492212
Reached Baseline at C50	ug/L	-	Yes		5492212	Yes		5492212	Yes		5492212
Surrogate Recovery (%)											
o-Terphenyl	%	-	106		5492212	107		5492212	109		5492212
4-Bromofluorobenzene	%	-	92		5492416	93		5492416	94		5492416
D4-1,2-Dichloroethane	%	-	97		5492416	97		5492416	95		5492416
D8-Toluene	%	-	101		5492416	101		5492416	103		5492416
RDL = Reportable Detection Limit			· · · · · · · · · · · · · · · · · · ·								

QC Batch = Quality Control Batch

Lab-Dup = Laboratory Initiated Duplicate

Criteria: Ontario Reg. 153/04 (Amended April 15, 2011)

Table 7: Generic Site Condition Standards for Shallow Soils in a Non-Potable Ground Water Condition

Non-Potable Ground Water - All Types of Property Use - Coarse Textured Soil



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (WATER)

Maxxam ID			GMK395		
			2018/04/17		
Sampling Date			15:30		
COC Number			n/a		
	UNITS	Criteria	MW-3	RDL	QC Batch
Calculated Parameters	·			-	
1,3-Dichloropropene (cis+trans)	ug/L	0.5	<0.50	0.50	5491802
Volatile Organics					
Acetone (2-Propanone)	ug/L	100000	<10	10	5492416
Benzene	ug/L	0.5	<0.20	0.20	5492416
Bromodichloromethane	ug/L	67000	<0.50	0.50	5492416
Bromoform	ug/L	5	<1.0	1.0	5492416
Bromomethane	ug/L	0.89	<0.50	0.50	5492416
Carbon Tetrachloride	ug/L	0.2	<0.20	0.20	5492416
Chlorobenzene	ug/L	140	<0.20	0.20	5492416
Chloroform	ug/L	2	<0.20	0.20	5492416
Dibromochloromethane	ug/L	65000	<0.50	0.50	5492416
1,2-Dichlorobenzene	ug/L	150	<0.50	0.50	5492416
1,3-Dichlorobenzene	ug/L	7600	<0.50	0.50	5492416
1,4-Dichlorobenzene	ug/L	0.5	<0.50	0.50	5492416
Dichlorodifluoromethane (FREON 12)	ug/L	3500	<1.0	1.0	5492416
1,1-Dichloroethane	ug/L	11	<0.20	0.20	5492416
1,2-Dichloroethane	ug/L	0.5	<0.50	0.50	5492416
1,1-Dichloroethylene	ug/L	0.5	<0.20	0.20	5492416
cis-1,2-Dichloroethylene	ug/L	1.6	<0.50	0.50	5492416
trans-1,2-Dichloroethylene	ug/L	1.6	<0.50	0.50	5492416
1,2-Dichloropropane	ug/L	0.58	<0.20	0.20	5492416
cis-1,3-Dichloropropene	ug/L	0.5	<0.30	0.30	5492416
trans-1,3-Dichloropropene	ug/L	0.5	<0.40	0.40	5492416
Ethylbenzene	ug/L	54	<0.20	0.20	5492416
Ethylene Dibromide	ug/L	0.2	<0.20	0.20	5492416
Hexane	ug/L	5	<1.0	1.0	5492416
Methylene Chloride(Dichloromethane)	ug/L	26	<2.0	2.0	5492416
Methyl Ethyl Ketone (2-Butanone)	ug/L	21000	<10	10	5492416
Methyl Isobutyl Ketone	ug/L	5200	<5.0	5.0	5492416
RDL = Reportable Detection Limit					
QC Batch = Quality Control Batch					
Criteria: Ontario Reg. 153/04 (Amended					
Table 7: Generic Site Condition Standard	s for Sha	allow Soil	s in a Non-Po	table	Ground
Water Condition Non-Potable Ground Water - All Types o	f Proner	tv Use - C	Coarse Textur	ed Soi	I
	oper	.,		24 501	•



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

O.REG 153 VOCS BY HS & F1-F4 (WATER)

Maxxam ID			GMK395		
Sampling Date			2018/04/17		
			15:30		
COC Number			n/a		
	UNITS	Criteria	MW-3	RDL	QC Batch
Methyl t-butyl ether (MTBE)	ug/L	15	<0.50	0.50	5492416
Styrene	ug/L	43	<0.50	0.50	5492416
1,1,1,2-Tetrachloroethane	ug/L	1.1	<0.50	0.50	5492416
1,1,2,2-Tetrachloroethane	ug/L	0.5	<0.50	0.50	5492416
Tetrachloroethylene	ug/L	0.5	<0.20	0.20	5492416
Toluene	ug/L	320	<0.20	0.20	5492416
1,1,1-Trichloroethane	ug/L	23	<0.20	0.20	5492416
1,1,2-Trichloroethane	ug/L	0.5	<0.50	0.50	5492416
Trichloroethylene	ug/L	0.5	<0.20	0.20	5492416
Trichlorofluoromethane (FREON 11)	ug/L	2000	<0.50	0.50	5492416
Vinyl Chloride	ug/L	0.5	<0.20	0.20	5492416
p+m-Xylene	ug/L	-	<0.20	0.20	5492416
o-Xylene	ug/L	-	<0.20	0.20	5492416
Total Xylenes	ug/L	72	<0.20	0.20	5492416
F1 (C6-C10)	ug/L	420	<25	25	5492416
F1 (C6-C10) - BTEX	ug/L	420	<25	25	5492416
F2-F4 Hydrocarbons		-	-		
F2 (C10-C16 Hydrocarbons)	ug/L	150	<100	100	5492212
F3 (C16-C34 Hydrocarbons)	ug/L	500	<200	200	5492212
F4 (C34-C50 Hydrocarbons)	ug/L	500	<200	200	5492212
Reached Baseline at C50	ug/L	-	Yes		5492212
Surrogate Recovery (%)					
o-Terphenyl	%	-	107		5492212
4-Bromofluorobenzene	%	-	88		5492416
D4-1,2-Dichloroethane	%	-	93		5492416
D8-Toluene	%	-	98		5492416
RDL = Reportable Detection Limit QC Batch = Quality Control Batch					
Criteria: Ontario Reg. 153/04 (Amended Table 7: Generic Site Condition Standar Water Condition	ds for Sha		s in a Non-Po	table	Ground

Non-Potable Ground Water - All Types of Property Use - Coarse Textured Soil



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

TEST SUMMARY

Maxxam ID: GMK393 Sample ID: MW-1 Matrix: Water					Collected: 2018/04/17 Shipped: Received: 2018/04/18
Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Analyst
1,3-Dichloropropene Sum	CALC	5491802	N/A	2018/04/20	Automated Statchk
Petroleum Hydrocarbons F2-F4 in Water	r GC/FID	5492212	2018/04/19	2018/04/20	Fatemeh Habibagahi
Volatile Organic Compounds and F1 PHC	Cs GC/MSFD	5492416	N/A	2018/04/19	Liliana Gaburici
Maxxam ID: GMK393 Du Sample ID: MW-1 Matrix: Water	q				Collected: 2018/04/17 Shipped: Received: 2018/04/18
Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Analyst
Petroleum Hydrocarbons F2-F4 in Water	r GC/FID	5492212	2018/04/19	2018/04/20	Fatemeh Habibagahi
Volatile Organic Compounds and F1 PHC	Cs GC/MSFD	5492416	N/A	2018/04/19	Liliana Gaburici
Maxxam ID: GMK394 Sample ID: MW-2 Matrix: Water					Collected: 2018/04/17 Shipped: Received: 2018/04/18
Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Analyst
1,3-Dichloropropene Sum	CALC	5491802	N/A	2018/04/20	Automated Statchk
Petroleum Hydrocarbons F2-F4 in Water	GC/FID	5492212	2018/04/19	2018/04/20	Fatemeh Habibagahi
Volatile Organic Compounds and F1 PHC	Cs GC/MSFD	5492416	N/A	2018/04/19	Liliana Gaburici
Maxxam ID: GMK395 Sample ID: MW-3 Matrix: Water					Collected: 2018/04/17 Shipped: Received: 2018/04/18
Test Description	Instrumentation	Batch	Extracted	Date Analyzed	Analyst
1,3-Dichloropropene Sum	CALC	5491802	N/A	2018/04/20	Automated Statchk
Petroleum Hydrocarbons F2-F4 in Water	r GC/FID	5492212	2018/04/19	2018/04/20	Fatemeh Habibagahi
Volatile Organic Compounds and F1 PHC	Cs GC/MSFD	5492416	N/A	2018/04/19	Liliana Gaburici



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

GENERAL COMMENTS

Each temperature is the average of up to three cooler temperatures taken at receipt

Package 1 2.7°C

Cooler custody seal was present and intact.

Results relate only to the items tested.



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QUALITY ASSURANCE REPORT

QA/QC								
Batch	Init	QC Type	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limits
5492212	FHB	Matrix Spike	o-Terphenyl	2018/04/20		112	%	30 - 130
			F2 (C10-C16 Hydrocarbons)	2018/04/20		86	%	50 - 130
			F3 (C16-C34 Hydrocarbons)	2018/04/20		86	%	50 - 130
			F4 (C34-C50 Hydrocarbons)	2018/04/20		86	%	50 - 130
5492212	FHB	Spiked Blank	o-Terphenyl	2018/04/20		115	%	30 - 130
			F2 (C10-C16 Hydrocarbons)	2018/04/20		94	%	80 - 120
			F3 (C16-C34 Hydrocarbons)	2018/04/20		94	%	80 - 120
			F4 (C34-C50 Hydrocarbons)	2018/04/20		94	%	80 - 120
5492212	FHB	Method Blank	o-Terphenyl	2018/04/20		111	%	30 - 130
			F2 (C10-C16 Hydrocarbons)	2018/04/20	<100		ug/L	
			F3 (C16-C34 Hydrocarbons)	2018/04/20	<200		ug/L	
			F4 (C34-C50 Hydrocarbons)	2018/04/20	<200		ug/L	
5492212	FHB	RPD [GMK393-02]	F2 (C10-C16 Hydrocarbons)	2018/04/20	NC		%	50
			F3 (C16-C34 Hydrocarbons)	2018/04/20	NC		%	50
			F4 (C34-C50 Hydrocarbons)	2018/04/20	NC		%	50
5492416	LGA	Matrix Spike [GMK394-01]	4-Bromofluorobenzene	2018/04/19		97	%	70 - 130
			D4-1,2-Dichloroethane	2018/04/19		85	%	70 - 130
			D8-Toluene	2018/04/19		105	%	70 - 130
			Acetone (2-Propanone)	2018/04/19		92	%	60 - 140
			Benzene	2018/04/19		107	%	70 - 130
			Bromodichloromethane	2018/04/19		100	%	70 - 130
			Bromoform	2018/04/19		112	%	70 - 130
			Bromomethane	2018/04/19		96	%	60 - 140
			Carbon Tetrachloride	2018/04/19		114	%	70 - 130
			Chlorobenzene	2018/04/19		104	%	70 - 130
			Chloroform	2018/04/19		104	%	70 - 130
			Dibromochloromethane	2018/04/19		111	%	70 - 130
			1,2-Dichlorobenzene	2018/04/19		101	%	70 - 130
			1,3-Dichlorobenzene	2018/04/19		107	%	70 - 130
			1,4-Dichlorobenzene	2018/04/19		103	%	70 - 130
			Dichlorodifluoromethane (FREON 12)	2018/04/19		89	%	60 - 140
			1,1-Dichloroethane	2018/04/19		107	%	70 - 130
			1,2-Dichloroethane	2018/04/19		98	%	70 - 130
			1,1-Dichloroethylene	2018/04/19		118	%	70 - 130
			cis-1,2-Dichloroethylene	2018/04/19		97	%	70 - 130
			trans-1,2-Dichloroethylene	2018/04/19		94	%	70 - 130
			1,2-Dichloropropane	2018/04/19		92	%	70 - 130
			cis-1,3-Dichloropropene	2018/04/19		88	%	70 - 130
			trans-1,3-Dichloropropene	2018/04/19		88	%	70 - 130
			Ethylbenzene	2018/04/19		108	%	70 - 130
			Ethylene Dibromide	2018/04/19		100	%	70 - 130
			Hexane	2018/04/19		121	%	70 - 130
			Methylene Chloride(Dichloromethane)	2018/04/19		82	%	70 - 130
			Methyl Ethyl Ketone (2-Butanone)	2018/04/19		92	%	60 - 140
			Methyl Isobutyl Ketone	2018/04/19		87	%	70 - 130
			Methyl t-butyl ether (MTBE)	2018/04/19		100	%	70 - 130
			Styrene	2018/04/19		107	%	70 - 130
			, 1,1,1,2-Tetrachloroethane	2018/04/19		118	%	70 - 130
			1,1,2,2-Tetrachloroethane	2018/04/19		94	%	70 - 130
			Tetrachloroethylene	2018/04/19		108	%	70 - 130
			Toluene	2018/04/19		106	%	70 - 130



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QA/QC								
Batch	Init	QC Type	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limits
			1,1,1-Trichloroethane	2018/04/19		101	%	70 - 130
			1,1,2-Trichloroethane	2018/04/19		94	%	70 - 130
			Trichloroethylene	2018/04/19		101	%	70 - 130
			Trichlorofluoromethane (FREON 11)	2018/04/19		111	%	70 - 130
			Vinyl Chloride	2018/04/19		120	%	70 - 130
			p+m-Xylene	2018/04/19		108	%	70 - 130
			o-Xylene	2018/04/19		111	%	70 - 130
			F1 (C6-C10)	2018/04/19		115	%	60 - 140
5492416	LGA	Spiked Blank	4-Bromofluorobenzene	2018/04/19		98	%	70 - 130
			D4-1,2-Dichloroethane	2018/04/19		91	%	70 - 130
			D8-Toluene	2018/04/19		105	%	70 - 130
			Acetone (2-Propanone)	2018/04/19		103	%	60 - 140
			Benzene	2018/04/19		117	%	70 - 130
			Bromodichloromethane	2018/04/19		114	%	70 - 130
			Bromoform	2018/04/19		127	%	70 - 130
			Bromomethane	2018/04/19		106	%	60 - 140
			Carbon Tetrachloride	2018/04/19		110	%	70 - 130
			Chlorobenzene	2018/04/19		115	%	70 - 130
			Chloroform	2018/04/19		111	%	70 - 130
			Dibromochloromethane	2018/04/19		126	%	70 - 130
			1,2-Dichlorobenzene	2018/04/19		110	%	70 - 130
			1,3-Dichlorobenzene	2018/04/19		112	%	70 - 130
			1,4-Dichlorobenzene	2018/04/19		109	%	70 - 130
			Dichlorodifluoromethane (FREON 12)	2018/04/19		93	%	60 - 140
			1,1-Dichloroethane	2018/04/19		117	%	70 - 130
			1,2-Dichloroethane	2018/04/19		112	%	70 - 130
			1,1-Dichloroethylene	2018/04/19		108	%	70 - 130
			cis-1,2-Dichloroethylene	2018/04/19		109	%	70 - 130
			trans-1,2-Dichloroethylene	2018/04/19		103	%	70 - 130
			1,2-Dichloropropane	2018/04/19		104	%	70 - 130
			cis-1,3-Dichloropropene	2018/04/19		99	%	70 - 130
			trans-1,3-Dichloropropene	2018/04/19		98	%	70 - 130
			Ethylbenzene	2018/04/19		119	%	70 - 130
			Ethylene Dibromide	2018/04/19		114	%	70 - 130
			Hexane	2018/04/19		119	%	70 - 130
			Methylene Chloride(Dichloromethane)	2018/04/19		92	%	70 - 130
			Methyl Ethyl Ketone (2-Butanone)	2018/04/19		110	%	60 - 140
			Methyl Isobutyl Ketone	2018/04/19		106	%	70 - 130
			Methyl t-butyl ether (MTBE)	2018/04/19		114	%	70 - 130
			Styrene	2018/04/19		116	%	70 - 130
			1,1,1,2-Tetrachloroethane	2018/04/19		127	%	70 - 130
			1,1,2,2-Tetrachloroethane	2018/04/19		109	%	70 - 130
			Tetrachloroethylene	2018/04/19		118	%	70 - 130
			Toluene	2018/04/19		116	%	70 - 130
			1,1,1-Trichloroethane	2018/04/19		108	%	70 - 130
			1,1,2-Trichloroethane	2018/04/19		106	%	70 - 130
			Trichloroethylene	2018/04/19		112	%	70 - 130
			Trichlorofluoromethane (FREON 11)	2018/04/19		119	%	70 - 130
			Vinyl Chloride	2018/04/19		121	%	70 - 130
			p+m-Xylene	2018/04/19		118	%	70 - 130
			o-Xylene	2018/04/19		120	%	70 - 130
			F1 (C6-C10)	2018/04/19		136	%	60 - 140



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QA/QC Batch	Init	QC Type	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limits
5492416	LGA	Method Blank	4-Bromofluorobenzene	2018/04/19		94	%	70 - 130
			D4-1,2-Dichloroethane	2018/04/19		105	%	70 - 130
			D8-Toluene	2018/04/19		97	%	70 - 130
			Acetone (2-Propanone)	2018/04/19	<10		ug/L	
			Benzene	2018/04/19	<0.20		ug/L	
			Bromodichloromethane	2018/04/19	<0.50		ug/L	
			Bromoform	2018/04/19	<1.0		ug/L	
			Bromomethane	2018/04/19	<0.50		ug/L	
			Carbon Tetrachloride	2018/04/19	<0.20		ug/L	
			Chlorobenzene	2018/04/19	<0.20		ug/L	
			Chloroform	2018/04/19	<0.20		ug/L	
			Dibromochloromethane	2018/04/19	<0.50		ug/L	
			1,2-Dichlorobenzene	2018/04/19	<0.50		ug/L	
			1,3-Dichlorobenzene	2018/04/19	<0.50		ug/L	
			1,4-Dichlorobenzene	2018/04/19	<0.50		ug/L	
			Dichlorodifluoromethane (FREON 12)	2018/04/19	<1.0		ug/L	
			1,1-Dichloroethane	2018/04/19	<0.20		ug/L	
			1,2-Dichloroethane	2018/04/19	<0.50		ug/L	
			1,1-Dichloroethylene	2018/04/19	<0.20		ug/L	
			cis-1,2-Dichloroethylene	2018/04/19	<0.50		ug/L	
			trans-1,2-Dichloroethylene	2018/04/19	<0.50		ug/L	
			1,2-Dichloropropane	2018/04/19	<0.20		ug/L	
			cis-1,3-Dichloropropene	2018/04/19	<0.30		ug/L	
			trans-1,3-Dichloropropene	2018/04/19	<0.40		ug/L	
			Ethylbenzene	2018/04/19	<0.20		ug/L	
			Ethylene Dibromide	2018/04/19	<0.20		ug/L	
			Hexane	2018/04/19	<1.0		ug/L	
			Methylene Chloride(Dichloromethane)	2018/04/19	<2.0		ug/L	
			Methyl Ethyl Ketone (2-Butanone)	2018/04/19	<10		ug/L	
			Methyl Isobutyl Ketone	2018/04/19	<5.0		ug/L	
			Methyl t-butyl ether (MTBE)	2018/04/19	<0.50		ug/L	
			Styrene	2018/04/19	<0.50		ug/L	
			1,1,1,2-Tetrachloroethane	2018/04/19	<0.50		ug/L	
			1,1,2,2-Tetrachloroethane	2018/04/19	<0.50		ug/L	
			Tetrachloroethylene	2018/04/19	<0.20		ug/L	
			Toluene	2018/04/19	<0.20		ug/L ug/L	
			1,1,1-Trichloroethane	2018/04/19	<0.20		ug/L	
			1,1,2-Trichloroethane	2018/04/19	<0.20		ug/L	
			Trichloroethylene	2018/04/19	<0.30		ug/L	
			Trichlorofluoromethane (FREON 11)	2018/04/19	<0.20		ug/L	
			Vinyl Chloride	2018/04/19	<0.50		ug/L ug/L	
			p+m-Xylene	2018/04/19	<0.20		ug/L ug/L	
			o-Xylene	2018/04/19	<0.20 <0.20		ug/L ug/L	
			Total Xylenes	2018/04/19	<0.20		ug/L ug/L	
			F1 (C6-C10)	2018/04/19	<0.20 <25		ug/L ug/L	
				2018/04/19				
492416	LGA	RPD [GMK393-01]	F1 (C6-C10) - BTEX		<25 NC		ug/L ∝	20
492410	LGA	עיא [10-262אואוטן עיא	Acetone (2-Propanone)	2018/04/19			%	30 20
			Benzene Bromodichloromethane	2018/04/19	2.2 NC		%	30 20
				2018/04/19	NC		%	30
			Bromoform	2018/04/19	NC		%	30
			Bromomethane	2018/04/19	NC		%	30
			Carbon Tetrachloride	2018/04/19	NC		%	30



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

QUALITY ASSURANCE REPORT(CONT'D)

QA/QC Batch	Init	QC Type	Parameter	Date Analyzed	Value	Recovery	UNITS	QC Limit
			Chlorobenzene	2018/04/19	NC		%	30
			Chloroform	2018/04/19	NC		%	30
			Dibromochloromethane	2018/04/19	NC		%	30
			1,2-Dichlorobenzene	2018/04/19	NC		%	30
			1,3-Dichlorobenzene	2018/04/19	NC		%	30
			1,4-Dichlorobenzene	2018/04/19	NC		%	30
			Dichlorodifluoromethane (FREON 12)	2018/04/19	NC		%	30
			1,1-Dichloroethane	2018/04/19	NC		%	30
			1,2-Dichloroethane	2018/04/19	NC		%	30
			1,1-Dichloroethylene	2018/04/19	NC		%	30
			cis-1,2-Dichloroethylene	2018/04/19	NC		%	30
			trans-1,2-Dichloroethylene	2018/04/19	NC		%	30
			1,2-Dichloropropane	2018/04/19	NC		%	30
			cis-1,3-Dichloropropene	2018/04/19	NC		%	30
			trans-1,3-Dichloropropene	2018/04/19	NC		%	30
			Ethylbenzene	2018/04/19	NC		%	30
			Ethylene Dibromide	2018/04/19	NC		%	30
			Hexane	2018/04/19	NC		%	30
			Methylene Chloride(Dichloromethane)	2018/04/19	NC		%	30
			Methyl Ethyl Ketone (2-Butanone)	2018/04/19	NC		%	30
			Methyl Isobutyl Ketone	2018/04/19	NC		%	30
			Methyl t-butyl ether (MTBE)	2018/04/19	NC		%	30
			Styrene	2018/04/19	NC		%	30
			1,1,1,2-Tetrachloroethane	2018/04/19	NC		%	30
			1,1,2,2-Tetrachloroethane	2018/04/19	NC		%	30
			Tetrachloroethylene	2018/04/19	NC		%	30
			Toluene	2018/04/19	NC		%	30
			1,1,1-Trichloroethane	2018/04/19	NC		%	30
			1,1,2-Trichloroethane	2018/04/19	NC		%	30
			Trichloroethylene	2018/04/19	NC		%	30
			Trichlorofluoromethane (FREON 11)	2018/04/19	NC		%	30
			Vinyl Chloride	2018/04/19	NC		%	30
			p+m-Xylene	2018/04/19	NC		%	30
			o-Xylene	2018/04/19	NC		%	30
			Total Xylenes	2018/04/19	NC		%	30
			F1 (C6-C10)	2018/04/19	NC		%	30
			F1 (C6-C10) - BTEX	2018/04/19	NC		%	30

Duplicate: Paired analysis of a separate portion of the same sample. Used to evaluate the variance in the measurement.

Matrix Spike: A sample to which a known amount of the analyte of interest has been added. Used to evaluate sample matrix interference.

Spiked Blank: A blank matrix sample to which a known amount of the analyte, usually from a second source, has been added. Used to evaluate method accuracy.

Method Blank: A blank matrix containing all reagents used in the analytical procedure. Used to identify laboratory contamination.

Surrogate: A pure or isotopically labeled compound whose behavior mirrors the analytes of interest. Used to evaluate extraction efficiency.

NC (Duplicate RPD): The duplicate RPD was not calculated. The concentration in the sample and/or duplicate was too low to permit a reliable RPD calculation (absolute difference <= 2x RDL).



Pinchin Ltd Client Project #: PHASE II ESA Site Location: CARLING AVENUE Sampler Initials: RML

VALIDATION SIGNATURE PAGE

The analytical data and all QC contained in this report were reviewed and validated by the following individual(s).


Steve Roberts, Ottawa Lab Manager

Maxxam has procedures in place to guard against improper use of the electronic signature and have the required "signatories", as per section 5.10.2 of ISO/IEC 17025:2005(E), signing the reports. For Service Group specific validation please refer to the Validation Signature Page.




6740 Campobello Road, Mississauga, Ontario L5N 2L8 Phone: 905-817-5700 Fax: 905-817-5779 Toll Free: 800-563-6266


Invoice Informa	ion	Repo	rt Information	if dif	fers fr	om in	nvoice	e)	1.5		1	Projec	ct Info	rmati	ion (whe	re appli	cable)		Turnaround Time (TAT) Required					
Company Name: Pinchin Ltd.		Company Name:									Quotation	n #:							×	Regular	TAT (5	-7 days)	Most analyses	
Contact Name: Matt Ryan & Ryan L	Ronde	Contact Name:				10					P.O. #/ AF	E#:							PL	EASE PROVID	E ADVA	NCE NOT	ICE FOR RUSH P	ROJEC
Address: 1 Hines Road, Suite	200, Kanata ON K2K 3C7	Address:				3.1		1.75	1, 14		Project #:				Pha	se II ESA				Rush TA	T (Sur	charges	will be applied	4)
	的制度。這些			111		12					Site Locat	ion:	101 10 824		Carlir	ng Avenu	Je	ि छ। माल्रान्वा		1 Day		2 Days	3-4 Day	s
Phone: 613-291-5656 Fax:		Phone:			Fax:			1			Site #: 220			409.002	-									
Email:mryan@pinchin.com & rlaron	le@pinchin.com	Email:	dina di sing	146	6.7	1	19 TT	lies.			Sampled By: RM			L	g na	100	Dat	e Required:						
MOE REGULATED DRIN	ING WATER OR WATER INTE		INSUMPTION I	MUSTI	BE SUE	змітт	TED O	N TH	IE MA	XXAN	AM DRINKING WATER CHAIN OF CUST				OF CUST	STODY				Rush Confirmation #:				
Regulation 153		Other Regulations		-	_	_	_	_	_	_	Analysis	Requ	ested	_	-		_	-		1	ABOR	ATORY U	SEONLY	
I able 2 X Ind/Comm X I I able 3 Agri/ Uther Table 7 FOR RSC (PLEASE CIRCLE) no		Storm Sewer By Kegion	law	BMITTED	LE) Metals / Hg / CrVI				REG 153 METALS & INORGANICS	SJ	als, HWS - B)				1			YZE	Pr	CUSTODY S V N esent Int -J		COOI	er tempera 3 , 3 , 2	URE
Include Criteria on Certificate of Analysis:	Yes			ERS SU	(CIRCLE)				S & IA	META	LS IS Met		75m					ANALYZE						
SAMPLES MUST BE KEPT COOL (< 10 [°]	A CONTRACTOR OF THE OWNER OF THE	and the second second second	MAXXAM	VTAINE	TERED	IC F1	- F4		METAL	ICPMS	153 METALS Cr VI, ICPMS Metals,		4		1		-E	DO NOT	cod	DLING MEDIA	PRÉSEN	т: (C	Y. / N	
		SAMPLED TIME SAMI /MM/DD) (HH:MN		# OF CONT	FIELD FILTERED	BTEX/ PHC F1	PHCs F2 - I	vocs	REG 153	REG 153 ICPMS METALS	REG 153 (Hg. Cr V	Hd	Texture Size	PAH				ногр- р			С	OMMEN	TS	
1 MW-1	1	7-Apr 12:30	gw	4	語の	x	x	х																
2 MW-2	1	7-Apr 1:30	gw	4	12 mil	x	x	x													ŋ.		2.4.6.	-
3 MW-3	1	7-Apr 3:30	gw	4		x	x	x																
4			5	1														- Mail	05	CEIVE	AI D	1 OT	TAWA	1
5					195						18-	Ap	r-18	15	:00				1.2.0		- 5		deale	
6										Jor	athan	T Int	100											
7			1.	120	1				- 11 11						1					1441				
8		Line Char		1							B888	39	6								1.11			
9				13	110			1	M	VA	(TC	T-0	01						0	Dn	ice		
10																T		Tell.				3	1, 199	
RELINQUISHED BY: (Signature/Pr	nt) DATE: (YYYY/	MM/DD) TIME: (I	H:MM)		RECE	VED	BY: (S	ignat	ture/F	Print)	1.65	DA	TE: (Y)	YYY/N	/M/DD)	TIN	ЛЕ: (HH	:MM)			MA	XXAM J	OB #	
Ryan LaRonde	18-Ar	r 11	:00	Mas	1		1	1		15	Saucer	1			18		10.	60						

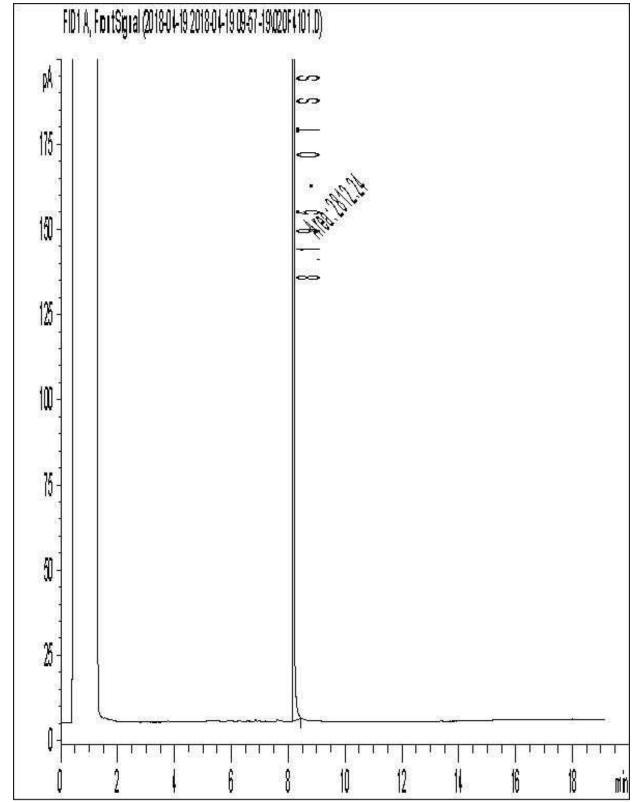


Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.

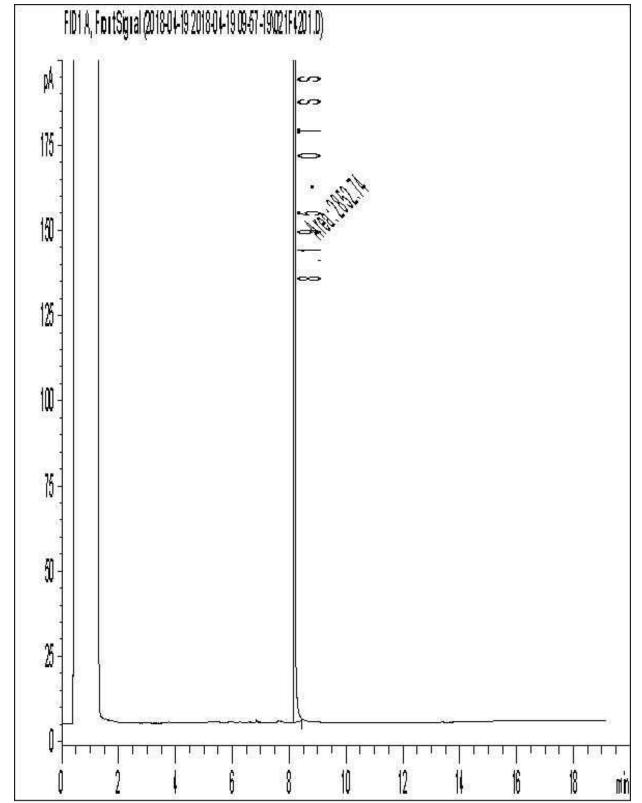

Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.

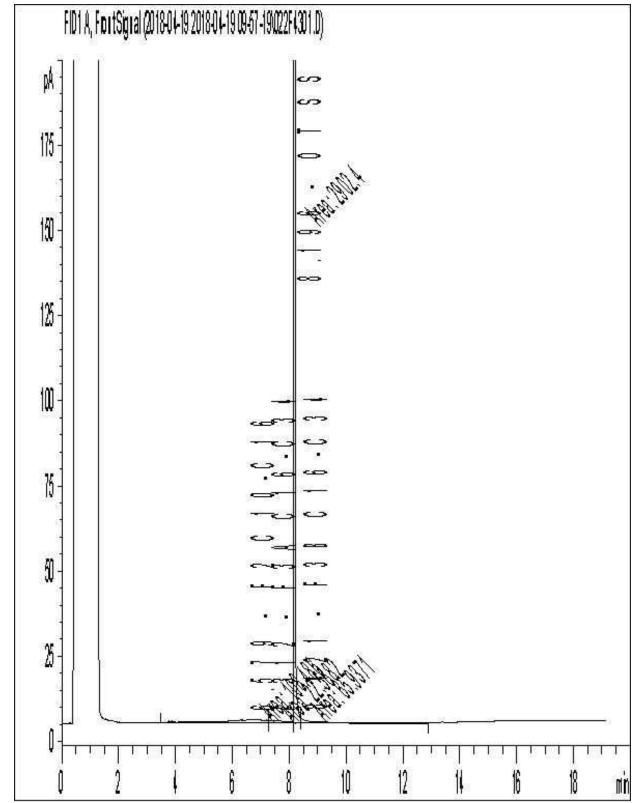

Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.

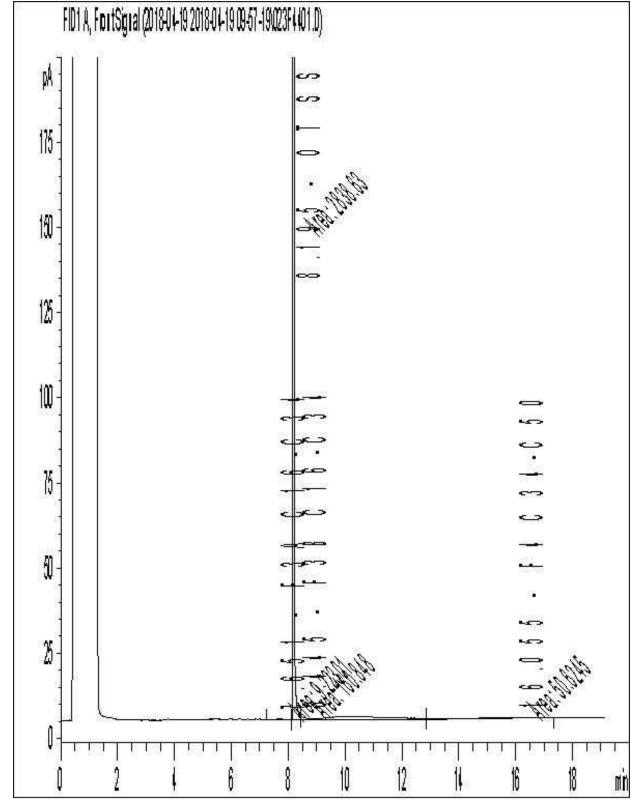

Note: This information is provided for reference purposes only. Should detailed chemist interpretation or fingerprinting be required, please contact the laboratory.



RELIABLE.

300 - 2319 St. Laurent Blvd Ottawa, ON, K1G 4J8 1-800-749-1947 www.paracellabs.com

Certificate of Analysis

Paterson Group Consulting Engineers

9 Auriga Drive Ottawa, ON K2E 7T9 Attn: Karyn Munch

Client PO: 57503 Project: PE6046 Custody: 140686

Report Date: 23-May-2023 Order Date: 16-May-2023

Order #: 2320171

This Certificate of Analysis contains analytical data applicable to the following samples as submitted :

Paracel ID 2320171-01 2320171-02

Client ID MW2-GW MW3-GW

Approved By:

Mark Foto

Mark Foto, M.Sc. Lab Supervisor

Any use of these results implies your agreement that our total liability in connection with this work, however arising, shall be limited to the amount paid by you for this work, and that our employees or agents shall not under any circumstances be liable to you in connection with this work.



Report Date: 23-May-2023 Order Date: 16-May-2023

Order #: 2320171

Project Description: PE6046

Analysis Summary Table

Analysis	Method Reference/Description	Extraction Date	Analysis Date
PHC F1	CWS Tier 1 - P&T GC-FID	18-May-23	19-May-23
PHCs F2 to F4	CWS Tier 1 - GC-FID, extraction	19-May-23	23-May-23
REG 153: VOCs by P&T GC/MS	EPA 624 - P&T GC-MS	18-May-23	19-May-23



Certificate of Analysis

Client: Paterson Group Consulting Engineers

Client PO: 57503

Order #: 2320171

Report Date: 23-May-2023

Order Date: 16-May-2023

Project Description: PE6046

	Client ID: Sample Date: Sample ID:	MW2-GW 16-May-23 00:00 2320171-01	MW3-GW 16-May-23 00:00 2320171-02	- - -	- - -
Volatiles	MDL/Units	Ground Water	Ground Water	-	-
Acetone	5.0 ug/L	<5.0	<5.0	-	
Benzene	0.5 ug/L	<0.5	<0.5	_	
Bromodichloromethane	0.5 ug/L	<0.5	<0.5	-	-
Bromoform	0.5 ug/L	<0.5	<0.5	-	-
Bromomethane	0.5 ug/L	<0.5	<0.5	_	
Carbon Tetrachloride	0.2 ug/L	<0.2	<0.2	_	
Chlorobenzene	0.5 ug/L	<0.5	<0.2	_	
Chloroform	0.5 ug/L	<0.5	<0.5	_	
Dibromochloromethane	0.5 ug/L	<0.5	<0.5	_	
Dichlorodifluoromethane	1.0 ug/L	<1.0	<1.0	-	-
1,2-Dichlorobenzene	0.5 ug/L	<0.5	<0.5	_	-
1,3-Dichlorobenzene	0.5 ug/L	<0.5	<0.5	_	
1,4-Dichlorobenzene	0.5 ug/L	<0.5	<0.5	_	
1.1-Dichloroethane	0.5 ug/L	<0.5	<0.5	_	
1.2-Dichloroethane	0.5 ug/L	<0.5	<0.5	_	
1,1-Dichloroethylene	0.5 ug/L	<0.5	<0.5	_	-
cis-1,2-Dichloroethylene	0.5 ug/L	<0.5	<0.5	-	-
trans-1,2-Dichloroethylene	0.5 ug/L	<0.5	<0.5	-	
1,2-Dichloropropane	0.5 ug/L	<0.5	<0.5	-	
cis-1,3-Dichloropropylene	0.5 ug/L	<0.5	<0.5	-	-
trans-1,3-Dichloropropylene	0.5 ug/L	<0.5	<0.5	-	-
1,3-Dichloropropene, total	0.5 ug/L	<0.5	<0.5	-	-
Ethylbenzene	0.5 ug/L	<0.5	<0.5	-	-
Ethylene dibromide (dibromoethane, 1,2-)	0.2 ug/L	<0.2	<0.2	-	-
Hexane	1.0 ug/L	<1.0	<1.0	-	-
Methyl Ethyl Ketone (2-Butanone)	5.0 ug/L	<5.0	<5.0	-	-
Methyl Isobutyl Ketone	5.0 ug/L	<5.0	<5.0	-	-
Methyl tert-butyl ether	2.0 ug/L	<2.0	<2.0	-	-
Methylene Chloride	5.0 ug/L	<5.0	<5.0	-	-
Styrene	0.5 ug/L	<0.5	<0.5	-	-
1,1,1,2-Tetrachloroethane	0.5 ug/L	<0.5	<0.5	-	-
1,1,2,2-Tetrachloroethane	0.5 ug/L	<0.5	<0.5	-	-
Tetrachloroethylene	0.5 ug/L	<0.5	<0.5	-	-
Toluene	0.5 ug/L	<0.5	<0.5	-	-
1,1,1-Trichloroethane	0.5 ug/L	<0.5	<0.5	-	-

OTTAWA . MISSISSAUGA . HAMILTON . KINGSTON . LONDON . NIAGARA . WINDSOR . RICHMOND HILL



Order #: 2320171

Report Date: 23-May-2023 Order Date: 16-May-2023

Project Description: PE6046

	-				
	Client ID:	MW2-GW	MW3-GW	-	-
	Sample Date:	16-May-23 00:00	16-May-23 00:00	-	-
	Sample ID:	2320171-01	2320171-02	-	-
	MDL/Units	Ground Water	Ground Water	-	-
1,1,2-Trichloroethane	0.5 ug/L	<0.5	<0.5	-	-
Trichloroethylene	0.5 ug/L	<0.5	<0.5	-	-
Trichlorofluoromethane	1.0 ug/L	<1.0	<1.0	-	-
Vinyl chloride	0.5 ug/L	<0.5	<0.5	-	-
m,p-Xylenes	0.5 ug/L	<0.5	<0.5	-	-
o-Xylene	0.5 ug/L	<0.5	<0.5	-	-
Xylenes, total	0.5 ug/L	<0.5	<0.5	-	-
4-Bromofluorobenzene	Surrogate	109%	107%	-	-
Dibromofluoromethane	Surrogate	113%	114%	-	-
Toluene-d8	Surrogate	109%	111%	-	-
Hydrocarbons					
F1 PHCs (C6-C10)	25 ug/L	<25	<25	-	-
F2 PHCs (C10-C16)	100 ug/L	<100	<100	-	-
F3 PHCs (C16-C34)	100 ug/L	<100	<100	-	-
F4 PHCs (C34-C50)	100 ug/L	<100	<100	-	_



Certificate of Analysis Client: Paterson Group Consulting Engineers Client PO: 57503

Method Quality Control: Blank

Report Date: 23-May-2023

Order Date: 16-May-2023

Project Description: PE6046

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Hydrocarbons									
F1 PHCs (C6-C10)	ND	25	ug/L						
F2 PHCs (C10-C16)	ND	100	ug/L						
F3 PHCs (C16-C34)	ND	100	ug/L						
F4 PHCs (C34-C50)	ND	100	ug/L						
Volatiles			5						
Acetone	ND	5.0	ug/L						
Benzene	ND	0.5	ug/L						
Bromodichloromethane	ND	0.5	ug/L						
Bromoform	ND	0.5	ug/L						
Bromomethane	ND	0.5	ug/L						
Carbon Tetrachloride	ND	0.2	ug/L						
Chlorobenzene	ND	0.5	ug/L						
Chloroform	ND	0.5	ug/L						
Dibromochloromethane	ND	0.5	ug/L						
Dichlorodifluoromethane	ND	1.0	ug/L						
1,2-Dichlorobenzene	ND	0.5	ug/L						
1,3-Dichlorobenzene	ND	0.5	ug/L						
1,4-Dichlorobenzene	ND	0.5	ug/L						
1,1-Dichloroethane	ND	0.5	ug/L						
1,2-Dichloroethane	ND	0.5	ug/L						
1,1-Dichloroethylene	ND	0.5	ug/L						
cis-1,2-Dichloroethylene	ND	0.5	ug/L						
trans-1,2-Dichloroethylene	ND	0.5	ug/L						
1,2-Dichloropropane	ND	0.5	ug/L						
cis-1,3-Dichloropropylene	ND	0.5	ug/L						
trans-1,3-Dichloropropylene	ND	0.5	ug/L						
1,3-Dichloropropene, total	ND	0.5	ug/L						
Ethylbenzene	ND	0.5	ug/L						
Ethylene dibromide (dibromoethane, 1,2	ND	0.2	ug/L						
Hexane	ND	1.0	ug/L						
Methyl Ethyl Ketone (2-Butanone)	ND	5.0	ug/L						
Methyl Isobutyl Ketone	ND	5.0	ug/L						
Methyl tert-butyl ether	ND	2.0	ug/L						
Methylene Chloride	ND	5.0	ug/L						
Styrene	ND	0.5	ug/L						
1,1,1,2-Tetrachloroethane	ND	0.5	ug/L						
1,1,2,2-Tetrachloroethane	ND	0.5	ug/L						
Tetrachloroethylene	ND	0.5	ug/L						
Toluene	ND	0.5	ug/L						
1,1,1-Trichloroethane	ND	0.5	ug/L						
1,1,2-Trichloroethane	ND	0.5	ug/L						
Trichloroethylene	ND	0.5	ug/L						
Trichlorofluoromethane	ND	1.0	ug/L						
Vinyl chloride	ND	0.5	ug/L						
m,p-Xylenes	ND	0.5	ug/L						
o-Xylene	ND	0.5	ug/L						
Xylenes, total	ND	0.5	ug/L						
Surrogate: 4-Bromofluorobenzene	90.2		ug/L		113	50-140			
Surrogate: Dibromofluoromethane	85.2		ug/L		106	50-140			
			- 3						



Method Quality Control: Duplicate

Report Date: 23-May-2023

Order Date: 16-May-2023

Project Description: PE6046

		Reporting		Source		%REC		RPD	
Analyte	Result	Limit	Units	Result	%REC	Limit	RPD	Limit	Notes
Hydrocarbons									
F1 PHCs (C6-C10)	ND	25	ug/L	ND			NC	30	
Volatiles									
Acetone	ND	5.0	ug/L	ND			NC	30	
Benzene	ND	0.5	ug/L	ND			NC	30	
Bromodichloromethane	4.01	0.5	ug/L	3.04			27.5	30	
Bromoform	ND	0.5	ug/L	ND			NC	30	
Bromomethane	ND	0.5	ug/L	ND			NC	30	
Carbon Tetrachloride	ND	0.2	ug/L	ND			NC	30	
Chlorobenzene	ND	0.5	ug/L	ND			NC	30	
Chloroform	9.92	0.5	ug/L	7.58			26.7	30	
Dibromochloromethane	1.60	0.5	ug/L	1.20			28.6	30	
Dichlorodifluoromethane	ND	1.0	ug/L	ND			NC	30	
1,2-Dichlorobenzene	ND	0.5	ug/L	ND			NC	30	
1,3-Dichlorobenzene	ND	0.5	ug/L	ND			NC	30	
1,4-Dichlorobenzene	ND	0.5	ug/L	ND			NC	30	
1,1-Dichloroethane	ND	0.5	ug/L	ND			NC	30	
1,2-Dichloroethane	ND	0.5	ug/L	ND			NC	30	
1,1-Dichloroethylene	ND	0.5	ug/L	ND			NC	30	
cis-1,2-Dichloroethylene	ND	0.5	ug/L	ND			NC	30	
trans-1,2-Dichloroethylene	ND	0.5	ug/L	ND			NC	30	
1,2-Dichloropropane	ND	0.5	ug/L	ND			NC	30	
cis-1,3-Dichloropropylene	ND	0.5	ug/L	ND			NC	30	
trans-1,3-Dichloropropylene	ND	0.5	ug/L	ND			NC	30	
Ethylbenzene	ND	0.5	ug/L	ND			NC	30	
Ethylene dibromide (dibromoethane, 1,2-	ND	0.2	ug/L	ND			NC	30	
Hexane	ND	1.0	ug/L	ND			NC	30	
Methyl Ethyl Ketone (2-Butanone)	ND	5.0	ug/L	ND			NC	30	
Methyl Isobutyl Ketone	ND	5.0	ug/L	ND			NC	30	
Methyl tert-butyl ether	ND	2.0	ug/L	ND			NC	30	
Methylene Chloride	ND	5.0	ug/L	ND			NC	30	
Styrene	ND	0.5	ug/L	ND			NC	30	
1,1,1,2-Tetrachloroethane	ND	0.5	ug/L	ND			NC	30	
1,1,2,2-Tetrachloroethane	ND	0.5	ug/L	ND			NC	30	
Tetrachloroethylene	ND	0.5	ug/L	ND			NC	30	
Toluene	ND	0.5	ug/L	ND			NC	30	
1,1,1-Trichloroethane	ND	0.5	ug/L	ND			NC	30	
1,1,2-Trichloroethane	ND	0.5	ug/L	ND			NC	30	
Trichloroethylene	ND	0.5	ug/L	ND			NC	30	
Trichlorofluoromethane	ND	1.0	ug/L	ND			NC	30	
Vinyl chloride	ND	0.5	ug/L	ND			NC NC	30	
m,p-Xylenes	ND	0.5	ug/L	ND				30 30	
o-Xylene	ND 88.3	0.5	ug/L	ND	110	50-140	NC	30	
Surrogate: 4-Bromofluorobenzene			ug/L						
Surrogate: Dibromofluoromethane	90.1		ug/L		113	50-140			
Surrogate: Toluene-d8	89.3		ug/L		112	50-140			

OTTAWA - MISSISSAUGA - HAMILTON - KINGSTON - LONDON - NIAGARA - WINDSOR - RICHMOND HILL



Method Quality Control: Spike

Report Date: 23-May-2023

Order Date: 16-May-2023

Project Description: PE6046

Analyte	Result	Reporting Limit	Units	Source Result	%REC	%REC Limit	RPD	RPD Limit	Notes
Hydrocarbons									
F1 PHCs (C6-C10)	2180	25	ug/L	ND	109	68-117			
F2 PHCs (C10-C16)	1160	100	ug/L	ND	72.5	60-140			
F3 PHCs (C16-C34)	3540	100	ug/L	ND	90.3	60-140			
F4 PHCs (C34-C50)	2120	100	ug/L	ND	85.4	60-140			
Volatiles									
Acetone	57.2	5.0	ug/L	ND	57.2	50-140			
Benzene	32.9	0.5	ug/L	ND	82.4	60-130			
Bromodichloromethane	42.8	0.5	ug/L	ND	107	60-130			
Bromoform	36.2	0.5	ug/L	ND	90.4	60-130			
Bromomethane	32.9	0.5	ug/L	ND	82.2	50-140			
Carbon Tetrachloride	32.5	0.2	ug/L	ND	81.4	60-130			
Chlorobenzene	32.8	0.5	ug/L	ND	82.0	60-130			
Chloroform	35.2	0.5	ug/L	ND	87.9	60-130			
Dibromochloromethane	31.1	0.5	ug/L	ND	77.8	60-130			
Dichlorodifluoromethane	35.6	1.0	ug/L	ND	89.1	50-140			
1,2-Dichlorobenzene	33.5	0.5	ug/L	ND	83.8	60-130			
1,3-Dichlorobenzene	48.2	0.5	ug/L	ND	121	60-130			
1,4-Dichlorobenzene	29.7	0.5	ug/L	ND	74.4	60-130			
1,1-Dichloroethane	33.1	0.5	ug/L	ND	82.8	60-130			
1,2-Dichloroethane	45.8	0.5	ug/L	ND	115	60-130			
1,1-Dichloroethylene	34.4	0.5	ug/L	ND	85.9	60-130			
cis-1,2-Dichloroethylene	36.2	0.5	ug/L	ND	90.4	60-130			
trans-1,2-Dichloroethylene	35.1	0.5	ug/L	ND	87.8	60-130			
1,2-Dichloropropane	33.8	0.5	ug/L	ND	84.4	60-130			
cis-1,3-Dichloropropylene	38.2	0.5	ug/L	ND	95.6	60-130			
trans-1,3-Dichloropropylene	41.8	0.5	ug/L	ND	104	60-130			
Ethylbenzene	42.1	0.5	ug/L	ND	105	60-130			
Ethylene dibromide (dibromoethane, 1,2	32.3	0.2	ug/L	ND	80.7	60-130			
Hexane	42.1	1.0	ug/L	ND	105	60-130			
Methyl Ethyl Ketone (2-Butanone)	63.9	5.0	ug/L	ND	63.9	50-140			
Methyl Isobutyl Ketone	63.9	5.0	ug/L	ND	63.9	50-140			
Methyl tert-butyl ether	71.8	2.0	ug/L	ND	71.8	50-140			
Methylene Chloride	34.7	5.0	ug/L	ND	86.8	60-130			
Styrene	31.7	0.5	ug/L	ND	79.2	60-130			
1,1,1,2-Tetrachloroethane	36.4	0.5	ug/L	ND	91.1	60-130			
1,1,2,2-Tetrachloroethane	46.3	0.5	ug/L	ND	116	60-130			
Tetrachloroethylene	35.2	0.5	ug/L	ND	88.0	60-130			
Toluene	30.5	0.5	ug/L	ND	76.3	60-130			
1,1,1-Trichloroethane	32.0	0.5	ug/L	ND	80.1	60-130			
1,1,2-Trichloroethane	34.2	0.5	ug/L	ND	85.6	60-130			
Trichloroethylene	31.8	0.5	ug/L	ND	79.5	60-130			
Trichlorofluoromethane	35.1	1.0	ug/L	ND	87.8	60-130			
Vinyl chloride	33.3	0.5	ug/L	ND	83.3	50-140			
m,p-Xylenes	61.2	0.5	ug/L	ND	76.6	60-130			
o-Xylene	33.9	0.5	ug/L	ND	84.8	60-130			
Surrogate: 4-Bromofluorobenzene	75.9		ug/L		94.9	50-140			
Surrogate: Dibromofluoromethane	82.9		ug/L		104	50-140			
Surrogate: Toluene-d8	76.9		ug/L		96.1	50-140			

OTTAWA - MISSISSAUGA - HAMILTON - KINGSTON - LONDON - NIAGARA - WINDSOR - RICHMOND HILL



Sample Data Revisions

None

Work Order Revisions / Comments:

None

Other Report Notes:

n/a: not applicable ND: Not Detected MDL: Method Detection Limit Source Result: Data used as source for matrix and duplicate samples %REC: Percent recovery. RPD: Relative percent difference. NC: Not Calculated

CCME PHC additional information:

- The method for the analysis of PHCs complies with the Reference Method for the CWS PHC and is validated for use in the laboratory. All prescribed quality criteria identified in the method has been met.

- F1 range corrected for BTEX.

- F2 to F3 ranges corrected for appropriate PAHs where available.

- The gravimetric heavy hydrocarbons (F4G) are not to be added to C6 to C50 hydrocarbons.

- In the case where F4 and F4G are both reported, the greater of the two results is to be used for comparison to CWS PHC criteria.

- When reported, data for F4G has been processed using a silica gel cleanup.

Order #: 2320171

Report Date: 23-May-2023 Order Date: 16-May-2023 Project Description: PE6046

C PARACEL LABORATORIES LTD.	Pa					Paracel Order Number (Lab Use Only) 2326(7)					Chain Of Custody (Lab Use Only) № 140686					
Client Name: Raterson Group Contact Name: Karyn Munch Address: 9 Auriga Dr. Telephone: 613-226-7381 REG 153/04 [REG 406/19] Other Regula	ation	Quoti PO #: E-mai	5 Kn	2E6046 2503 nunch@Pat echek@		D.CQ	-				Date	1 da 2 da Requ	v uired:	+	3	3 day Regular
Table 2 X Ind/Comm X Coarse CCME CCME	I PWQO MISA SU - Storm	SW (Su	irface V	Vater) SS (Storm/Si Paint) A (Air) O (Ot	nitary Sewer)	PHCs F1-F4+BTEX	vocs	PAHs	Metals by ICP	Re	quired	(SMH) 8	lysis			
1 MWQ-GW 2 MWJ-GW 3 4 5 6	GN GN			16-MAY-2023 16-MAY-2023		X X	X X		6							
7 8 9 0 mments:															1	
linquished By (Sign):	ceived By Driver/D te/Time: nperature:)epot:			Received at Lab: Scooln Date/Time: Ma- Temperature:	. p 16)an 4'.	C112	V 5 0	Perified	ndr me:	el	Car Dena te, M	ner nins ay17	, 8:	54