


OWNER:
STOKED INDUSTRIES INC
14 KNOLL TERRACE,
NEPEAN ON
K2J 2K6

DRAWING LEGEND

INV	INVERT OF PIPE
SAN	SANITARY SEWER
WL	WATER LINE
DS	EAVE TROUGH DOWNSPOUT
± 67.89	EXISTING GRADE ELEVATION
+ 67.89	PROPOSED GRADE ELEVATION
2%	EXISTING SLOPE OF GRADE
2%	PROPOSED SLOPE OF GRADE
T.O.S	TOP OF SLOPE
B.O.S	BOTTOM OF SLOPE
.....	CENTRELINE OF SWALE
.....	SILT BARRIER FENCE
---	PROPERTY LINE
DC	150mm CURB/DEPRESSED CURB
	LIGHT-DUTY PAVEMENT
	HEAVY-DUTY PAVEMENT
	CONCRETE
.....	LANDSCAPE
C.Z.	CRITICAL ROOT ZONE
FFL	FIRST FLOOR ELEVATION
USF	UNDERSIDE OF FOOTING
⇨	EMERGENCY OVERLAND FLOW

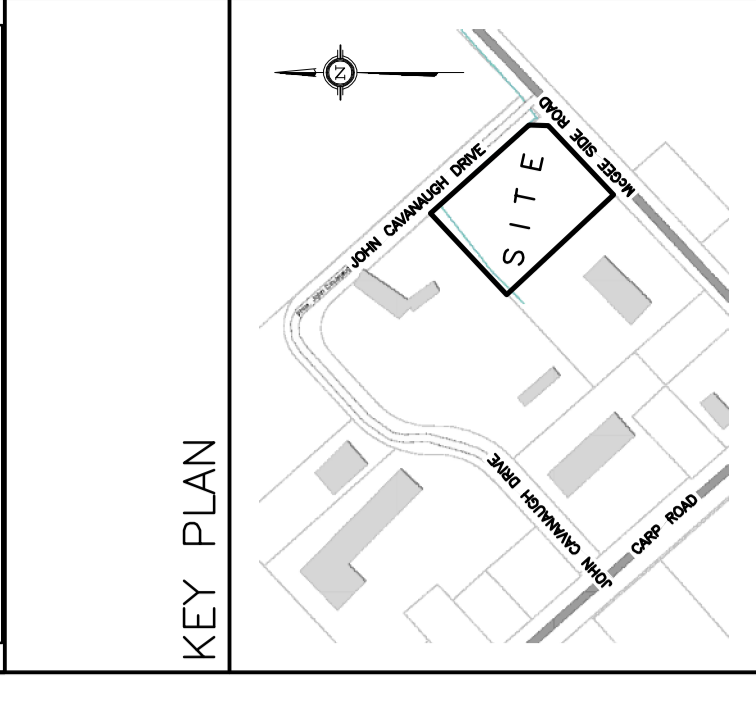

9 DEC 21-23	RE-ISSUED FOR APPROVAL
8 AUG 10-23	RE-ISSUED FOR APPROVAL
7 JUN 29-23	RE-ISSUED FOR APPROVAL
6 JUN 23-23	RE-ISSUED FOR COORDINATION
5 JUN 8-23	ISSUED FOR COORDINATION
4 APR 19-23	ISSUED FOR CLIENT REVIEW
3 JUL 26-21	RE-ISSUED FOR APPROVAL
2 JUN 14-21	RE-ISSUED FOR APPROVAL
1 MAR 12-21	ISSUED FOR APPROVAL
No.	DATE
	REVISION

D. B. GRAY ENGINEERING INC.
 700 Long Point Circle
 Ottawa, Ontario
 613-425-8044
 dgray@dbgrayengineering.com

OFFICE & WAREHOUSE
 2167 MCGEE SIDE ROAD
 OTTAWA, ONTARIO


SITE SERVICING PLAN

Drawn: D.B.G.
 Horz. Scale: 1:250
 Vert. Scale: 1:25
 Date: APR 19-23
 Job No.: 23024

Engineer's Seal
 D.B. GRAY
 17016502
 O.Reg. No. 21-23

NOT VALID UNLESS
 SIGNED & DATED

Drawing No. **C-1**
 of **7**

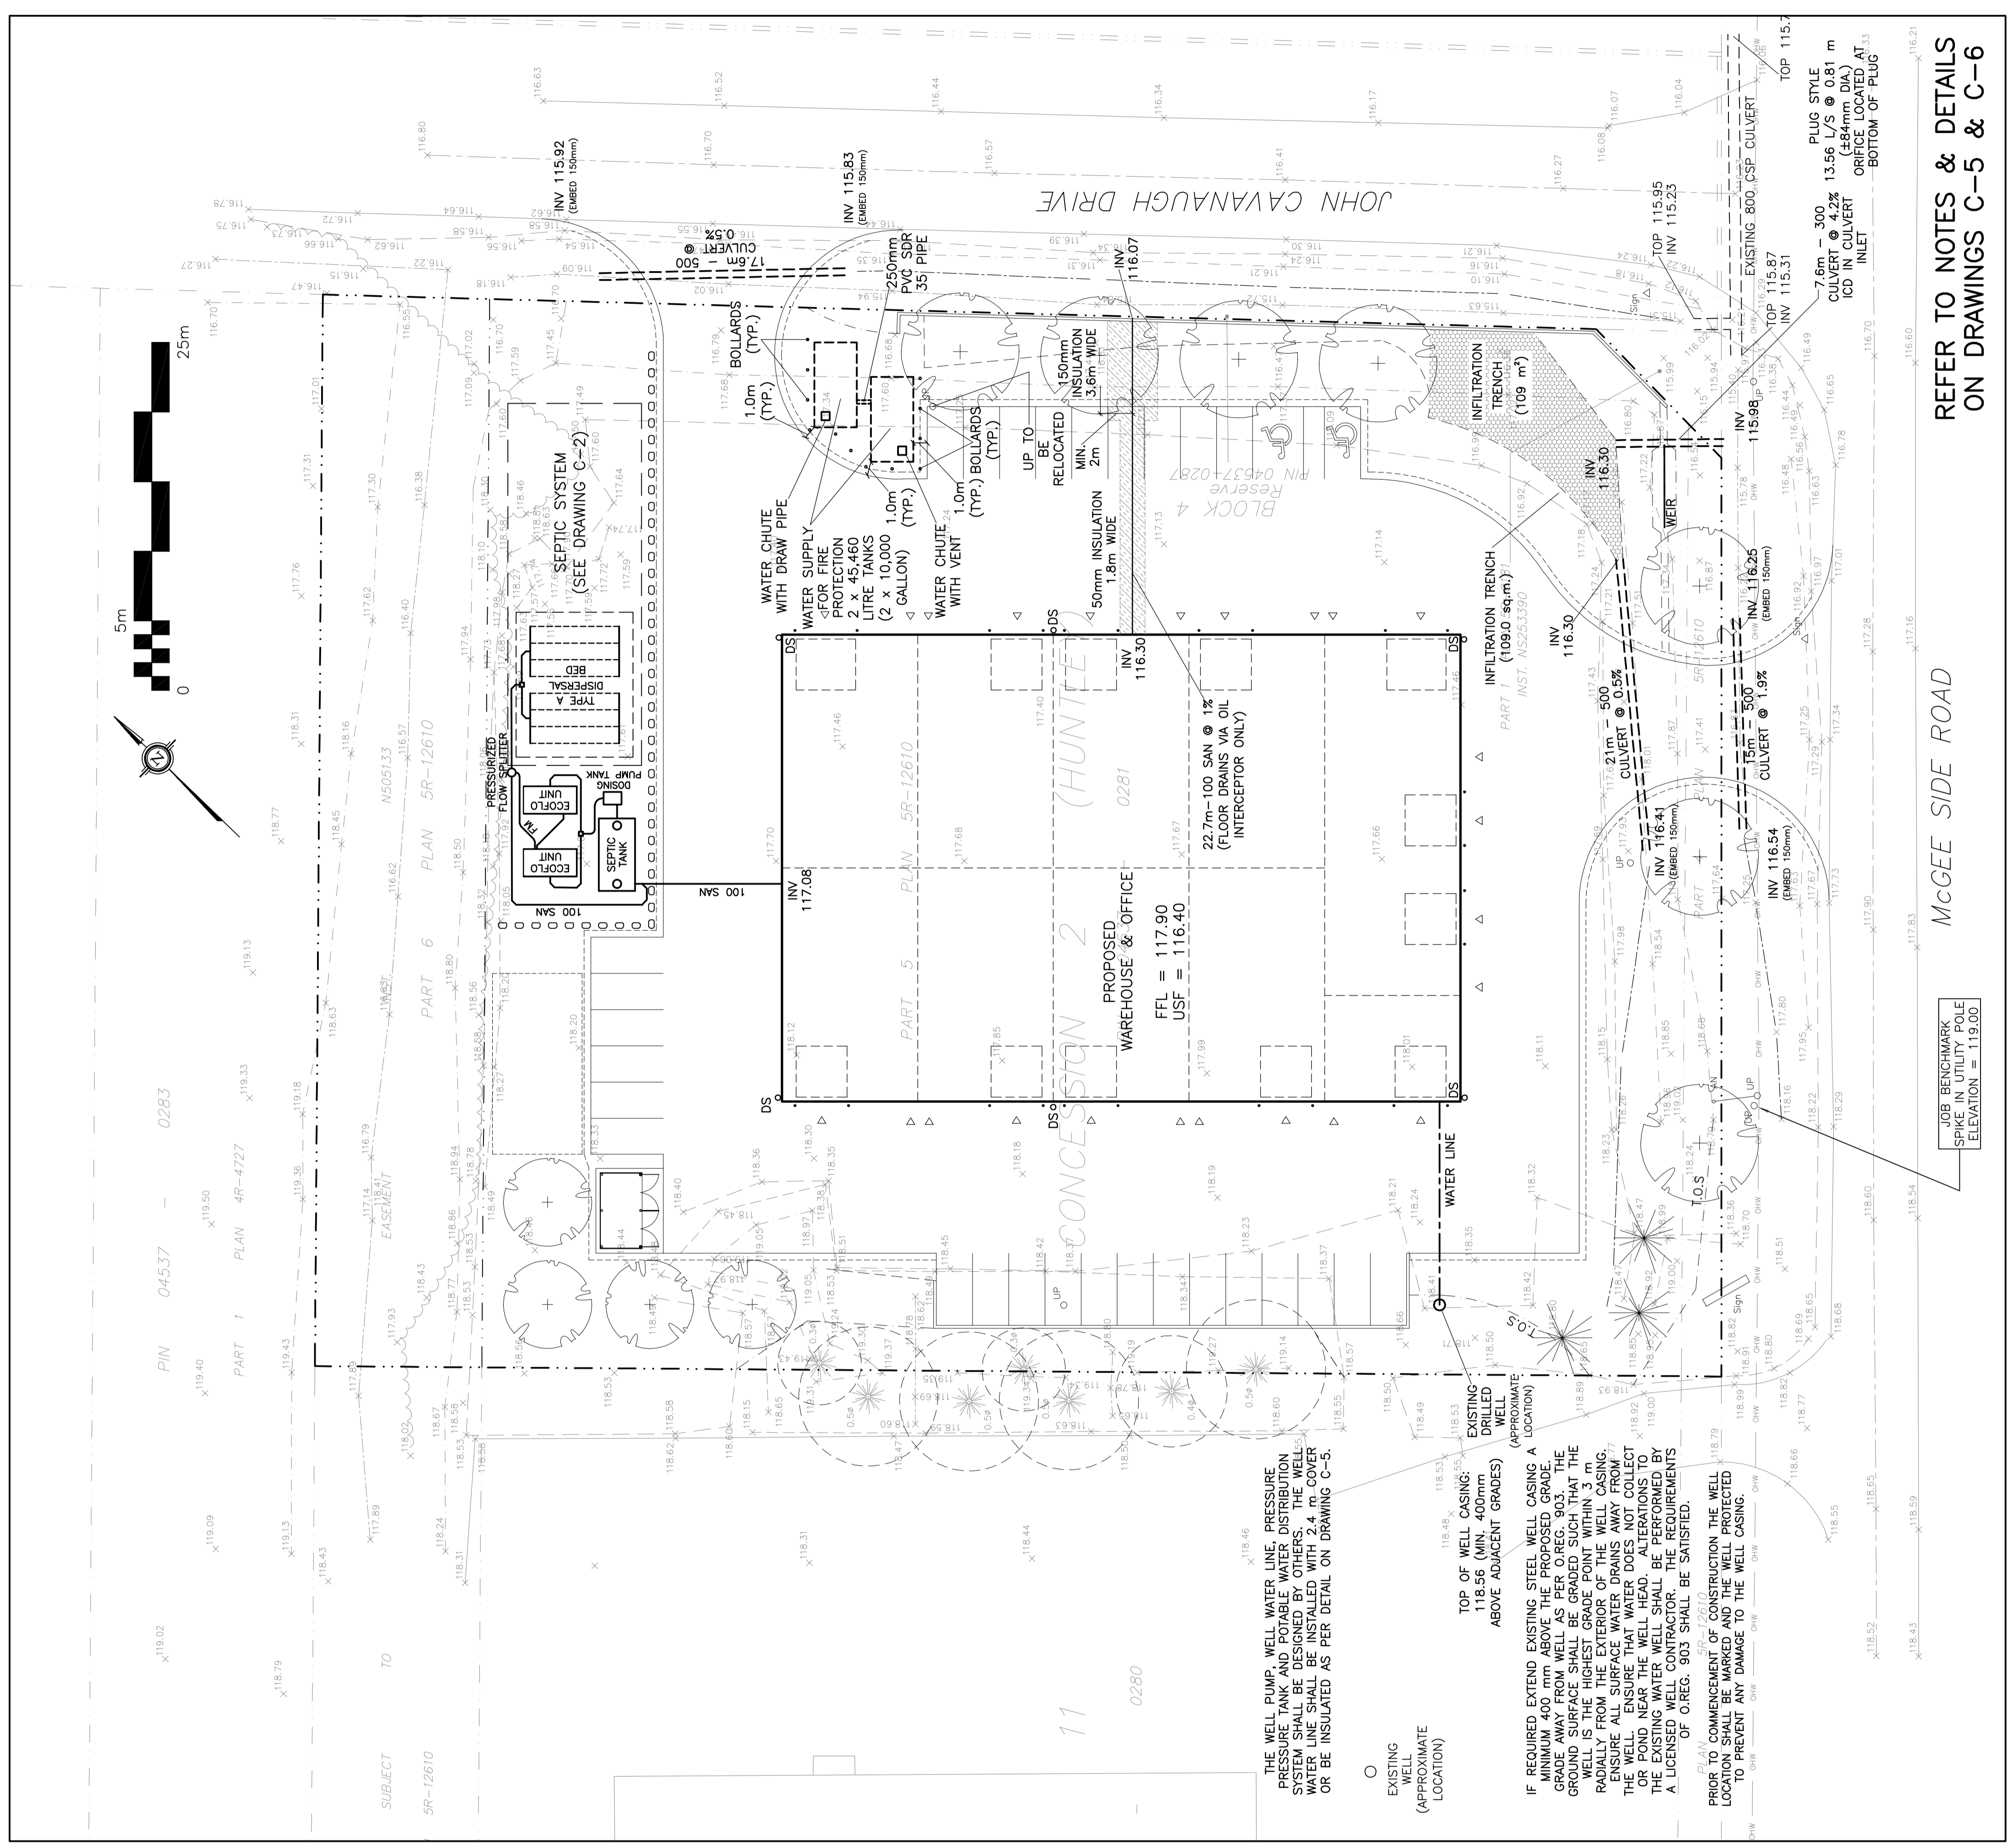

REFER TO NOTES & DETAILS
 ON DRAWINGS C-5 & C-6

MCGEE SIDE ROAD

JOB BENCHMARK
 SPIKE IN UTILITY POLE
 ELEVATION = 119.00

THE WELL PUMP, WELL WATER LINE, PRESSURE TANK AND POTABLE WATER DISTRIBUTION SYSTEM SHALL BE DESIGNED BY OTHERS. THE WELL SHALL BE INSULATED WITH 4" COVER OR BE INSULATED AS PER DETAIL ON DRAWING C-6.

EXISTING WELL (APPROXIMATE LOCATION)

TOP OF WELL CASING: 118.56 (MIN. 400mm ABOVE ADJACENT GRADES)

IF REQUIRED EXTEND EXISTING STEEL WELL CASING A MINIMUM OF 300mm ABOVE THE GRADE. THE GRADE AWAY FROM WELL AS PER O. REG. 903. THE GROUND SURFACE SHALL BE GRADED SUCH THAT THE WELL IS THE HIGHEST GRADE POINT WITHIN 3 m RADIALLY FROM THE EXTERIOR OF THE WELL CASING. ENSURE ALL SURFACE WATER DRAINS AWAY FROM THE WELL. THE WELL SHALL BE PROTECTED BY A CONCRETE OR FOND NEAR THE WELL HEAD. ALTERATIONS TO THE EXISTING WATER WELL SHALL BE PERFORMED BY A LICENSED WELL CONTRACTOR. THE REQUIREMENTS OF O. REG. 903 SHALL BE SATISFIED.

PRIOR TO COMMENCEMENT OF CONSTRUCTION THE WELL LOCATION SHALL BE MARKED AND THE WELL PROTECTED TO PREVENT ANY DAMAGE TO THE WELL CASING.