

1. GENERAL

1.1 USE BAR SCALE TO CONFIRM ACTUAL PLOT SCALE. EXISTING AND NEW ELEVATIONS AND INVERTS SHOWN ARE GEODETIC AND ARE IN METERS. ALL PIPE DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.

1.2 UNLESS OTHERWISE STATED ENGINEER REFERS TO D.B. GRAY ENGINEERING INC.

1.3 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.4 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.5 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.6 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.7 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.8 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.9 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.10 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.11 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.12 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.13 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.14 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

1.15 ALL DIMENSIONS ARE TO FACE UNLESS OTHERWISE NOTED.

2. EROSION AND SEDIMENT CONTROL PLAN

2.1 THE EROSION AND SEDIMENT CONTROL PLAN IS A "LIVING DOCUMENT" AND SHALL BE REVISED IN THE EVENT THE SPECIFIED CONTROL MEASURES ARE NOT SUFFICIENT. THE CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES TO PROVIDE PROTECTION OF THE AREA DRAINAGE SYSTEM DURING CONSTRUCTION ACTIVITIES. THIS INCLUDES

2.2 THE CONTRACTOR SHALL MAINTAIN THE EXISTING DRAINAGE SYSTEM AND SHALL NOT OBTAIN PERMISSION TO

2.3 THE CONTRACTOR SHALL MAINTAIN THE EXISTING DRAINAGE SYSTEM AND SHALL NOT OBTAIN PERMISSION TO

2.4 THE CONTRACTOR SHALL MAINTAIN THE EXISTING DRAINAGE SYSTEM AND SHALL NOT OBTAIN PERMISSION TO

2.5 THE CONTRACTOR SHALL MAINTAIN THE EXISTING DRAINAGE SYSTEM AND SHALL NOT OBTAIN PERMISSION TO

3. GRADING & DRAINAGE

3.1 NEW GRASSES TO MATCH EXISTING AT PROPERTY LINE. NO EXCESS DRAINAGE WILL BE DIRECTED TOWARDS THE ADJACENT PROPERTY DURING AND AFTER CONSTRUCTION. THERE WILL BE NO ALTERATION TO EXISTING GRADE AND DRAINAGE PATTERNS ON OTHER APPROVED DISPOSAL AREAS. GRADING SHALL BE GRADUAL FROM FINISHED TO EXISTING GRADE AND DRAINAGE PATTERNS ON OTHER APPROVED DISPOSAL AREAS. GRADING SHALL BE GRADUAL FROM FINISHED TO EXISTING GRADE AND DRAINAGE PATTERNS ON OTHER APPROVED DISPOSAL AREAS.

3.2 WHETHER RESULT OF POOR WORKMANSHIP OR DAMAGED DEFECTIVE GRADING SHALL BE CORRECTED. PROMPTLY MAKE GOOD

3.3 RIP RAP: PLACE RIP-RAP 300mm THICK AS INDICATED. USE QUARRIED STONE 200mm TO 300mm IN DIAMETER. AREA TO BE RIP RAPPED SHALL BE EXCAVATED AND FINE GRADED TO A UNIFORM AND EVEN SURFACE TO PROVIDE ADEQUATE FOUNDATION. FILL AND THOROUGHLY COMPACT DEPRESSIONS. WHERE RIP RAP IS TO BE PLACED ON SLOPES, EXCAVATE TRENCH AT TOE OF SLOPE AND THOROUGHLY COMPACT DEPRESSIONS. WHERE RIP RAP IS TO BE PLACED ON SLOPES, EXCAVATE TRENCH AT TOE OF SLOPE AND THOROUGHLY COMPACT DEPRESSIONS.

3.4 RIP RAP: PLACE RIP-RAP 300mm THICK AS INDICATED. USE QUARRIED STONE 200mm TO 300mm IN DIAMETER. AREA TO BE RIP RAPPED SHALL BE EXCAVATED AND FINE GRADED TO A UNIFORM AND EVEN SURFACE TO PROVIDE ADEQUATE FOUNDATION. FILL AND THOROUGHLY COMPACT DEPRESSIONS. WHERE RIP RAP IS TO BE PLACED ON SLOPES, EXCAVATE TRENCH AT TOE OF SLOPE AND THOROUGHLY COMPACT DEPRESSIONS.

4. SITE SERVICES

4.1 CONNECTION TO WATERMAIN BY CITY OF OTTAWA FORCES. CONTRACTOR SHALL PROVIDE EXCAVATION, BACKFILL AND REINSTATEMENT. PRESSURE MAY BE ABOVE 80 PSI. AT THE COMPLETION OF CONSTRUCTION A PRESSURE TEST BE PERFORMED TO DETERMINE IF PRESSURE REDUCING VALVES (PRVs) ARE REQUIRED TO BE INSTALLED. IF REQUIRED INSTALL PRV IMMEDIATELY AFTER THE WATER METER.

4.2 ALL WATER SERVICE MATERIALS AND CONSTRUCTION METHODS TO CITY OF OTTAWA STANDARDS AND ONTARIO PROVINCIAL STANDARDS SPECIFICATIONS (OPSS & OPSD). PRIVATE WATERMAIN MATERIALS SHALL BE PVC PRESSURE CLASS 150 DR18. PROVIDE THRUST BLOCKS AS PER CITY OF OTTAWA D.M.G. NO. W23.3 & W23.4 AT ALL VALVES, TEES, CAPS, BENDS, REDUCERS AND HYPRANTS. ALL INSTALLATION AS PER CITY OF OTTAWA D.M.G. NO. W45, W42, W44 & W47.

4.3 ALL WATER SERVICE MATERIALS AND CONSTRUCTION METHODS TO CITY OF OTTAWA STANDARDS AND ONTARIO PROVINCIAL STANDARDS SPECIFICATIONS (OPSS & OPSD). PRIVATE WATERMAIN MATERIALS SHALL BE PVC PRESSURE CLASS 150 DR18. PROVIDE THRUST BLOCKS AS PER CITY OF OTTAWA D.M.G. NO. W23.3 & W23.4 AT ALL VALVES, TEES, CAPS, BENDS, REDUCERS AND HYPRANTS. ALL INSTALLATION AS PER CITY OF OTTAWA D.M.G. NO. W45, W42, W44 & W47.

5. CONSTRUCTION

5.1 PRIOR TO COMMENCING WORK:

5.2 OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES. OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES. OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES.

5.3 OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES. OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES. OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES.

5.4 OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES. OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES. OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE AUTHORITIES.

C. EXISTING GRADE ELEVATIONS INDICATED ON THE DRAWINGS ARE FOR GUIDANCE ONLY. COMPLETENESS AND ACCURACY ARE NOT GUARANTEED. CONFIRM EXISTING GRADE ELEVATIONS AND REPORT ANY DIFFERENCES TO THE ENGINEER.

D. SCHEDULE WORK TO PROVIDE THE MINIMUM DISRUPTION TO SERVICES.

E. INSTALL CONSTRUCTION FENCING AROUND THE AREA OF WORK. DO NOT REMOVE FENCING UNTIL WORK IS COMPLETE.

5.3 PROTECT EXISTING BUILDINGS, TREES AND OTHER PLANTS, LAMPS, FENCING, SERVICE POLES, WIRES, PAVEMENT, SURVEY BENCH MARKS AND MONUMENTS AND SURFACE FEATURES FROM DAMAGE WHILE WORK IS IN PROGRESS. DO NOT DISTURB SOIL WITH EXCESSIVE TRAFFIC OR TRUCKS OR OTHER EQUIPMENT. TAKE NECESSARY PRECAUTIONS TO PROTECT EXISTING UTILITIES FROM DAMAGE AND REPLACEMENT OF ALL NECESSARY SIGNAGE AND BARRIERS, AS REQUIRED BY THE AUTHORITIES. IF APPLICABLE, PROVIDE TRAFFIC MANAGEMENT PLAN AS PER CITY OF OTTAWA REQUIREMENTS.

5.6 CUT PAVEMENT AND / OR SIDEWALK NEARLY ALONG ALL LOCATIONS OF PROPOSED EXCAVATION IN ORDER THAT SURFACE MAY BREAK EVENLY AND CLEANLY. PAVEMENT FOR GEOTECHNICAL INSPECTIONS AND COMPACTION TESTS OF SUB-GRADE, PIPE BEDDING AND EACH LAYER OF SURROUNDING MATERIAL. BACKFILL SUB-BASE AND ASPHALT TO THE SATISFACTION OF THE GEOTECHNICAL CONSULTANT AND ENGINEER. SUBMIT GEOTECHNICAL INSPECTIONS AND COMPACTION REPORTS TO ENGINEER.

5.7 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.8 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.9 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.10 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.11 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.12 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.13 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.14 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.15 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.16 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.17 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.18 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.19 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.20 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.21 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.22 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.23 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.24 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.25 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.26 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.27 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.28 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.29 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.30 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.31 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.32 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

5.33 EXCAVATION AND ADJACENT AREAS TO BE MAINTAINED AND REINSTATE SUB-GRADATION, FINISH SURFACE AND UNDESIRABLE EXCAVATED AREAS. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL. SUBMIT TO THE CITY OF OTTAWA FOR APPROVAL.

WATER SERVICE PROFILE TABLE

MATERIAL: 150mm PVC PRESSURE CLASS 150 DR18

| STATION | DESCRIPTION | GRADE ELEVATION | TOP OF PIPE | DEPTH OF COVER | NOTES |
|-----------------|---|-----------------|-------------|----------------|--|
| A+00.0 | 400mm x 150mm TEE CONNECTION IN 400mm MUNICIPAL WATERMAIN TO CITY OF OTTAWA STANDARDS | ±104.49 | ±102.05 | ±2.44 | - |
| A+07.7 | - | ±104.47 | 102.05 | 2.42 | CROSSING 600 CSP INV ±103.55 WM TOP 102.05 - 1500mm CLEARANCE (MIN. 500mm REQ'D) |
| A+08.8 | 150mm VALVE & VALVE BOX TO CITY OF OTTAWA STANDARDS | ±104.51 | 102.05 | 2.46 | INSULATION 75mm THICK CITY OF OTTAWA DRAWING No. W23 |
| A+13.9 | - | 104.45 | 102.05 | 2.40 | ON PROPERTY LINE |
| A+16.5 | 11.25' BEND TO CITY OF OTTAWA STANDARDS | 104.41 | 102.01 | 2.40 | BOTTOM OF CURB |
| A+22.6 | 11.25' BEND TO CITY OF OTTAWA STANDARDS | 104.41 | 102.01 | 2.40 | - |
| A+25.2 | 150mm x 150mm TEE CONNECTION TO CITY OF OTTAWA STANDARDS | 104.41 | 102.01 | 2.40 | - |
| A+25.9 (C+00.0) | 50mm PCY CONNECTION TO CITY OF OTTAWA STANDARDS | 104.41 | 102.01 | 2.40 | - |
| A+26.7 | 150mm END CAP TO CITY OF OTTAWA STANDARDS | 104.41 | 102.01 | 2.40 | - |

MATERIAL: 150mm PVC PRESSURE CLASS 150 DR18

| | | | | | |
|-----------------|--|--------|--------|------|---|
| B+00.0 (A+25.2) | 150mm x 150mm TEE CONNECTION TO CITY OF OTTAWA STANDARDS | 104.41 | 102.01 | 2.40 | - |
| B+00.8 | 150mm VALVE & VALVE BOX TO CITY OF OTTAWA STANDARDS | 104.43 | 102.01 | 2.42 | - |
| B+02.0 | FIRE HYDRANT TO CITY OF OTTAWA STANDARDS | 104.45 | 102.01 | 2.44 | - |

MATERIAL: 50mm PEX TUBING TO AWWA C-904 SDR 9 (CTS)


| | | | | | |
|-----------------|--|---------|--------|------|---------------------|
| C+00.0 (A+25.9) | CONNECTION TO 150mm TO CITY OF OTTAWA STANDARDS | 104.41 | 101.96 | 2.45 | - |
| C+02.0 | 50mm CURB STOP & STANDPOST TO CITY OF OTTAWA STANDARDS | 104.41 | 101.88 | 2.53 | - |
| C+02.7 | - | ±104.26 | 101.86 | 2.40 | BOTTOM OF CURB |
| C+11.9 | - | ±104.20 | 101.80 | 2.40 | - |
| C+28.7 | - | ±104.13 | 101.73 | 2.40 | - |
| C+40.0 | - | ±104.06 | 101.66 | 2.40 | - |
| C+50.0 | - | ±104.02 | 101.62 | 2.40 | - |
| C+58.2 | - | 104.28 | 101.88 | 2.40 | - |
| C+72.3 | - | 104.34 | 101.94 | 2.40 | ENTRY INTO BUILDING |

MANHOLE SCHEDULE


| REF | TOP | SIZE | TYPE | INVERT AT INLET | INVERT AT OUTLET | NOTES |
|---------|--------|--------|---------------------------|-----------------|------------------|---|
| MH-SA-1 | 104.32 | 1200mm | PRE-CAST CONCRETE MANHOLE | 102.91(N) | 102.88(SW) | TO OPSS 701.010 & CITY OF OTTAWA STANDARDS - FRAME & COVER TO CITY OF OTTAWA OPSD 401.010 |
| MH-SA-2 | 104.51 | 1200mm | PRE-CAST CONCRETE MANHOLE | 102.64(NE) | 102.63(SW) | TO OPSS 701.010 & CITY OF OTTAWA STANDARDS - FRAME & COVER TO CITY OF OTTAWA OPSD 401.010 |

NOTES & SCHEDULES

Engineer's Seal

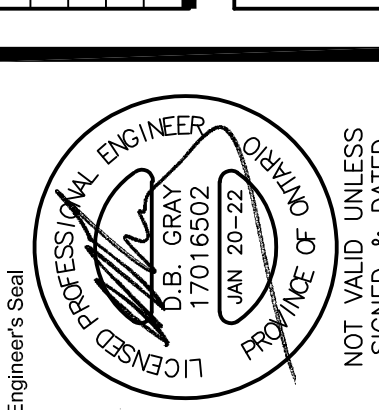

NOT VALID UNLESS SIGNED & DATED

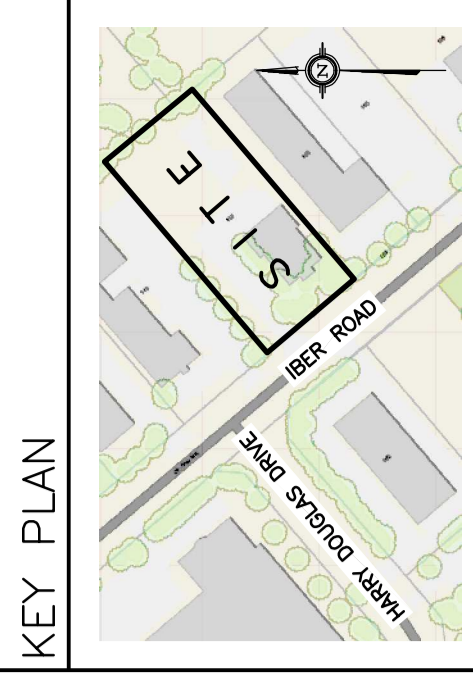

D. B. GRAY ENGINEERING INC.
 700 Long Point Circle
 Ottawa, Ontario
 613-425-8044
 d.gray@dbgrayengineering.com

PROPOSED
1-STORY WAREHOUSE
 155 IBER ROAD
 OTTAWA, ONTARIO

Drawing Title: _____
 Drawing No.: **C-5** of **6**
 D.B.G.
 H. Scale
 V. Scale
 Date: MAY 10-21
 Job No.: 21027