


RECORD OF REVISIONS:

1	ISSUED FOR SITE PLAN CONTROL REV. 2	JUNE 7, 2022
2	ISSUED FOR SITE PLAN APPROVAL	DECEMBER 16, 2021

NUMBER: REVISION: DATE: (MM/DD/YYYY)

PRELIMINARY 33%
NOT FOR CONSTRUCTION

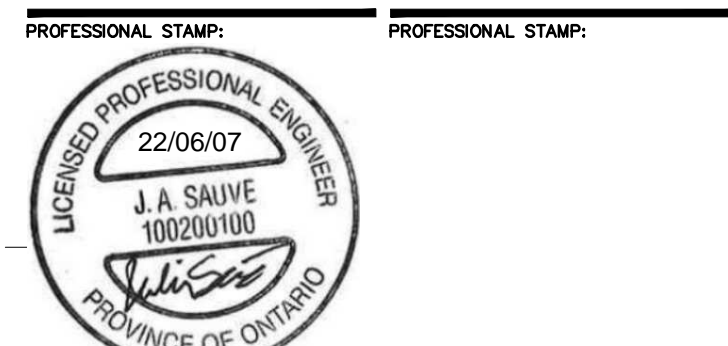

CIVITAS ARCHITECTURE INC. OTTAWA, ON T: 613.742.7482
14 CHAMBERLAIN AVENUE, SUITE 101 CANADA K1S 1V9 WWW.CIVITAS-INC.CA
CONSULTANT LOGO:

PROJECT TITLE:
- FASTFRATE OTTAWA WAREHOUSE AND DISTRIBUTION FACILITY
SCALE: NONE
SOMME ST. OTTAWA, ON

DETAILS

DRAWN BY: D.CANN DRAWING NUMBER:
DATE: J.SAUVE
REVIEWED BY: J.SAUVE **C017**
APPROVED BY:
PRINT DATE: REVISION NUMBER:
ISSUED DATE: NOVEMBER 26, 2021
CLIENT PROJECT #: PROJECT #:

A001083

DO NOT SCALE THIS DRAWING. USE DIMENSIONS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL DIMENSIONS AND NOTIFYING THE ARCHITECT OF ANY DISCREPANCIES BEFORE CONSTRUCTION COMMENCES. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL STRUCTURAL, MECHANICAL, ELECTRICAL, CIVIL AND OTHER CONSULTANT DRAWINGS. THIS DRAWING SHALL NOT BE USED FOR CONSTRUCTION PURPOSES UNLESS SIGNED BY THE ARCHITECT. COPYRIGHT RESERVED. ALL PARTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE ARCHITECT AND SHALL NOT BE USED WITHOUT THE EXPRESSED PERMISSION FROM THE ARCHITECT.

TABLE 1 - NUMBER OF RODS IN FRAME

PIPE DIA	No of RODS
450	1
525	2
600	3
675	4
750	5
825	6
900	7
975	8
1050	9
1200	10

TABLE 2 - NUMBER OF RODS IN FIXED UPPER FRAME

PIPE DIA	No of RODS
1350	1
1500	2
1650	3
1800	4
1950	5
2100	6
2250	7
2400	8

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2018 Rev 2
GRATING FOR CONCRETE ENDWALL
OPSD 804.050

SPLICE BOLT AND NUT

LOCATION	LENGTH
At posts	32
At structure anchor	36

ARRANGEMENT AT POST WOODEN POST SHOWN

NOTES:
1 Base metal thickness of rail shall be 2.67mm nominal and 2.44mm minimum.
2 Holes only in rail.
A All dimensions subject to manufacturing tolerances unless otherwise indicated.
B All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2010 Rev 2
GUIDE RAIL SYSTEM, STEEL BEAM RAIL COMPONENT
OPSD 912.101

POST BOLT AND HOLE

Note	Post Bolt Size and Type
1	16x460 BH
2	18
3	18x310 CoB

NOTES:
1 Washer shall not be installed at front face of rail. One bolt located at centre of steel beam guide rail.
A Wooden posts and offset blocks shall be 150x150mm. Tops to have 25mm chamfer.
B Steel beam guide rail mounting heights shall be as specified.
C This OPSD to be read in conjunction with OPSD 912.101 and 912.102.
D All dimensions are in millimetres unless otherwise shown.

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2010 Rev 2
GUIDE RAIL SYSTEM, STEEL BEAM WOODEN POST ASSEMBLY INSTALLATION - SINGLE RAIL
OPSD 912.140

CLEARANCE TABLE

Type	Inside Diameter mm	Clearance mm
TYPE 1 OR 2 SOIL	900 or less	300
	Over 900	500
TYPE 3 SOIL	900 or less	300
	Over 900	500
TYPE 4 SOIL	900 or less	300
	Over 900	500

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2014 Rev 3
FLEXIBLE PIPE EMBEDMENT AND BACKFILL EARTH EXCAVATION
OPSD 802.010

CLEARANCE TABLE

Type	Pipe Span mm	Clearance mm
TYPE 1 OR 2 SOIL	900 or less	300
	Over 900	500
TYPE 3 SOIL	900 or less	300
	Over 900	500
TYPE 4 SOIL	900 or less	300
	Over 900	500

ONTARIO PROVINCIAL STANDARD DRAWING Nov 2015 Rev 3
FLEXIBLE PIPE ARCH EMBEDMENT AND BACKFILL EARTH EXCAVATION
OPSD 802.020