GENERAL NOTES:

1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL, ENGINEERING AND RELATED DRAWINGS AND DOCUMENTS.
2. REFER TO ENGINEERING DRAWINGS FOR GRADING.
3. REFER TO ARCHITECTURAL DRAWINGS FOR SITE LAYOUT.
4. CONTRACTOR SHALL PROVIDE THE LOCATION(S) OF ALL SERVICES/UTILITIES BY CONSULTING MUNICIPAL AUTHORITIES AND UTILITY COMPANIES AND SHALL BE RESPONSIBLE FOR ADEQUATE PROTECTION FROM DAMAGE DURING CONSTRUCTION.
5. PLANT MATERIAL SHALL BE NO. 1 GRADE AND SHALL COMPLY WITH THE METRIC GUIDE SPECIFICATIONS FOR NURSERY STOCK (LATEST EDITION), PUBLISHED BY THE CANADIAN NURSERY TRADES ASSOCIATION.
6. PLANT MATERIAL LOCATIONS ARE SHEMATIC/APPROXIMATE ONLY. CONTRACTOR SHALL STAKE OUT LOCATIONS ON SITE PRIOR TO WORK.
7. SODDED AREAS TO RECEIVE 125MM TOPSOIL. SOD SHALL BE NO. 1 QUALITY CONFORMING TO THE CANADIAN NURSERY SOD GROWERS SPECIFICATION.
8. REINSTATE ALL AREAS DAMAGED OR DISTURBED BEYPOND THE LIMIT OF WORK.
9. CONTRACTOR SHALL GUARANTEE ALL STREET TREE PLANT MATERIAL (DECIDUOUS AND CONIFEROUS) FOR A PERIOD OF TWO (2) FULL YEARS FROM THE DATE OF FINAL ACCEPTANCE.
10. TREES PLANTED SHALL BE:
    1. 6.0M MIN. FROM STREET LIGHTS.
    2. 1.5M MIN. FROM DRIVEWAYS AND SIDEWALKS.
    3. 2.5M MIN. FROM ROAD CURB.
    4. 2.5M MIN. FROM FIRE HYDRANTS.
    5. 3.0M MIN. FROM UTILITY PEDESTALS AND HYDRO TRANSFORMERS.
    6. 2.0M MIN. FROM WATER STANDPIPE.
11. PLANT MATERIAL SUBSTITUTIONS SHALL NOT BE PERMITTED WITHOUT WRITTEN APPROVAL FROM THE CONSULTANT.
12. THIS PLAN HAS BEEN PREPARED FOR MUNICIPAL APPROVAL AND MAY NOT BE USED FOR CONSTRUCTION.

TREE PLANTING –SECTION:

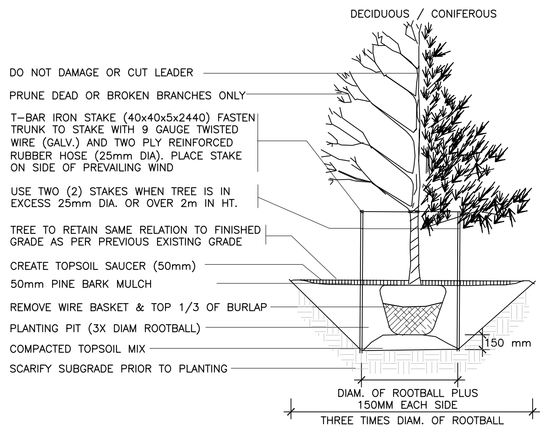

ENSURE 400mm DEPTH OF PLANTING SOIL FOR ALL PLANT MATERIAL.

SHRUB PLANTING –SECTION:

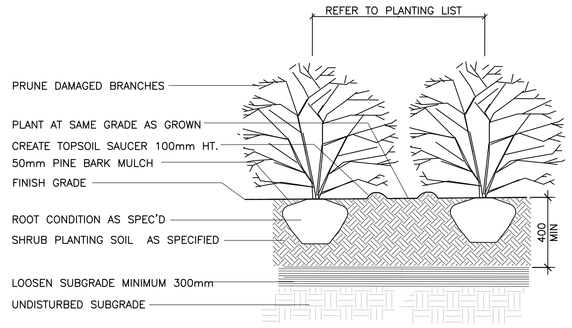

ENSURE 400mm DEPTH OF PLANTING SOIL FOR ALL PLANT MATERIAL.

PLANT LIST:

SYM.	BOTANICAL NAME	COMMON NAME	QTY.	SIZE	REMARKS
DECIDUOUS TREES					
AF	ACER FREEMANII 'AUTUMN BLAZE'	AUTUMN BLAZE MAPLE	5	70 MM CAL.	B&B/W.B.
AC	ACER SACCHARUM	SUGAR MAPLE	3	70 MM CAL	B&B/W.B.
AST	ACER SACCHARUM ' TEMPLE '	COLUMNAR TEMPLE MAPLE	65	50 MM CAL.	B&B/W.B.
ACO	AMELANCHIER CANADENSIS CLUMP	CANADIAN SERVICEBERRY CLUMP	3	250 CM HT.	B&B/W.B.
MH	MALUS 'HARVEST GOLD'	HARVEST GOLD CRABAPPLE	11	50 MM CAL. (SPECIMEN)	B&B/W.B.
PD	PRUNUS PADUS COMMUTATA	MAYDAY TREE	12	50 MM CAL.	B&B/W.B.
SR	SYRINGA RETICULATA ' IVORY SILK '	IVORY SILK TREE LILAC	6	70 MM CAL.	B&B/W.B.
UA	ULMUS AMERICANA ' LIBERTY ELM '	LIBERTY ELM	76	70 MM CAL.	B&B/W.B.
CONIFEROUS TREES					
PS	PINUS SYLVESTRIS	SCOT'S PINE	1	300 CM HT. (SPECIMEN)	B&B/W.B.
SHRUBS					
HK	HYPERICUM KALMIANUM	ST JOHN'S WORT	135	50 CM HT.	POT – 0.5M O.C.
RR	ROSA RUGOSA 'ALBA'	WHITE ROSA RUGOSA	19	80 CM HT.	POT – 1M O.C.
SI	SALIX INTREGRA 'HAKURO NISHIKI	HAKURO NISHIKKI DAPPLED WILLOW	88	90 CM HT.	POT – 1m O.C.
JS	JUNIPERUS SABINA ' TAMARISCIFOLIA'	TAMARIX JUNIPER	350	50 CM SPREAD	POT – 1M O.C.
CSF	CORNUS SERICEA FLAVIRAMEA	YELLOW TWIG DOGWOOD	126	50 CM HT.	POT – 1M. O.C.
PERENIALS/GRASSES					
AS	ANDROPOGON SCOPARIUS	LITTLE BLUE STEM	85	1 GAL. POT	POT – 0.8M O.C.
CA	CALAMAGROSTIS ACUTIFLORA 'KARL FORESTER'	KARL FORESTER FEATHER REED GRASS	45	1 GAL. POT	POT – 1M O.C.
DC	DESCHAMPSIA CESPITOSA 'BROZESCHLEIER'	BRONZE VEIL TUFTED HAIR GRASS	85	1 GAL. POT	POT – 1M O.C.
HP	HEMEROCALLIS 'PARDON ME'	PARDON ME DAYLILY	395	1 GAL. POT	POT – 0.4M O.C.
HN	HEMEROCALLIS 'NIGHT WHISPERS'	NIGHT WHISPERS DAYLILY	540	1 GAL. POT	POT – 0.4M O.C.
IS	IRIS SIBERICA 'BLUE KING'	BLUE KING SIBERIAN IRIS	150	1 GAL. POT	POT – 0.5M O.C.
LG	LIGULARIA GRANITO	GRANITO GOLDEN RAY	65	1 GAL. POT	POT – 0.5M O.C.
MD	MONARDA DIDYMA 'MARSHALL'S DELIGHT'	MARSHALL'S DELIGHT BEE BALM	105	1 GAL. POT	POT – 0.4M O.C.
PV	PANICUM VIRGATUM 'PRAIRIE FIRE'	RED SWITCH GRASS	20	1 GAL. POT	POT – 1M O.C.
PA	PENNISETUM ALOPECURIODES	FOUNTAIN GRASS	230	1 GAL. POT	POT – 1M O.C.
PH	PENNISETUM ALOPECURIODES 'HAMELN'	HAMELN DWARF FOUNTAIN GRASS	205	1 GAL. POT	POT – 0.4M O.C.
SN	SALVIA NEMEROSA 'BLUE QUEEN'	BLUE QUEEN PERENNIAL SALVIA	70	1 GAL. POT	POT – 0.4M O.C.

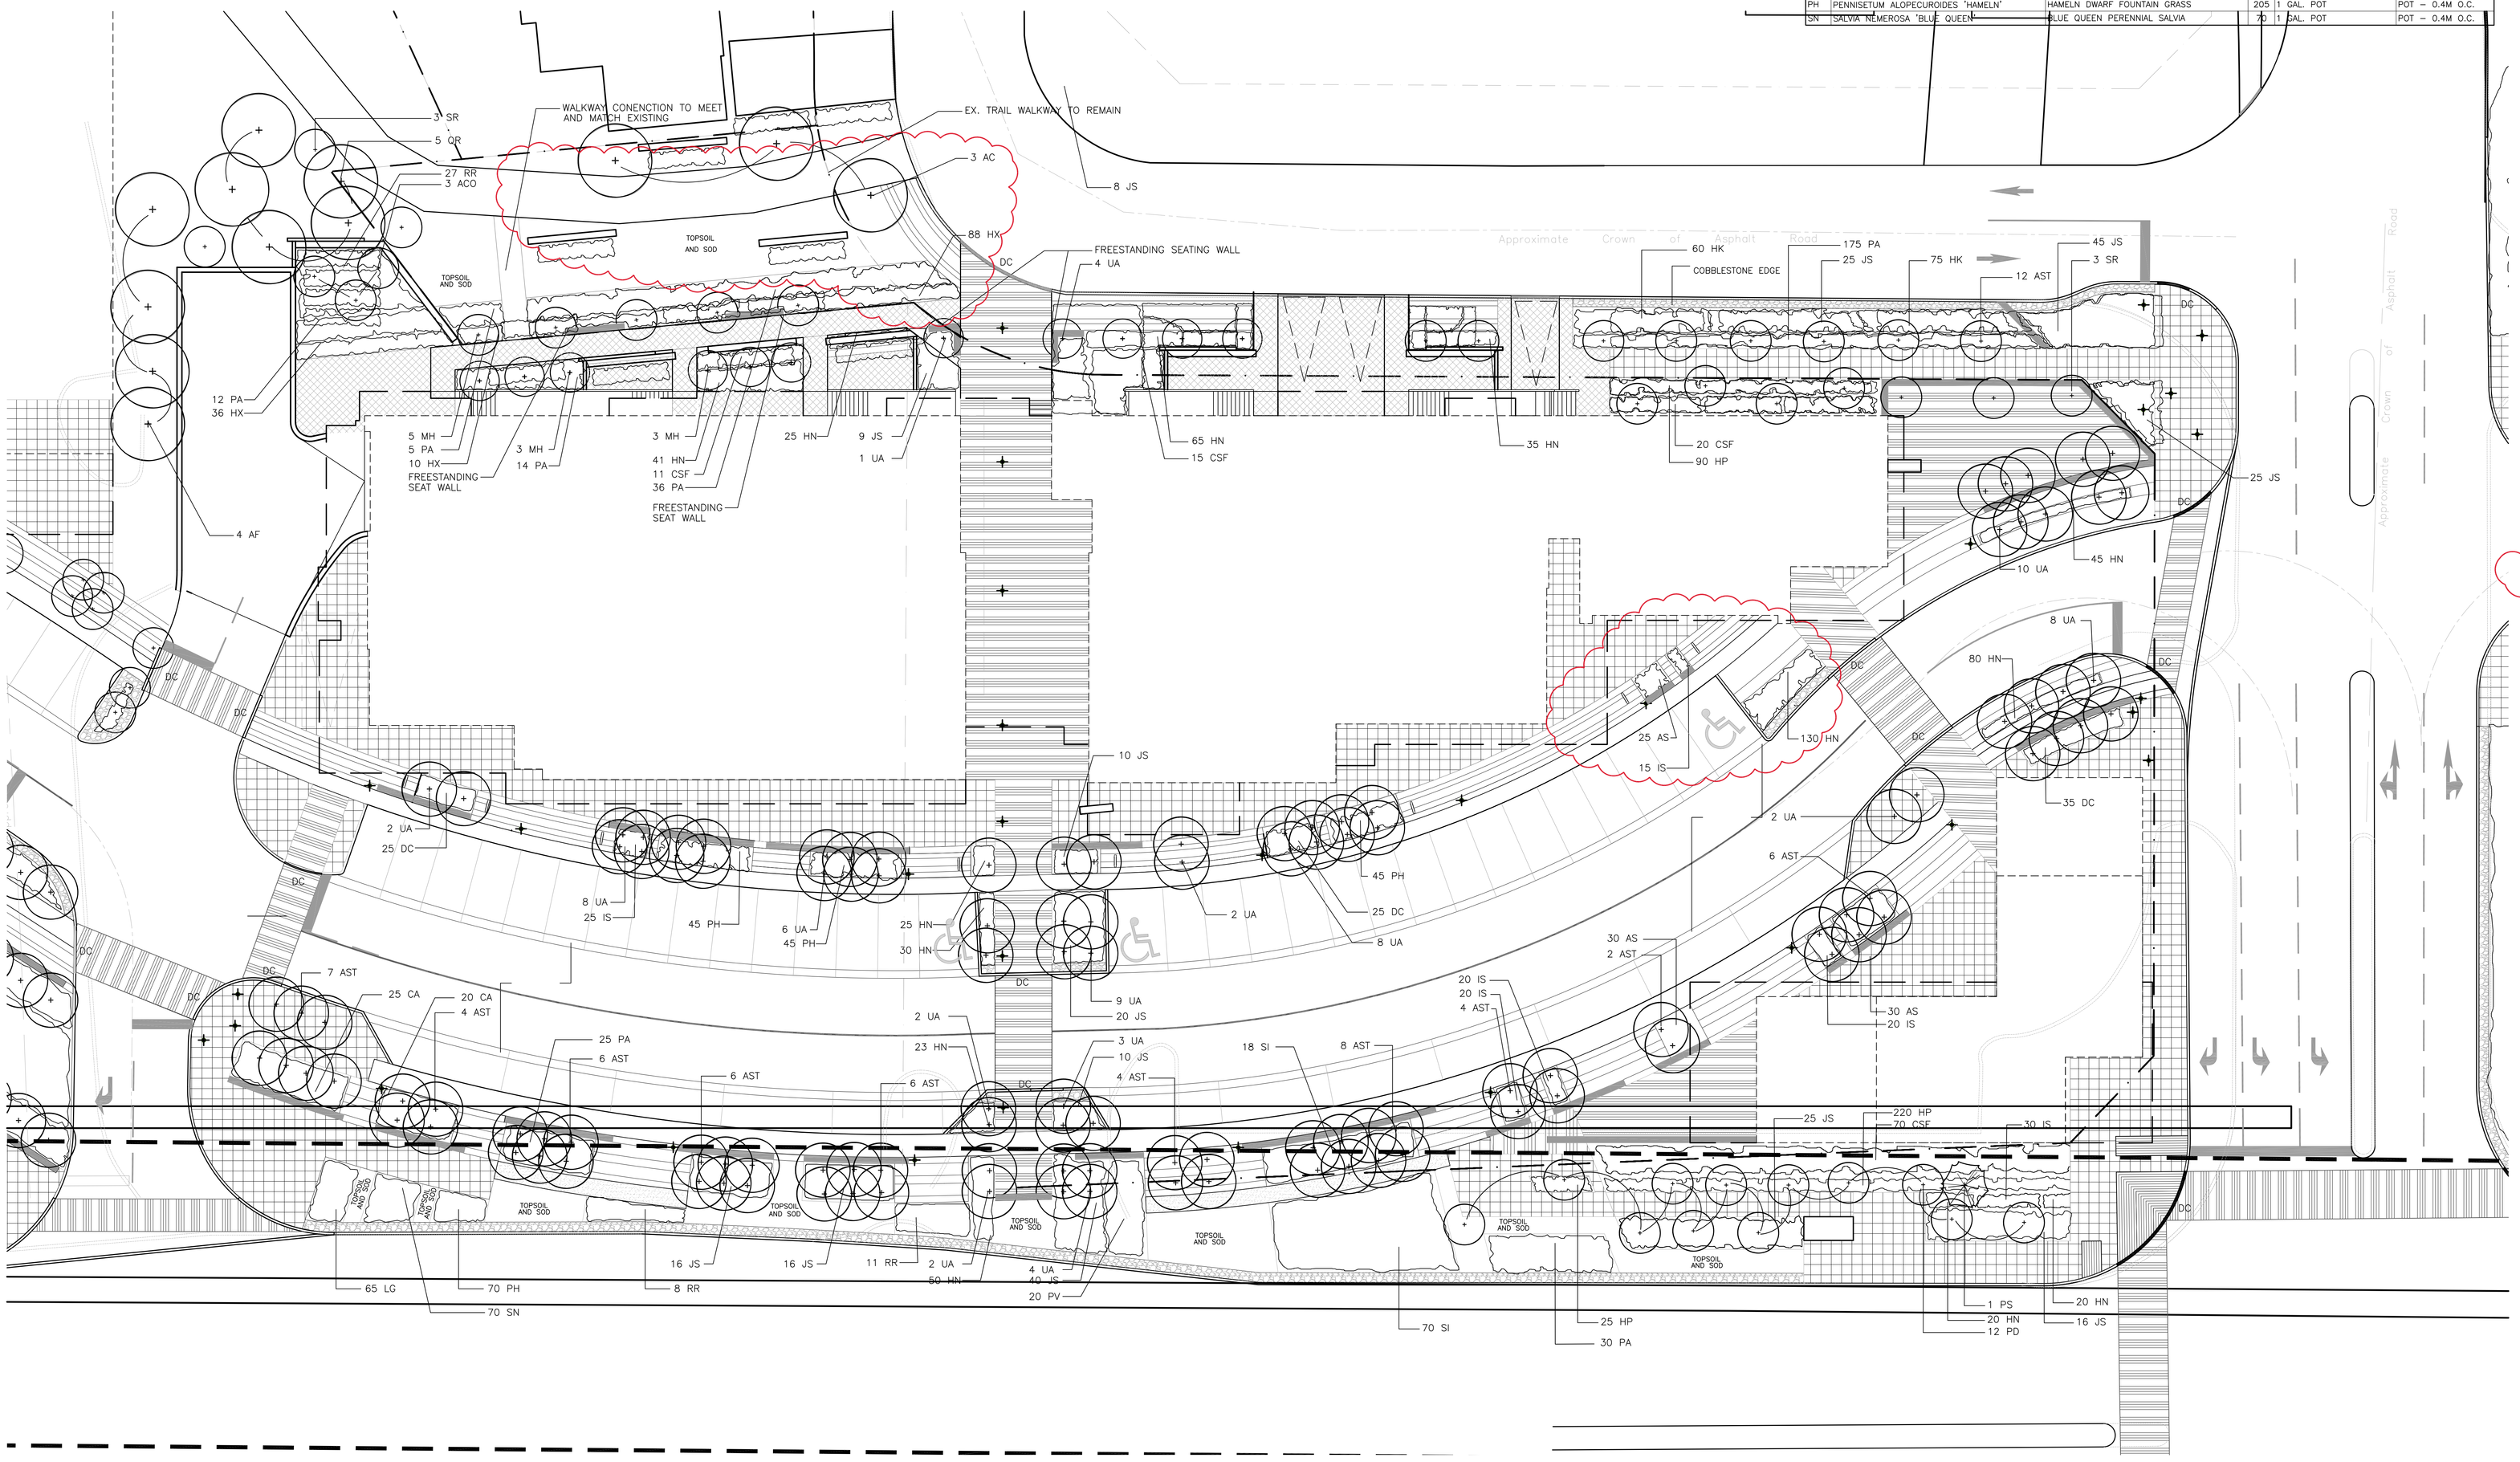

LEGEND:

- DC — DROP CURB
- GRAVEL PATHWAY
- MAINTENANCE EDGE
- PEDESTRIAN LIGHT
- PROPOSED TREES
- PROPOSED SHRUBS
- PRECAST PAVERS 1.
- PRECAST PAVERS 2.
- PRECAST PAVERS 3.
- PRECAST PAVERS 4.

CORUSH SUNDERLAND WRIGHT
Landscape Architecture
Urban Design
Site Planning
Recreation and Park Planning
Project Management
1960 Scott Street, Suite 200, Ottawa, Ontario K1Z 8L8
Tel: (613) 729-4536 Fax: (613) 729-3018

ONTARIO ASSOCIATION OF LANDSCAPE ARCHITECTS

NO.	DESCRIPTION	DATE (M/DD/YY)	CHK
05	REVISED AS PER ENGINEER	03.04.13	SH
04	REVISED AS-PER CLIENT	02.27.13	SH
03	RE-ISSUED FOR SITE PLAN APPROVAL	08.11.11	ML
02	RE-ISSUED FOR SITE PLAN APPROVAL	08.11.11	JC
01	ISSUED FOR SITE PLAN APPROVAL	06.30.11	SS

REVISIONS/ISSUES:

1. All measurements in millimeters unless specified otherwise. Do not scale drawing. All drawings to be read in conjunction with written specifications.
2. Copyright reserved. This drawing is the exclusive property of Corush Sunderland Wright Ltd. and shall not be used without the consent thereof.
3. This Drawing is issued for Site Plan Approval and shall not be used for construction.
4. It is the responsibility of the contractor to:
   - check and verify all dimensions on site;
   - report all errors and/or omissions to the landscape architect;
   - comply with all pertinent codes and by-laws;
   - check and verify locations of all underground services with all local utilities prior to any digging.

PROJECT NORTH

DRAWN	S.K./J.G.
DATE	06.30.11
CHECKED	S.S.

bbb architects

PROJECT
CENTRAL PARK
MERIVALE ROAD

DWG. TITLE
PHASE 1 LANDSCAPE PLAN
DETAILS/ PLANT LIST

SCALE	DWG. No.	REV.
1:150	L-2	02
PROJ. NO. 1187-01		