

CLIENT
TAMARACK HOMES

3187 ALBION ROAD SOUTH

COPYRIGHT
This drawing has been prepared solely for the intended use, thus any reproduction or distribution for any purpose other than authorized by IBI Group is forbidden. Written dimensions shall have precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on the job, and IBI Group shall be informed of any variations from the dimensions and conditions shown on the drawing. Shop drawings shall be submitted to IBI Group for general concurrence before proceeding with fabrication.

IBI Group Professional Services (Canada) Inc.
is a member of the IBI Group of companies

ISSUES		
No.	DESCRIPTION	DATE
1	ISSUED FOR CITY REVIEW	2021-03-05
2	REVISED PER CITY COMMENTS	2021-03-05
3	REVISED AS PER CITY COMMENTS	2021-07-28
4	REVISED PER NEW SITE PLAN	2021-08-30
5	ISSUED FOR BUILDING PERMIT	2021-09-13



CONSULTANTS





Project Coordinator
Tamarack Homes

Architect:
RLA Architecture

Landscape:
Lashley + Associates

Surveyor:
Stantec Geomatics Ltd.

Geotech:
Paterson Group

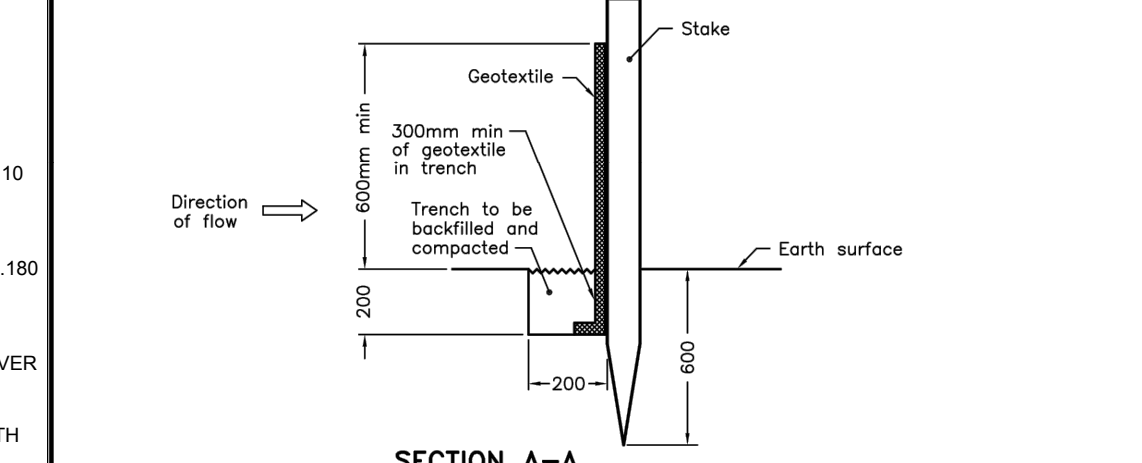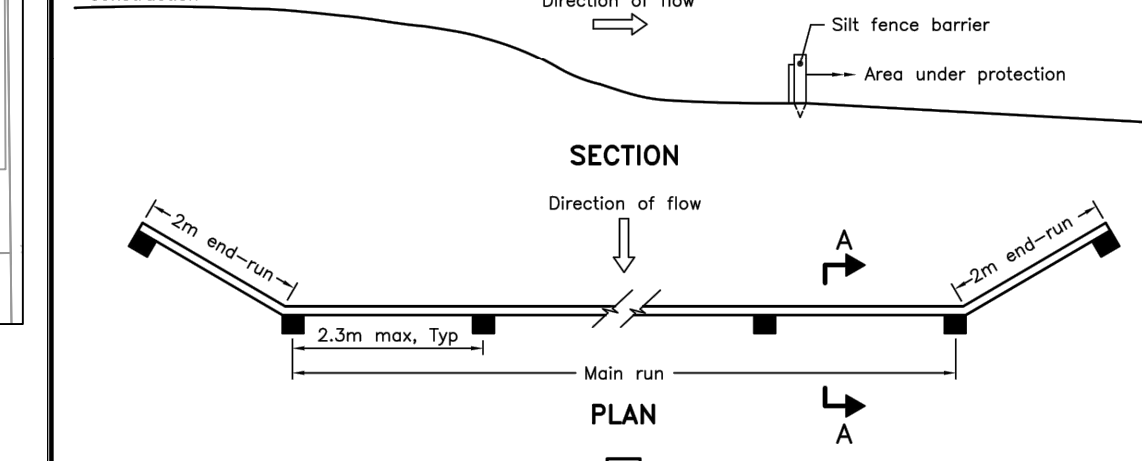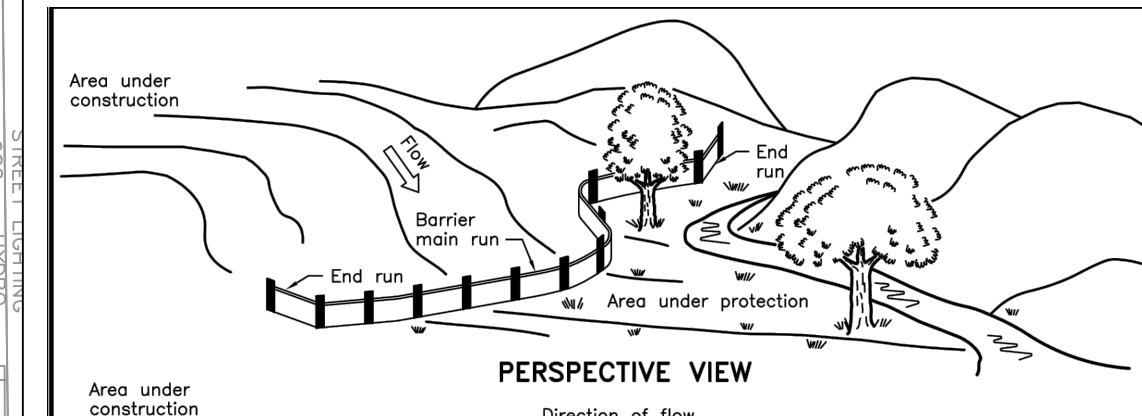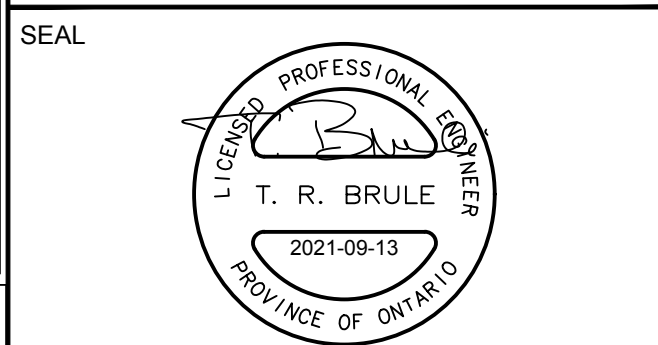

NOTE:
A All dimensions are in millimetres unless otherwise shown.

NOTES:

- SILT FENCE TO BE ERRECTED PRIOR TO EARTH WORKS BEING COMMENCED. SILT FENCE TO BE MAINTAINED UNTIL VEGETATION IS ESTABLISHED AND CONSTRUCTION COMPLETE.
- SILT SACK TO BE PLACED AND MAINTAINED UNDER COVER OF ALL CATCHBASINS. GEOTEXTILE SILT SACK IN STREET C&B TO REMAIN UNTIL ALL CURBS ARE CONSTRUCTED. GEOTEXTILE FABRIC IN RYCBs TO REMAIN UNTIL VEGETATION IS ESTABLISHED. ALL CATCHBASINS TO BE REGULARLY INSPECTED AND CLEANED, AS NECESSARY, UNTIL SOD AND CURBS ARE CONSTRUCTED.
- CONTRACTOR TO PROVIDE DETAILS ON LOCATION(S) AND DESIGN OF DEWATERING TRAP(S) PRIOR TO COMMENCING WORK. CONTRACTOR ALSO RESPONSIBLE FOR MAINTAINING TRAP(S) AND ADJUSTING SIZE(S) IF DEEMED REQUIRED BY THE ENGINEER DURING CONSTRUCTION.

LEGEND

- LIGHT DUTY SILT FENCE AS PER OPSD-219.110
- SNOW FENCE
- STRAW BALE CHECK DAM AS PER OPSD-219.180
- ROCK CHECK DAM AS PER OPSD-219.210
- SILT SACK PLACED UNDER EXISTING CB COVER
- TEMPORARY MUD MAT 0.15m THICK 50mm CLEAR STONE ON NON WOVEN FILTER CLOTH

Jameso

DOUGLAS JAMES, MCIP, RPP
MANAGER, DEVELOPMENT REVIEW - CENTRAL PLANNING, INFRASTRUCTURE & ECONOMIC DEVELOPMENT DEPARTMENT, CITY OF OTTAWA

APPROVED
By Jameso at 11:51 am, Nov 25, 2021

ONTARIO PROVINCIAL STANDARD DRAWING
LIGHT-DUTY SILT FENCE BARRIER

Nov 2006 Rev 1
OPSD 219.110

IBI GROUP
Suite 400 - 333 Preston Street
Ottawa ON K1S 5N4 Canada
tel 613 225 1311 / 613 241 3300 fax 613 225 9868
ibigroup.com

PROJECT
93 NORMAN STREET

PROJECT NO: 132469
DRAWN BY: D.D.
PROJECT MGR: T.R.B.

CHECKED BY: J.B.
APPROVED BY: T.R.B.

SHEET TITLE
EROSION AND SEDIMENTATION CONTROL PLAN

SHEET NUMBER C-900 **ISSUE** 5

CITY FILE No. D07-12-13-0225
Scale Check
File Location: J:\132469_93_Norman\7_0_Production\7_02_ErosionAnd_SedimentationControl_Plan.dwg Last Saved: September 9, 2021, 2:56:59 PM by Denise Dore