

40mm SUPERPAVE 12.5 ASPHALTIC CONCRETE
50mm SUPERPAVE 19.0 ASPHALTIC CONCRETE
150mm OPSS GRANULAR A CRUSHED STONE
400mm OPSS GRANULAR B TYPE II

NOTE:
ALL EXISTING BUILDINGS, BARNs,
POST & WIRE FENCES, TREES,
UTILITY WIRES, POLES AND
CULVERTS WITHIN LOTS AND BLOCKS
TO BE REMOVED, UNLESS
OTHERWISE NOTED

NOTE
FOR WATERMAIN LAYOUT AT DEAD-END
STREETS REFER TO CITY STD. W37.2

ANY DISTURBED AREA DURING
CONSTRUCTION TO BE RESTORED TO
THE ORIGINAL CONDITION OR BETTER
TO THE SATISFACTION OF THE
AUTHORITIES HAVING JURISDICTION

WRITTEN PERMISSION REQUIRED
FOR WORK ON ADJACENT LANDS

NOTE
FOR WATERMAIN STUBS, 2.4m
MIN. COVER TO BE PROVIDED

NOTE:
ALL WATERMAIN CONNECTIONS AND
DECOMMISSIONING OF EXISTING WATERMAINS TO
BE COMPLETED BY CITY FORCES. TRENCH
BACKFILL/REINSTATEMENT TO BE COMPLETED BY
THE CONTRACTOR TO THE SATISFACTION OF THE
CITY OF OTTAWA.

**NOTE:RE: TEST PIT/BOREHOLE
EXCAVATIONS**
ANY DISTURBED MATERIAL ENCOUNTERED
BELOW THE SUBGRADE LEVEL WITHIN A
BUILDING FOOTPRINT TO BE SUB-EXCAVATED
AND BACKFILLED WITH COMPACTED ENGINEERED
FILL AS PER GEOTECHNICAL ENGINEERS
RECOMMENDATION.



CONTRACTOR TO VERIFY THE
PRECISE LOCATIONS AND INVERT
ELEVATIONS OF Ex. UNDERGROUND
SERVICES AND Ex. UTILITIES PRIOR
TO STARTING CONSTRUCTION

NOTE: CB
FOR CATCHBASIN INFORMATION, REFER TO
DRAWING No. 3 FOR DETAIL.



GRADING FOR SUBDIVISION PER IBI
PROJECT No. 27970 - REV 16,
DATED JUNE 27, 2019.

SERVICING FOR SUBDIVISION PER IBI
PROJECT No. 27970 - REV 18,
DATED JANUARY 11, 2019.

COMPOSITE UTILITY PLAN OF
SUBDIVISION PER IBI PROJECT No.
27970 - REV 7, DATED NOVEMBER
29, 2018.

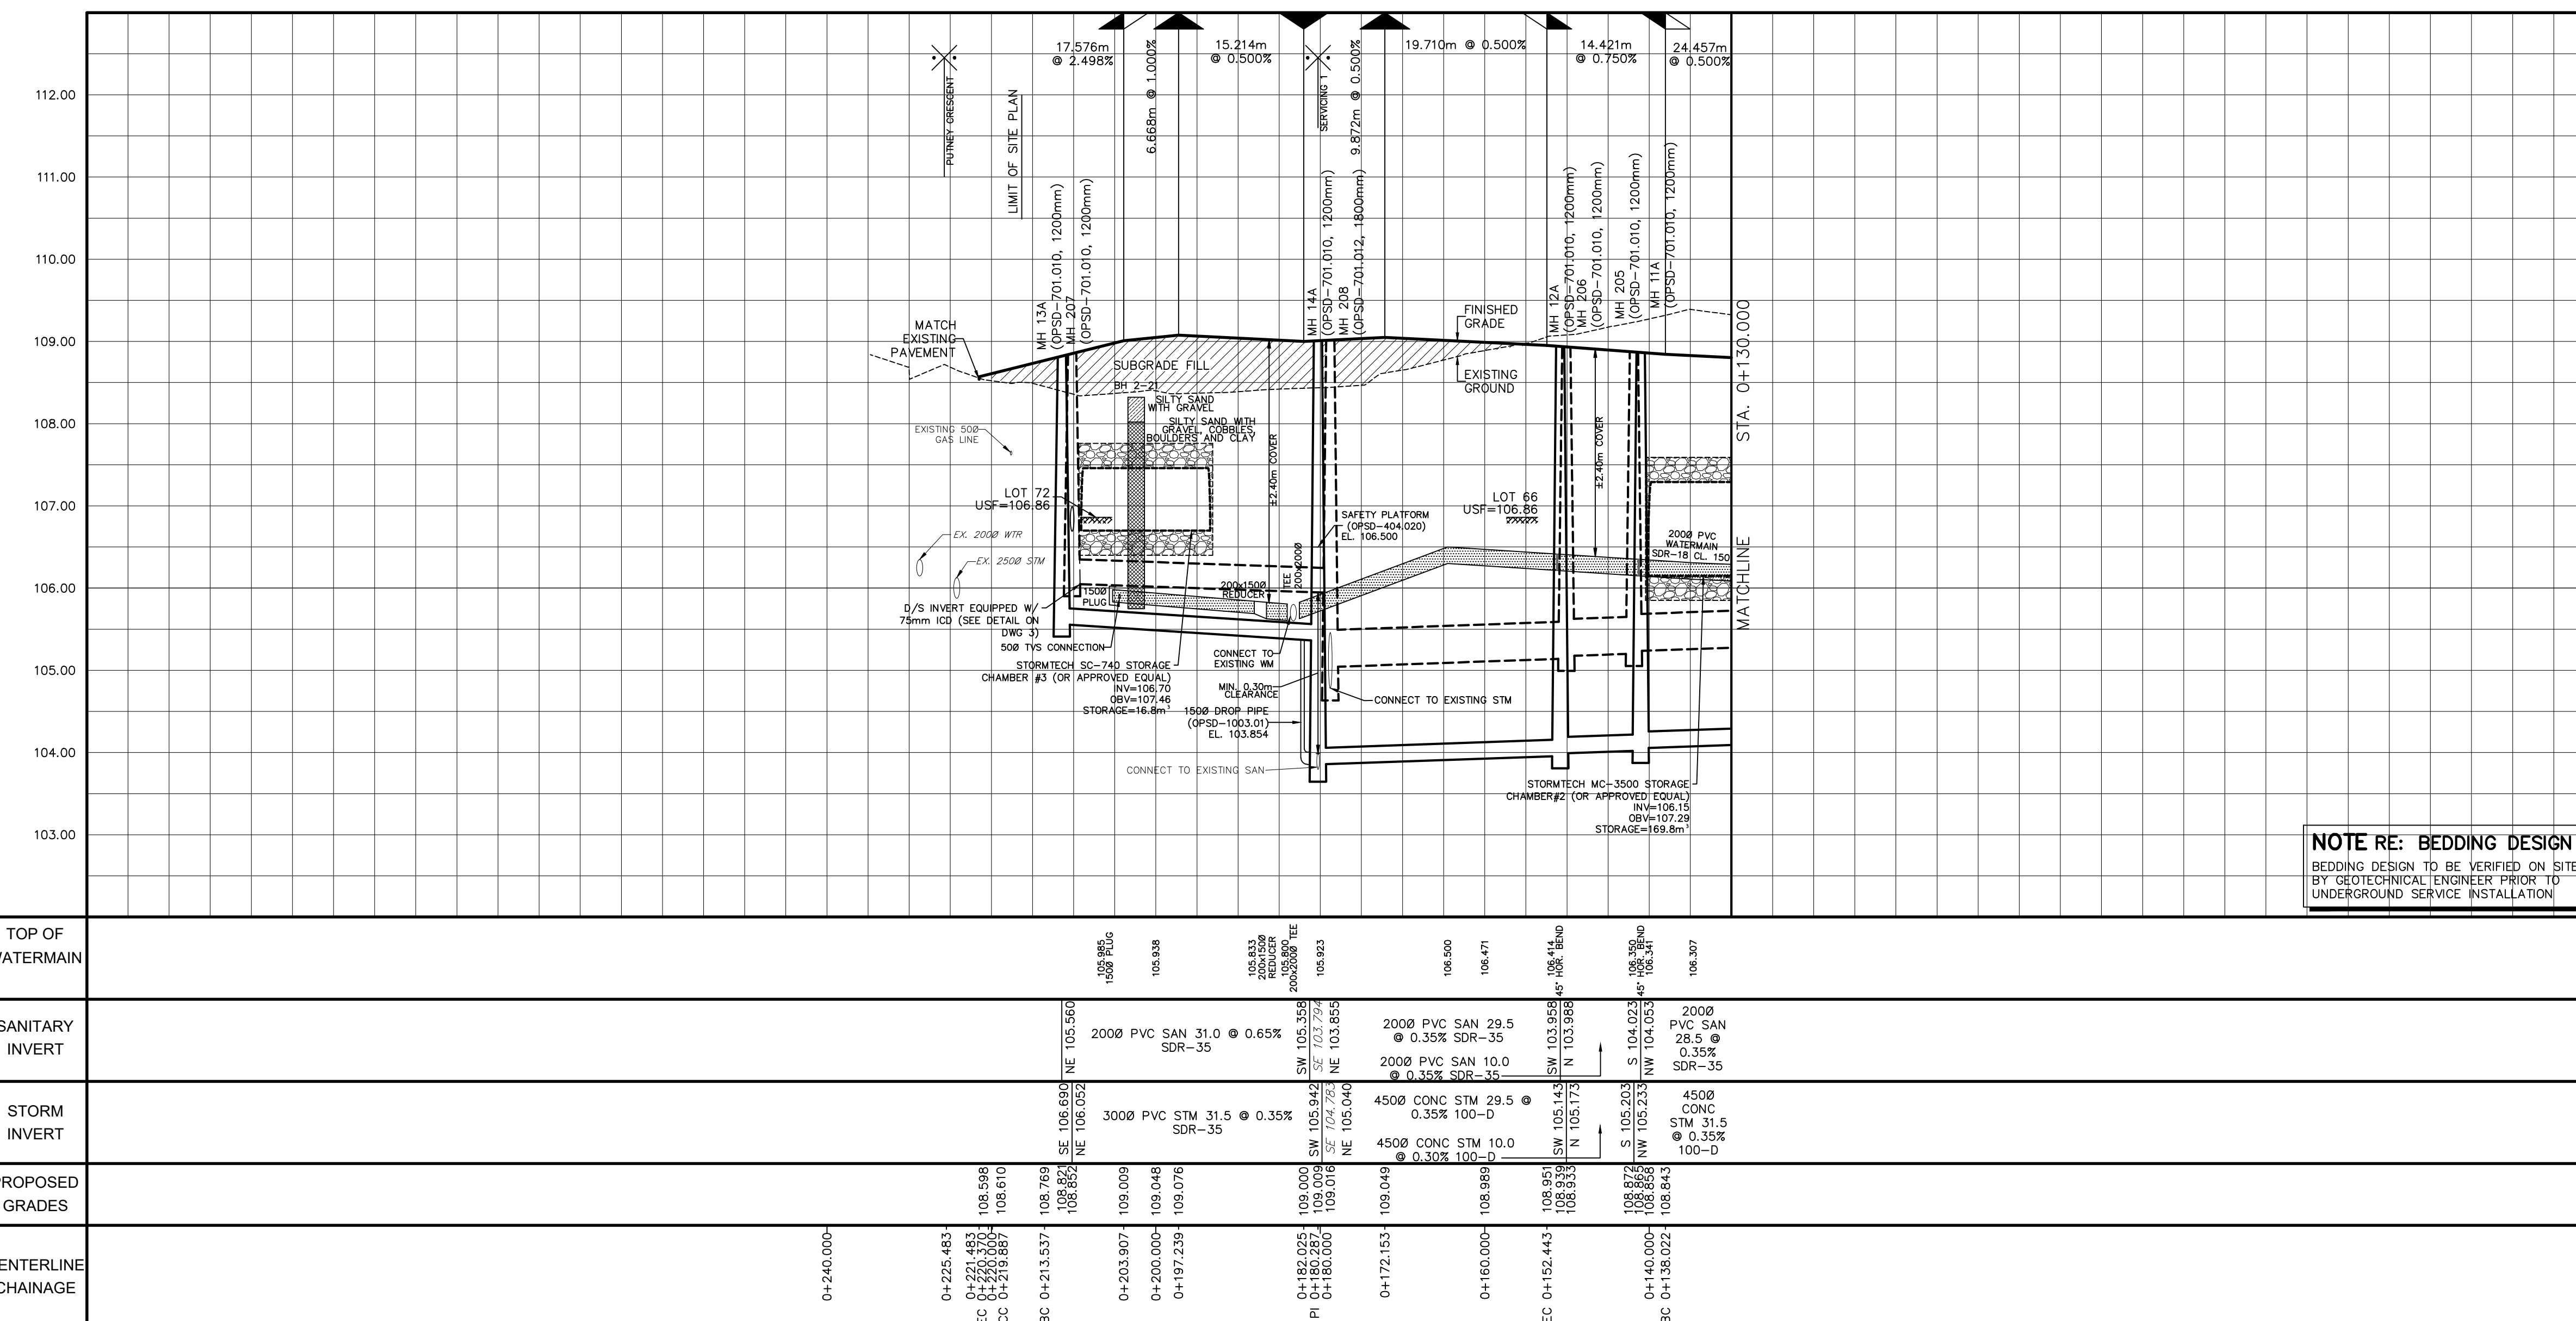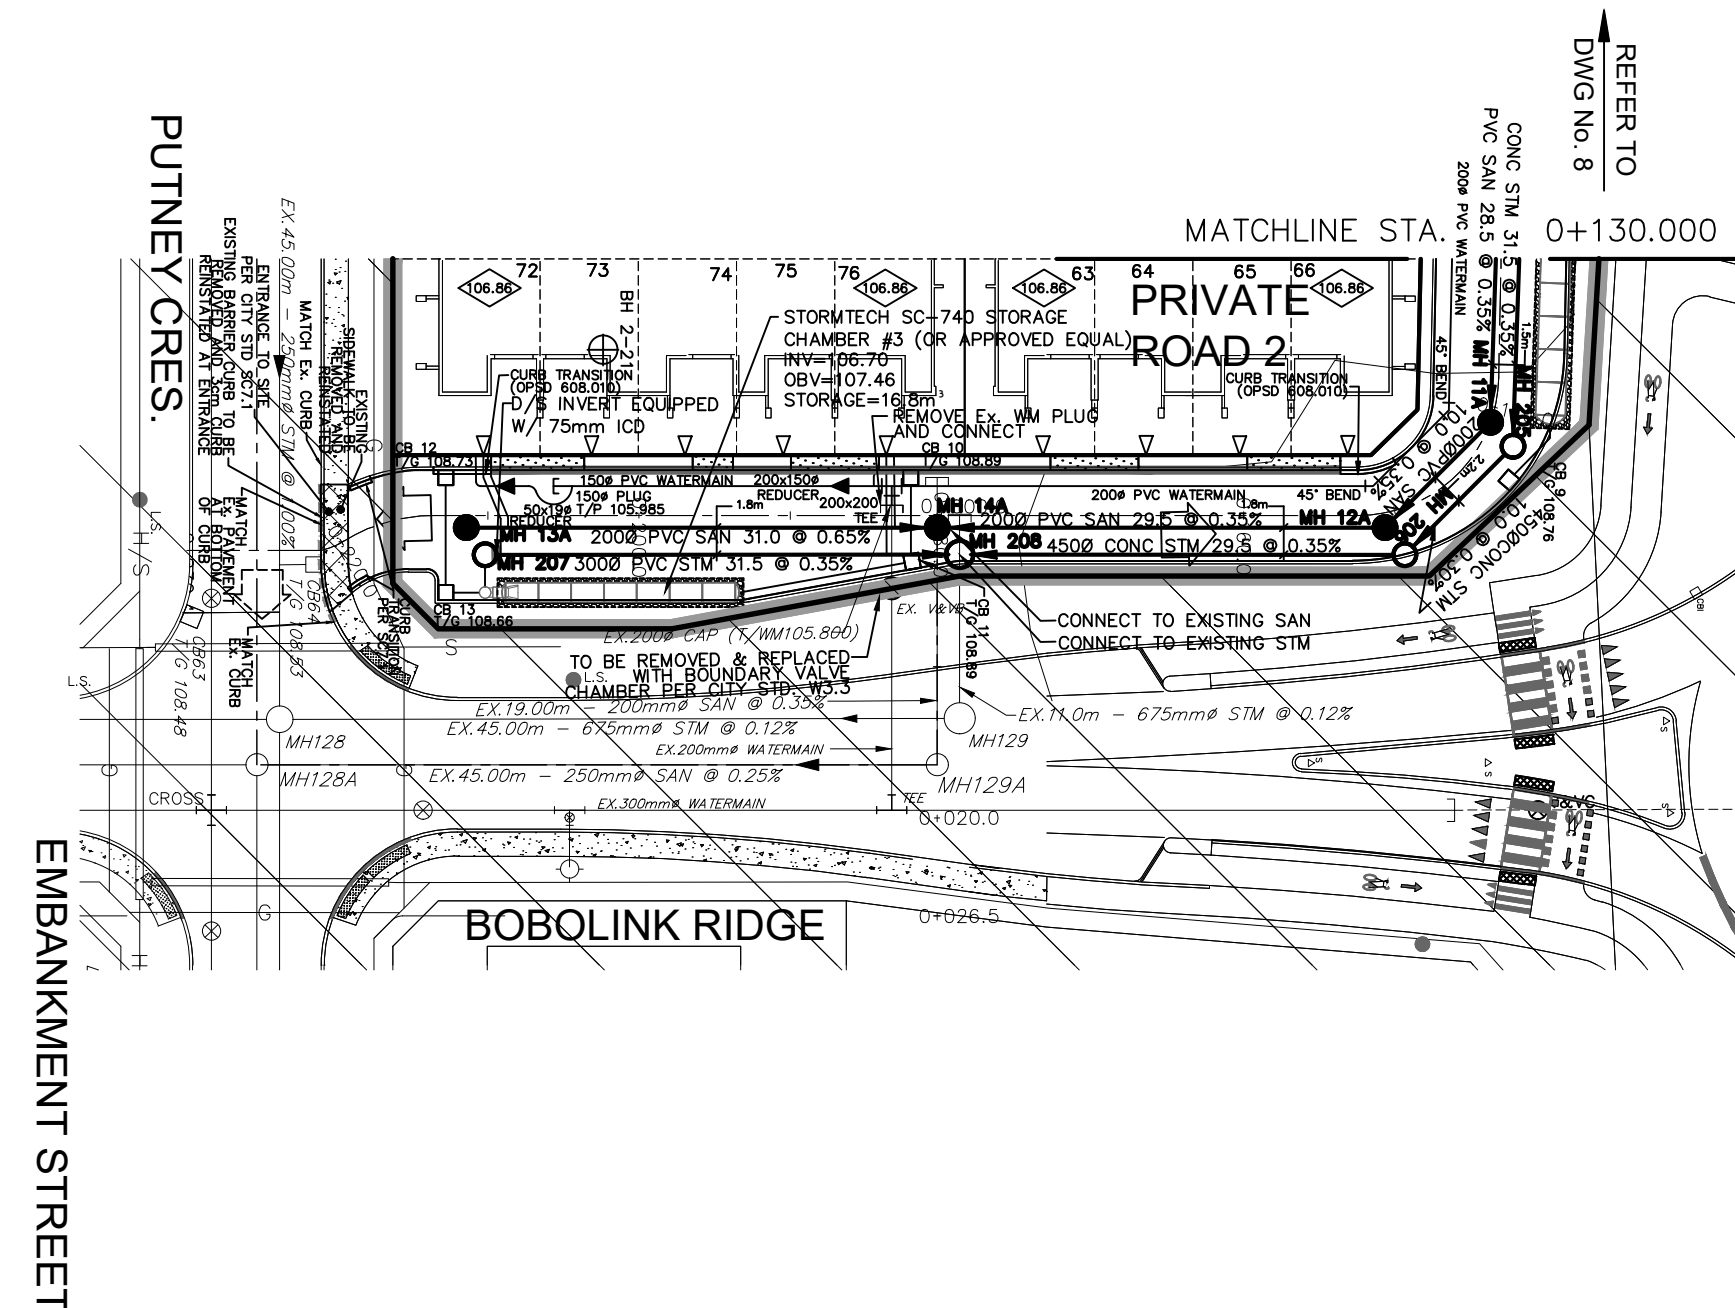

NOTE RE: BEDDING DESIGN
BEDDING DESIGN TO BE VERIFIED ON SITE
BY GEOTECHNICAL ENGINEER PRIOR TO
UNDERGROUND SERVICE INSTALLATION

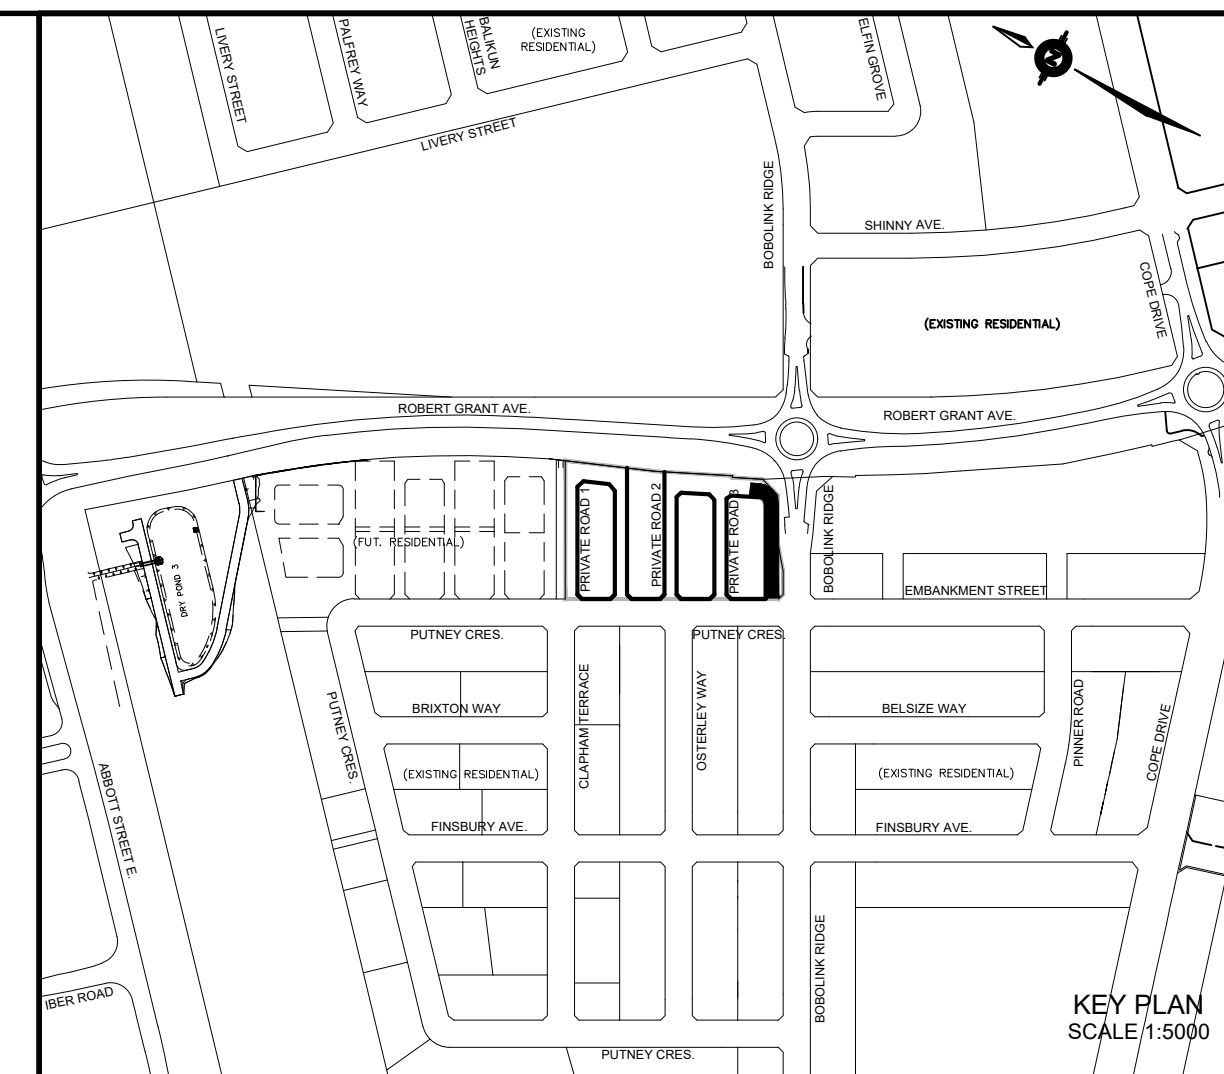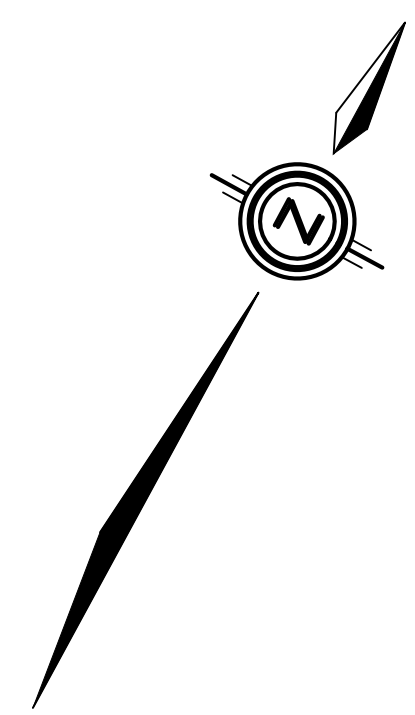

The diagram illustrates a vertical sewer main assembly. At the top, a cross-section shows the pipe entering from above. The main shaft contains several horizontal branches connected by tees. From top to bottom, the components are:

- CROSS**: The top connection point.
- 45° BEND**: A bend fitting below the cross.
- LATERAL**: A horizontal branch connection.
- HYDRANT, VALVE & VB**: A connection for a hydrant, valve, and vent box.
- TEE**: A standard tee fitting.
- VALVE & VC**: A connection for a valve and vent cap.
- VALVE & VB**: Another connection for a valve and vent box.
- 22.5° BEND**: A bend fitting.
- 11.25° BEND**: A bend fitting.
- REDUCER**: A fitting to change pipe diameter.
- CAP**: A closed end at the bottom of the main shaft.
- SANITARY MAINTENANCE HOLE**: An access point labeled MH202A.
- CAP**: Another closed end.
- STREET CATCHBASIN & LEAD**: Labeled ST.
- CATCHBASIN/ MAINTENANCE HOLE WITH CLOSED LID & LEAD**: Labeled MH202.
- STORM MAINTENANCE HOLE**: Labeled CBMH201.
- CURB INLET CATCHBASIN & LEAD**: Labeled CBMH201.
- CATCHBASIN/ MAINTENANCE HOLE**: Labeled CBMH201.
- INTERCONNECTED CATCH BASIN & LEADS**: A connection between two catch basins.
- CAP**: A closed end.
- SINGLE SERVICE LOCATION (ST, SAN & WM)**: A service line connection.
- SINGLE SERVICE LOCATION (ST, SAN & WM)**: Another service line connection.
- TEE CATCHBASIN PERFORATED PIPE**: A connection to a catch basin.
- ELBOW CATCHBASIN**: A connection to a catch basin.
- DITCH AND CULVERT**: The final exit point at the bottom.

Dimensions and labels include "30mm", "WM", "V&C", "V&B", "20mm", "3/8mm", and "600ø CSP". Arrows indicate flow direction or connection points.

HYDRO TRANSFORMER

STREET LIGHT STANDARD

CONCRETE SIDEWALK

CURB & DEPRESSED CURB

ASPHALT SIDEWALK

CHAINLINK FENCE (1.5m)

UNLESS OTHERWISE NOTED

NOISE BARRIER (2.5m)

UNLESS OTHERWISE NOTED

DECORATIVE FENCE (SEE LANDSCAPE FOR DETAIL)

CONSTRUCTION FENCE

POST AND RAIL FENCE

PHASING LIMITS

PROPERTY BOUNDARY

BOREHOLE (BH)

TEST PIT (TP)

AUGER HOLE (AH)

MONITORING WELL LOCATION

CONCEPTUAL WELL LOCATION

TOP OF FOUNDATION ELEVATION

FINISHED FLOOR ELEVATION

UNDERGIRD OF FOOTING ELEVATION

NUMBER OF RISERS

UNITS REQUIRING PRESSURE

REDUCING VALVES

WALKOUT UNITS

SLAB ON GRADE

OVERLAND FLOW DIRECTION

EXTERNAL OVERLAND FLOW DIRECTION

EMERGENCY OVERLAND FLOW DIRECTION

AS PER GEOTECHNICAL REPORT

6

3000




600

300

150

500

NOT FOR CONSTRUCTION

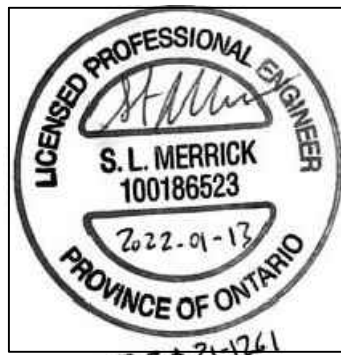1	S.L.M.	22-01-13	1st SUBMISSION
No.	BY	DATE	DESCRIPTION
TOPOGRAPHIC INFORMATION TOPOGRAPHIC INFORMATION PROVIDED BY ANNIS, O'SULLIVAN, VOLLEBEKK LTD. PROJECT No. 22111-21 RECEIVED JUNE 24, 2021			
LEGAL INFORMATION CALCULATED M-PLAN PROVIDED BY ANNIS, O'SULLIVAN, VOLLEBEKK LTD., PROJECT No. 22111-21, RECEIVED DECEMBER 13, 2021.			
BENCH MARK SITE BENCHMARK #1, FIRE HYDRANT TOP OF SPINDLE ELEVATION = 109.78m SITE BENCHMARK #2, CP IN ASPHALT ELEVATION = 109.09			
TAMARACK HOMES		BOBOLINK RIDGE BLOCK 343	
 120 Iber Road Unit 103 Stittsville, Ontario, K2S 1E9 Tel. (613) 836-0856 Fax. (613) 836-7183 www.DSEL.ca			
		110 Laurier Ave W Ottawa, Ontario, K1P 1J1 Tel. (613) 580-2400 www.Ottawa.ca	
PLAN AND PROFILE OF		© DSEL	
PRIVATE ROAD 2 (STA. 0+130.00 TO 0+240.00)			
DRAWN BY: G.G.G.		CHECKED BY: S.L.M.	
DESIGNED BY: G.G.G.		CHECKED BY: S.L.M.	
SCALE: HORIZ. 1:50			
VERT. 1:500			
		PROJECT No. 21-1261	
		SHEET No. 9	

CITY FILE No. D07-XX-XX-XXXX CITY PLAN No. XXXXXX