
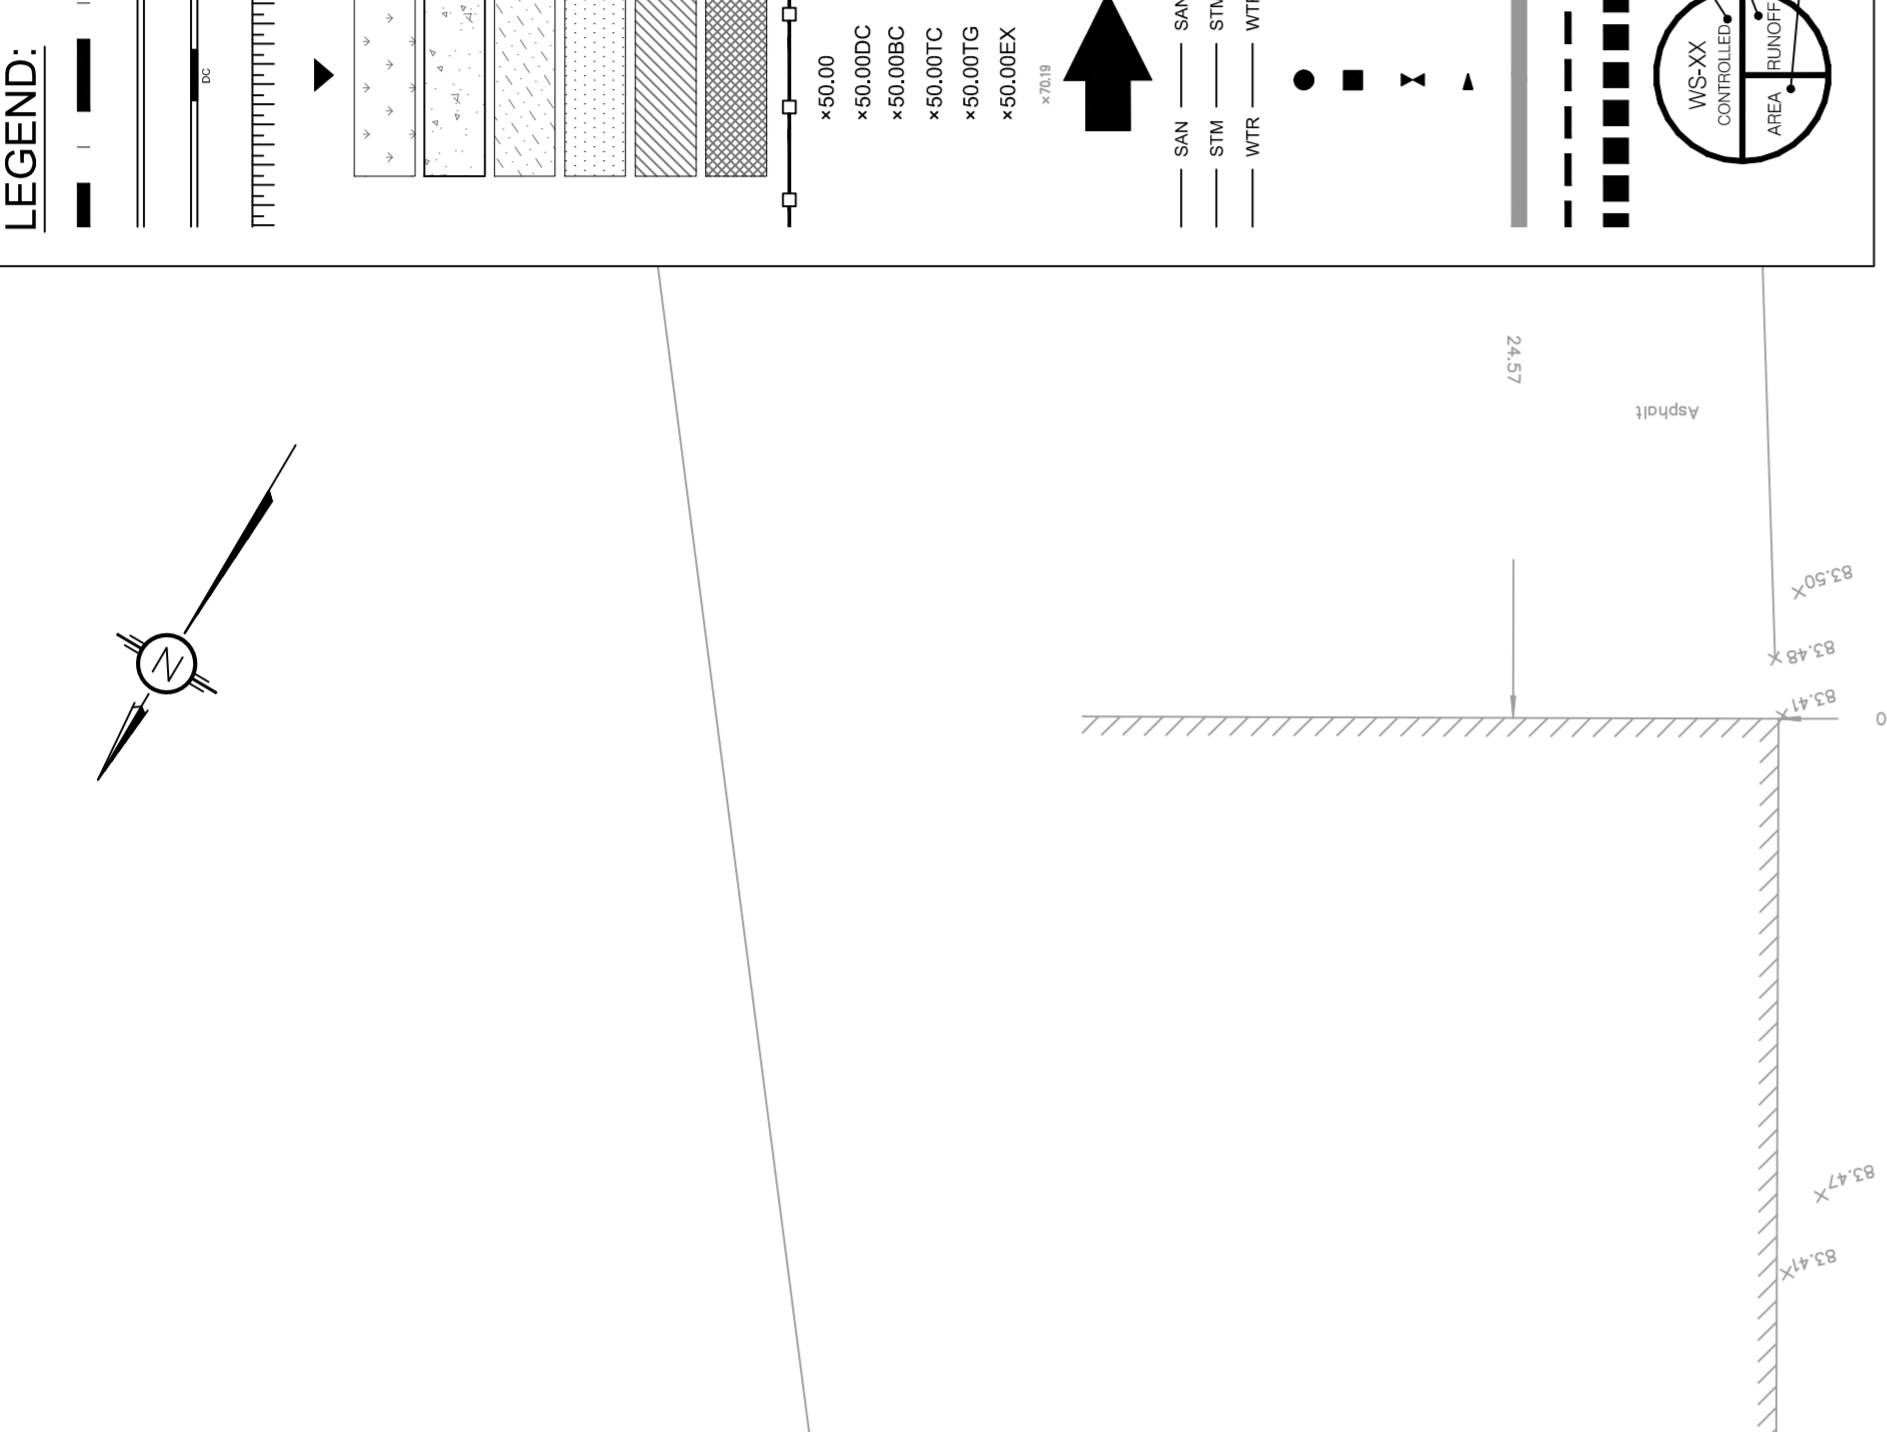
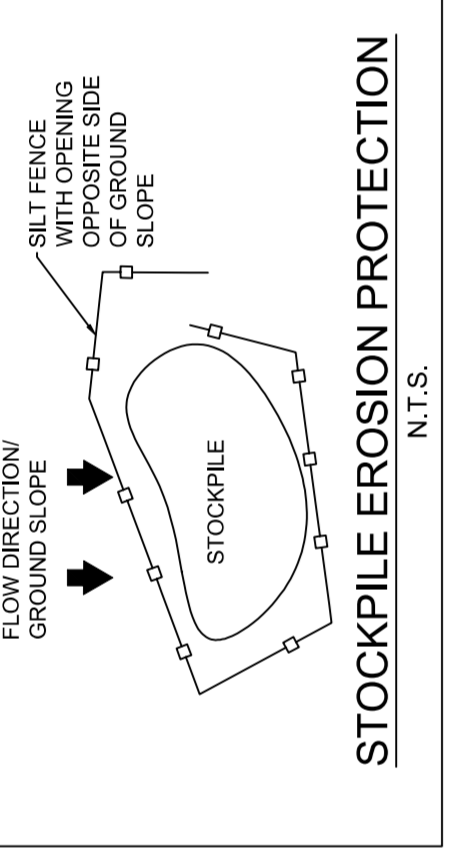


- EROSION AND SEDIMENT CONTROL MEASURES:**
- PRIOR TO START OF CONSTRUCTION:
    - PRIOR TO ANY VEGETATIVE COVER, MOVING OF SOIL AND CONSTRUCTION:
      - INSTALL GEOSOCK INSERTS WITH AN OVERLAP IN ALL THE DOWNSTREAM CATCHBASINS AND MANHOLES
      - INSPECT MEASURES IMMEDIATELY AFTER INSTALLATION.
  - 2. DURING CONSTRUCTION:
    - WORK TO BE DONE IN THE VICINITY OF MAJOR WATERWAYS TO BE CARRIED OUT FROM JULY AND SEPTEMBER ONLY.
    - PROTECT DISTURBED AREAS FROM RUNOFF.
    - PROVIDE TEMPORARY COVER SUCH AS SEEDING OR MULCHING IF DISTURBED AREA WILL NOT BE REHABILITATED WITHIN 30 DAYS.
    - SILT FENCES, FILTER CLOTHS AND CATCH BASIN SWIMPS WEEKLY AND AFTER EVERY MAJOR STORM EVENT.
    - CLEAN AND REPAIR WHEN NECESSARY.
    - PLAN TO BE REVIEWED AND REVISED AS REQUIRED DURING CONSTRUCTION
    - EROSION CONTROL FENCING TO BE ALSO INSTALLED AROUND THE BASE OF ALL STOCKPILES.
    - ONE WHICH IS TO BE PAVED BEFORE THE PILES ARE REMOVED. ALL TOPSOIL PILES (IF ANY) ARE TO BE SEEDED IF THEY ARE TO REMAIN ON SITE LONG ENOUGH FOR SEEDS TO GROW (LONGER THAN 30 DAYS).
    - CONTROL WIND-BLOWN DUST OFF SITE TO ACCEPTABLE LEVELS BY SEEDING TOPSOIL PILES AND OTHER AREAS
    - ALL EROSION CONTROL MEASURES TO REMAIN IN PLACE UNTIL ALL DISTURBED GROUND SURFACES HAVE BEEN STABILIZED EITHER BY PAVING OR RESTORATION OF VEGETATIVE GROUND COVER.
    - NO ALTERNATE METHODS OF EROSION PROTECTION SHALL BE PERMITTED UNLESS APPROVED BY THIS CONSULTING ENGINEER.
    - CONTRACTOR RESPONSIBLE FOR CITY ROADWAY AND SIDEWALK TO BE CLEANED OF ALL SEDIMENT FROM VEHICULAR TRACKING ETC. AT THE END OF EACH WORK DAY.
    - PROVIDE GRAVEL ENTRANCE WHEREVER EQUIPMENT LEAVES THE SITE TO PREVENT MUD TRACKING ONTO PAVED AREAS.
    - DURING WET CONDITIONS, TREES OF ALL VEHICLES/EQUIPMENT LEAVING THE SITE ARE TO BE SCRAPED.
    - ANY MUD/MATERIAL TRACKED ONTO THE ROAD SHALL BE REMOVED IMMEDIATELY BY HAND OR RUBBER TIRE LOADER.
    - TRACKED ONTO ADJUTING PROPERTIES OR PUBLIC STREETS DURING CONSTRUCTION AND PROCEED IMMEDIATELY TO CLEAN UP ANY AREAS SO AFFECTED.
  - 3. AFTER CONSTRUCTION:
    - PROVIDE PERMANENT COVER CONSISTING OF TOPSOIL AND SEED TO DISTURBED AREAS.
    - REMOVE ANY STRAW BALE FLOW CHECK DAMS, SILT FENCES AND FILTER CLOTHS ON CATCH BASINS AND MANHOLE AREAS AND STABILIZED.
    - INSPECT AND CLEAN CATCH BASIN SWIMPS AND STORM SEWERS.

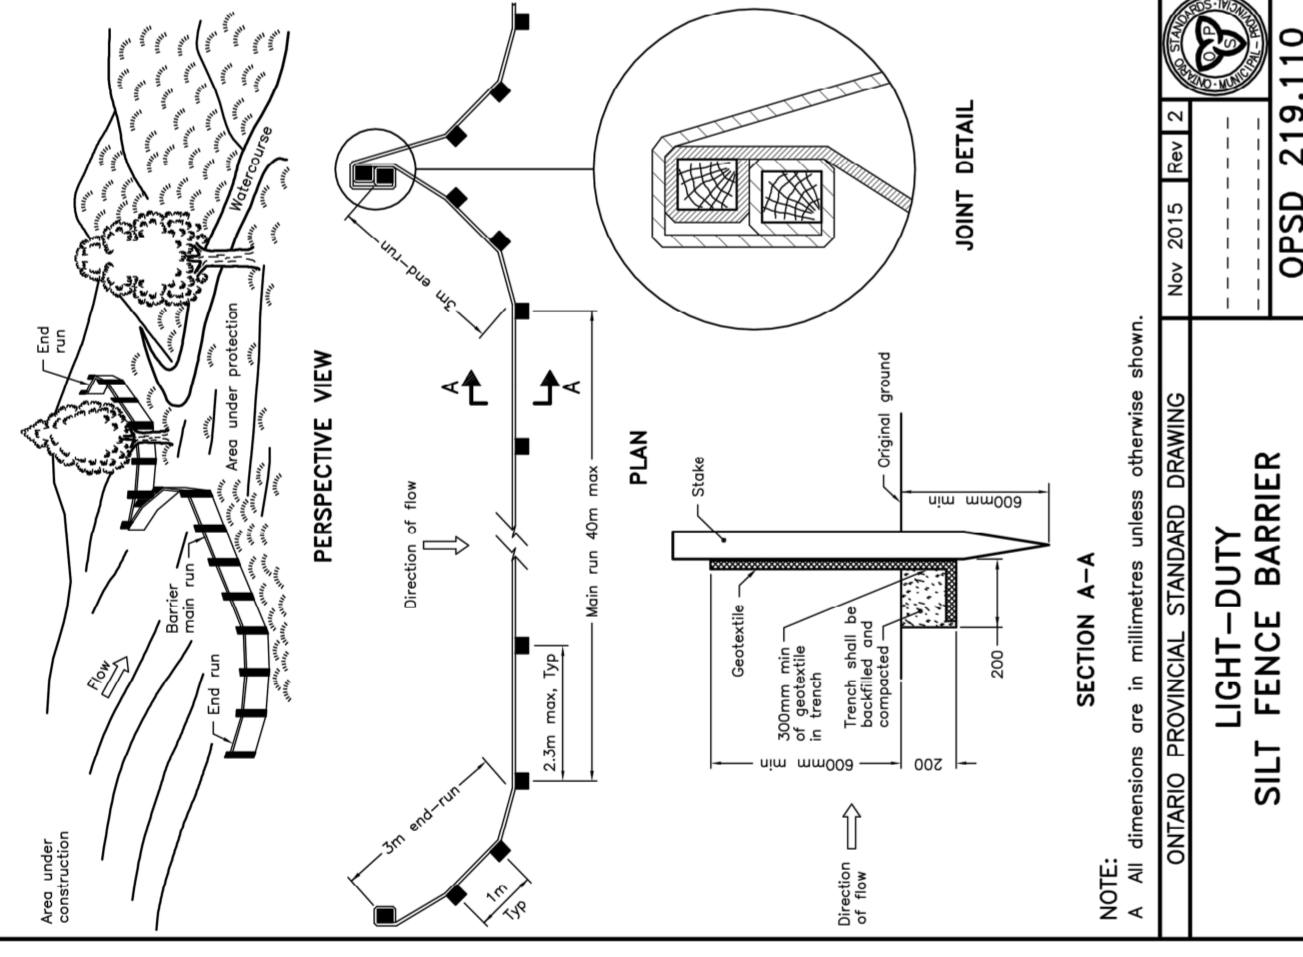

**USE AND INTERPRETATION OF DRAWINGS:**

THE GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION AS PART OF THE CONTRACT DOCUMENTS APPLY TO THESE DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

**GENERAL NOTES:**

CONTRACTOR IS ADVISED TO COLLECT INFORMATION ON SOIL CONDITIONS BEFORE START OF CONSTRUCTION.

THE ENGINEER WIVES ANY AND ALL RESPONSIBILITY AND LIABILITY FOR THE DESIGN AND CONSTRUCTION OF THE PROJECT TO THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

