

STRUCTURES AND ASSUME ALL LIABILITY FOR DAMAGE TO THEM.

## **GENERAL NOTES:**

- 1) COORDINATE AND SCHEDULE ALL WORK WITH OTHER TRADES AND CONTRACTORS
- 2) DETERMINE THE EXACT LOCATION, SIZE, MATERIAL AND ELEVATION OF ALL EXISTING UTILITIES PRIOR TO COMMENCING CONSTRUCTION. PROTECT AND ASSUME RESPONSIBILITY FOR ALL EXISTING UTILITIES WHETHER OR NOT SHOWN ON THIS DRAWING.
- 3) OBTAIN ALL NECESSARY PERMITS AND APPROVALS FROM THE CITY OF OTTAWA BEFORE COMMENCING CONSTRUCTION. 4) BEFORE COMMENCING CONSTRUCTION OBTAIN AND PROVIDE PROOF OF COMPREHENSIVE, ALL RISK AND OPERATIONAL LIABILITY INSURANCE FOR \$2,000,000.00. INSURANCE POLICY TO NAME OWNERS, ENGINEERS AND ARCHITECTS AS CO-INSURED
- AND THE CITY OF OTTAWA AS THIRD PARTY. 5) RESTORE ALL DISTURBED AREAS ON-SITE AND OFF-SITE, INCLUDING TRENCHES AND SURFACES ON PUBLIC ROAD ALLOWANCES TO EXISTING CONDITIONS OR BETTER TO THE SATISFACTION OF THE CITY OF OTTAWA AND ENGINEER.
- 6) REMOVE FROM SITE ALL EXCESS EXCAVATED MATERIAL, ORGANIC MATERIAL AND DEBRIS UNLESS OTHERWISE INSTRUCTED BY ENGINEER. EXCAVATE AND REMOVE FROM SITE ANY CONTAMINATED MATERIAL. ALL CONTAMINATED MATERIAL SHALL BE DISPOSED OF AT A LICENSED LANDFILL FACILITY.
- 7) ALL ELEVATIONS ARE GEODETIC. SITE BENCHMARK IS A HYDRANT LOCATED IN FRONT OF THE SUBJECT SITE.
- 8) REFER TO ARCHITECT'S AND LANDSCAPE ARCHITECT'S DRAWINGS FOR BUILDING AND HARD SURFACE AREAS AND DIMENSIONS. 9) SAW CUT AND KEY GRIND ASPHALT AT ALL ROAD CUTS AND ASPHALT TIE IN POINTS AS PER CITY OF OTTAWA STANDARDS (R10).
- ALL ROAD CUTS TO BE REINSTATED WITH FULL MILL OVERLAY AS PER CITY OF OTTAWA STANDARDS (R10). 10) CONTRACTOR TO PROVIDE THE CONSULTANT WITH A GENERAL PLAN OF SERVICES INDICATING ALL SERVICING AS-BUILT INFORMATION SHOWN ON THIS PLAN. AS-BUILT INFORMATION MUST INCLUDE: PIPE MATERIAL, SIZES, LENGTHS, SLOPES, INVERT AND T/G ELEVATIONS, STRUCTURE LOCATIONS, VALVE AND HYDRANT LOCATIONS, T/WM ELEVATIONS AND ANY ALIGNMENT CHANGES, AND ALL SURFACE ELEVATION AS-BUILT GRADES.
- 11) NO EXCESS DRAINAGE SHALL BE DIRECTED ONTO NEIGHBOURING PROPERTY.
- 12) NO ALTERATIONS TO EXISTING GRADES ARE PERMITTED BEYOND THE PROPERTY LINE.
- 13) REFER TO ARCHITECT'S DRAWINGS FOR ADDITIONAL DETAILS ON THE PROPOSED BUILDING ADDITION / RETROFITS.
- 14) REFER TO LANDSCAPE ARCHITECT'S DRAWINGS FOR ADDITIONAL DETAILS ON THE HARDSCAPE AND SOFTSCAPE AREAS, AND PLANTINGS.
- 15) REFER TO THE 'SERVICING BRIEF AND STORMWATER MANAGEMENT REPORT' (R-2022-011) DATED FEBRUARY 2, 2022 PREPARED BY NOVATECH FOR ADDITIONAL DETAILS ON THE SITE SERVICING AND STORMWATER MANAGEMENT FOR THE SUBJECT SITE.

## **GRADING NOTES:**

- 1) ALL TOPSOIL, ORGANIC OR DELETERIOUS MATERIAL MUST BE ENTIRELY REMOVED FROM BENEATH THE PROPOSED PAVED AREAS.
- 2) EXPOSED SUBGRADES IN PROPOSED PAVED AREAS SHOULD BE PROOF ROLLED WITH A LARGE STEEL DRUM ROLLER AND INSPECTED BY THE GEOTECHNICAL CONSULTANT.
- 3) ANY SOFT AREAS EVIDENT FROM THE PROOF ROLLING SHOULD BE SUBEXCAVATED AND REPLACED WITH SUITABLE MATERIAL THAT IS FROST COMPATIBLE WITH THE EXISTING SOILS.
- 4) THE GRANULAR BASE SHOULD BE COMPACTED TO AT LEAST 98% OF THE STANDARD PROCTOR MAXIMUM DRY DENSITY VALUE. ANY ADDITIONAL GRANULAR FILL USED BELOW THE PROPOSED PAVEMENT SHOULD BE COMPACTED TO AT LEAST 98% OF THE STANDARD PROCTOR MAXIMUM DRY DENSITY VALUE.
- 5) GRADE AND/OR FILL BEHIND PROPOSED CURB AND BETWEEN BUILDINGS AND CURBS, WHERE REQUIRED TO PROVIDE POSITIVE DRAINAGE.
- 6) MINIMUM OF 2% AND MAXIMUM OF 7% GRADE FOR ALL GRASS AREAS UNLESS OTHERWISE NOTED, OR TERRACING IS TO BE USED AT MAXIMUM 3:1 RATIO.
- 7) ALL GRADES BY CURBS ARE EDGE OF PAVEMENT GRADES UNLESS OTHERWISE INDICATED.


ANDREW MCCREIGHT MANAGER (A), DEVELOPMENT REVIEW CENTRAL PLANNING, REAL ESTATE & ECONOMIC DEVELOPMENT **DEPARTMENT, CITY OF OTTAWA** 

> **APPROVED** By Andrew McCreight at 2:47 pm, Sep 21, 2022

					SCALE	DESIGN	FOR REVIEW ONLY	
					1.000	AN CHECKED	PROFESSIONA	
ľ	5.	ISSUED FOR CITY REVIEW	APR 04/22	внв	1:200	BCS		Engineers, P
	4.	REVISED PER CITY COMMENTS	MAR 29/22	BHB		AN		Suite 200, 1
	3.	ISSUED FOR CITY REVIEW	FEB 02/22	BHB	1:200	CHECKED		Ottawa,
	2.	ISSUED FOR COORDINATION	JAN 21/22	BHB	0 2 4 6 8	BCS	April 4, 2022	Telephone Facsimile
	1.	ISSUED FOR COORDINATION	JAN 11/22	BHB		APPROVED	ROLINCE OF ONTAR	Website
	No.	REVISION	DATE	BY		BHB		



NORTH

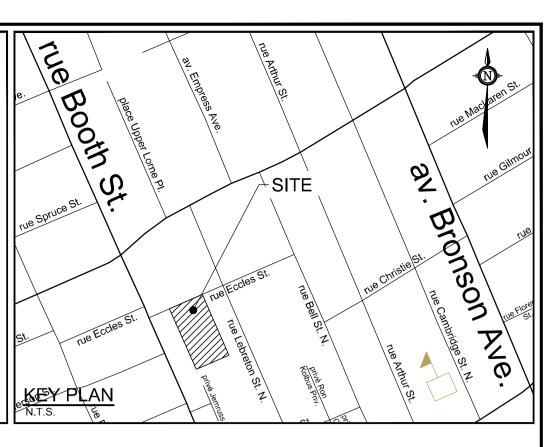

## LEGEND

× 120.46 × 118.56	PROPOSED ELEVATION EXISTING ELEVATION			
x 120.46(S)	PROPOSED SWALE ELEVATION			
x 120.46T/G	PROPOSED TOP OF GRATE ELEVATION			
★ 87.78TW ★ 85.98BW	PROPOSED TOP OF NOISE WALL ELEVATION PROPOSED BOTTOM OF NOISE WALL ELEVATION			
3.2%	GRADE AND DIRECTION			
127.55	PROPOSED TERRACE ELEVATION			
120.46*	SPILL ELEVATION			
FF=	FINISHED FLOOR ELEVATION			
TF=	TOP OF FOUNDATION ELEVATION			
USF=	UNDERSIDE OF FOOTING ELEVATION			
$\Box$	EMERGENCY OVERLAND FLOW			
	PROPOSED TERRACING			
	PROPOSED SWALE			
97.84	LIMITS AND ELEVATION OF PONDING FOR 100YR			
$\otimes$	PROPOSED VALVE LOCATION			
V&VB	VALVE & VALVE BOX			
НҮ <b>⊡-∲</b> €-	PROPOSED HYDRANT C/W VALVE & LEAD			
T/F=98.45	PROPOSED TOP OF BOTTOM FLANGE			
	PROPOSED SANITARY MH			
0	PROPOSED STORM MH			
LYCB O	PROPOSED LANDSCAPE TEE CATCHBASIN PER S29, S30, S31			
LYCB O	PROPOSED LANDSCAPE ELBOW CATCHBASIN PER S29, S30, S31			
RYCВМН <b>О</b>	PROPOSED REAR YARD CATCHBASIN MANHOLE			
RYCB 🗖	PROPOSED REAR YARD CATCHBASIN			
СВ 🗖	PROPOSED ROAD CATCHBASIN			
®	REMOTE METER WATER METER			
$\bigotimes$	SIAMESE WATER CONNECTION			
▼	PROPOSED ENTRANCE			
part and part part part part part part	CANOPY			
	EXISTING CONCRETE SIDEWALK			
	PROPOSED CONCRETE SIDEWALK REINSTATEMENT			
	EXISTING ASPHALT TO REMAIN			
	PROPOSED OVERLAY			
[]	PROPOSED TRENCH EXCAVATION LIMITS			
	PROPOSED CONCRETE WALKWAY			
x x x	EXISTING FENCE - CHAINLINK			

ΛΤΞϹΗ ngineers, Planners & Landscape Architect



www.novatech-eng.com

LOCATION CITY OF OTTAWA **44 ECCLES STREET** DRAWING NAME

**GRADING PLAN** 

121255-00

REV # 5 /ING No.

121255-GR 🗖

4

-002

 $\sim$ 

Ο