


**ROADWAY TRAFFIC NOISE  
ASSESSMENT**

150 Laurier Avenue West  
Ottawa, Ontario  
REPORT: 22-221 – Traffic Noise

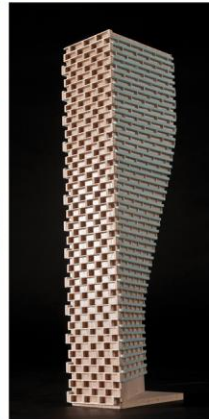

August 29, 2022

PREPARED FOR

**Jadco Group**

345 Boulevard Samson, Suite 100  
Lava, Quebec H7X 2Z7

PREPARED BY

Essraa Alqassab, B.A.Sc., Junior Environmental Scientist  
Joshua Foster, P.Eng., Lead Engineer

## EXECUTIVE SUMMARY

This report describes a roadway traffic noise assessment undertaken in support of a Site Plan Control (SPC) application for a proposed development located at 150 Laurier Avenue East in Ottawa, Ontario. The primary sources of roadway traffic noise on the development include Elgin Street, Metcalfe Street, and Laurier Avenue West. This report also provides commentary on stationary noise impacts from existing surrounding buildings and impacts of the proposed mechanical systems on the surroundings and the development itself. Figure 1 illustrates a complete site plan with surrounding context.

The assessment is based on (i) theoretical noise prediction methods that conform to the Ministry of the Environment, Conservation and Parks (MECP) and City of Ottawa requirements; (ii) noise level criteria as specified by the City of Ottawa's Environmental Noise Control Guidelines (ENCG); (iii) future vehicular traffic volumes based on the City of Ottawa's Official Plan roadway classifications; and (iv) architectural drawings provided by RLA Architecture, dated March 20, 2022.

The results of the current analysis indicate that noise levels will range between 39 and 69 dBA during the daytime period (07:00-23:00) and between 31 and 62 dBA during the nighttime period (23:00-07:00). The highest noise level (69 dBA) occurs at the north façade, which is nearest and most exposed to Laurier Avenue West.

Building components with a higher Sound Transmission Class (STC) rating will be required where exterior noise levels exceed 65 dBA, as seen in Table 4 and Figure 6. In addition, the building will require central air conditioning, or a similar mechanical system, which will allow occupants to keep windows closed and maintain a comfortable living/working environment. Furthermore, a Type D Warning Clause will also be required on all Lease, Purchase and Sale Agreements, as summarized in Section 6.

As noise levels exceed the 55 dBA criterion for the Level 1, Level 6, and Level 7 roof decks, noise barriers will be required in these areas. Results indicate that the noise level at the Level 1 roof deck can be reduced to below 55 dBA if a 2m perimeter guard is used. To reduce the noise levels at the east Level 7 roof deck below 55dBA, a 2.1m perimeter guard is used. A 1.5m perimeter guard is used to reduce noise levels at the Level 6 and Level 7 west decks. The perimeter guard must be of solid construction with no gaps along the length of the wall and an overall surface density of 20 kg/m<sup>2</sup>.



The stationary noise impacts of the building on the surroundings would be considered at a future stage once the mechanical design has progressed and equipment have been selected. Stationary noise sources associated with the development could include rooftop air handling units, cooling towers or dry coolers, and emergency generators. Should noise levels from these units exceed the criteria established in NPC-300, noise from these sources can be controlled to acceptable limits by judicious selection of the equipment, locating the equipment on a high roof away from nearby residential receptors, and where necessary, installing silencers or noise screens.



**TABLE OF CONTENTS**

**1. INTRODUCTION ..... 1**

**2. TERMS OF REFERENCE ..... 1**

**3. OBJECTIVES ..... 1**

**4. METHODOLOGY..... 2**

**4.1 Background..... 2**

**4.2 Roadway Traffic Noise ..... 3**

**4.2.1 Criteria for Roadway Traffic Noise ..... 3**

**4.2.2 Theoretical Roadway Noise Predictions ..... 4**

**4.2.3 Roadway Traffic Volumes ..... 5**

**5. ROADWAY TRAFFIC NOISE RESULTS ..... 6**

**5.1 Roadway Traffic Noise Levels ..... 6**

**6. DISCUSSION, CONCLUSIONS AND RECOMMENDATIONS..... 8**

**FIGURES**

**APPENDICES**

**Appendix A – STAMSON 5.04 Input and Output Data and Supporting Information**



## **1. INTRODUCTION**

Gradient Wind Engineering Inc. (Gradient Wind) was retained by Jadco Group to undertake a roadway traffic noise assessment in support of a Site Plan Control (SPC) application for a proposed development located at 150 Laurier Avenue East in Ottawa, Ontario. This report summarizes the methodology, results, and recommendations related to the assessment of exterior and interior noise levels generated by local roadway traffic.

Our work is based on theoretical noise calculation methods conforming to the City of Ottawa<sup>1</sup> and Ministry of the Environment, Conservation and Parks (MECP)<sup>2</sup> guidelines. Noise calculations were based on architectural drawings provided by RLA Architecture on March 28, 2022, with future traffic volumes corresponding to the City of Ottawa's Official Plan (OP) roadway classifications.

## **2. TERMS OF REFERENCE**


The subject site is located at 150 Laurier Avenue West in Ottawa; situated on the north end of a rectangular parcel of land bordered by Laurier Avenue West to the north, Elgin Street to the east, Gloucester Street to the south, and Metcalfe Street to the west.

The proposed development comprises a nominally rectangular 27-storey mixed-use residential building, inclusive of a seven-storey podium, topped with a mechanical penthouse (MPH) level. Above five below-grade parking levels, the ground floor includes a main entrance and lobby to the north, commercial space to the east, shared building support spaces to the south, and central elevator cores. Surface parking is situated along the west side of the subject site. Access to below-grade parking is provided by a ramp at the southwest corner of the proposed development via a laneway from Laurier Avenue West. At Level 2, the proposed development cantilevers over the laneway at grade and a floorplate setback is situated to the south. Levels 2-6 and 8-27 are reserved for residential use. Private terraces are situated from the south to the northwest at Level 6. Level 7 is reserved for indoor amenities and is served by an amenity terrace which extends from the west clockwise to the southeast.

---

<sup>1</sup> City of Ottawa Environmental Noise Control Guidelines, January 2016

<sup>2</sup> Ontario Ministry of the Environment and Climate Change – Environmental Noise Guidelines, Publication NPC-300, Queens Printer for Ontario, Toronto, 2013



The stationary noise impacts of the building on the surroundings would be considered at a future stage once the mechanical design has progressed and equipment have been selected. Stationary noise sources associated with the development could include rooftop air handling units, cooling towers or dry coolers, and emergency generators. Should noise levels from these units exceed the criteria established in NPC-300, noise from these sources can be controlled to acceptable limits by judicious selection of the equipment, locating the equipment on a high roof away from nearby residential receptors, and where necessary, installing silencers or noise screens.

### **3. OBJECTIVES**

The principal objectives of this study are to (i) calculate the future noise levels on the study buildings produced by local roadway traffic, and (ii) ensure that interior and exterior noise levels do not exceed the allowable limits specified by the City of Ottawa's Environmental Noise Control Guidelines as outlined in Section 4.2 of this report.

### **4. METHODOLOGY**

#### **4.1 Background**

Noise can be defined as any obtrusive sound. It is created at a source, transmitted through a medium, such as air, and intercepted by a receiver. Noise may be characterized in terms of the power of the source or the sound pressure at a specific distance. While the power of a source is characteristic of that particular source, the sound pressure depends on the location of the receiver and the path that the noise takes to reach the receiver. Measurement of noise is based on the decibel unit, dBA, which is a logarithmic ratio referenced to a standard noise level ( $2 \times 10^{-5}$  Pascals). The 'A' suffix refers to a weighting scale, which better represents how the noise is perceived by the human ear. With this scale, a doubling of power results in a 3 dBA increase in measured noise levels and is just perceptible to most people. An increase of 10 dBA is often perceived to be twice as loud.

## 4.2 Roadway Traffic Noise

### 4.2.1 Criteria for Roadway Traffic Noise

For surface roadway traffic noise, the equivalent sound energy level,  $L_{eq}$ , provides a measure of the time varying noise levels, which is well correlated with the annoyance of sound. It is defined as the continuous sound level, which has the same energy as a time varying noise level over a period of time. For roadways, the  $L_{eq}$  is commonly calculated on the basis of a 16-hour ( $L_{eq16}$ ) daytime (07:00-23:00) / 8-hour ( $L_{eq8}$ ) nighttime (23:00-07:00) split to assess its impact on residential buildings. The City of Ottawa’s Environmental Noise Control Guidelines (ENCG) specifies that the recommended indoor noise limit range (that is relevant to this study) is 45 and 40 dBA for living rooms and sleeping quarters respectively for roadway as listed in Table 1. Based on Gradient Wind’s experience, more comfortable indoor noise levels should be targeted, towards 42 and 37 dBA, respectively, to control peak noise and deficiencies in building envelope construction.

**TABLE 1: INDOOR SOUND LEVEL CRITERIA (ROAD)<sup>3</sup>**

Type of Space	Time Period	$L_{eq}$ (dBA)
General offices, reception areas, retail stores, etc.	07:00 – 23:00	50
Living/dining/den areas of <b>residences</b> , hospitals, schools, nursing/retirement homes, day-care centres, theatres, places of worship, libraries, individual or semi-private offices, conference rooms, etc.	07:00 – 23:00	45
Sleeping quarters of hotels/motels	23:00 – 07:00	45
Sleeping quarters of <b>residences</b> , hospitals, nursing/retirement homes, etc.	23:00 – 07:00	40

Predicted noise levels at the plane of window (POW) dictate the action required to achieve the recommended sound levels. An open window is considered to provide a 10 dBA reduction in noise, while a standard closed window is capable of providing a minimum 20 dBA noise reduction<sup>4</sup>. A closed window due to a ventilation requirement will bring noise levels down to achieve an acceptable indoor

<sup>3</sup> Adapted from ENCG 2016 – Tables 2.2b and 2.2c

<sup>4</sup> Burberry, P.B. (2014). Mitchell’s Environment and Services. Routledge, Page 125



environment<sup>5</sup>. Therefore, where noise levels exceed 55 dBA daytime and 50 dBA nighttime, the ventilation for the building should consider the need for having windows and doors closed, which triggers the need for forced air heating with provision for central air conditioning. Where noise levels exceed 65 dBA daytime and 60 dBA nighttime, air conditioning will be required and building components will require higher levels of sound attenuation<sup>6</sup>.

The sound level criterion for outdoor living areas is 60 dBA, which applies during the daytime (07:00 to 23:00). When noise levels exceed 60 dBA, mitigation must be provided to reduce noise levels where technically and administratively feasible to acceptable levels at or below the criterion.

#### 4.2.2 Theoretical Roadway Noise Predictions

Noise predictions were performed with the aid of the MECP computerized noise assessment program, STAMSON 5.04, for road analysis. Appendix A includes the STAMSON 5.04 input and output data.

Roadway traffic noise calculations were performed by treating each roadway segment as separate line sources of noise. In addition to the traffic volumes summarized in Table 2, theoretical noise predictions were based on the following parameters:

- Truck traffic on all roadways was taken to comprise 5% heavy trucks and 7% medium trucks, as per ENCG requirements for noise level predictions.
- The day/night split for all streets was taken to be 92%/8%, respectively.
- Ground surfaces were taken to be reflective due to the presence of hard (paved) ground.
- Topography was assumed to be a flat/gentle slope surrounding the study building.
- Receptor heights are noted in Table 3.
- Noise receptors were strategically placed at 11 locations around the study area (see Figure 2).
- For select sources where appropriate, the receptor considered the surrounding existing and proposed buildings as a barrier partially or fully obstructing exposure to the sources as illustrated by exposure angles in Figures 3, 4 and 5.
- Receptor distances and exposure angles are illustrated in Figures 3, 4, and 5.

---

<sup>5</sup> MOECP, Environmental Noise Guidelines, NPC 300 – Part C, Section 7.8

<sup>6</sup> MOECP, Environmental Noise Guidelines, NPC 300 – Part C, Section 7.1.3



### 4.2.3 Roadway Traffic Volumes

The ENCG dictates that noise calculations should consider future sound levels based on a roadway’s classification at the mature state of development. Therefore, traffic volumes are based on the roadway classifications outlined in the City of Ottawa’s Official Plan (OP) and Transportation Master Plan<sup>7</sup> which provide additional details on future roadway expansions. Average Annual Daily Traffic (AADT) volumes are then based on data in Table B1 of the ENCG for each roadway classification. Table 2 (below) summarizes the AADT values used for each roadway included in this assessment.

**TABLE 2: ROADWAY TRAFFIC DATA**

Segment	Roadway Traffic Data	Speed Limit (km/h)	Traffic Volumes
Elgin Street	4-Lane Urban Arterial Divided (4-UAD)	50	<b>35,000</b>
Laurier Avenue West	2-Lane Urban Arterial Undivided (2-UAU)	50	<b>15,000</b>
Metcalfe Street	2-Lane Urban Arterial Undivided (2-UAU)	50	<b>15,000</b>

<sup>7</sup> City of Ottawa Transportation Master Plan, November 2013



## 5. ROADWAY TRAFFIC NOISE RESULTS

### 5.1 Roadway Traffic Noise Levels

The results of the roadway traffic noise calculations are summarized in Table 3 below. A complete set of input and output data from all STAMSON 5.04 calculations are available in Appendix A.

**TABLE 3: EXTERIOR NOISE LEVELS DUE TO ROAD TRAFFIC**

Receptor Number	Receptor Height Above Grade (m)	Receptor Location	STAMSON 5.04 Noise Level (dBA)	
			Day	Night
1	85.5	POW – North Façade – Level 27	69	62
2	85.5	POW – West Façade – Level 27	66	59
3	16.5	POW – West Façade – Level 6	64	56
4	1.5	POW – East Façade	59	51
5	85.5	POW – East Façade – Level 27	68	61
6	1.5	POW – West Facade	39	31
7	85.5	POW – South Façade – Level 27	63	55
8	7.5	OLA – Roof Deck at Level 1	60	N/A*
9	24	OLA – Roof Deck at Level 7 – East	66	N/A*
10	24	OLA – Roof Deck at Level 7 – West	62	N/A*
11	19.5	OLA – Roof Deck at Level 6 – West	62	N/A*

\*Nighttime noise levels for the OLA are not considered as per ENCG

The results of the current analysis indicate that noise levels at Plane-of-Window receptors will range between 39 and 69 dBA during the daytime period (07:00-23:00) and between 31 and 62 dBA during the nighttime period (23:00-07:00). The highest noise level (69 dBA) occurs at the north façade, which is nearest and most exposed to Laurier Avenue. Building components with a higher Sound Transmission Class (STC) rating will be required where exterior noise levels exceed 65.



### 5.1.1 Noise Control Measures

The noise level predicted due to traffic noise exceeds the criteria listed in Section 4.2 for building components for the development. As discussed in Section 4.2, the anticipated STC requirements for windows have been estimated based on the overall noise reduction required for each intended use of space (STC = outdoor noise level – targeted indoor noise levels). As per NPC-300 requirements, detailed STC calculations will be required to be completed prior to building permit application for each unit type. The STC requirements for the windows are summarized below for various units within the development (see Figure 6).

**TABLE 5: NOISE CONTROL REQUIREMENTS**

Façade	Window STC (Bedroom/Living Room/Retail)	Exterior Wall STC
North	32/27/25	45
West	29/25/25	45
East	31/26/25	45

The results of the calculations also indicate that the development should be designed with central air conditioning or a similar system, which will allow occupants to keep windows closed and maintain a comfortable living environment. A Type D Warning Clause should be used in all Lease, Purchase and Sale Agreements of the building’s units, as summarized in section 6.

### 5.1.1 Noise Barrier Investigation

Various barrier heights were tested, with the barrier located along the perimeters of the amenity areas, as indicated in Figure 4. Results indicate that the noise level at the Level 1 roof deck can be reduced to below 55 dBA if a 2m perimeter guard is used. To reduce the noise levels at the east Level 7 roof deck to below 55dBA, a 2.1m perimeter guard is used. A 1.5m perimeter guard is used to reduce noise levels at the Level 6 and Level 7 west decks. The perimeter guard must be of solid construction with no gaps along the length of the wall and an overall surface density of 20 kg/m<sup>2</sup>. The result of the investigation can be seen in Table 4 (below) and Figure 7:

**TABLE 4: RESULTS OF NOISE BARRIER INVESTIGATION**

Receptor ID	Receptor Height Above Grade (m)	Daytime L <sub>eq</sub> Noise Levels (dBA)				
		No Barrier	With 1.1m Barrier	With 1.5m Barrier	With 2m Barrier	With 2.1m Barrier
R8	7.5	60	57	56	<b>55</b>	--
R9	24	66	59	58	56	<b>55</b>
R10	24	62	56	<b>55</b>	--	--
R11	19.5	62	57	<b>55</b>	--	--

## 6. DISCUSSION, CONCLUSIONS AND RECOMMENDATIONS

The results of the current analysis indicate that noise levels will range between 39 and 69 dBA during the daytime period (07:00-23:00) and between 31 and 62 dBA during the nighttime period (23:00-07:00). The highest noise level (69 dBA) occurs at the north façade which is nearest and most exposed to Laurier Avenue West. Building components with a higher Sound Transmission Class (STC) rating will be required where exterior noise levels exceed 65 dBA. The STC requirements can be seen in Table 5 as well as in Figure 6.

Results of the calculations also indicate that the proposed building will require central air conditioning, or a similar mechanical system, which will allow occupants to keep windows closed and maintain a

comfortable living/working environment. The following Type D Warning Clause<sup>8</sup> will also be required on all Lease, Purchase and Sale Agreements, as summarized below:

**Type D:**

*"This dwelling unit has been supplied with a central air conditioning system which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment."*

As noise levels exceed the 55 dBA criterion for the Level 1, Level 6, and Level 7 roof decks, noise barriers will be required in these areas. Results indicate that the noise level at the Level 1 roof deck can be reduced to below 55 dBA if a 2m perimeter guard is used. To reduce the noise levels at the east Level 7 roof deck to below 55dBA, a 2.1m perimeter guard is used. A 1.5m perimeter guard is used to reduce noise levels at the Level 6 and Level 7 west decks. The perimeter guard must be of solid construction with no gaps along the length of the wall and an overall surface density of 20 kg/m<sup>2</sup>.

In addition, the stationary noise impacts of the building on the surroundings would be considered at a future stage once the mechanical design has progressed and equipment have been selected. Stationary noise sources associated with the development could include rooftop air handling units, cooling towers or dry coolers, and emergency generators. Should noise levels from these units exceed the criteria established in NPC-300, noise from these sources can be controlled to acceptable limits by judicious selection of the equipment, locating the equipment on a high roof away from nearby residential receptors, and where necessary, installing silencers or noise screens.

---

<sup>8</sup> MECP, Environmental Noise Guidelines, NPC 300 – Part C, Section 8



This concludes our roadway traffic noise assessment and report. If you have any questions or wish to discuss our findings, please advise us. In the interim, we thank you for the opportunity to be of service.


Sincerely,

**Gradient Wind Engineering Inc.**



Essraa Alqassab, B.A.Sc.  
Junior Environmental Scientist

*Gradient Wind Report #22-221-T.Noise*



Joshua Foster, P.Eng.  
Lead Engineer



**GRADIENTWIND**  
ENGINEERS & SCIENTISTS

127 WALGREEN ROAD, OTTAWA, ON  
613 836 0934 • GRADIENTWIND.COM

PROJECT

150 LAURIER AVENUE EAST, OTTAWA  
ROADWAY TRAFFIC ASSESSMENT

SCALE

1:1000 (APPROX.)

DRAWING NO.

GW22-221-1

DATE

AUGUST 24, 2022

DRAWN BY

E.A.

DESCRIPTION


FIGURE 1:  
SITE PLAN AND SURROUNDING CONTEXT



- # OLA RECEPTOR
- # POW RECEPTOR

PROJECT	150 LAURIER AVENUE EAST, OTTAWA ROADWAY TRAFFIC ASSESSMENT	
SCALE	1:200 (APPROX.)	DRAWING NO. GW22-221-2
DATE	AUGUST 24, 2022	DRAWN BY E.A.



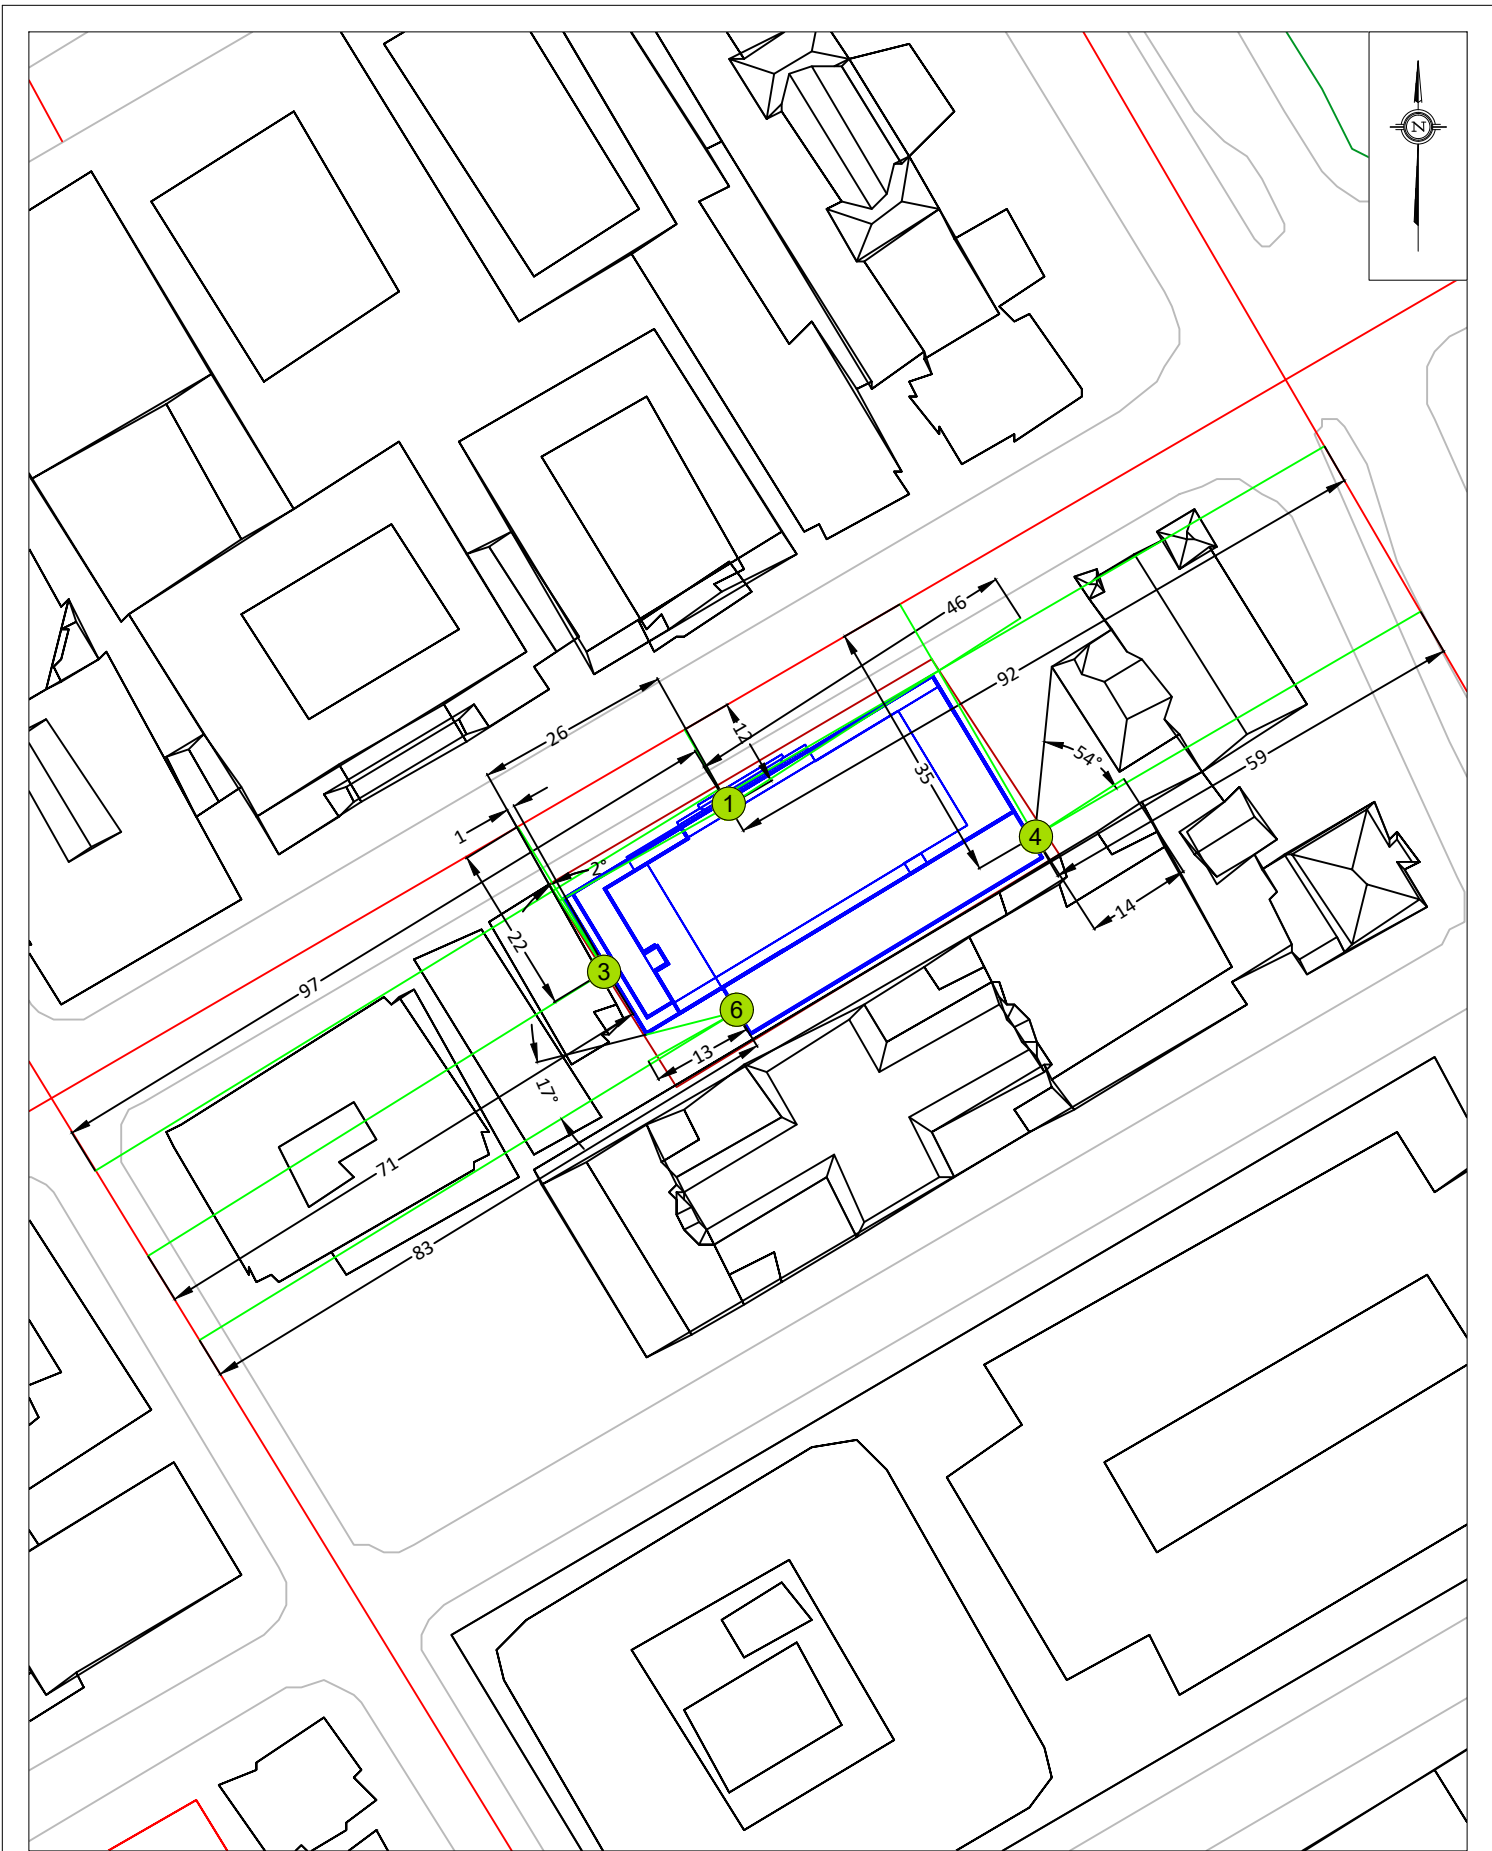

PROJECT	150 LAURIER AVENUE EAST, OTTAWA ROADWAY TRAFFIC ASSESSMENT	
SCALE	1:1000 (APPROX.)	DRAWING NO. GW22-221-3
DATE	AUGUST 25, 2022	DRAWN BY E.A.






PROJECT	150 LAURIER AVENUE EAST, OTTAWA ROADWAY TRAFFIC ASSESSMENT	
SCALE	1:1000 (APPROX.)	DRAWING NO. GW22-221-5
DATE	AUGUST 25, 2022	DRAWN BY E.A.

DESCRIPTION	FIGURE 5: STAMSON PARAMETERS (RECEPTORS: 3,8,9,10)
-------------	---



- BEDROOM/LIVING ROOM/RETAIL WINDOWS: STC 32/27/25
- BEDROOM/LIVING ROOM/RETAIL WINDOWS: STC 31/26/25
- BEDROOM/LIVING ROOM/RETAIL WINDOWS: STC 29/25/25

<p><b>GRADIENTWIND</b> ENGINEERS &amp; SCIENTISTS 127 WALGREEN ROAD, OTTAWA, ON 613 836 0934 • GRADIENTWIND.COM</p>	PROJECT	150 LAURIER AVENUE EAST, OTTAWA ROADWAY TRAFFIC ASSESSMENT	DESCRIPTION
	SCALE	1:200 (APPROX.)	DRAWING NO.
	DATE	AUGUST 24, 2022	DRAWN BY
			FIGURE 6: STC RECOMMENDATION

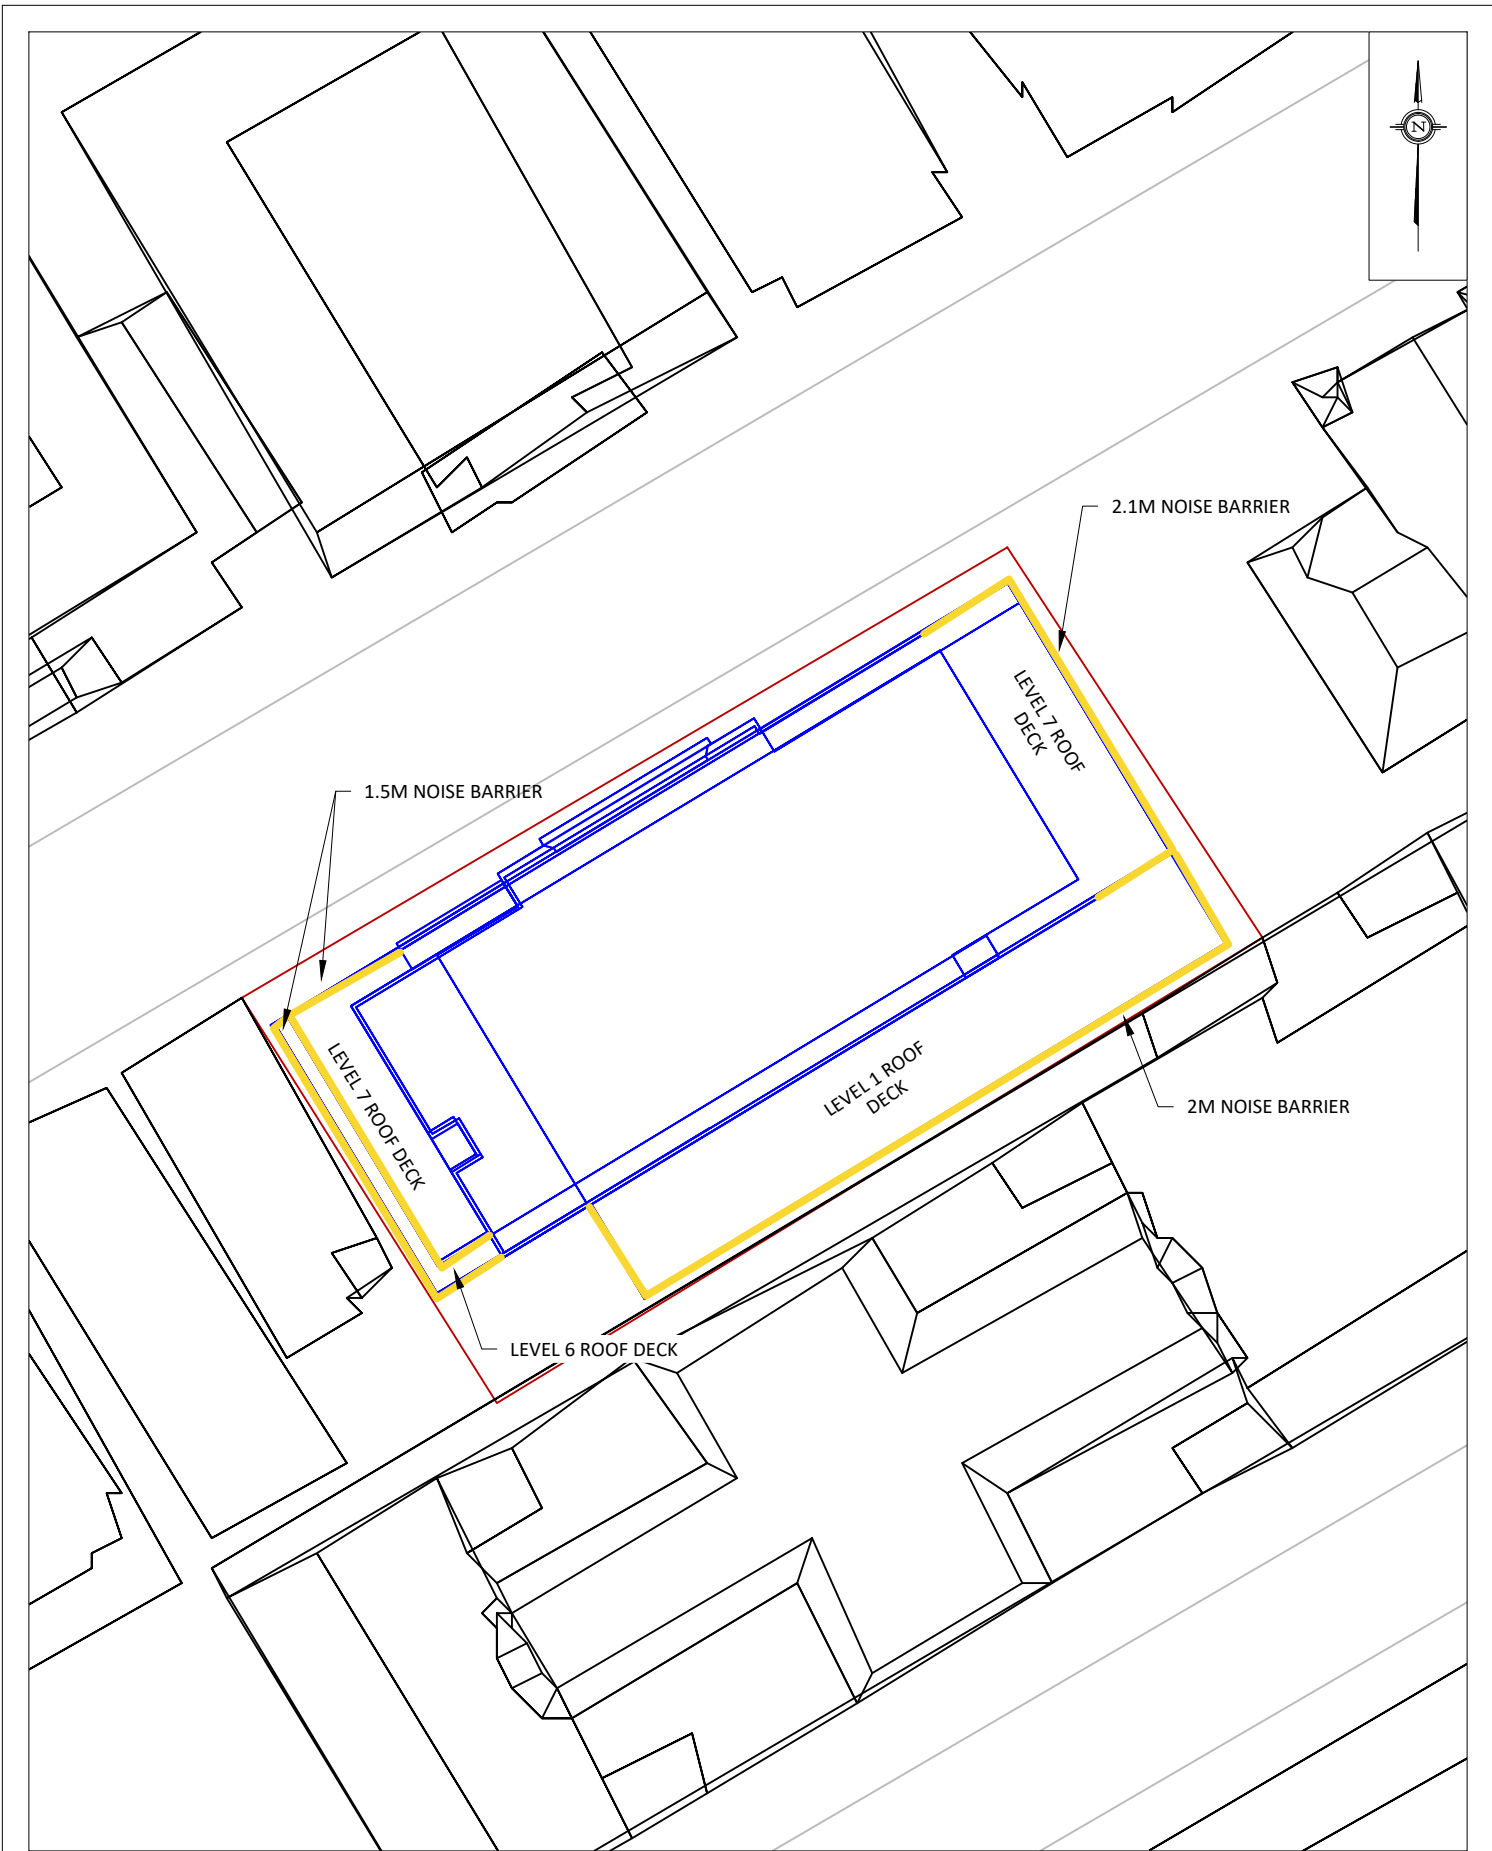

PROJECT	150 LAURIER AVENUE EAST, OTTAWA ROADWAY TRAFFIC ASSESSMENT	
SCALE	1:200 (APPROX.)	DRAWING NO. GW22-221-7
DATE	AUGUST 25, 2022	DRAWN BY E.A.

DESCRIPTION	FIGURE 7: NOISE BARRIER RECOMMENDATIONS
-------------	--

# GRADIENTWIND

ENGINEERS & SCIENTISTS



## APPENDIX A

### STAMSON 5.04 – INPUT AND OUTPUT DATA



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      COMPREHENSIVE REPORT                      Date: 25-08-2022 11:50:39  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r1.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----  
Angle1 Angle2 : -90.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 15.00 / 15.00 m  
Receiver height : 85.50 / 85.50 m  
Topography : 1 (Flat/gentle slope; no barrier)  
Reference angle : 0.00

## Road data, segment # 2: Elgin (day/night)

-----  
Car traffic volume : 28336/2464 veh/TimePeriod \*  
Medium truck volume : 2254/196 veh/TimePeriod \*  
Heavy truck volume : 1610/140 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 35000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00



# GRADIENTWIND

ENGINEERS & SCIENTISTS

## Data for Segment # 2: Elgin (day/night)

-----  
Angle1 Angle2 : 0.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 92.00 / 92.00 m  
Receiver height : 85.50 / 85.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg  
Barrier height : 35.00 m  
Barrier receiver distance : 24.00 / 24.00 m  
Source elevation : 46.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 3: Metcalfe (day/night)

-----  
Car traffic volume : 1600/800 veh/TimePeriod  
Medium truck volume : 320/160 veh/TimePeriod  
Heavy truck volume : 160/80 veh/TimePeriod  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

## Data for Segment # 3: Metcalfe (day/night)

-----  
Angle1 Angle2 : -90.00 deg 0.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 97.00 / 97.00 m  
Receiver height : 85.50 / 85.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : 0.00 deg  
Barrier height : 20.00 m  
Barrier receiver distance : 26.00 / 26.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Segment # 1: Laurier (day)

-----  
Source height = 1.50 m

ROAD (0.00 + 68.48 + 0.00) = 68.48 dBA

Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq  
-----





# GRADIENTWIND

ENGINEERS & SCIENTISTS

-90      90      0.00   68.48    0.00    0.00    0.00    0.00    0.00    0.00    68.48

---

Segment Leq : 68.48 dBA

Segment # 2: Elgin (day)

---

Source height = 1.50 m

Barrier height for grazing incidence

---

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	85.50	!
		75.59	!
			75.59

ROAD (0.00 + 61.27 + 0.00) = 61.27 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
0	90	0.00	72.16	0.00	-7.88	-3.01	0.00	0.00	-0.00	61.27*
0	90	0.00	72.16	0.00	-7.88	-3.01	0.00	0.00	0.00	61.27

---

\* Bright Zone !

Segment Leq : 61.27 dBA

Segment # 3: Metcalfe (day)

---

Source height = 1.67 m

Barrier height for grazing incidence

---

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.67	!	85.50	!
		63.03	!
			63.03

ROAD (0.00 + 51.07 + 0.00) = 51.07 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	0	0.00	62.18	0.00	-8.11	-3.01	0.00	0.00	-0.01	51.06*
-90	0	0.00	62.18	0.00	-8.11	-3.01	0.00	0.00	0.00	51.07

---

\* Bright Zone !

Segment Leq : 51.07 dBA

Total Leq All Segments: 69.30 dBA



Segment # 1: Laurier (night)

-----  
 Source height = 1.50 m

ROAD (0.00 + 60.88 + 0.00) = 60.88 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	60.88	0.00	0.00	0.00	0.00	0.00	0.00	60.88

-----  
 Segment Leq : 60.88 dBA

Segment # 2: Elgin (night)

-----  
 Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	85.50	75.59	75.59

ROAD (0.00 + 53.68 + 0.00) = 53.68 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
0	90	0.00	64.56	0.00	-7.88	-3.01	0.00	0.00	-0.00	53.67*
0	90	0.00	64.56	0.00	-7.88	-3.01	0.00	0.00	0.00	53.68

-----  
 \* Bright Zone !

Segment Leq : 53.68 dBA

Segment # 3: Metcalfe (night)

-----  
 Source height = 1.67 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.67	85.50	63.03	63.03

ROAD (0.00 + 51.07 + 0.00) = 51.07 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq



# GRADIENTWIND

ENGINEERS & SCIENTISTS

---

-90	0	0.00	62.18	0.00	-8.11	-3.01	0.00	0.00	-0.01	51.06*
-90	0	0.00	62.18	0.00	-8.11	-3.01	0.00	0.00	0.00	51.07

---

\* Bright Zone !

Segment Leq : 51.07 dBA

Total Leq All Segments: 62.00 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 69.30  
(NIGHT): 62.00



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 15:54:34  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r2.te    Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

---

Car traffic volume : 11880/1320 veh/TimePeriod \*  
Medium truck volume : 945/105 veh/TimePeriod \*  
Heavy truck volume : 675/75 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 90.00

## Data for Segment # 1: Laurier (day/night)

---

Angle1 Angle2 : -90.00 deg 0.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 23.00 / 23.00 m  
Receiver height : 85.50 / 85.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : -25.00 deg  
Barrier height : 20.00 m  
Barrier receiver distance : 7.00 / 7.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalfe (day/night)

---

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalfe (day/night)

```
-----
Angle1   Angle2           : -90.00 deg   90.00 deg
Wood depth      :           0   (No woods.)
No of house rows :           0 / 0
Surface         :           2   (Reflective ground surface)
Receiver source distance : 77.00 / 77.00 m
Receiver height  : 85.50 / 85.50 m
Topography      :           2   (Flat/gentle slope; with barrier)
Barrier angle1   : -90.00 deg   Angle2 : 90.00 deg
Barrier height   : 20.00 m
Barrier receiver distance : 7.00 / 7.00 m
Source elevation : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation : 0.00 m
Reference angle  : 0.00
-----
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !      85.50 !      59.93 !      59.93
-----
```

ROAD (0.00 + 62.10 + 57.95) = 63.52 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-25	0.00	68.38	0.00	-1.86	-4.42	0.00	0.00	-0.03	62.07*
-90	-25	0.00	68.38	0.00	-1.86	-4.42	0.00	0.00	0.00	62.10
-25	0	0.00	68.38	0.00	-1.86	-8.57	0.00	0.00	0.00	57.95

\* Bright Zone !

Segment Leq : 63.52 dBA

Results segment # 2: Metcalfe (day)



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)			
1.50	!	85.50	!	77.86	!	77.86

ROAD (0.00 + 61.38 + 0.00) = 61.38 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	68.48	0.00	-7.10	0.00	0.00	0.00	-0.00	61.37*
-90	90	0.00	68.48	0.00	-7.10	0.00	0.00	0.00	0.00	61.38

\* Bright Zone !

Segment Leq : 61.38 dBA

Total Leq All Segments: 65.59 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)			
1.50	!	85.50	!	59.93	!	59.93

ROAD (0.00 + 55.57 + 51.42) = 56.99 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-25	0.00	61.85	0.00	-1.86	-4.42	0.00	0.00	-0.03	55.54*
-90	-25	0.00	61.85	0.00	-1.86	-4.42	0.00	0.00	0.00	55.57
-25	0	0.00	61.85	0.00	-1.86	-8.57	0.00	0.00	0.00	51.42

\* Bright Zone !

Segment Leq : 56.99 dBA

Results segment # 2: Metcalfe (night)

Source height = 1.50 m



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	85.50	!	77.86	!	77.86

ROAD (0.00 + 53.78 + 0.00) = 53.78 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	60.88	0.00	-7.10	0.00	0.00	0.00	-0.00	53.78*
-90	90	0.00	60.88	0.00	-7.10	0.00	0.00	0.00	0.00	53.78

\* Bright Zone !

Segment Leq : 53.78 dBA

Total Leq All Segments: 58.69 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 65.59  
(NIGHT): 58.69



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 15:55:05  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r3.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

---

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

---

Angle1 Angle2 : -90.00 deg 0.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 22.00 / 22.00 m  
Receiver height : 16.50 / 16.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : -2.00 deg  
Barrier height : 5.00 m  
Barrier receiver distance : 1.00 / 1.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalfe (day/night)

---

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:





# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalfe (day/night)

```

-----
Angle1 Angle2      : -90.00 deg  90.00 deg
Wood depth          :          0      (No woods.)
No of house rows   :          0 / 0
Surface            :          2      (Reflective ground surface)
Receiver source distance : 71.00 / 71.00 m
Receiver height     : 16.50 / 16.50 m
Topography         :          2      (Flat/gentle slope; with barrier)
Barrier angle1     : -90.00 deg  Angle2 : 90.00 deg
Barrier height     : 20.00 m
Barrier receiver distance : 1.00 / 1.00 m
Source elevation   : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation  : 0.00 m
Reference angle    : 0.00
  
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          16.50 !          15.82 !          15.82
  
```

ROAD (0.00 + 63.71 + 47.27) = 63.81 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-2	0.00	68.48	0.00	-1.66	-3.11	0.00	0.00	-0.01	63.70*
-90	-2	0.00	68.48	0.00	-1.66	-3.11	0.00	0.00	0.00	63.71
-2	0	0.00	68.48	0.00	-1.66	-19.54	0.00	0.00	0.00	47.27

\* Bright Zone !

Segment Leq : 63.81 dBA

Results segment # 2: Metcalfe (day)



Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	16.50	16.29	16.29

ROAD (0.00 + 44.55 + 0.00) = 44.55 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	68.48	0.00	-6.75	0.00	0.00	0.00	-17.18	44.55

Segment Leq : 44.55 dBA

Total Leq All Segments: 63.86 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	16.50	15.82	15.82

ROAD (0.00 + 56.11 + 39.68) = 56.21 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-2	0.00	60.88	0.00	-1.66	-3.11	0.00	0.00	-0.01	56.10*
-90	-2	0.00	60.88	0.00	-1.66	-3.11	0.00	0.00	0.00	56.11
-2	0	0.00	60.88	0.00	-1.66	-19.54	0.00	0.00	0.00	39.68

\* Bright Zone !

Segment Leq : 56.21 dBA

Results segment # 2: Metcalfe (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	16.50		



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	16.50	!	16.29	!	16.29

ROAD (0.00 + 36.95 + 0.00) = 36.95 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	60.88	0.00	-6.75	0.00	0.00	0.00	-17.18	36.95

Segment Leq : 36.95 dBA

Total Leq All Segments: 56.26 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 63.86  
(NIGHT): 56.26



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 15:58:11  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r4.te    Time Period: Day/Night 16/8 hours  
Description:

Road data, segment # 1: Laurier (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 1: Laurier (day/night)

-----  
Angle1 Angle2 : 0.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 35.00 / 35.00 m  
Receiver height : 1.50 / 1.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : 36.00 deg Angle2 : 90.00 deg  
Barrier height : 10.00 m  
Barrier receiver distance : 14.00 / 14.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Road data, segment # 2: Elgin (day/night)

```

-----
Car traffic volume   : 28336/2464  veh/TimePeriod  *
Medium truck volume : 2254/196   veh/TimePeriod  *
Heavy truck volume  : 1610/140   veh/TimePeriod  *
Posted speed limit  :    50 km/h
Road gradient       :     0 %
Road pavement      :     1 (Typical asphalt or concrete)
  
```

\* Refers to calculated road volumes based on the following input:

```

24 hr Traffic Volume (AADT or SADT): 35000
Percentage of Annual Growth       : 0.00
Number of Years of Growth         : 0.00
Medium Truck % of Total Volume    : 7.00
Heavy Truck % of Total Volume     : 5.00
Day (16 hrs) % of Total Volume    : 92.00
  
```

Data for Segment # 2: Elgin (day/night)

```

-----
Angle1  Angle2      : -90.00 deg   90.00 deg
Wood depth      :      0      (No woods.)
No of house rows :      0 / 0
Surface         :      2      (Reflective ground surface)
Receiver source distance : 59.00 / 59.00 m
Receiver height  :  1.50 / 1.50 m
Topography      :      2      (Flat/gentle slope; with barrier)
Barrier angle1  : -90.00 deg   Angle2 : 90.00 deg
Barrier height   : 10.00 m
Barrier receiver distance : 14.00 / 14.00 m
Source elevation :  0.00 m
Receiver elevation :  0.00 m
Barrier elevation :  0.00 m
Reference angle  :  0.00
  
```

Results segment # 1: Laurier (day)

Source height = 1.50 m


Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          1.50 !          1.50 !          1.50
  
```

ROAD (57.81 + 43.21 + 0.00) = 57.96 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
0	36	0.00	68.48	0.00	-3.68	-6.99	0.00	0.00	0.00	57.81
36	90	0.00	68.48	0.00	-3.68	-5.23	0.00	0.00	-16.37	43.21



Segment Leq : 57.96 dBA

Results segment # 2: Elgin (day)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	1.50	!
1.50	!	1.50	!
1.50	!	1.50	!

ROAD (0.00 + 49.23 + 0.00) = 49.23 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	72.16	0.00	-5.95	0.00	0.00	0.00	-16.99	49.23

Segment Leq : 49.23 dBA

Total Leq All Segments: 58.51 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	1.50	!
1.50	!	1.50	!
1.50	!	1.50	!

ROAD (50.21 + 35.61 + 0.00) = 50.36 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
0	36	0.00	60.88	0.00	-3.68	-6.99	0.00	0.00	0.00	50.21
36	90	0.00	60.88	0.00	-3.68	-5.23	0.00	0.00	-16.37	35.61

Segment Leq : 50.36 dBA

Results segment # 2: Elgin (night)



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	1.50	!	1.50	!	1.50

ROAD (0.00 + 41.63 + 0.00) = 41.63 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	64.56	0.00	-5.95	0.00	0.00	0.00	-16.99	41.63

Segment Leq : 41.63 dBA

Total Leq All Segments: 50.91 dBA

TOTAL Leq FROM ALL SOURCES (DAY) : 58.51  
(NIGHT) : 50.91



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 15:58:00  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r5.te    Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----  
Angle1 Angle2 : 0.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 20.00 / 20.00 m  
Receiver height : 85.50 / 85.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : 0.00 deg Angle2 : 90.00 deg  
Barrier height : 10.00 m  
Barrier receiver distance : 14.00 / 14.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Elgin (day/night)

-----  
Car traffic volume : 28336/2464 veh/TimePeriod \*  
Medium truck volume : 2254/196 veh/TimePeriod \*  
Heavy truck volume : 1610/140 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)





# GRADIENTWIND

ENGINEERS & SCIENTISTS

\* Refers to calculated road volumes based on the following input:

```

24 hr Traffic Volume (AADT or SADT): 35000
Percentage of Annual Growth      : 0.00
Number of Years of Growth       : 0.00
Medium Truck % of Total Volume  : 7.00
Heavy Truck % of Total Volume   : 5.00
Day (16 hrs) % of Total Volume  : 92.00
    
```

Data for Segment # 2: Elgin (day/night)

```

-----
Angle1   Angle2      : -90.00 deg   90.00 deg
Wood depth      : 0           (No woods.)
No of house rows : 0 / 0
Surface        : 2           (Reflective ground surface)
Receiver source distance : 60.00 / 60.00 m
Receiver height  : 85.50 / 85.50 m
Topography      : 2           (Flat/gentle slope; with barrier)
Barrier angle1   : -90.00 deg   Angle2 : 90.00 deg
Barrier height   : 10.00 m
Barrier receiver distance : 14.00 / 14.00 m
Source elevation : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation : 0.00 m
Reference angle  : 0.00
    
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver ! Barrier ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !      85.50 !      26.70 !      26.70
    
```

ROAD (0.00 + 64.22 + 0.00) = 64.22 dBA

```

-----
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
      0    90   0.00  68.48   0.00  -1.25  -3.01   0.00   0.00  -0.10  64.12*
      0    90   0.00  68.48   0.00  -1.25  -3.01   0.00   0.00   0.00  64.22
-----
    
```

\* Bright Zone !

Segment Leq : 64.22 dBA

Results segment # 2: Elgin (day)



Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)
1.50	85.50	65.90	65.90

ROAD (0.00 + 66.14 + 0.00) = 66.14 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	72.16	0.00	-6.02	0.00	0.00	0.00	-0.00	66.14*
-90	90	0.00	72.16	0.00	-6.02	0.00	0.00	0.00	0.00	66.14

\* Bright Zone !

Segment Leq : 66.14 dBA

Total Leq All Segments: 68.30 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)
1.50	85.50	26.70	26.70

ROAD (0.00 + 56.62 + 0.00) = 56.62 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
0	90	0.00	60.88	0.00	-1.25	-3.01	0.00	0.00	-0.10	56.53*
0	90	0.00	60.88	0.00	-1.25	-3.01	0.00	0.00	0.00	56.62

\* Bright Zone !

Segment Leq : 56.62 dBA

Results segment # 2: Elgin (night)

Source height = 1.50 m

Barrier height for grazing incidence



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Source Height (m)	! Receiver ! Height (m)	! Barrier ! Height (m)	! Elevation of ! Barrier Top (m)
1.50	!	85.50	!
		65.90	!
			65.90

ROAD (0.00 + 58.54 + 0.00) = 58.54 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	64.56	0.00	-6.02	0.00	0.00	0.00	-0.00	58.54*
-90	90	0.00	64.56	0.00	-6.02	0.00	0.00	0.00	0.00	58.54

\* Bright Zone !

Segment Leq : 58.54 dBA

Total Leq All Segments: 60.70 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 68.30  
(NIGHT): 60.70



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 15:57:50  
 MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r6.te                                      Time Period: Day/Night 16/8 hours  
 Description:

Road data, segment # 1: Metcalfe (day/night)

```
-----
Car traffic volume   : 12144/1056   veh/TimePeriod   *
Medium truck volume :    966/84    veh/TimePeriod   *
Heavy truck volume  :    690/60    veh/TimePeriod   *
Posted speed limit  :     50 km/h
Road gradient       :      0 %
Road pavement      :      1 (Typical asphalt or concrete)
```

\* Refers to calculated road volumes based on the following input:

```
24 hr Traffic Volume (AADT or SADT): 15000
Percentage of Annual Growth       : 0.00
Number of Years of Growth         : 0.00
Medium Truck % of Total Volume    : 7.00
Heavy Truck % of Total Volume     : 5.00
Day (16 hrs) % of Total Volume    : 92.00
```

Data for Segment # 1: Metcalfe (day/night)

```
-----
Angle1  Angle2      : -90.00 deg   17.00 deg
Wood depth      :      0      (No woods.)
No of house rows :      0 / 0
Surface         :      2      (Reflective ground surface)
Receiver source distance : 83.00 / 83.00 m
Receiver height  :   1.50 / 1.50 m
Topography      :      2      (Flat/gentle slope; with barrier)
Barrier angle1   : -90.00 deg   Angle2 : 17.00 deg
Barrier height   :   40.00 m
Barrier receiver distance : 13.00 / 13.00 m
Source elevation :   0.00 m
Receiver elevation :   0.00 m
Barrier elevation :   0.00 m
Reference angle  :   0.00
```

Results segment # 1: Metcalfe (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          1.50 !          1.50 !          1.50
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

ROAD (0.00 + 39.09 + 0.00) = 39.09 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	17	0.00	68.48	0.00	-7.43	-2.26	0.00	0.00	-19.70	39.09

Segment Leq : 39.09 dBA

Total Leq All Segments: 39.09 dBA

Results segment # 1: Metcalfe (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	1.50	1.50	1.50

ROAD (0.00 + 31.49 + 0.00) = 31.49 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	17	0.00	60.88	0.00	-7.43	-2.26	0.00	0.00	-19.70	31.49

Segment Leq : 31.49 dBA

Total Leq All Segments: 31.49 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 39.09  
(NIGHT): 31.49



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 15:59:27  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r7.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Metcalfe (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00


## Data for Segment # 1: Metcalfe (day/night)

-----  
Angle1 Angle2 : -90.00 deg 0.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 103.00 / 103.00 m  
Receiver height : 85.50 / 85.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : 0.00 deg  
Barrier height : 40.00 m  
Barrier receiver distance : 33.00 / 33.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Elgin (day/night)

-----  
Car traffic volume : 28336/2464 veh/TimePeriod \*  
Medium truck volume : 2254/196 veh/TimePeriod \*  
Heavy truck volume : 1610/140 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 35000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Elgin (day/night)

```

-----
Angle1 Angle2      : 0.00 deg  90.00 deg
Wood depth          : 0          (No woods.)
No of house rows   : 0 / 0
Surface            : 2          (Reflective ground surface)
Receiver source distance : 85.00 / 85.00 m
Receiver height     : 85.50 / 85.50 m
Topography         : 2          (Flat/gentle slope; with barrier)
Barrier angle1     : 0.00 deg  Angle2 : 90.00 deg
Barrier height     : 10.00 m
Barrier receiver distance : 40.00 / 40.00 m
Source elevation   : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation  : 0.00 m
Reference angle    : 0.00
  
```

Results segment # 1: Metcalfe (day)

Source height = 1.50 m

Barrier height for grazing incidence

```

-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !      85.50 !      58.59 !      58.59
  
```

ROAD (0.00 + 57.10 + 0.00) = 57.10 dBA


Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	0	0.00	68.48	0.00	-8.37	-3.01	0.00	0.00	-0.03	57.08*
-90	0	0.00	68.48	0.00	-8.37	-3.01	0.00	0.00	0.00	57.10

\* Bright Zone !

Segment Leq : 57.10 dBA

Results segment # 2: Elgin (day)

Source height = 1.50 m



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)
1.50	!	85.50	!
		45.97	!
			45.97

ROAD (0.00 + 61.62 + 0.00) = 61.62 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
0	90	0.00	72.16	0.00	-7.53	-3.01	0.00	0.00	-0.01	61.61*
0	90	0.00	72.16	0.00	-7.53	-3.01	0.00	0.00	0.00	61.62

\* Bright Zone !

Segment Leq : 61.62 dBA

Total Leq All Segments: 62.93 dBA

Results segment # 1: Metcalfe (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)
1.50	!	85.50	!
		58.59	!
			58.59

ROAD (0.00 + 49.51 + 0.00) = 49.51 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	0	0.00	60.88	0.00	-8.37	-3.01	0.00	0.00	-0.03	49.48*
-90	0	0.00	60.88	0.00	-8.37	-3.01	0.00	0.00	0.00	49.51

\* Bright Zone !

Segment Leq : 49.51 dBA

Results segment # 2: Elgin (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	! Receiver Height (m)	! Barrier Height (m)	! Elevation of Barrier Top (m)





# GRADIENTWIND

ENGINEERS & SCIENTISTS

-----+-----+-----+-----  
 1.50 !            85.50 !            45.97 !            45.97

ROAD (0.00 + 54.02 + 0.00) = 54.02 dBA


Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
0	90	0.00	64.56	0.00	-7.53	-3.01	0.00	0.00	-0.01	54.01*
0	90	0.00	64.56	0.00	-7.53	-3.01	0.00	0.00	0.00	54.02

\* Bright Zone !

Segment Leq : 54.02 dBA

Total Leq All Segments: 55.34 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 62.93  
 (NIGHT): 55.34



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 16:07:59  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r8.te    Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Elgin (day/night)

-----

Car traffic volume : 28336/2464 veh/TimePeriod \*  
Medium truck volume : 2254/196 veh/TimePeriod \*  
Heavy truck volume : 1610/140 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 35000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Elgin (day/night)

-----

Angle1 Angle2 : -9.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 83.00 / 83.00 m  
Receiver height : 7.50 / 7.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -9.00 deg Angle2 : 90.00 deg  
Barrier height : 6.00 m  
Barrier receiver distance : 23.00 / 23.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalf (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalf (day/night)

```
-----
Angle1 Angle2      : -90.00 deg   9.00 deg
Wood depth          :          0      (No woods.)
No of house rows   :          0 / 0
Surface            :          2      (Reflective ground surface)
Receiver source distance : 105.00 / 105.00 m
Receiver height     :    7.50 / 7.50 m
Topography         :          2      (Flat/gentle slope; with barrier)
Barrier angle1     : -90.00 deg   Angle2 : 9.00 deg
Barrier height     :    6.00 m
Barrier receiver distance : 22.00 / 22.00 m
Source elevation   :    0.00 m
Receiver elevation :    0.00 m
Barrier elevation  :    0.00 m
Reference angle    :    0.00
-----
```

Results segment # 1: Elgin (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          7.50 !          5.84 !          5.84
-----
```

ROAD (0.00 + 57.11 + 0.00) = 57.11 dBA

```
-----
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
    -9    90   0.00  72.16  0.00  -7.43  -2.60   0.00   0.00  -5.03  57.11
-----
```

Segment Leq : 57.11 dBA

Results segment # 2: Metcalf (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	7.50	!	6.24	!	6.24

ROAD (0.00 + 57.43 + 0.00) = 57.43 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	9	0.00	68.48	0.00	-8.45	-2.60	0.00	0.00	-4.94	52.49*
-90	9	0.00	68.48	0.00	-8.45	-2.60	0.00	0.00	0.00	57.43

\* Bright Zone !

Segment Leq : 57.43 dBA

Total Leq All Segments: 60.28 dBA

Results segment # 1: Elgin (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	7.50	!	5.84	!	5.84

ROAD (0.00 + 49.51 + 0.00) = 49.51 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-9	90	0.00	64.56	0.00	-7.43	-2.60	0.00	0.00	-5.03	49.51

Segment Leq : 49.51 dBA

Results segment # 2: Metcalf (night)


Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	7.50	!	6.24	!	6.24

ROAD (0.00 + 49.84 + 0.00) = 49.84 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq



# GRADIENTWIND

ENGINEERS & SCIENTISTS

-90	9	0.00	60.88	0.00	-8.45	-2.60	0.00	0.00	-4.94	44.90*
-90	9	0.00	60.88	0.00	-8.45	-2.60	0.00	0.00	0.00	49.84

---

\* Bright Zone !

Segment Leq : 49.84 dBA

Total Leq All Segments: 52.69 dBA

TOTAL Leq FROM ALL SOURCES (DAY) : 60.28  
(NIGHT) : 52.69

# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 16:08:21  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r8b.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Elgin (day/night)

-----

Car traffic volume : 28336/2464 veh/TimePeriod \*  
Medium truck volume : 2254/196 veh/TimePeriod \*  
Heavy truck volume : 1610/140 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 35000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Elgin (day/night)

-----

Angle1 Angle2 : -9.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 83.00 / 83.00 m  
Receiver height : 7.50 / 7.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -9.00 deg Angle2 : 90.00 deg  
Barrier height : 8.00 m  
Barrier receiver distance : 23.00 / 23.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalf (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalf (day/night)

```
-----
Angle1 Angle2      : -90.00 deg   9.00 deg
Wood depth          :          0      (No woods.)
No of house rows    :          0 / 0
Surface             :          2      (Reflective ground surface)
Receiver source distance : 105.00 / 105.00 m
Receiver height     :    7.50 / 7.50 m
Topography          :          2      (Flat/gentle slope; with barrier)
Barrier angle1      : -90.00 deg   Angle2 : 9.00 deg
Barrier height      :    8.00 m
Barrier receiver distance : 22.00 / 22.00 m
Source elevation    :    0.00 m
Receiver elevation  :    0.00 m
Barrier elevation   :    0.00 m
Reference angle     :    0.00
```

Results segment # 1: Elgin (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          7.50 !          5.84 !          5.84
```

ROAD (0.00 + 53.92 + 0.00) = 53.92 dBA

```
-----
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
   -9    90   0.00  72.16  0.00  -7.43  -2.60   0.00   0.00  -8.21  53.92
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
```

Segment Leq : 53.92 dBA

Results segment # 2: Metcalf (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	7.50	!	6.24	!	6.24

ROAD (0.00 + 50.12 + 0.00) = 50.12 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	9	0.00	68.48	0.00	-8.45	-2.60	0.00	0.00	-7.32	50.12

Segment Leq : 50.12 dBA

Total Leq All Segments: 55.43 dBA

Results segment # 1: Elgin (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	7.50	!	5.84	!	5.84

ROAD (0.00 + 46.32 + 0.00) = 46.32 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-9	90	0.00	64.56	0.00	-7.43	-2.60	0.00	0.00	-8.21	46.32

Segment Leq : 46.32 dBA

Results segment # 2: Metcalf (night)


Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	7.50	!	6.24	!	6.24

ROAD (0.00 + 42.52 + 0.00) = 42.52 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	9	0.00	60.88	0.00	-8.45	-2.60	0.00	0.00	-7.32	42.52





Segment Leq : 42.52 dBA

Total Leq All Segments: 47.83 dBA

TOTAL Leq FROM ALL SOURCES (DAY) : 55.43  
(NIGHT) : 47.83

# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 16:10:07  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r9.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----

Angle1 Angle2 : -21.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 21.00 / 21.00 m  
Receiver height : 24.00 / 24.00 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -21.00 deg Angle2 : 90.00 deg  
Barrier height : 22.50 m  
Barrier receiver distance : 9.00 / 9.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Elgin (day/night)

-----

Car traffic volume : 28336/2464 veh/TimePeriod \*  
Medium truck volume : 2254/196 veh/TimePeriod \*  
Heavy truck volume : 1610/140 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 35000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Elgin (day/night)

```
-----
Angle1 Angle2      : -90.00 deg   90.00 deg
Wood depth          :          0      (No woods.)
No of house rows   :          0 / 0
Surface             :          2      (Reflective ground surface)
Receiver source distance : 63.00 / 63.00 m
Receiver height     : 24.00 / 24.00 m
Topography          :          2      (Flat/gentle slope; with barrier)
Barrier angle1     : -90.00 deg   Angle2 : 90.00 deg
Barrier height      : 22.50 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation    : 0.00 m
Receiver elevation  : 0.00 m
Barrier elevation   : 0.00 m
Reference angle     : 0.00
-----
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          24.00 !          14.36 !          14.36
-----
```

ROAD (0.00 + 47.98 + 0.00) = 47.98 dBA

```
-----
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
      -21    90   0.00  68.48   0.00  -1.46  -2.10   0.00   0.00 -16.94  47.98
-----
```

Segment Leq : 47.98 dBA

Results segment # 2: Elgin (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	24.00	!	22.93	!	22.93

ROAD (0.00 + 65.93 + 0.00) = 65.93 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	72.16	0.00	-6.23	0.00	0.00	0.00	-4.03	61.90*
-90	90	0.00	72.16	0.00	-6.23	0.00	0.00	0.00	0.00	65.93

\* Bright Zone !

Segment Leq : 65.93 dBA

Total Leq All Segments: 66.00 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	24.00	!	14.36	!	14.36

ROAD (0.00 + 40.38 + 0.00) = 40.38 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-21	90	0.00	60.88	0.00	-1.46	-2.10	0.00	0.00	-16.94	40.38

Segment Leq : 40.38 dBA

Results segment # 2: Elgin (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	24.00	!	22.93	!	22.93

ROAD (0.00 + 58.33 + 0.00) = 58.33 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
--------	--------	-------	--------	-------	-------	-------	-------	-------	-------	--------



# GRADIENTWIND

ENGINEERS & SCIENTISTS

-90	90	0.00	64.56	0.00	-6.23	0.00	0.00	0.00	-4.03	54.31*
-90	90	0.00	64.56	0.00	-6.23	0.00	0.00	0.00	0.00	58.33

---

\* Bright Zone !

Segment Leq : 58.33 dBA

Total Leq All Segments: 58.40 dBA

TOTAL Leq FROM ALL SOURCES (DAY) : 66.00  
(NIGHT) : 58.40

# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 25-08-2022 11:45:40  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r9b.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----

Angle1 Angle2 : -21.00 deg 90.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 21.00 / 21.00 m  
Receiver height : 24.00 / 24.00 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -21.00 deg Angle2 : 90.00 deg  
Barrier height : 24.60 m  
Barrier receiver distance : 9.00 / 9.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Elgin (day/night)

-----

Car traffic volume : 28336/2464 veh/TimePeriod \*  
Medium truck volume : 2254/196 veh/TimePeriod \*  
Heavy truck volume : 1610/140 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 35000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Elgin (day/night)

```
-----
Angle1  Angle2      : -90.00 deg   90.00 deg
Wood depth      :      0      (No woods.)
No of house rows :      0 / 0
Surface         :      2      (Reflective ground surface)
Receiver source distance : 63.00 / 63.00 m
Receiver height : 24.00 / 24.00 m
Topography     :      2      (Flat/gentle slope; with barrier)
Barrier angle1 : -90.00 deg   Angle2 : 90.00 deg
Barrier height  : 24.60 m
Barrier receiver distance : 3.00 / 3.00 m
Source elevation : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation : 0.00 m
Reference angle : 0.00
-----
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !      24.00 !      14.36 !      14.36
-----
```

ROAD (0.00 + 46.96 + 0.00) = 46.96 dBA

```
-----
Angle1 Angle2  Alpha RefLeq  P.Adj  D.Adj  F.Adj  W.Adj  H.Adj  B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
   -21    90   0.00  68.48   0.00  -1.46  -2.10   0.00   0.00 -17.96  46.96
-----
```

Segment Leq : 46.96 dBA

Results segment # 2: Elgin (day)

Source height = 1.50 m

Barrier height for grazing incidence



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	24.00	22.93	22.93

ROAD (0.00 + 54.82 + 0.00) = 54.82 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	72.16	0.00	-6.23	0.00	0.00	0.00	-11.11	54.82

Segment Leq : 54.82 dBA

Total Leq All Segments: 55.48 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	24.00	14.36	14.36

ROAD (0.00 + 39.37 + 0.00) = 39.37 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-21	90	0.00	60.88	0.00	-1.46	-2.10	0.00	0.00	-17.96	39.37

Segment Leq : 39.37 dBA

Results segment # 2: Elgin (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	Receiver Height (m)	Barrier Height (m)	Elevation of Barrier Top (m)
1.50	24.00	22.93	22.93

ROAD (0.00 + 47.22 + 0.00) = 47.22 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	64.56	0.00	-6.23	0.00	0.00	0.00	-11.11	47.22





Segment Leq : 47.22 dBA

Total Leq All Segments: 47.88 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.48  
(NIGHT): 47.88



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 24-08-2022 16:15:59  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r10.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----

Angle1 Angle2 : -90.00 deg 13.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 21.00 / 21.00 m  
Receiver height : 24.00 / 24.00 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : 13.00 deg  
Barrier height : 22.50 m  
Barrier receiver distance : 10.00 / 10.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalfe (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalfe (day/night)

```
-----
Angle1 Angle2      : -90.00 deg  90.00 deg
Wood depth          :      0      (No woods.)
No of house rows   :      0 / 0
Surface            :      2      (Reflective ground surface)
Receiver source distance : 75.00 / 75.00 m
Receiver height    : 24.00 / 24.00 m
Topography         :      2      (Flat/gentle slope; with barrier)
Barrier angle1     : -90.00 deg  Angle2 : 90.00 deg
Barrier height     : 22.50 m
Barrier receiver distance : 2.00 / 2.00 m
Source elevation   : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation  : 0.00 m
Reference angle    : 0.00
-----
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !      24.00 !    13.28 !      13.28
-----
```

ROAD (0.00 + 47.42 + 0.00) = 47.42 dBA

```
-----
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
    -90    13   0.00  68.48  0.00 -1.46 -2.42  0.00  0.00 -17.18  47.42
-----
```

Segment Leq : 47.42 dBA

Results segment # 2: Metcalfe (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	24.00	!	23.40	!	23.40

ROAD (0.00 + 61.49 + 0.00) = 61.49 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	68.48	0.00	-6.99	0.00	0.00	0.00	-0.56	60.93*
-90	90	0.00	68.48	0.00	-6.99	0.00	0.00	0.00	0.00	61.49

\* Bright Zone !

Segment Leq : 61.49 dBA

Total Leq All Segments: 61.66 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	24.00	!	13.28	!	13.28

ROAD (0.00 + 39.82 + 0.00) = 39.82 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	13	0.00	60.88	0.00	-1.46	-2.42	0.00	0.00	-17.18	39.82

Segment Leq : 39.82 dBA

Results segment # 2: Metcalfe (night)


Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	24.00	!	23.40	!	23.40

ROAD (0.00 + 53.89 + 0.00) = 53.89 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
--------	--------	-------	--------	-------	-------	-------	-------	-------	-------	--------



# GRADIENTWIND

ENGINEERS & SCIENTISTS

-90	90	0.00	60.88	0.00	-6.99	0.00	0.00	0.00	-0.56	53.34*
-90	90	0.00	60.88	0.00	-6.99	0.00	0.00	0.00	0.00	53.89

---

\* Bright Zone !

Segment Leq : 53.89 dBA

Total Leq All Segments: 54.06 dBA

TOTAL Leq FROM ALL SOURCES (DAY) : 61.66  
(NIGHT) : 54.06



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 25-08-2022 11:45:56  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r10b.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----

Angle1 Angle2 : -90.00 deg 13.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 21.00 / 21.00 m  
Receiver height : 24.00 / 24.00 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : 13.00 deg  
Barrier height : 24.00 m  
Barrier receiver distance : 10.00 / 10.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalfe (day/night)

-----

Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalfe (day/night)

```
-----
Angle1 Angle2      : -90.00 deg  90.00 deg
Wood depth          :      0      (No woods.)
No of house rows   :      0 / 0
Surface            :      2      (Reflective ground surface)
Receiver source distance : 75.00 / 75.00 m
Receiver height    : 24.00 / 24.00 m
Topography         :      2      (Flat/gentle slope; with barrier)
Barrier angle1     : -90.00 deg  Angle2 : 90.00 deg
Barrier height     : 24.00 m
Barrier receiver distance : 2.00 / 2.00 m
Source elevation   : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation  : 0.00 m
Reference angle    : 0.00
-----
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !      24.00 !    13.28 !      13.28
-----
```

ROAD (0.00 + 46.77 + 0.00) = 46.77 dBA

```
-----
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
   -90    13   0.00  68.48  0.00 -1.46 -2.42  0.00  0.00 -17.83  46.77
-----
```

Segment Leq : 46.77 dBA

Results segment # 2: Metcalfe (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	24.00	!	23.40	!	23.40

ROAD (0.00 + 54.31 + 0.00) = 54.31 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	68.48	0.00	-6.99	0.00	0.00	0.00	-7.18	54.31

Segment Leq : 54.31 dBA

Total Leq All Segments: 55.01 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	24.00	!	13.28	!	13.28

ROAD (0.00 + 39.17 + 0.00) = 39.17 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	13	0.00	60.88	0.00	-1.46	-2.42	0.00	0.00	-17.83	39.17

Segment Leq : 39.17 dBA

Results segment # 2: Metcalfe (night)


Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	24.00	!	23.40	!	23.40

ROAD (0.00 + 46.72 + 0.00) = 46.72 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	60.88	0.00	-6.99	0.00	0.00	0.00	-7.18	46.72





Segment Leq : 46.72 dBA

Total Leq All Segments: 47.42 dBA

TOTAL Leq FROM ALL SOURCES (DAY) : 55.01  
(NIGHT) : 47.42

# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      NORMAL REPORT                      Date: 25-08-2022 11:46:07  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r11.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----  
Angle1 Angle2 : -90.00 deg -8.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 24.00 / 24.00 m  
Receiver height : 19.50 / 19.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : -8.00 deg  
Barrier height : 18.00 m  
Barrier receiver distance : 12.00 / 12.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalfe (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalfe (day/night)

```
-----
Angle1 Angle2      : -90.00 deg  90.00 deg
Wood depth          :      0      (No woods.)
No of house rows   :      0 / 0
Surface            :      2      (Reflective ground surface)
Receiver source distance : 73.00 / 73.00 m
Receiver height     : 19.50 / 19.50 m
Topography         :      2      (Flat/gentle slope; with barrier)
Barrier angle1     : -90.00 deg  Angle2 : 90.00 deg
Barrier height     : 18.00 m
Barrier receiver distance : 2.00 / 2.00 m
Source elevation   : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation  : 0.00 m
Reference angle    : 0.00
-----
```

Results segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          19.50 !          10.50 !          10.50
-----
```

ROAD (0.00 + 46.84 + 0.00) = 46.84 dBA

```
-----
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
   -90    -8   0.00  68.48  0.00  -2.04  -3.41   0.00   0.00 -16.19  46.84
-----
```

Segment Leq : 46.84 dBA

Results segment # 2: Metcalfe (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	19.50	!	19.01	!	19.01

ROAD (0.00 + 61.61 + 0.00) = 61.61 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	68.48	0.00	-6.87	0.00	0.00	0.00	-0.42	61.19*
-90	90	0.00	68.48	0.00	-6.87	0.00	0.00	0.00	0.00	61.61

\* Bright Zone !

Segment Leq : 61.61 dBA

Total Leq All Segments: 61.75 dBA

Results segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	19.50	!	10.50	!	10.50

ROAD (0.00 + 39.24 + 0.00) = 39.24 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-8	0.00	60.88	0.00	-2.04	-3.41	0.00	0.00	-16.19	39.24

Segment Leq : 39.24 dBA

Results segment # 2: Metcalfe (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	19.50	!	19.01	!	19.01

ROAD (0.00 + 54.01 + 0.00) = 54.01 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
--------	--------	-------	--------	-------	-------	-------	-------	-------	-------	--------



# GRADIENTWIND

ENGINEERS & SCIENTISTS

-90	90	0.00	60.88	0.00	-6.87	0.00	0.00	0.00	-0.42	53.59*
-90	90	0.00	60.88	0.00	-6.87	0.00	0.00	0.00	0.00	54.01

---

\* Bright Zone !

Segment Leq : 54.01 dBA

Total Leq All Segments: 54.15 dBA

TOTAL Leq FROM ALL SOURCES (DAY) : 61.75  
(NIGHT) : 54.15



# GRADIENTWIND

ENGINEERS & SCIENTISTS

STAMSON 5.0                      COMPREHENSIVE REPORT                      Date: 25-08-2022 11:46:18  
MINISTRY OF ENVIRONMENT AND ENERGY / NOISE ASSESSMENT

Filename: r11b.te                      Time Period: Day/Night 16/8 hours  
Description:

## Road data, segment # 1: Laurier (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:

24 hr Traffic Volume (AADT or SADT): 15000  
Percentage of Annual Growth : 0.00  
Number of Years of Growth : 0.00  
Medium Truck % of Total Volume : 7.00  
Heavy Truck % of Total Volume : 5.00  
Day (16 hrs) % of Total Volume : 92.00

## Data for Segment # 1: Laurier (day/night)

-----  
Angle1 Angle2 : -90.00 deg -8.00 deg  
Wood depth : 0 (No woods.)  
No of house rows : 0 / 0  
Surface : 2 (Reflective ground surface)  
Receiver source distance : 24.00 / 24.00 m  
Receiver height : 19.50 / 19.50 m  
Topography : 2 (Flat/gentle slope; with barrier)  
Barrier angle1 : -90.00 deg Angle2 : -8.00 deg  
Barrier height : 19.50 m  
Barrier receiver distance : 12.00 / 12.00 m  
Source elevation : 0.00 m  
Receiver elevation : 0.00 m  
Barrier elevation : 0.00 m  
Reference angle : 0.00

## Road data, segment # 2: Metcalfe (day/night)

-----  
Car traffic volume : 12144/1056 veh/TimePeriod \*  
Medium truck volume : 966/84 veh/TimePeriod \*  
Heavy truck volume : 690/60 veh/TimePeriod \*  
Posted speed limit : 50 km/h  
Road gradient : 0 %  
Road pavement : 1 (Typical asphalt or concrete)

\* Refers to calculated road volumes based on the following input:



# GRADIENTWIND

ENGINEERS & SCIENTISTS

24 hr Traffic Volume (AADT or SADT): 15000  
 Percentage of Annual Growth : 0.00  
 Number of Years of Growth : 0.00  
 Medium Truck % of Total Volume : 7.00  
 Heavy Truck % of Total Volume : 5.00  
 Day (16 hrs) % of Total Volume : 92.00

Data for Segment # 2: Metcalfe (day/night)

```
-----
Angle1 Angle2      : -90.00 deg  90.00 deg
Wood depth          :          0      (No woods.)
No of house rows   :          0 / 0
Surface            :          2      (Reflective ground surface)
Receiver source distance : 73.00 / 73.00 m
Receiver height     : 19.50 / 19.50 m
Topography         :          2      (Flat/gentle slope; with barrier)
Barrier angle1     : -90.00 deg  Angle2 : 90.00 deg
Barrier height     : 19.50 m
Barrier receiver distance : 2.00 / 2.00 m
Source elevation   : 0.00 m
Receiver elevation : 0.00 m
Barrier elevation  : 0.00 m
Reference angle    : 0.00
-----
```

Segment # 1: Laurier (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
Height (m) ! Height (m) ! Height (m) ! Barrier Top (m)
-----+-----+-----+-----
          1.50 !          19.50 !          10.50 !          10.50
-----
```

ROAD (0.00 + 45.94 + 0.00) = 45.94 dBA

```
-----
Angle1 Angle2 Alpha RefLeq P.Adj D.Adj F.Adj W.Adj H.Adj B.Adj SubLeq
-----
-90 -8 0.00 68.48 0.00 -2.04 -3.41 0.00 0.00 -17.08 45.94
-----
```

Segment Leq : 45.94 dBA

Segment # 2: Metcalfe (day)

Source height = 1.50 m

Barrier height for grazing incidence

```
-----
Source      ! Receiver      ! Barrier      ! Elevation of
```



# GRADIENTWIND

ENGINEERS & SCIENTISTS

Height (m)	!	Height (m)	!	Height (m)	!	Barrier Top (m)
1.50	!	19.50	!	19.01	!	19.01

ROAD (0.00 + 54.98 + 0.00) = 54.98 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	68.48	0.00	-6.87	0.00	0.00	0.00	-6.63	54.98

Segment Leq : 54.98 dBA

Total Leq All Segments: 55.49 dBA

Segment # 1: Laurier (night)

Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	19.50	!	10.50	!	10.50

ROAD (0.00 + 38.35 + 0.00) = 38.35 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	-8	0.00	60.88	0.00	-2.04	-3.41	0.00	0.00	-17.08	38.35

Segment Leq : 38.35 dBA

Segment # 2: Metcalfe (night)


Source height = 1.50 m

Barrier height for grazing incidence

Source Height (m)	!	Receiver Height (m)	!	Barrier Height (m)	!	Elevation of Barrier Top (m)
1.50	!	19.50	!	19.01	!	19.01

ROAD (0.00 + 47.39 + 0.00) = 47.39 dBA

Angle1	Angle2	Alpha	RefLeq	P.Adj	D.Adj	F.Adj	W.Adj	H.Adj	B.Adj	SubLeq
-90	90	0.00	60.88	0.00	-6.87	0.00	0.00	0.00	-6.63	47.39





Segment Leq : 47.39 dBA

Total Leq All Segments: 47.90 dBA

TOTAL Leq FROM ALL SOURCES (DAY): 55.49  
(NIGHT): 47.90