
- ACCORDANCE WITH OPSD STANDARDS AND SPECIFICATIONS, AS WELL AS CITY STANDARDS.
- MINIMUM COVER OF 2.4m. OTHERWISE THERMAL INSULATION IS REQUIRED AS PER CITY STANDARDS (IF
- ALIGNMENT, ENSURE THAT THE AMOUNT OF DEFLECTION USED IS EQUAL TO OR LESS THAN THAT WHICH IS RECOMMENDED BY THE MANUFACTURER.
- OPSD 1109.030.
- BE COMPLETED UNTIL A WATER PERMIT IS OBTAINED FROM THE CITY. CITY TO BE PRESENT FOR WATERMAIN AND REINSTATEMENT TO BE COMPLETED BY CONTRACTOR.
- PERFORM ANY WATERMAIN CONNECTION(S) REQUIRED. THIS SHALL BE COMPLETED IN THE PRESENCE OF A DESIGNATED MUNICIPAL WATER OPERATOR AND THE SELECTED CONTRACTOR SHALL PROVE TO THE SATISFACTION OF THE CITY THAT THEY ARE COMPETENT TO PERFORM THE WORKS PRIOR TO INITIATING CONSTRUCTION.


- SHOWN ARE SUPPLIED FOR INFORMATION PURPOSES ONLY, AND
- THIS PLAN IS NOT A CADASTRAL SURVEY SHOWING LEGAL PROPERTY BOUNDARIES AND EASEMENTS. THE PROPERTY BOUNDARIES SHOWN HEREON HAVE BEEN DERIVED INFORMATION SUPPLIED BY ANNIS O'SULLIVAN VOLLEBEKK LTD (OR SHOWN ON) DRAWING V-22629 AND CANNOT BE RELIED UPON TO BE ACCURATE OR COMPLETE. THE PRECISE LOCATION OF THE CURRENT PROPERTY BOUNDARIES AND FASEMENTS CAN ONLY BE DETERMINED BY AN UP-TO-DATE LAND TITLES SEARCH AND A SUBSEQUENT CADASTRAL SURVEY PERFORMED AND CERTIFIED BY AN ONTARIO LAND SURVEYOR.
- CONSTRUCTION.
- MATERIAL AND ELEVATION OF ALL EXISTING UTILITIES PRIOR TO COMMENCING CONSTRUCTION, PROTECT AND ASSUME ALL RESPONSIBILITY FOR EXISTING LITUITIES WHETHER OR NOT SHOWN ON TO NOTIFY THE ENGINEER PROMPTLY.
- ALLOWANCES TO CONDITION EQUAL OR BETTER THAN ORIGINAL CONDITION AND TO THE SATISFACTION OF THE CITY AUTHORITIES.
- AS ASPHALT, CURBING AND DEBRIS, OFF SITE AS DIRECTED BY THE NGINEER AND THE CITY
- STANDARD PROCTOR DENSITY.
- BETTER UNLESS OTHERWISE SPECIFIED. AND SAFETY MEASURES DURING THE CONSTRUCTION PERIOD, INCLUDING THE SUPPLY, INSTALLATION, AND REMOVAL OF ALL NECESSARY SIGNAGE, DELINEATORS, MARKERS AND BARRIERS
- UNDERTAKEN IN ACCORDANCE WITH CITY STANDARDS AND AWAY FROM THE BUILDING.
- LOTS, ROADWAYS AND LANDSCAPED AREAS PRIOR TO PLACEMENT OF ASPHALT AND TOPSOIL, ALL DEFICIENCIES NOTED SHALL BE RECTIFIED TO THE CITY'S SATISFACTION PRIOR TO PLACEMENT OF ANY ASPHALT. TOPSOIL, SEED & MULCH AND/OR SOD.
- TO NOTIFY THE ENGINEER PROMPTLY.
- ARE SUBJECT TO THE INDIVIDUAL AGENCY: • ELECTRICAL SERVICE - HYDRO ONE, GAS SERVICE - ENBRIDGE. TELEPHONE SERVICE - BELL CANADA
- FOLLOWED DURING CONSTRUCTION
- OTHERWISE SPECIFIED.
- INVESTIGATION COMPLETED BY PATERSON GROUP, DATED JULY 20, 2022


- SPECIFICATIONS, AS WELL AS CITY.
- 802.010 AND 802.013 UNLESS NOTED OTHERWISE.
- COMPACTED GRANULAR "B" TYPE 1.
- GRANULAR "A" OR GRANULAR "B" TYPE 1.
- (FROM PAVEMENT SUBGRADE TO 2.0 METRES BELOW FINISHED GRADE) SHALL MATCH EXISTING SOIL CONDITIONS.


- TO BE PROPERLY CAPPED AND LOCATED WITH 2"x4"X8' LONG MARKER.
- OUTLET CONNECTION TO THE MAIN AND PIPES 150mmØ OR GREATER PRIOR TO BASE COURSE ASPHALT. UPON COMPLETION OF ALL SEWERS & APPURTENANCES.



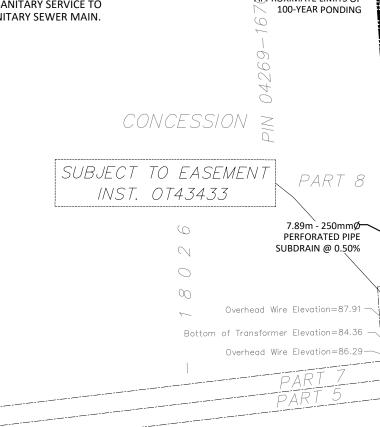

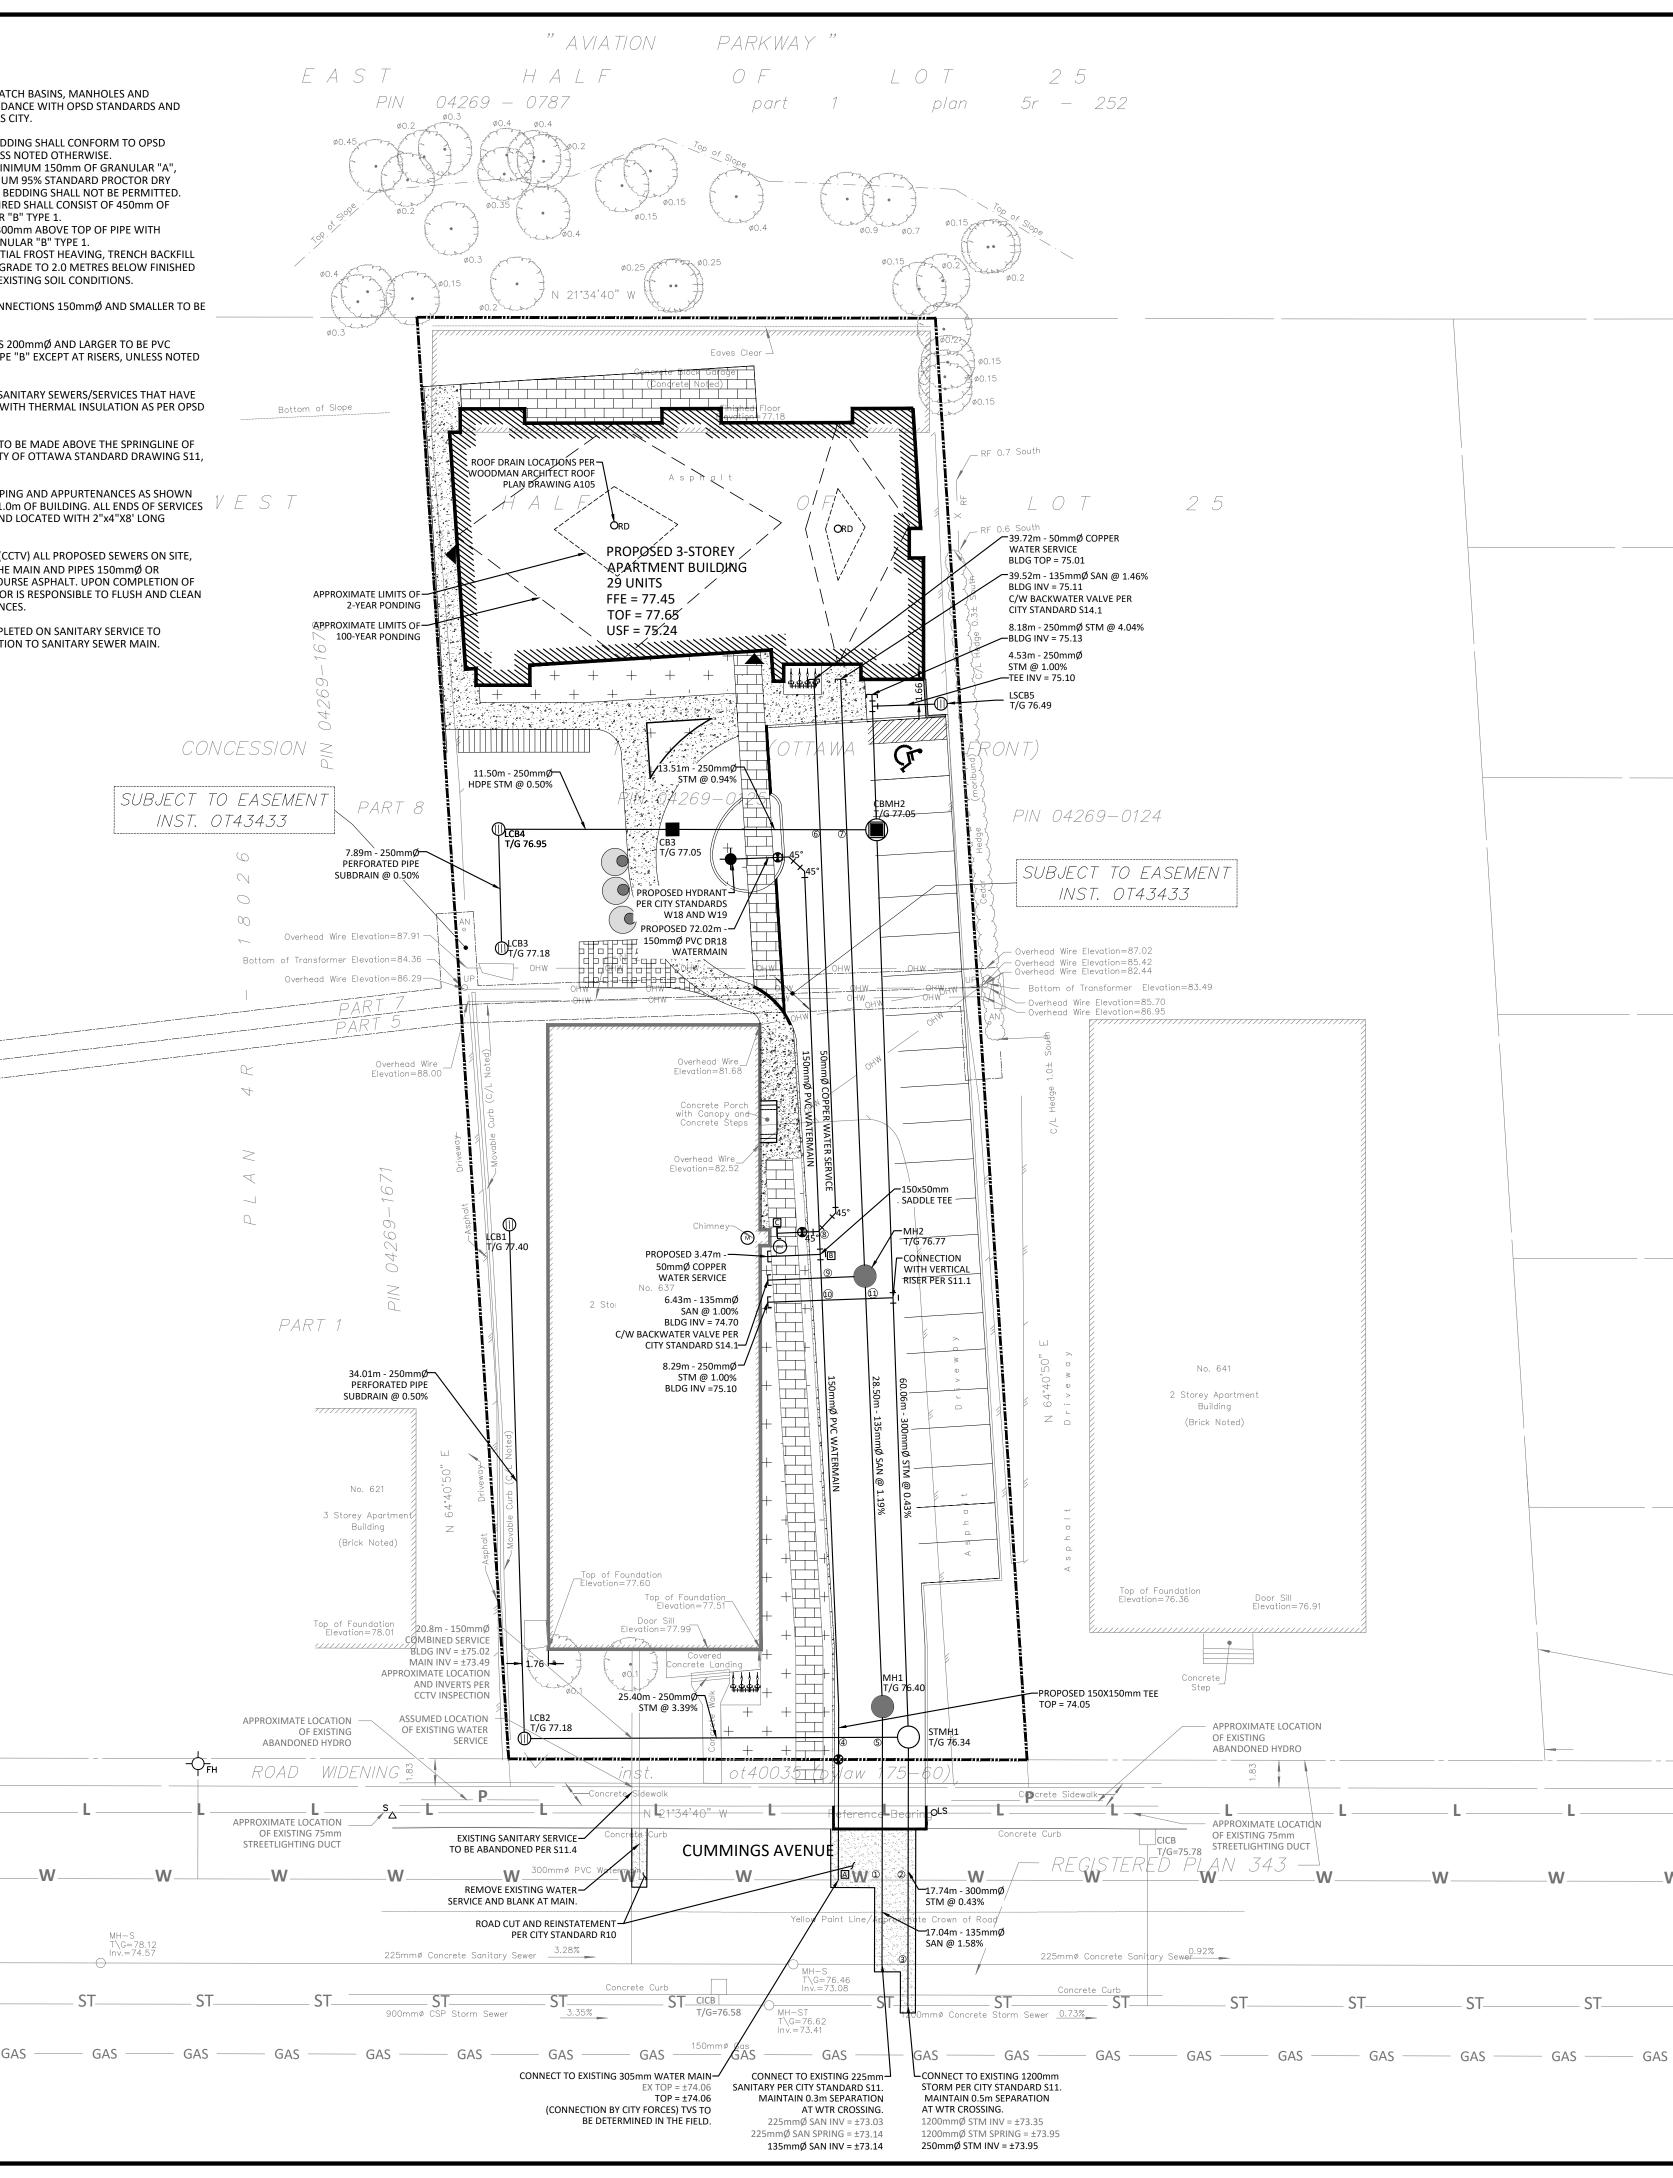

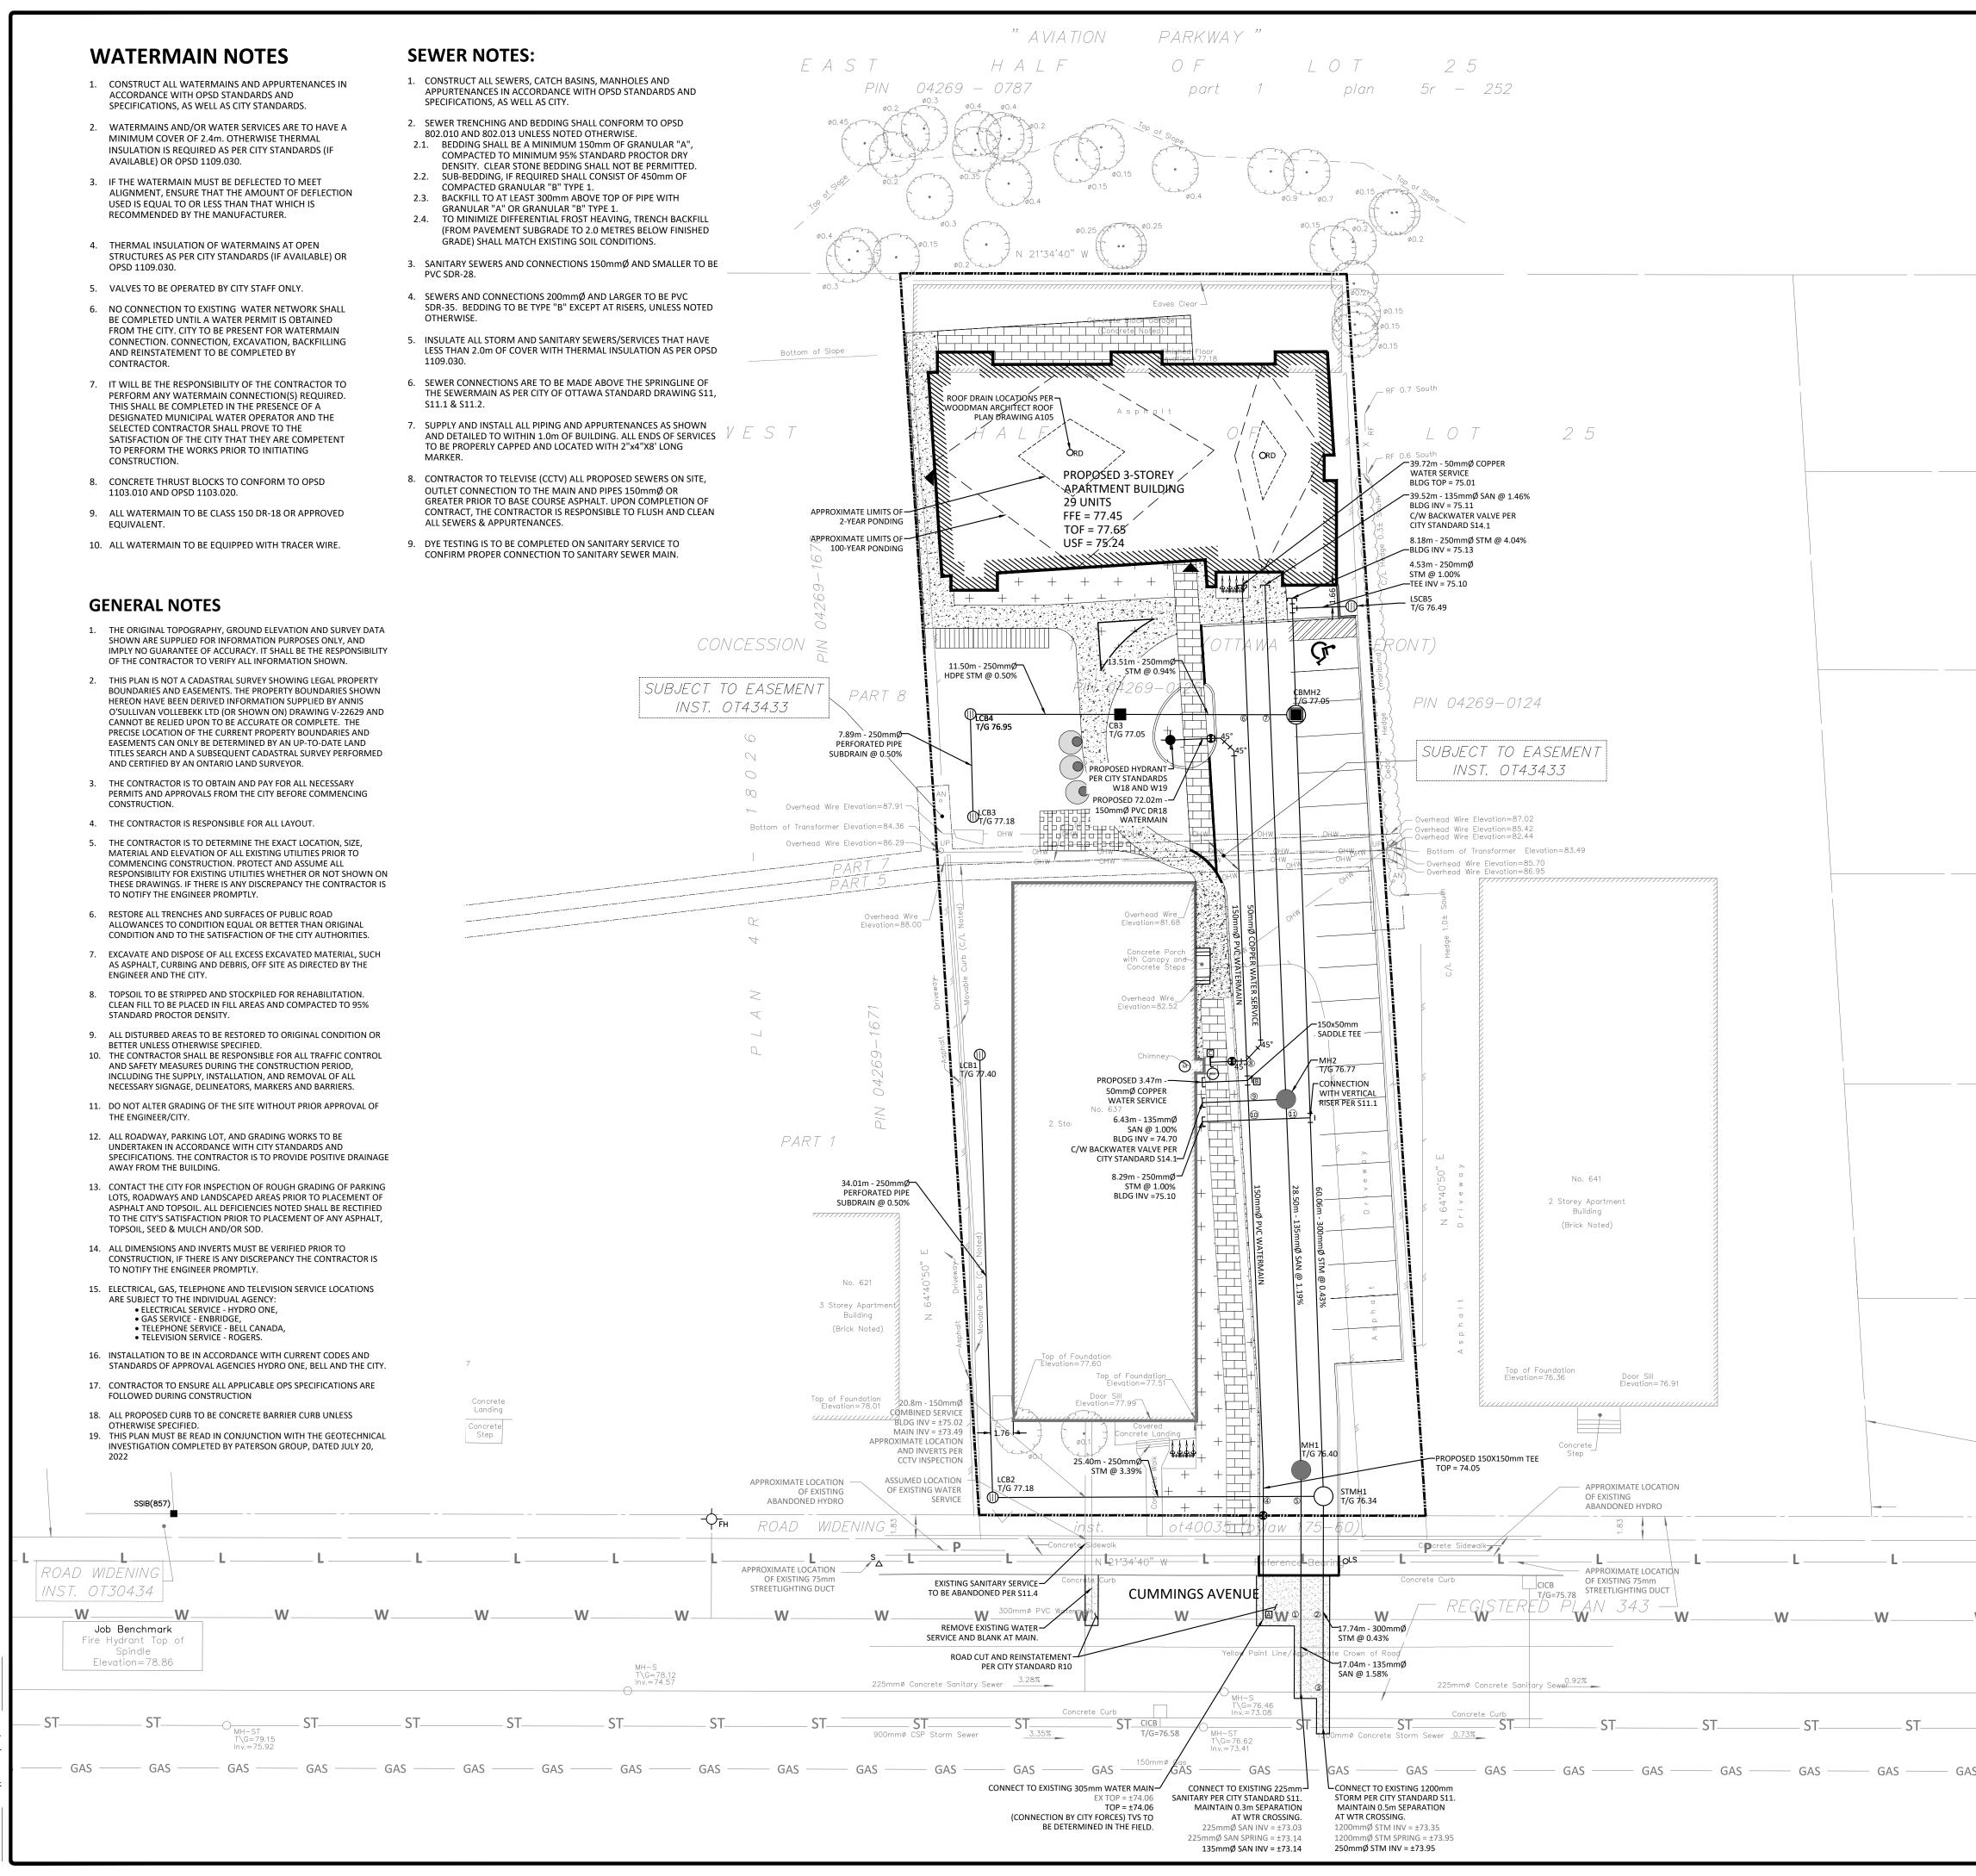

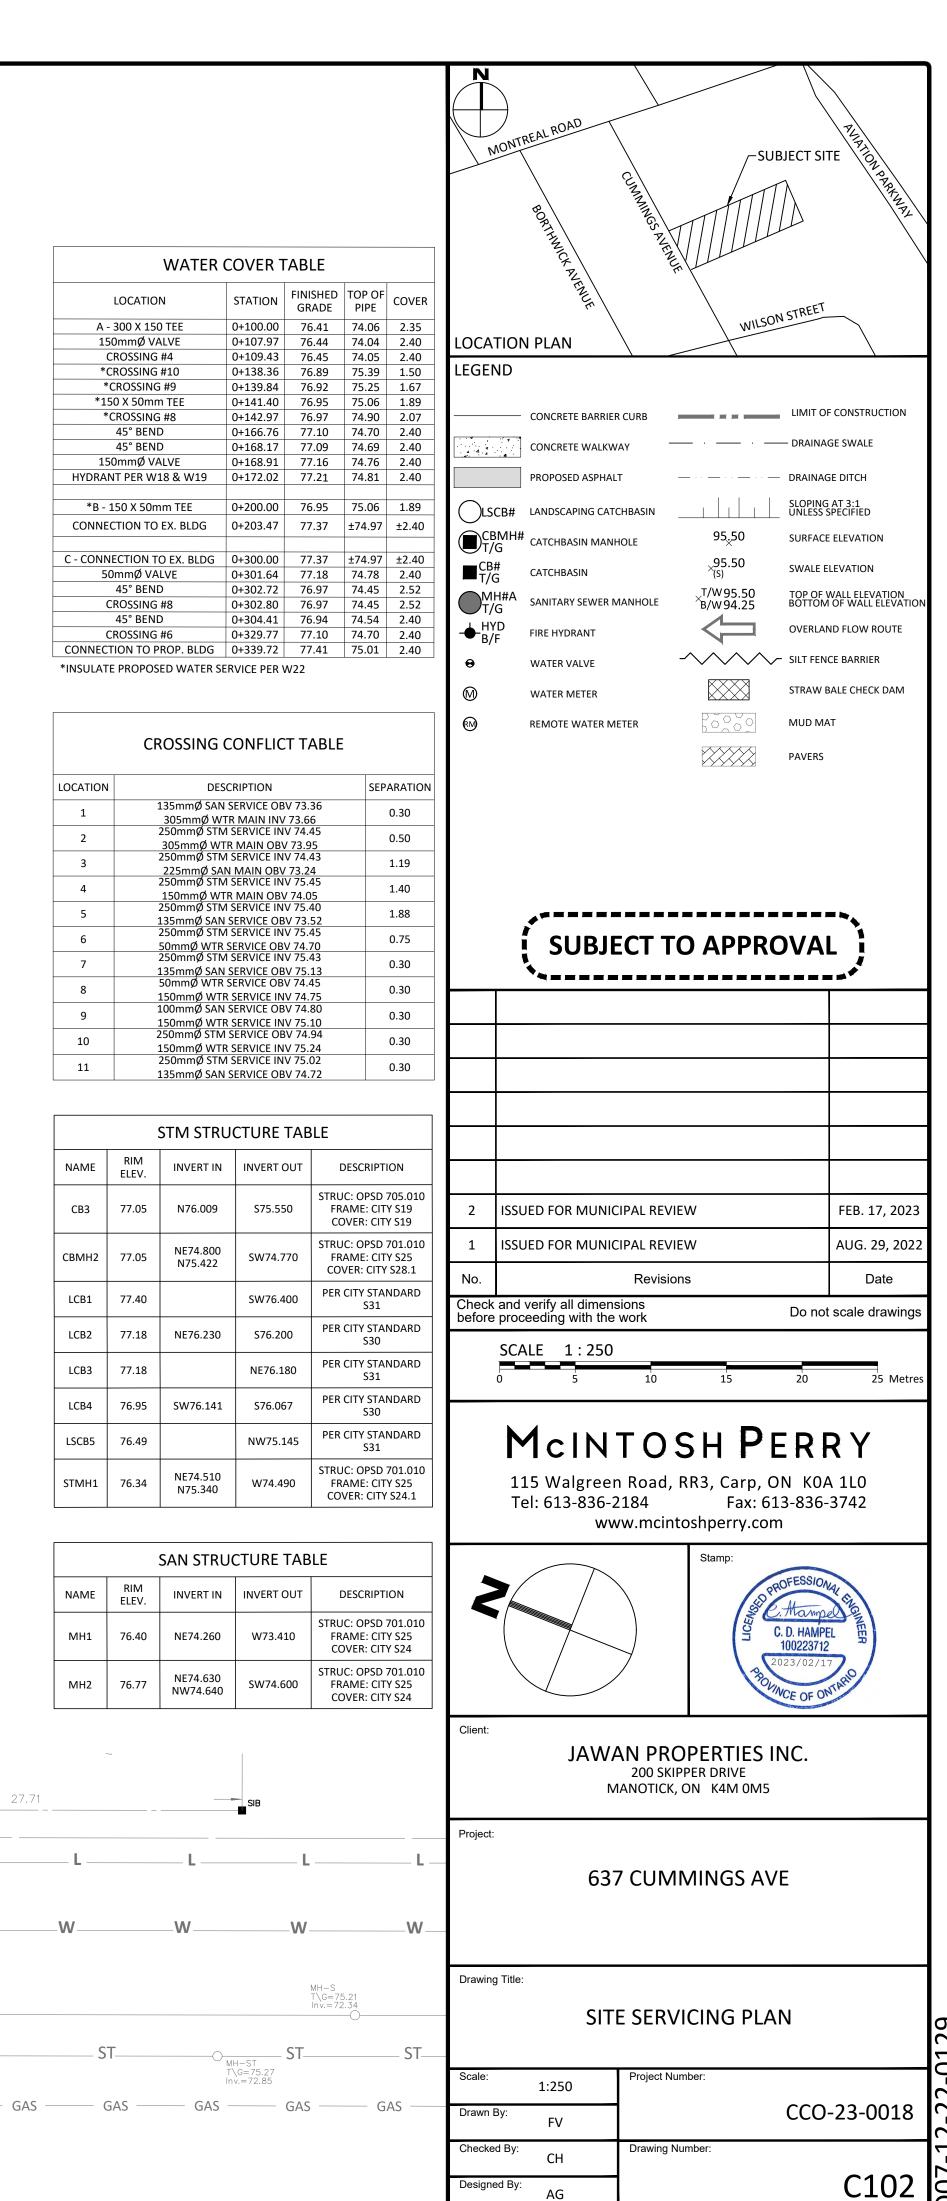

#1883