

## **Client Name withheld on Request**

# **Planning Rationale and Design Brief**

### DYT3 – 2625 Sheffield Road

#### Prepared by:

AECOM Canada Ltd. 50 Sportsworld Crossing Road, Suite 290 Kitchener, ON N2P 0A4 Canada

T: 519.650.5313 F: 519.650.3424 www.aecom.com

#### Prepared for:

City of Ottawa 110, avenue Laurier Avenue West / Ouest, 4th Floor / 4ième étage Ottawa, ON K1P 1J1

 Date:
 October, 2022

 Project #:
 60648725

### **Distribution List**

# Hard Copies	PDF Required	Association / Company Name	
	~	Client Name withheld on Request	
	✓	AECOM Canada Ltd.	

### **Revision History**

Rev #	Date	Revised By:	Revision Description



AECOM Canada Ltd. 50 Sportsworld Crossing Road, Suite 290 Kitchener, ON N2P 0A4 Canada

T: 519.650.5313 F: 519.650.3424 www.aecom.com

October 13, 2022

Kelby Lodoen Unseth City of Ottawa 110, avenue Laurier Avenue West / Ouest, 4th Floor / 4ième étage Ottawa, ON K1P 1J1

*Project #* 60648725

Dear Mr. Unseth:

#### Subject: Planning Rationale and Design Brief DYT3 – 2625 Sheffield Road

Please find our Planning Rationale and Design Brief for the above noted project in support of Site Plan Approval.

Our report summarizes the planning and urban design requirements provided in the terms of reference from the Pre-Consultation process for this site. The components of the proposed development of the site satisfies the Official Plan, and Zoning By-Law requirements. The report incorporates the finalized Site Plan, architectural, and landscape drawings to show the plan is complete and constructible.

Should you have any questions, comments, or concerns, please do not hesitate to contact the undersigned.

Sincerely, **AECOM Canada Ltd.** 

Milan Kuljanin, P.Eng Project Manager Milan.kuljanin@aecom.com

## **Statement of Qualifications and Limitations**

The attached Report (the "Report") has been prepared by AECOM Canada Ltd. ("AECOM") for the benefit of the Client ("Client") in accordance with the agreement between AECOM and Client, including the scope of work detailed therein (the "Agreement").

The information, data, recommendations, and conclusions contained in the Report (collectively, the "Information"):

- is subject to the scope, schedule, and other constraints and limitations in the Agreement and the qualifications contained in the Report (the "Limitations").
- represents AECOM's professional judgement in light of the Limitations and industry standards for the preparation of similar reports.
- may be based on information provided to AECOM which has not been independently verified.
- has not been updated since the date of issuance of the Report and its accuracy is limited to the time period and circumstances in which it was collected, processed, made, or issued.
- must be read as a whole and sections thereof should not be read out of such context.
- was prepared for the specific purposes described in the Report and the Agreement; and
- in the case of subsurface, environmental, or geotechnical conditions, may be based on limited testing and on the assumption that such conditions are uniform and not variable either geographically or over time.

AECOM shall be entitled to rely upon the accuracy and completeness of information that was provided to it and has no obligation to update such information. AECOM accepts no responsibility for any events or circumstances that may have occurred since the date on which the Report was prepared and, in the case of subsurface, environmental, or geotechnical conditions, is not responsible for any variability in such conditions, geographically or over time.

AECOM agrees that the Report represents its professional judgement as described above and that the Information has been prepared for the specific purpose and use described in the Report and the Agreement, but AECOM makes no other representations, or any guarantees or warranties whatsoever, whether express or implied, with respect to the Report, the Information or any part thereof.

Without in any way limiting the generality of the foregoing, any estimates or opinions regarding probable construction costs or construction schedule provided by AECOM represent AECOM's professional judgement in light of its experience and the knowledge and information available to it at the time of preparation. Since AECOM has no control over market or economic conditions, prices for construction labour, equipment or materials or bidding procedures, AECOM, its directors, officers and employees are not able to, nor do they, make any representations, warranties or guarantees whatsoever, whether express or implied, with respect to such estimates or opinions, or their variance from actual construction costs or schedules, and accept no responsibility for any loss or damage arising therefrom or in any way related thereto. Persons relying on such estimates or opinions do so at their own risk.

Except (1) as agreed to in writing by AECOM and Client; (2) as required by-law; or (3) to the extent used by governmental reviewing agencies for the purpose of obtaining permits or approvals, the Report and the Information may be used and relied upon only by Client.

AECOM accepts no responsibility, and denies any liability whatsoever, to parties other than Client who may obtain access to the Report or the Information for any injury, loss or damage suffered by such parties arising from their use of, reliance upon, or decisions or actions based on the Report or any of the Information ("improper use of the Report"), except to the extent those parties have obtained the prior written consent of AECOM to use and rely upon the Report and the Information. Any injury, loss or damages arising from improper use of the Report shall be borne by the party making such use.

This Statement of Qualifications and Limitations is attached to and forms part of the Report and any use of the Report is subject to the terms hereof.

AECOM: 2015-04-13 © 2009-2015 AECOM Canada Ltd. All Rights Reserved.

## **Authors**

**Report Prepared By:** 

Ashley Hosker Landscape Architect

**Report Reviewed By:** 

Milan Kuljanin Project Manager

**Report Approved By:** 

Rick Bogaert <sup>4</sup> Landscape Architect

page

## **Table of Contents**

1.	Introduction			
2.	Pro	pject Background and Overview	1	
	2.1 2.2	Proposed Use Supporting Studies Summary	2 4	
3.	Des	sign Brief	4	
4.	Сог	nclusions	7	

## List of Figures

Figure 1:	Existing Site Location and Bounding Streets	1
Figure 2:	Context Plan	5

## List of Tables

Table 1: Site Zoning Requirements    3
--

## Appendices

Appendix A. Drawings

# 1. Introduction

AECOM Canada Ltd. Has been retained to file an application for Site Plan Approval (the 'Applicant') for the proposed re-development of an existing warehouse and distribution facility at 2625 Sheffield Road (the 'Site') in the City of Ottawa (the 'City'). The subject property is legally described as *Lot 24, CON 3 on Ottawa River, City of Ottawa*. The purpose of the Planning Rationale and Design Brief is to provide planning justification in support of the site plan control application for the site.

## 2. Project Background and Overview

The existing site is located at 2625 Sheffield Road, which is located in the south-east corner of the City of Ottawa. The site is bound by Humber Place to the south, Sheffield Road to the west, VIA rail lines to the east and adjacent property to the north. Access to the site is by five driveway entrances from Sheffield Road, and three driveway entrances from Humber Place. Entrances along Sheffield Road will remain unchanged and entrances along Humber Place will be reduced to one entrance. The 7.06 ha site currently contains a one-storey industrial building currently used for industrial (heavy) zoning for warehousing and distribution. The existing site is fully serviced with an existing water, sanitary and storm connection to municipal infrastructure on Sheffield Road and Humber Place.

A pre-consultation meeting was held in August 2022 with city staff to review submission requirements for a Site Plan Control application, for which AECOM has received the meeting minutes, notes, and submission requirements for the site.

The proposed redevelopment of the site involves a complete demolition of all existing site work and the existing building to prepare the site for a new Logistics Delivery Station Facility complete with new parking, loading docks, storm water management system and a robust landscaping design in compliance with applicable zoning by-law and local regulations.

The subject property location is shown in Figure 1.



### Figure 1: Existing Site Location and Bounding Streets

### 2.1 Proposed Use

The proposed use for the site is a new logistics Delivery Station which fulfills customer orders. The tenant specializes in "last mile" delivery of customer orders. Packages are shipped to the Delivery Station from large distribution centers. Packages arrive from line haul trucks, are sorted based on postal codes, and loaded into delivery vans operated by delivery service providers or personal vehicle operators.

Delivery stations operate 24/7, with sortation activity done early in the morning when the line haul trucks arrive with customer packages. At this proposed facility, Trucks will deliver packages to the Delivery Station predominantly between 8pm and 7am. Packages are then sorted by routes, placed onto movable racks and loaded onto delivery vehicles.

The design for the building consists of four interior components, an office, a receiving and sorting area, a delivery van staging, and a delivery van loading area.

The subject property is zoned industrial (heavy) which the stated purpose is to:

"permit a wide range of industrial uses, including those which, by their nature, generate noise, fumes, odours, and are hazardous or obnoxious, in accordance with the Employment Area designation of the Official Plan or, the General Urban Area designation where applicable;"

The following uses are permitted in the IH zone:

Warehouse

- Parking Lot
- Truck Transport Terminal
- Light Industrial Uses
   Drive-through facility
- The Official Plan land use designation for this property is to remain the same for the site, as an Official Plan Amendment is not being pursued.

The site is not proposed to be re-zoned or require amendments to the existing zoning bylaws. Table 1, below, illustrates the required and provided performance provisions under the IG3 zoning designation.

Site         Lot Area       70,635 m2         Lot Frontage       Existing to Remain         Minimum Lot Area       4000m²         Minimum Lot Width       N/A         Maximum Lot Coverage       N/A         Maximum Lot Coverage       N/A         Maximum Cot Coverage       N/A         Maximum Cot Coverage       N/A         Building Setbacks (min)       Required (minimum)       Proposed         Font & Comer Yard       7.5m       10.3m         Side Yard       7.5m       51.4m         Easements and Usage       Existing       Proposed         Zoning       Existing       Proposed         Building       Required       Proposed         Building Coverage       35%       Existing       Proposed         Building Height       Required       Proposed       Max 22m       13.64m         Number of Units incl. floora area       Required       Proposed       33.472m²       24,484m²         Parking Rate (Light Industrial       0.8 / 100m² for first 5000m² GFA       100       1         Total Accessible Parking Spaces Required       154 spaces       7 spaces       1         Space Provided       3 spaces       4 spaces       7 spaces							
Lot Prontage         Existing to Remain           Minimum Lot Area         4000m²           Minimum Lot Width         N/A           Maximum Cot Width         N/A           Maximum Elor Space Index         2, unless otherwise shown on zoning maps           Building Setbacks (min)         Required (minimum)         Proposed           Front & Corner Yard         7.5m         10.3m           Side Yard         7.5m         51.4m           Easements and Usage         Existing         Proposed           Zoning         Existing         Proposed           Building Coverage         35%         Existing to Remain           Building Height         Required         Proposed           Gross Floor Area (GFA)         Existing         Proposed           1         1         1         Gross Floor Area (GFA)         Existing           Parking Rate (Light Industrial         0.8 / 100m² for first 5000m² GFA         0.4 / 100m² for first 5000m² GFA           Total Parking Spaces Required         189 paces         Total           Space Required         3 spaces         4 spaces           Total Parking Spaces Required         15 spaces         Total           Space Required         3 spaces         4 spaces         7 spaces </th <th>Site</th> <th></th> <th></th> <th></th> <th></th>	Site						
Minimum Lot Area       4000m <sup>2</sup> Minimum Lot Width       N/A         Maximum Lot Coverage       N/A         Maximum Floor Space Index       2, unless otherwise shown on zoning maps         Building Setbacks (min)       Required (minimum)       Proposed         Front & Corner Yard       7.5m       10.3m         Side Yard       7.5m       51.4m         Easements and Usage       Existing       Proposed         Zoning       Existing       Proposed         Building Coverage       35%       Existing to Remain         Building Goverage       35%       Existing to Remain         Building Height       Required       Proposed         Max 22m       13.64m       Required         Number of Units incl. floor area       Required       Proposed         33,472m <sup>2</sup> 24,484m <sup>2</sup> 24,484m <sup>2</sup> Parking Rate (Light Industrial       0.8 / 100m <sup>2</sup> for first 5000m <sup>2</sup> GFA       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA         Use)       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA         Total Accessible Parking       Type A       Type B       Total       Spaces       7 spaces         Bicycle Parking Rate       1 / 2000m <sup>2</sup> GFA = 12.22 total	Lot Area	70,635 m2					
Minimum Lot Area       4000m <sup>2</sup> Minimum Lot Width       N/A         Maximum Lot Coverage       N/A         Maximum Floor Space Index       2, unless otherwise shown on zoning maps         Building Setbacks (min)       Required (minimum)       Proposed         Front & Corner Yard       7.5m       10.3m         Side Yard       7.5m       51.4m         Easements and Usage       Existing       Proposed         Zoning       Existing       Proposed         Building Coverage       35%       Existing to Remain         Building Goverage       35%       Existing to Remain         Building Height       Required       Proposed         Max 22m       13.64m       Required         Number of Units incl. floor area       Required       Proposed         33,472m <sup>2</sup> 24,484m <sup>2</sup> 24,484m <sup>2</sup> Parking Rate (Light Industrial       0.8 / 100m <sup>2</sup> for first 5000m <sup>2</sup> GFA       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA         Use)       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA         Total Accessible Parking       Type A       Type B       Total       Spaces       7 spaces         Bicycle Parking Rate       1 / 2000m <sup>2</sup> GFA = 12.22 total	Lot Frontage	Existing to Remain	n				
Maximum Lot Coverage       N/A         Maximum Floor Space Index       2, unless otherwise shown on zoning maps         Building Setbacks (min)       Required (minimum)       Proposed         Front & Corner Yard       7.5m       10.3m         Side Yard       7.5m       51.4m         Easements and Usage       Existing       Proposed         Editiding       Existing       Proposed         Building Coverage       35%       Existing to Remain         Building Coverage       35%       Proposed         Building Height       Required       Proposed         Max 22m       13.64m       Number of Units incl. floor area       Required       Proposed         Max 22m       13.64m       Number of Units incl. floor area       Required       Proposed         Maxing       24,484m <sup>2</sup> Proposed       33,472m <sup>2</sup> 24,484m <sup>2</sup> Parking       Areas for Minimum Parking Space Reqs = Area C       0.8 / 100m <sup>2</sup> for first 5000m <sup>2</sup> GFA       0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA         Otal       Data Parking Spaces Required       154 spaces       Total       Space Provided         Space Provided       3 spaces       4 spaces       7 spaces       7 spaces         Total Accessible Parking       Type A       Type							
Maximum Floor Space Index       2, unless otherwise shown on zoning maps         Building Setbacks (min)       Required (minimum)       Proposed         Front & Corner Yard       7.5m       10.3m         Side Yard       7.5m       51.4m         Easements and Usage       Proposed         Building Coverage       35%       Proposed         Building Coverage       35%       Existing to Remain         Building Coverage       35%       Existing       Proposed         Building Height       Required       Proposed       Existing         Required       Proposed       Ital.4M       Max 22m       13.64m         Number of Units incl. floor area       Required       Proposed       Ital.4M         Grass Floor Area (GFA)       Existing       Proposed       Proposed         String       Proposed       Ital.4Mm       Ital.4Mm         Reaking Space Required       Ital.48m       Space Forde       Areas for Minimum Parking Space Reqs = Area C         Parking Spaces Required       Ital.48m spaces       Total	Minimum Lot Width	N/A					
Maximum Floor Space Index       2, unless otherwise shown on zoning maps         Building Setbacks (min)       Required (minimum)       Proposed         Front & Corner Yard       7.5m       10.3m         Side Yard       7.5m       51.4m         Easements and Usage       Proposed         Zoning       Existing       Proposed         Building Coverage       35%       Proposed         Building Coverage       35%       Existing to Remain         Building Coverage       35%       Proposed         Building Coverage       35%       Statistical Coverage       Proposed         Building Coverage       35%       Statistical Coverage       Proposed         Building Height       Required       Proposed       Max 22m       13.64m         Of each unit       1       1       1       1         Gross Floor Area (GFA)       Existing       Proposed       24.484m²         Parking       Protos       Areas for Minimum Parking Space Reqs = Area C       Proposed         Total Parking Spaces Required       0.8 / 100m² for first 5000m² GFA       Otal       25.28         Total Accessible Parking       Type A       Type B       Total       25.28         Total Accessible Parking       Type	Maximum Lot Coverage	N/A					
Building Setbacks (min)         Required (minimum)         Proposed           Front & Corner Yard         7.5m         10.3m           Side Yard         7.5m         51.4m           Easements and Usage         51.4m         Essements           Zoning         Existing         Proposed           Building         Existing         Proposed           Building Coverage         35%         Existing to Remain           Building Height         Required         Proposed           Max 22m         13.64m         Number of Units incl. floor area           Required         Proposed         Proposed           of each unit         1         1           Gross Floor Area (GFA)         Existing         Proposed           Bailding Rate (Light Industrial         0.8 / 100m² for first 5000m² GFA         Parking Spaces Required           Use)         0.4 / 100m² above 5000m² GFA         Total           Space Required         154 spaces         Total           Space Required         3 spaces         4 spaces           Total Accessible Parking         Type A         Type B         Total           Space Required         3 spaces         4 spaces         7 spaces           Bicycle Parking Provoided         17 sp		2, unless otherwis	e shown o	on zoning	maps		
Front & Corner Yard       7.5m       10.3m         Side Yard       7.5m       51.4m         Easements and Usage       Existing       Proposed         Zoning       Existing       Proposed         Building Coverage       35%       Existing to Remain         Building Height       Required       Proposed         Mumber of Units incl. floor area       Required       Proposed         of each unit       1       1       1         Gross Floor Area (GFA)       Existing       Proposed       24,484m²         Parking       Areas for Minimum Parking Space Required       0.8 / 100m² for first 5000m² GFA       0.8 / 100m² for GFA         Total Parking Spaces Required       0.8 / 100m² for first 5000m² GFA       0.8 / 200m² GFA       0.8 / 200m² GFA         Total Parking Spaces Required       154 spaces       Total       Space Required       3 spaces         Total Accessible Parking       Type A       Type B       Total       Spaces       7 spaces         Bicycle Parking Rate       1 / 2000m² GFA = 12.22 total       Bicycle Parking Rate       1 / 2000m² GFA = 12.22 total       Bicycle Parking Provided       17 spaces         Bicycle Parking Dimensions       Horizontal Orientation = 0.5m x 1.5m       Vertical Orientation = 0.5m x 1.5m       Vertical Orientation							
Easements and Usage         Existing         Proposed           Zoning         Existing         Existing to Remain           Building         Existing to Remain         Existing to Remain           Building Coverage         35%         Existing to Remain           Building Coverage         35%         Existing to Remain           Building Height         Required         Proposed           Max 22m         13.64m         Number of Units incl. floor area         Required           of each unit         1         1         1           Gross Floor Area (GFA)         Existing         Proposed           Atreas for Minimum Parking Space Reqs = Area C         Parking Spaces Required         0.8 / 100m² for first 5000m² GFA           Notes         Areas for Minimum Parking Space Reqs = Area C         Parking Spaces Required         154 spaces           Total Parking Spaces Required         154 spaces         Total         Space Spaces           Total Accessible Parking         Type A         Type B         Total           Space Required         17 spaces         Total         Spaces           Total Accessible Parking         Type A         Type B         Total           Space Provided         3 spaces         4 spaces         7 spaces		7.5m	,	- ·			
Easements and Usage         Existing         Proposed           Zoning         Existing         Existing to Remain           Building         Existing to Remain         Existing to Remain           Building Coverage         35%         Existing to Remain           Building Coverage         35%         Existing to Remain           Building Height         Required         Proposed           Max 22m         13.64m         Number of Units incl. floor area         Required           of each unit         1         1         1           Gross Floor Area (GFA)         Existing         Proposed           Atreas for Minimum Parking Space Reqs = Area C         Parking Spaces Required         0.8 / 100m² for first 5000m² GFA           Notes         Areas for Minimum Parking Space Reqs = Area C         Parking Spaces Required         154 spaces           Total Parking Spaces Required         154 spaces         Total         Space Spaces           Total Accessible Parking         Type A         Type B         Total           Space Required         17 spaces         Total         Spaces           Total Accessible Parking         Type A         Type B         Total           Space Provided         3 spaces         4 spaces         7 spaces	Side Yard	7.5m					
ZoningExistingProposedH, Warehousing/DistributionExisting to RemainBuilding Coverage35%Building HeightRequiredProposedMax 22m13.64mNumber of Units incl. floor area of each unitRequiredProposed111Gross Floor Area (GFA)ExistingProposedBarking MotesAreas for Minimum Parking Space Reqs = Area CParking Notes0.8 / 100m² for first 5000m² GFAUse)0.8 / 100m² for first 5000m² GFATotal Parking Spaces Required154 spacesTotal Accessible Parking Space ProvidedType AType AType BTotalSpace Provided3 spaces4 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking Provided17 spacesBicycle Parking Provided17 spacesBicycle Parking Dimensions25000m2 and over = 3 spaces (heavy industrial/warehouse)Loading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Loading Spaces Provided10 loading doorsSpace Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Landscape Buffer Strip (min)Required orientation = 0.5m x 1.5mMeasured from any other lot line3mMasured from any other lot line3m							
IH, Warehousing/Distribution       Existing to Remain         Building Building Coverage       35%.         Building Height       Required       Proposed         Max 22m       13.64m         Number of Units incl. floor area of each unit       Required       Proposed         Gross Floor Area (GFA)       Existing       Proposed         Existing       Proposed       24,484m²         Parking Notes       Areas for Minimum Parking Space Reqs = Area C         Parking Rate (Light Industrial Use)       0.8 / 100m² for first 5000m² GFA       0.8 / 100m² for first 5000m² GFA         Total Parking Spaces Required       154 spaces       Total       Space Required         Total Parking Spaces Provided       884 spaces       Total       Spaces       7 spaces         Total Accessible Parking Space Required       3 spaces       4 spaces       7 spaces         Total Accessible Parking Space Required       1 / 200m² GFA = 12.22 total       E         Bicycle Parking Rate       1 / 200m² GFA = 12.22 total       E         Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5m         Loading Spaces Required       10 loading doors       Spaces (heavy industrial/warehouse)         Total Number of Loading Spaces Provided       25000m² and over = 3 spaces (heavy indu	¥	Existing		Proposed			
Warehousing/DistributionBuildingBuilding Coverage35%Building CoverageBuilding CoverageBuilding CoverageBuilding CoverageBuilding CoverageBuilding CoverageBuilding CoverageBuilding CoverageGrading CoverageGrading CoverageAreas for Minimum Parking Space Reqs = Area COne of first Stong CoverageParking Rate (Light Industrial Use)NotesAreas for Minimum Parking Space Reqs = Area CO.8 / 100m² for first S000m² GFAOtal Parking Spaces RequiredTotal Accessible Parking Type AType BTotalSpace RequiredTotalSpace RequiredTotalSpace RequiredTotalSpaces ProvidedSpaces I spacesTotal Accessible Parking Spaces ProvidedType AType BTotalSpaces RequiredTotalSpaces Provided17 spacesTotal Accessible Parking Spaces ProvidedTotalSpace SpacesTotalSpacesTotalSpaces <th <="" colspan="2" th=""><th>Ū</th><th colspan="2"></th><th colspan="2"></th></th>	<th>Ū</th> <th colspan="2"></th> <th colspan="2"></th>		Ū				
Building Coverage         35%           Building Height         Required         Proposed           Max 22m         13.64m           Number of Units incl. floor area of each unit         Required         Proposed           Gross Floor Area (GFA)         Existing         Proposed           Gross Floor Area (GFA)         Existing         Proposed           Start         24,484m²         Proposed           Parking Rate (Light Industrial Use)         0.8 / 100m² for first 5000m² GFA         Protal           Total Parking Spaces Required         154 spaces         Total           Total Parking Spaces Provided         844 spaces         Total           Space Required         17 ype A         Type B         Total           Space Required         3 spaces         4 spaces         7 spaces           Total Accessible Parking         Type A         Type B         Total           Space Provided         3 spaces         4 spaces         7 spaces           Bicycle Parking Dimensions         Horizontal Orientation = 0.6m x 1.8m         Vertical Orientation = 0.5m x 1.5m           Loading         25000m2 and over = 3 spaces (heavy industrial/warehouse)         Industrial/warehouse)         Industrial/warehouse)           Total Number of Loading Spaces Provided         10 loading		Warehousing/Dist	ribution				
Building Height         Required max 22m         Proposed           Number of Units incl. floor area of each unit         Required max 22m         13.64m           Aux 22m         13.64m         Proposed           f each unit         1         1           Gross Floor Area (GFA)         Existing         Proposed           Building Meight         Areas for Minimum Parking Space Reqs = Area C         Parking Rate (Light Industrial Use)           Notes         Areas for Minimum Parking Space Reqs = Area C         Parking Spaces Required           Dtal Parking Spaces Required         0.8 / 100m <sup>2</sup> for first 5000m <sup>2</sup> GFA         0.4 / 100m <sup>2</sup> above 5000m <sup>2</sup> GFA           Total Parking Spaces Provided         84 spaces         Total         Space S           Total Accessible Parking         Type A         Type B         Total           Space Provided         3 spaces         4 spaces         Total           Space Provided         3 spaces         4 spaces         Total           Bicycle Parking Dimensions         Horizontal Orientation = 0.6m x 1.8m         Vertical Orientation = 0.5m x 1.5m           Loading         25000m2 and over = 3 spaces (heavy industrial/warehouse)         10 loading doors           Spaces Provided         25000m2 and over = 3 spaces (heavy industrial/warehouse)         N/A           Tota							
Max 22m13.64mNumber of Units incl. floor area of each unitRequiredProposed111Gross Floor Area (GFA)ExistingProposedBittingProposed24,484m²ParkingAreas for Minimum Parking Space Reqs = Area CParking Rate (Light Industrial Use)0.8 / 100m² for first 5000m² GFAOtal Parking Spaces Required0.8 / 100m² above 5000m² GFATotal Parking Spaces Required154 spacesTotal Parking Spaces Provided884 spacesTotal Accessible Parking Space RequiredType AType AType BTotalSpace Provided3 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided7.5mN/AMeasured from any other lot line3mLandscape Percentage10.8%		35%					
Number of Units incl. floor area of each unitRequiredProposedGross Floor Area (GFA)ExistingProposed33,472m²24,484m²Parking NotesAreas for Minimum Parking Space Reqs = Area CParking Rate (Light Industrial Use)0.8 / 100m² for first 5000m² GFAOtal Parking Spaces Required0.8 / 100m² door first 5000m² GFATotal Parking Spaces Required154 spacesTotal Parking Spaces Required154 spacesTotal Accessible Parking Space RequiredType AType AType BTotal Accessible Parking Space ProvidedType ASpace Required3 spaces4 spaces7 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsSpaces Provided7.5mN/AExterior Site Landscape Buffer Strip (min)Measured from any other lot lineMeasured from any other lot line3mSm3m	Building Height	Required		Proposed			
of each unit       1       1         Image: Gross Floor Area (GFA)       Existing       Proposed         Sagar 2       24,484m²         Parking       Areas for Minimum Parking Space Reqs = Area C         Parking Rate (Light Industrial       0.8 / 100m² for first 5000m² GFA         Use)       0.8 / 100m² for first 5000m² GFA         Total Parking Spaces Required       154 spaces         Total Parking Spaces Provided       884 spaces         Total Accessible Parking       Type A         Type A       Type B         Total Accessible Parking       Type A         Space Required       3 spaces         Space Provided       3 spaces         Bicycle Parking Rate       1 / 2000m² GFA         Spaces       7 spaces         Bicycle Parking Rate       1 / 2000m² GFA         Spaces       7 spaces         Bicycle Parking Rate       1 / 2000m² GFA         Spaces       7 spaces         Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m         Vertical Orientation = 0.5m x 1.5m       Image: Spaces Required         Total Number of Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading       Abutting a residential or institutional zone       7.5		Max 22m		13.64m			
of each unit       1       1       1         Gross Floor Area (GFA)       Existing       Proposed         33,472m <sup>2</sup> 24,484m <sup>2</sup> Parking       Areas for Minimum Parking Space Reqs = Area C         Parking Rate (Light Industrial       0.8 / 100m <sup>2</sup> for first 5000m <sup>2</sup> GFA         Use)       0.8 / 100m <sup>2</sup> for first 5000m <sup>2</sup> GFA         Total Parking Spaces Required       154 spaces         Total Parking Spaces Provided       884 spaces         Total Accessible Parking       Type A         Space Required       3 spaces         Total Accessible Parking       Type A         Type A       Type B         Total       3 spaces         Space Provided       3 spaces         Bicycle Parking Rate       1 / 2000m <sup>2</sup> GFA         If ype A       Type B         Total       3 spaces         Bicycle Parking Rate       1 / 2000m <sup>2</sup> GFA         Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m         Vertical Orientation = 0.5m x 1.5m       Itotal         Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading spaces       Required		Required					
33,472m²       24,484m²         Notes       Areas for Minimum Parking Space Reqs = Area C         Parking Rate (Light Industrial Use)       0.8 / 100m² for first 5000m² GFA 0.4 / 100m² above 5000m² GFA         Total Parking Spaces Required       154 spaces         Total Parking Spaces Provided       884 spaces         Total Accessible Parking Space Required       Type A       Type B         Total Accessible Parking Space Provided       Type A       Type B         Total Accessible Parking Space Provided       Type A       Type B         Total Accessible Parking Space Provided       Type A       Type B         Space Required       3 spaces       4 spaces       7 spaces         Bicycle Parking Rate       1 / 2000m² GFA = 12.22 total       Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5m         Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)       10 loading doors         Spaces Provided       25000m2 and over = 3 spaces (heavy industrial/warehouse)       N/A         Landscape Buffer Strip (min)       Required       Provided         Measured from any other lot line       3m       3m	of each unit	1		1			
Parking       Image: Parking Space Reqs = Area C         Notes       Areas for Minimum Parking Space Reqs = Area C         Parking Rate (Light Industrial Use)       0.8 / 100m² for first 5000m² GFA         Total Parking Spaces Required       154 spaces         Total Parking Spaces Provided       884 spaces         Total Accessible Parking       Type A         Space Required       3 spaces         A reas for Minimum Parking Spaces       7 spaces         Total Accessible Parking       Type A         Space Provided       3 spaces         Bicycle Parking Rate       1 / 2000m² GFA = 12.22 total         Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m         Vertical Orientation = 0.5m x 1.5m       Vertical Orientation = 0.5m x 1.5m         Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading       Abutting a residential or institutional zone         Measured from any other lot line       3m         Measured from any other lot line       3m	Gross Floor Area (GFA)	Existing		Proposed			
ParkingAreas for Minimum Parking Space Reqs = Area CNotesAreas for Minimum Parking Space Reqs = Area CParking Rate (Light Industrial Use)0.8 / 100m² for first 5000m² GFATotal Parking Spaces Required154 spacesTotal Parking Spaces Provided884 spacesTotal Accessible Parking Space RequiredType AType AType BTotal Accessible Parking Space ProvidedType AType AType BTotal Accessible Parking Space ProvidedType ASpace Provided3 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsExterior Site Landscape Buffer Strip (min)Required Measured from any other lot lineMeasured from any other lot line3mMeasured from any other lot line3m		v					
NotesAreas for Minimum Parking Space Reqs = Area CParking Rate (Light Industrial Use)0.8 / 100m² for first 5000m² GFA 0.4 / 100m² above 5000m² GFATotal Parking Spaces Required154 spacesTotal Parking Spaces Provided884 spacesTotal Accessible Parking Space RequiredType AType AType BTotalSpace Provided3 spaces4 spacesTotal Accessible Parking Space ProvidedType AType BSpace Required3 spaces4 spaces7 spacesSpace Provided3 spaces4 spaces7 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsSpaces Provided10 loading doorsExterior SiteImage: Space Strip (min)Landscape Buffer Strip (min)Required from any other lot lineMeasured from any other lot line3mSm3m <th>Parking</th> <th colspan="3"></th> <th></th>	Parking						
Parking Rate (Light Industrial Use)0.8 / 100m² for first 5000m² GFA 0.4 / 100m² above 5000m² GFATotal Parking Spaces Required154 spacesTotal Parking Spaces Provided884 spacesTotal Accessible Parking Space RequiredType AType BTotal Accessible Parking Space ProvidedType AType BTotal Accessible Parking Space ProvidedType AType BTotal Accessible Parking Space ProvidedType AType BTotal Accessible Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking Provided17 spacesBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces ProvidedRequiredProvidedN/AExterior Site Landscape Buffer Strip (min)Required from any other lot lineMeasured from any other lot line3mMeasured from any other lot line3m		Areas for Minimun	n Parking	Space Re	eas = Area C		
Use)0.4 / 100m² above 5000m² GFATotal Parking Spaces Required154 spacesTotal Parking Spaces Provided884 spacesTotal Accessible Parking Space RequiredType AType BTotalSpace RequiredType AType BTotalSpace RequiredType AType BTotalSpace ProvidedType AType BTotalSpace ProvidedType AType BTotalSpace Provided1 / 2000m² GFA = 12.22 totalTotalBicycle Parking Provided17 spacesBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsSpaces ProvidedRequiredProvidedLandscape Buffer Strip (min)Measured from any other lot line3mLandscape Percentage10.8%							
Total Parking Spaces Provided884 spacesTotal Accessible Parking Space RequiredType AType BTotalSpace RequiredType AType BTotalSpace ProvidedType AType BTotalSpace Provided1 / 2000m² GFA = 12.22 totalTotalBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided2600m2 and over = 3 spaces (heavy industrial/warehouse)Loading Contal Number of Loading Spaces ProvidedRequired ProvidedProvidedProvidedLandscape Buffer Strip (min)Required from any other lot lineRequired 3m3mLandscape Percentage10.8%							
Total Parking Spaces Provided884 spacesTotal Accessible Parking Space RequiredType AType BTotalSpace RequiredType AType BTotalSpace ProvidedType AType BTotalSpace Provided1 / 2000m² GFA = 12.22 totalTotalBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoading25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided2600m2 and over = 3 spaces (heavy industrial/warehouse)Loading Contal Number of Loading Spaces ProvidedRequired ProvidedProvidedProvidedLandscape Buffer Strip (min)Required from any other lot lineRequired 3m3mLandscape Percentage10.8%	Total Parking Spaces Required						
Space Required3 spaces4 spaces7 spacesTotal Accessible Parking Space ProvidedType AType BTotalSpace Provided3 spaces4 spaces7 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalImage: Space S and the space		•					
Space Required3 spaces4 spaces7 spacesTotal Accessible Parking Space ProvidedType AType BTotalSpace Provided3 spaces4 spaces7 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalImage: Constraint of the space set of the sp	Total Accessible Parking				Total		
Space Provided3 spaces4 spaces7 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking Provided17 spacesBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoadingTotal Number of Loading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsExterior SiteLandscape Buffer Strip (min)Required Measured from any other lot lineMeasured from any other lot line3mSm3m	Space Required	3 spaces	4 spaces		7 spaces		
Space Provided3 spaces4 spaces7 spacesBicycle Parking Rate1 / 2000m² GFA = 12.22 totalBicycle Parking Provided17 spacesBicycle Parking DimensionsHorizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5mLoadingTotal Number of Loading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsSpaces Provided10 loading doorsExterior SiteImage: Space ProvidedLandscape Buffer Strip (min)Required Measured from any other lot lineMeasured from any other lot line3mSm3m	Total Accessible Parking	Type A	Type B				
Bicycle Parking Rate       1 / 2000m² GFA = 12.22 total         Bicycle Parking Provided       17 spaces         Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5m         Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading Spaces Required       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading Spaces Provided       10 loading doors         Exterior Site       Image: Comparison of the strip (min)         Abutting a residential or institutional zone       7.5m         Measured from any other lot line       3m         Image: Landscape Percentage       10.8%	Space Provided		4 spaces		7 spaces		
Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5m         Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading Spaces Required       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading Spaces Provided       10 loading doors         Exterior Site       Required       Provided         Abutting a residential or institutional zone       7.5m       N/A         Measured from any other lot line       3m       3m         Landscape Percentage       10.8%       10.8%	Bicycle Parking Rate						
Bicycle Parking Dimensions       Horizontal Orientation = 0.6m x 1.8m Vertical Orientation = 0.5m x 1.5m         Loading       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading Spaces Required       25000m2 and over = 3 spaces (heavy industrial/warehouse)         Total Number of Loading Spaces Provided       10 loading doors         Exterior Site       Required       Provided         Abutting a residential or institutional zone       7.5m       N/A         Measured from any other lot line       3m       3m         Landscape Percentage       10.8%       10.8%		17 spaces					
LoadingTotal Number of Loading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsExterior SiteImage: Space Strip (min)Landscape Buffer Strip (min)Required Abutting a residential or institutional zoneMeasured from any other lot line3mLandscape Percentage10.8%		Horizontal Orienta	tion = 0.6	m x 1.8m			
Total Number of Loading Spaces Required25000m2 and over = 3 spaces (heavy industrial/warehouse)Total Number of Loading Spaces Provided10 loading doorsExterior SiteProvidedLandscape Buffer Strip (min)RequiredProvidedAbutting a residential or institutional zone7.5mN/AMeasured from any other lot line3m3mLandscape Percentage10.8%	-	Vertical Orientatio	n = 0.5m	x 1.5m			
Spaces Required       industrial/warehouse)         Total Number of Loading Spaces Provided       10 loading doors         Exterior Site							
Total Number of Loading Spaces Provided       10 loading doors         Exterior Site       Image: Strip S				es (heavy	/		
Spaces Provided     Spaces Provided       Exterior Site     Required     Provided       Landscape Buffer Strip (min)     Abutting a residential or institutional zone     7.5m     N/A       Measured from any other lot line     3m     3m       Landscape Percentage     10.8%			ise)				
Exterior Site       Required       Provided         Landscape Buffer Strip (min)       Abutting a residential or institutional zone       7.5m       N/A         Measured from any other lot line       3m       3m         Landscape Percentage       10.8%       5.5m       5.5m		10 loading doors					
Landscape Buffer Strip (min)       Required       Provided         Abutting a residential or institutional zone       7.5m       N/A         Measured from any other lot line       3m       3m         Landscape Percentage       10.8%       5.5m       10.8%							
Abutting a residential or institutional zone       7.5m       N/A         Measured from any other lot line       3m       3m         Landscape Percentage       10.8%			Pee	uirod	Provided		
or institutional zone     Image: second							
Measured from any other lot line     3m     3m       Landscape Percentage     10.8%				11	IN/A		
other lot line       Landscape Percentage       10.8%							
other lot line       Landscape Percentage       10.8%							
other lot line       Landscape Percentage       10.8%		Measured from ar	ıy 3m		3m		
		other lot line	er lot line				
Asphalt/Hard Surface Area 54.5%							
	Asphalt/Hard Surface Area	Asphalt/Hard Surface Area 54.5%					

### Table 1: Site Zoning Requirements

### 2.2 Supporting Studies Summary

As per the study and plan identification list, please find the following enclosed in support of the Design Brief and this application:


- Site Plan Control Application Form
- Site Plan, prepared by AECOM Canada Ltd.
- Architectural Plans, prepared by AECOM Canada Ltd.
- Geotechnical Investigation Study, prepared by AECOM Canada Ltd.
- Landscape Plan, prepared by AECOM Canada Ltd.
- Grading Plan & Erosion Sediment Control Plan, prepared by AECOM Canada Ltd.
- Site Servicing Plan, prepared by AECOM Canada Ltd.
- Site Servicing Report, prepared by AECOM Canada Ltd.
- Tree Conservation Report, prepared by AECOM Canada Ltd.
- Site Lighting Plan and Certification Letter, prepared by AECOM Canada Ltd.
- Legal Survey by Fairhall and Moffatt Limited
- Transportation Impact Assessment prepared by AECOM Canada Ltd.
- Phase 1 and 2 Environmental Site Assessment (ESA) prepared by Geosyntec Consultants

It was confirmed via pre-consultation comments received on September 7, 2022 that the City of Ottawa does not require a Noise Study to be done.

# 3. Design Brief


### **Context Analysis**

Key destinations and linkages within a 100m radius of the site located at 2625 Sheffield Road include bus stops along Sheffield Road and a bus stop near the intersection of Sheffield Road and Humber Place. The surrounding area contains various buildings and industrial zoning. Existing site conditions and surrounding context is illustrated below on the Context Plan and on the existing conditions and removals plan (sheet C101).

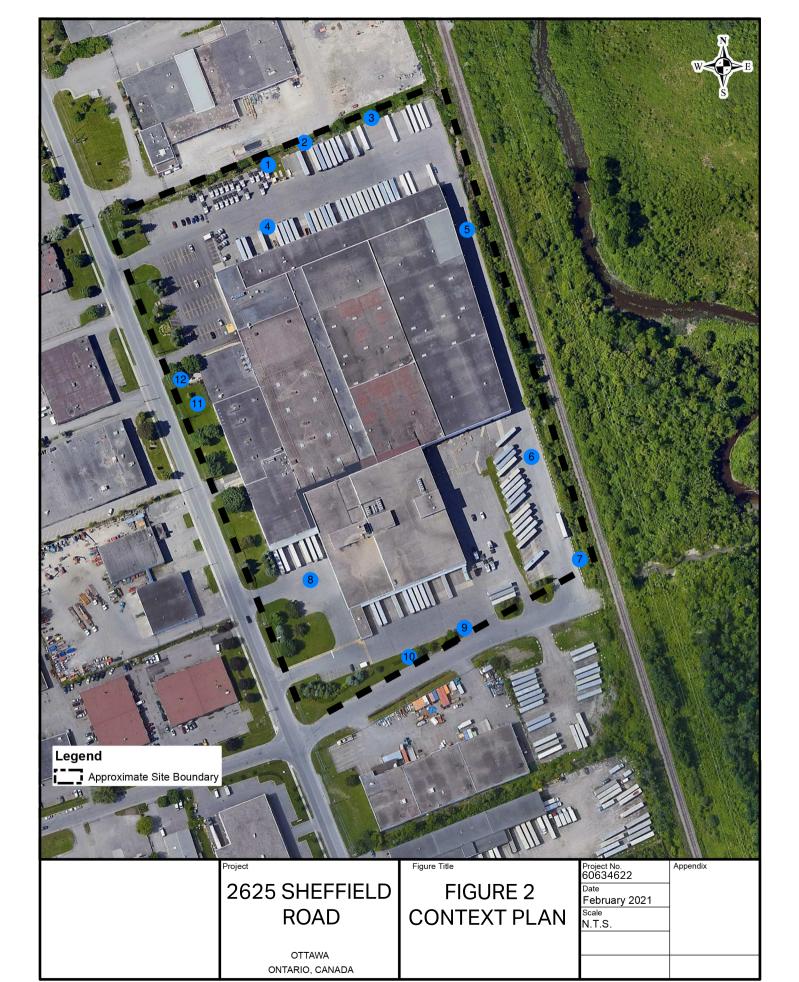

### Figure 2: Context Plan



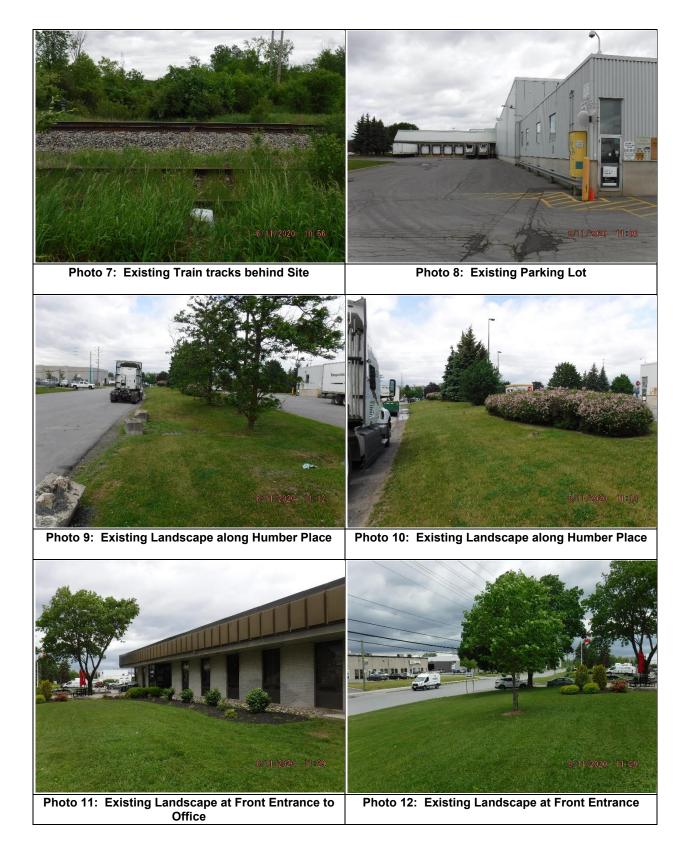

#### Massing and Scale

For modification to grading please refer to the grading plan on C102.

#### **Public Realm**

The existing streetscape along Humber Place will be modified to reduce the access and egress points to the site from three to two and the access and egress points along Sheffield Road will be reduced from five to four. Many existing trees are to be removed along the property line due to construction and grading.

The portion of the site visible to the public along Sheffield Road and Humber Place will be heavily landscaped with new shade trees, perennials and ornamental grasses providing shade and a welcoming addition to the parking lot and building.

The addition of a new bicycle rack and bench will be installed near the entrance to the office portion of the building, providing storage and options for alternative transportation to the site. The proposed courtyard at the front of the building provides seating options, including an accessible table and vegetation that provides screening between the seating area and the smoker shelter.

### **Building Design**

The proposed exterior architectural details and design are shown on the architectural elevation drawings. The proposed facility is clad in a robust and attractive pre-cast concrete façade with appropriate branding to align with the new tenant's international design standards. The proposed regrading of the site is extremely minor and has been tailored to suit optimum safety and dividing traffic flow between tractor trailers, associate vehicle and van traffic. The facility has been designed to allow delivery vans to enter the building for a complete interior queuing and loading solution, limiting disturbance to neighbours and providing a safe interior loading area for associates yearround. Ample interior and exterior amenities have been provided for associates, including a main and remote breakroom, ablution rooms, wellness rooms, outdoor amenity area and bench seating, exterior smoke shelter and exterior ride share shelter to promote carpooling and ride share programs. Direct access to the re-establish bus stop has also been provided for associate convenience and to promote the use of public transit.

#### Sustainability

The inclusion of native species within the landscape planning includes plant selections that support wildlife and birds, contributing to the reduction of invasive and non-native species within the community. The building roof has been designed to accommodate future PV systems and a robust infrastructure design has been provided to accommodate potential for future EV charging on site for the entire van fleet.

The proposed stormwater management facilities will consist of oil/grit separators and an underground chamber storage systems with the capacity to accept surface runoff up to and including the 100-year storm event for the proposed parking lot area and provide water quality treatment prior to discharging downstream. The chamber storage systems will consist of storage chambers with clear stone granular material bedding, surrounded by an impermeable liner to discourage infiltration of runoff from the parking lot area. The proposed underground chamber storage systems will then ultimately discharge to the municipal infrastructure on Leeds Road. Runoff from the roof area will be collected and discharges into a proposed infiltration basin to store up to 10mm depth of runoff. The proposed infiltration basins will consist of 50mm diameter clear stone, with an overflow outlet to the proposed on-Site storm sewer system.

## 4. Conclusions

This Planning Rationale and Design Brief has been prepared in support the site plan control application for the parking lot reconfiguration of the existing site located at 2625 Sheffield Road in the City of Ottawa. Based on the

information received from the pre-consultation comments, and discussions with City staff, it is our understanding that the proposed development is compliant with the planning policies and zoning requirements of the City's Official Plan, Zoning By-Law and that the project represents an appropriate land use and scale on the subject property.

#### Contact

Milan Kuljanin Project Manager 519-650-8706 Milan.kuljanin@aecom.com

aecom.com