

RICKSON OUTLET ARCHITECT

**LIGHT FACILITY ADDITION  
2700 SWANSEA CRESCENT, OTTAWA, ON  
SERVICING AND STORMWATER  
MANAGEMENT REPORT**

MAY 3, 2023







**LIGHT FACILITY ADDITION  
2700 SWANSEA CRESCENT,  
OTTAWA, ON**

**SERVICING AND STORMWATER  
MANAGEMENT REPORT**

**RICKSON OUTLET ARCHITECT**

2<sup>ND</sup> SUBMISSION

PROJECT NO.: 221-02216-00  
DATE: MAY 2023

WSP CANADA INC.  
2611 QUEESVIEW DRIVE, SUITE 300  
OTTAWA, ON, CANADA, K2B 8K2

TEL.: +1 613-829-2800

WSP.COM





---

# SIGNATURES



PREPARED BY



---

Victoria Teng, P.Eng  
Project Manager

PREPARED BY



---

Jingwei Zhang, P.Eng  
Senior Engineer

This report was prepared by WSP Canada Inc. for the account of Rickson Outlet Architect, in accordance with the professional services agreement. The disclosure of any information contained in this report is the sole responsibility of the intended recipient. The material in it reflects WSP Canada Inc.'s best judgement in light of the information available to it at the time of preparation. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. WSP Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This limitations statement is considered part of this report.

The original of the technology-based document sent herewith has been authenticated and will be retained by WSP for a minimum of ten years. Since the file transmitted is now out of WSP's control and its integrity can no longer be ensured, no guarantee may be given with regards to any modifications made to this document.





# TABLE OF CONTENTS

<b>1</b>	<b>GENERAL.....</b>	<b>11</b>
<b>1.1</b>	<b>INTRODUCTION AND BACKGROUND.....</b>	<b>11</b>
<b>1.2</b>	<b>Date and Revision Number.....</b>	<b>11</b>
<b>1.3</b>	<b>Pre-Consultation meetings.....</b>	<b>12</b>
<b>1.4</b>	<b>APPLICABLE GUIDELINE AND DESIGN STANDARDS .....</b>	<b>12</b>
<b>2</b>	<b>WATER DISTRIBUTION .....</b>	<b>13</b>
<b>2.1</b>	<b>Existing water service .....</b>	<b>13</b>
<b>2.2</b>	<b>Proposed water service .....</b>	<b>13</b>
<b>2.3</b>	<b>Calculations of water demands and fire flow .....</b>	<b>13</b>
<b>2.4</b>	<b>Boundary Conditions.....</b>	<b>13</b>
<b>2.5</b>	<b>Confirmation of adequate fire flow protection.....</b>	<b>14</b>
<b>2.6</b>	<b>Confirmation of adequate domestic supply and pressure.....</b>	<b>14</b>
<b>2.7</b>	<b>Confirmation of adequate fire flow protection.....</b>	<b>15</b>
<b>3</b>	<b>WASTEWATER DISPOSAL .....</b>	<b>16</b>
<b>3.1</b>	<b>Design Criteria .....</b>	<b>16</b>
<b>3.2</b>	<b>Consistency with master servicing study .....</b>	<b>16</b>
<b>3.3</b>	<b>Review of Soil conditions.....</b>	<b>16</b>
<b>3.4</b>	<b>Verification of available capacity in downstream sewer.....</b>	<b>16</b>
<b>4</b>	<b>SITE STORM SERVICING.....</b>	<b>17</b>
<b>4.1</b>	<b>Existing condition.....</b>	<b>17</b>
<b>4.2</b>	<b>Analysis of available capacity in public infrastructure .....</b>	<b>17</b>
<b>4.3</b>	<b>Drainage drawing.....</b>	<b>17</b>
<b>4.4</b>	<b>Water quantity control objective .....</b>	<b>17</b>
<b>4.5</b>	<b>Water quality control objective .....</b>	<b>17</b>



<b>4.6</b>	<b>Design criteria .....</b>	<b>17</b>
<b>4.7</b>	<b>Proposed minor system .....</b>	<b>18</b>
<b>4.8</b>	<b>Stormwater management .....</b>	<b>18</b>
<b>4.9</b>	<b>Inlet Controls .....</b>	<b>18</b>
<b>4.10</b>	<b>On-site detention.....</b>	<b>18</b>
<b>5</b>	<b>SEDIMENT AND EROSION CONTROL.....</b>	<b>21</b>
<b>5.1</b>	<b>General .....</b>	<b>21</b>
<b>6</b>	<b>APPROVAL AND PERMIT REQUIREMENTS .....</b>	<b>22</b>
<b>6.1</b>	<b>General .....</b>	<b>22</b>
<b>7</b>	<b>CONCLUSION CHECKLIST .....</b>	<b>23</b>
<b>7.1</b>	<b>Conclusions and recommendations .....</b>	<b>23</b>
<b>7.2</b>	<b>Comments received from review agencies .....</b>	<b>23</b>

---

## **TABLES**

TABLE 2-1: BOUNDARY CONDITIONS .....	13
TABLE 4-1: STORAGE REQUIREMENT CALCULATION FOR 5-YEAR STORM .....	19
TABLE 4-2: STORAGE REQUIREMENT CALCULATION FOR 5-YEAR STORM .....	19
TABLE 4-3: PROPOSED CONDITIONS STORMWATER STORAGE.....	20

---

## **FIGURES**

FIGURE 1-1 PROJECT LOCATION .....	11
-----------------------------------	----

---

## **APPENDICES**

### **A**

- PRE-CONSULTATION MEETING NOTES
- SURVEY TOPO
- EXISTING SERVICING REPORT BY GENIVAR
- CORRESPONDENCE WITH RVCA

### **B**

- FIRE UNDERWRITERS SURVEY - FIRE FLOW CALCULATION FOR BUILDING
- WATER DEMAND CALCULATION
- UPDATED BOUNDARY CONDITION

### **C**

- STORM SEWER DESIGN SHEET
- STORM DRAINAGE AREA PLAN C04
- STORMWATER MANAGEMENT CALCULATIONS
- DWG C01 - GRADING PLAN
- DWG C02 - SERVICING PLAN



**D**

- EROSION AND SEDIMENTATION CONTROL PLAN C03

**E**

- SUBMISSION CHECK LIST


# 1 GENERAL

---

## 1.1 INTRODUCTION AND BACKGROUND

WSP was retained by Rickson Outlet Architect to provide servicing, grading and stormwater management design services for a site development project located at 2700 Swansea Avenue. The project is to construct an addition to the existing 2-storey light manufacturing facility. The addition is approximately 1,532 square meters large and will be constructed above the parking lot and as an addition to the south side of second story of the existing facility as shown in **Figure 1-1**. The purpose of this addition is to provide more offices and mostly lab space to increase capacity with lab manufacturing stations.

A previous Servicing and Stormwater Management Report for this site was issued to the City of Ottawa and approved in 2011, and the report provided a detailed discussion of the water servicing, wastewater servicing, and stormwater servicing for the current site. This report outlines findings and calculations pertaining to the servicing of the existing building with an addition of 1,420 square metres.

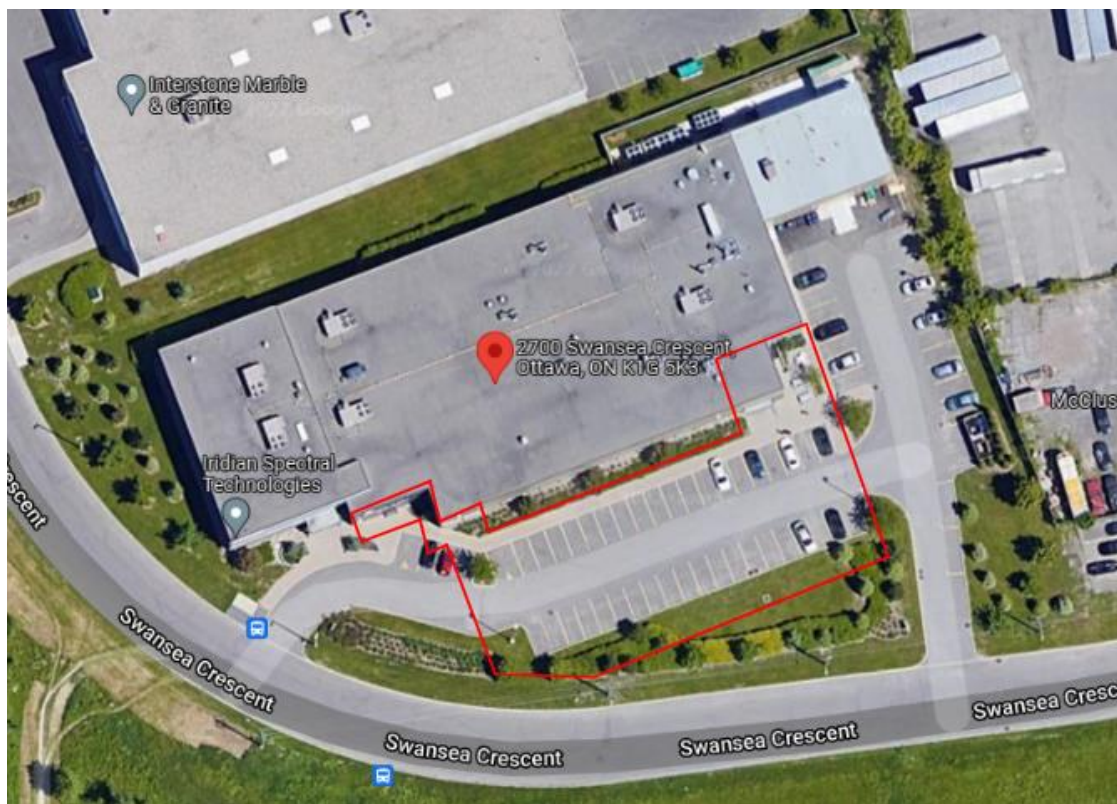

**Figure 1-1 Project Location**

---

## 1.2 DATE AND REVISION NUMBER

This version of the report is the second issue, dated May 3<sup>rd</sup>, 2023. The first issue is dated October 13, 2022.

---

### 1.3 PRE-CONSULTATION MEETINGS

A pre-consultation meeting was held with the City of Ottawa on September 23, 2021. Notes from this meeting are provided in **Appendix A**.

---

### 1.4 APPLICABLE GUIDELINE AND DESIGN STANDARDS

The review for servicing has been undertaken in conformance with, and utilizing information from, the following documents:

- Ottawa Sewer Design Guidelines (October 2012) and Technical Bulletins PIEDTB-2016-01 and ISTB-2018-01.
- Ottawa Design Guidelines – Water Distribution, July 2010 (WDG001) and Technical Bulletins ISD-2010-2, ISDTB-2014-02 and ISTB-2018-01.
- Fire Underwriters Survey, Water Supply for Public Fire Protection (FUS), 2020.
- The Stormwater Management Criteria is based on the following (as established in the Servicing Report prepared by GENIVAR, dated June 6, 2011)
  - The allowable release rate for this site, as determined through the 2011 SPC application from the Servicing Report prepared by GENIVAR, dated June 6, 2011, is 87.4 L/s.
  - Flows to the storm sewer in excess of the 5-year storm release rate, up to and including the 100-year storm event, must be detained on site.
  - Ensure no overland flow for all storms up to and including 100-year event.



## 2 WATER DISTRIBUTION

---

### 2.1 EXISTING WATER SERVICE

There is an existing 305mm diameter municipal watermain located on Swansea Crescent. A 152mm on-site water service was installed to provide domestic water demand and supply water for the sprinkler system in the current building.

---

### 2.2 PROPOSED WATER SERVICE

The water service pipe for the proposed addition is to connect to the existing water service pipe in the existing building. No new on-site water connection will be required.

---

### 2.3 CALCULATIONS OF WATER DEMANDS AND FIRE FLOW

As described in Section 1.1, the purpose of this addition is to provide more offices and mostly lab space to increase capacity with lab manufacturing stations. Therefore, the continuous process water demand for the site for the current operation of 0.47 L/s remains the same. An emergency process use allowance of 0.67 L/s is also required but can be regarded similar to fire flow requirements. To the daily process amount, a demand of 35,000 L/gross ha should be provided as noted in Table 4.2 of the Ottawa Design Guidelines – Water Distribution. The area being developed is 0.8867 ha, and therefore is assigned an average water demand of 31,336 L/day, or 0.36 L/s excluding the process flow. Total average demand is therefore estimated as  $0.47 + 0.36 = 0.83$  L/s.

Maximum day demand is estimated as 1.24 L/s based on 1.5 x average demand.

Peak hour demand is estimated as 2.24 L/s based on 1.8 x maximum day demand.

The required fire flow for the existing building and the proposed addition has been calculated using the Fire Underwriters Survey (FUS) method. The method takes into account the type of building construction, the effective floor area, the building occupancy, the use of sprinklers and the exposures to adjacent structures. For the total effective floor area of the existing building and the proposed addition of 5498 m<sup>2</sup>, the required fire flow demand of 8,000 L/min (133.3 L/s) has been calculated. Copy of the FUS calculations are included in **Appendix B**.

---

### 2.4 BOUNDARY CONDITIONS

Boundary conditions have been provided by the City of Ottawa at the location of the connection of the existing 150 mm water service pipe at the 305 mm watermain. A copy of boundary conditions is provided in **Appendix B** and listed in **Table 2-1**.

**Table 2-1: Boundary Conditions**

SCENARIO	BOUNDARY CONDITIONS AT SWANSEA CRESCENT	
	Water Demand (L/s)	Head (m) @ Connection
Basic Day (MAX HGL)	0.83	130.7
Peak Hour (MIN HGL)	2.24	123.8
Max Day + Fire Flow (ICI)	133.3	123.7

---

## 2.5 CONFIRMATION OF ADEQUATE FIRE FLOW PROTECTION

The demand of 8,000 L/min can be delivered through two existing municipal fire hydrants on Swansea Crescent. One is located on the east side of west entrance, which is within 45 m from the existing Siamese connection of the building. Another is located on the west side of east entrance.

Based on the boundary condition, the municipal water distribution system can provide the required fire flow of 133.3 L/s when water pressure drops to 42.20 m (water head 123.7 m – Ground elevation 81.50 m) at water service connection point. Available water pressure at the existing fire hydrant near west entrance is 41.03 m (water head 123.7 m – Ground elevation 82.67 m).

---

## 2.6 CONFIRMATION OF ADEQUATE DOMESTIC SUPPLY AND PRESSURE

Water demands are based on Table 4.2 of the Ottawa Design Guidelines – Water Distribution. A water demand calculation sheet is included in Appendix B, and the total water demands are summarized as follows:

Average Day	0.83 L/s
Maximum Day	1.24 L/s
Peak Hour	2.24 L/s

The 2010 City of Ottawa Water Distribution Guidelines stated that the preferred practice for design of a new distribution system is to have normal operating pressures range between 345 kPa (50 psi) and 552 kPa (80 psi) under maximum daily flow conditions. Other pressure criteria identified in the guidelines are as follows:

Minimum Pressure	Minimum system pressure under peak hour demand conditions shall not be less than 276 kPa (40 psi)
Fire Flow	During the period of maximum day demand, the system pressure shall not be less than 140 kPa (20 psi) during a fire flow event.
Maximum Pressure	Maximum pressure at any point the distribution system shall not exceed 689 kPa (100 psi). In accordance with the Ontario Building/Plumbing Code, the maximum pressure should not exceed 552 kPa (80 psi). Pressure reduction controls may be required for buildings where it is not possible/feasible to maintain the system pressure below 552 kPa.

Water pressure at municipal connection check:

Min. HGL @ Connection 1 – Pavement elevation = 123.8m – 82.35m = 41.45m = 406.38 kPa

Water pressure at building connection (at average day) check:

Max. HGL @ Connection 1 – Finished floor elevation = 130.7m – 83.21 = 47.49m = 465.60 kPa

Water pressure at building connection (at max. hour demand) check:

Min. HGL @ Connection 1 – Finished floor elevation = 123.8m-83.21m = 47.72m = 397.95 kPa

Water pressure at building connection (at max. day + fire demand):

(Max Day + Fire) HGL @ Connection 1 - Finished floor elevation = 123.7m-83.21m = 40.49m = 396.97 kPa

The minimum water pressure inside the building at the connection is determined with the minimum HGL condition, resulting in a pressure of 397.95 kPa which exceed the minimum requirement of 276 kPa per the guidelines.

## **3 WASTEWATER DISPOSAL**

---

### **3.1 EXISTING SANITARY SERVICE**

Currently, there is an existing 250mm PVC sanitary sewer located on Swansea Crescent. An existing on-site 150mm sanitary sewer service pipe was installed to convey sewage from the existing building to the City sanitary sewer system.

---

### **3.2 DESIGN CRITERIA AND FLOW CALCULATIONS**

The City of Ottawa Sewer Design Guidelines recommend a sanitary flow allowance of 35,000 L/ha/day for light industrial uses, with a peaking factor of 6.7 for an area of 0.89 hectares. The peak flow allowed for the site calculated using the guidelines is therefore 2.4 L/s. The extraneous flow allowance is 0.29 L/s/ha, raising the peak estimated allowable flow to 2.69 L/s.

---

### **3.3 VERIFICATION OF AVAILABLE CAPACITY IN ON-SITE SANITARY SEWER**

The slopes of the existing on-site 150 mm diameter sanitary sewer from the existing building to the City sanitary sewer are 1.0% and 8.0%, respectively. Correspondingly their capacities are 15.2 L/s and 43.1 L/s, respectively, which is adequate for the estimated flow from the proposed site as noted above.

## 4 SITE STORM SERVICING

---

### 4.1 EXISTING CONDITION

The site currently drains via private piped networks and overland flow to Swansea Crescent. An existing flow controller is located in catchbasin maintenance hole CBMH2 and controls flow to 85.1 l/s, excess flows above this limit up to those generated by the 100-year storm event are temporarily stored in the parking surface and the existing rooftop as per the existing condition.

---

### 4.2 DRAINAGE DRAWING

Drawing C002 shows the receiving storm sewer and site storm sewer network. Drawing C001 provides proposed grading and drainage and includes existing grading information. Drawing C004 provides a drainage sub-area plan, including both site and roof information. Site sub-area information is also provided on the storm sewer design sheet attached in Appendix C.

---

### 4.3 WATER QUANTITY CONTROL OBJECTIVE

As noted in the pre-consultation meeting and associated notes from the City of Ottawa, stormwater quantity control is desired for the site modification. The allowable release rate for the site is set at 87.4 l/s, flows in exceedance of this amount up to the 100-year storm event are required to be stored on site.

No provision is required on the site to accommodate any flow from the adjacent lands. All flows exceeding the defined minor system capacity and on-site storage capability will enter the major system, with overflow to adjacent surface waterways. Detailed stormwater management calculations are provided in Appendix C.

---

### 4.4 DESIGN CRITERIA

The stormwater system was designed following the principles of dual drainage, making accommodation for both major and minor flow.

Some of the key criteria include the following:

- Design Storm 1:5 year return (Ottawa)
- Rational Method Sewer Sizing
- Initial Time of Concentration 10 minutes
- Runoff Coefficients
  - Landscaped Areas C = 0.25
  - Asphalt/Concrete C = 0.90
  - Traditional Roof C = 0.90
- Pipe Velocities 0.80 m/s to 6.0 m/s
- Minimum Pipe Size 250 mm diameter  
(min 200 mm CB Leads and service pipes)

---

## 4.5 PROPOSED MINOR SYSTEM

The detailed design for this site will maintain the existing storm sewer networks to Swansea Crescent. Existing uncontrolled surface flow will also enter the existing storm sewer network to Swansea Crescent consistent with existing conditions.

Using the above noted criteria, the existing on-site storm sewers were sized accordingly. A detailed storm sewer design sheet and the associated storm sewer drainage area plan is included in Appendix C.

---

## 4.6 STORMWATER MANAGEMENT

The existing 5-year peak flow rate for the subject site will be maintained. Flows generated in excess of the allowable release rate will be detained on site through the use of surface storage and gradually released into the minor system so as not to exceed the site's allocation. Change to the existing pipe network is proposed. No change to the roof top storage on the existing building is proposed.

No surface ponding will occur during a 2-year event, and only minimal ponding will occur during a 5-year event.

Existing overland flow routes will be maintained in the grading to permit emergency overland flow from the site. The overflow routes will eliminate any increase in ponding depth for events exceeding 100 years. Please refer to the SWM Calculations in Appendix C.

The total area connected to the storm sewer consists of 0.889 hectares. The area includes 0.245 pervious surface and 0.644 impervious surface. The weighted average runoff coefficient is 0.73.

---

## 4.7 INLET CONTROLS

There are eight (8) rooftop flow controllers on the existing building which are each limited to a release rate of 1.89 l/s, resulting in a total flow from the roof of the existing building to 15.12 l/s. The roof drains are connected to the storm sewer upstream of CBMH2. There is an existing flow controller located at existing catchbasin maintenance hole CBMH2 which limits the flow released into the municipal system to 85.1 l/s which is within the 5-year release rate of 87.4 l/s (refer to Section 4.2).

---

## 4.8 ON-SITE DETENTION

Excess storm water from the site up to the 100-year event is to be stored on-site in order to not surcharge the downstream municipal storm sewer system. Rooftop storage, present on the existing building, will be kept. There will be no rooftop storage on the addition. Retention of storm water is also proposed within the parking lot, at grade level under the addition.

For the 5-year event, the total area requiring retention is 0.889 ha with a weighted average runoff coefficient of 0.73. This area has a maximum allowable release rate of 87.4 l/s and thus 60.3 m<sup>3</sup> is calculated as the retention volume required on-site.

**Table 4-1: Storage Requirement Calculation for 5-Year Storm**

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
<b>5 YEAR</b>	<b>10</b>	<b>104.19</b>	<b>187.89</b>	<b>87.40</b>	<b>100.49</b>	<b>60.30</b>	<b>213.87</b>
	20	70.25	126.69	87.40	39.29	47.14	<b>213.87</b>
	30	53.93	97.25	87.40	9.85	17.73	<b>213.87</b>
	40	44.18	79.68	87.40	-7.72	-18.53	<b>213.87</b>
	50	37.65	67.90	87.40	-19.50	-58.50	<b>213.87</b>
	60	32.94	59.41	87.40	-27.99	-100.77	<b>213.87</b>

For the 100-year event, the total area requiring retention is 0.889 ha with a weighted average runoff coefficient of 0.81. This area has a maximum allowable release rate of 87.4 l/s and thus 183.14 m<sup>3</sup> is calculated as the retention volume required on-site.

**Table 4-2: Storage Requirement Calculation for 5-Year Storm**

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
<b>100 YEAR</b>	10	178.56	357.29	87.40	269.89	161.93	<b>213.87</b>
	<b>20</b>	<b>119.95</b>	<b>240.01</b>	<b>87.40</b>	<b>152.61</b>	<b>183.14</b>	<b>213.87</b>
	30	91.87	183.82	87.40	96.42	173.56	<b>213.87</b>
	40	75.15	150.36	87.40	62.96	151.11	<b>213.87</b>
	50	63.95	127.97	87.40	40.57	121.71	<b>213.87</b>
	60	55.89	111.84	87.40	24.44	87.99	<b>213.87</b>
	70	49.79	99.63	87.40	12.23	51.35	<b>213.87</b>

The existing roof sub-area has a catchment area of 0.315 ha with a weighted runoff coefficient of 0.90. Based on the *Servicing Report for the Iridian Building, 2700 Swansea Crescent*, dated June 6, 2011, storage on the existing building rooftop consists of eight (8) drain locations each with a maximum storage depth of 150 mm totaling 50.0 m<sup>3</sup> for the 5-year event and 122.9 m<sup>3</sup> for the 100-year event.

The existing addition does not have rooftop flow controls and thus stormwater flows from this area into the parking lot and is controlled by the existing flow controller located in CBMH2.

The remaining stormwater will be stored within the parking lot and the grassed area south of the future addition, within the east entrance and in the grassed area to the east of the east entrance. In the event of a 100-year storm, ponding will also occur in the east entrance to a depth of 180mm. The maximum ponding depth is limited to 300mm in the hard surfaced areas and 600mm in the grassed areas. Ponding in the 5-year event is limited to 230mm in the parking lot and 580mm in both of the grassed areas. The maximum storage of 213.87m<sup>3</sup> is available at a maximum ponding depth of 81.55m.

There is a catchment area S-11 that drains uncontrolled to the storm sewer on Swansea Crescent. This area measures 0.004 hectares with a weighted runoff coefficient of 0.90. The 100-year release rate from this area is calculated to be 2.0 l/s. With

the release rate from the controlled areas of 85.1 l/s, the total release rate from the site is 87.1 l/s which is within the allowable release rate of 87.4 l/s.

The available storage can be summarized as follows. Refer to Appendix C for the storm sewer design sheet.

**Table 4-3: Proposed Conditions Stormwater Storage**

	Existing Building Required Storage (m <sup>3</sup> )	Ex. Building Available Rooftop Storage (m <sup>3</sup> )	Required Ground Level Storage (m <sup>3</sup> )	Available Ground Level Storage (m <sup>3</sup> )	Total Required Storage (m <sup>3</sup> )	Total Available Storage (m <sup>3</sup> )	Ground Level Ponding Elevation (m)
<b>5-year storm event</b>	49.87	50.0	10.43	10.77	60.30	60.77	81.29
<b>100-year storm event</b>	122.24	122.9	60.90	62.49	183.14	185.39	81.50

## 4.9 WATER QUALITY CONTROL

As indicated in the previous Stormwater Management report, the site is not required to achieve water quality objectives. Water quality objectives are achieved through downstream communal works providing quality treatment for the area. An e-mail noting this situation is attached to this report in Appendix A.



## 5 SEDIMENT AND EROSION CONTROL

---

### 5.1 GENERAL

During construction, existing storm sewer system can be exposed to sediment loadings. A number of construction techniques designed to reduce unnecessary construction sediment loadings will be used including;

- Filter cloths will remain on open surface structures such as manholes and catchbasins until these structures are commissioned and put into use;
- Installation of silt fence, where applicable, around the perimeter of the proposed work area;
- The installation of straw bales within existing drainage features surround the site;
- Bulkhead barriers will be installed in the outlet pipes;

During construction of the services, any trench dewatering using pumps will be fitted with a “filter sock.” Thus, any pumped groundwater will be filtered prior to release to the existing surface runoff. The contractor will inspect and maintain the filter sock as needed including sediment removal and disposal.

All catchbasins, and to a lesser degree, manholes, convey surface water to sewers. Consequently, until the surrounding surface has been completed, these structures will be covered to prevent sediment from entering the minor storm sewer system. These measures will stay in place and be maintained during construction and build-out until it is appropriate to remove them.

During construction of any development both imported and native soils are placed in stockpiles. Mitigative measures and proper management to prevent these materials entering the sewer system are needed.

During construction of the deeper water mains and sewers, imported granular bedding materials are temporarily stockpiled on site. These materials are however quickly used up and generally placed before any catchbasins are installed.

Refer to the Erosion and Sedimentation Control Plan C06 provided in Appendix D.

## 6 APPROVAL AND PERMIT REQUIREMENTS

---

### 6.1 GENERAL

The proposed development is subject to site plan approval and building permit approval.

No approvals related to municipal drains are required.

No permits or approvals are anticipated to be required from the Ontario Ministry of Transportation, National Capital Commission, Parks Canada, Public Works and Government Services Canada, or any other provincial or federal regulatory agency.

## **7 CONCLUSION CHECKLIST**

---

### **7.1 CONCLUSIONS AND RECOMMENDATIONS**

It is concluded that the proposed development can meet all provided servicing constraints and associated requirements. It is recommended that this report be submitted to the City of Ottawa in support of the application for site plan approval.

---

### **7.2 COMMENTS RECEIVED FROM REVIEW AGENCIES**

Revision 1 comments received from the City of Ottawa were addressed.



# APPENDIX

## A

- PRE-CONSULTATION MEETING NOTES
- SURVEY TOPO
- EXISTING SERVICING REPORT BY GENIVAR
- CORRESPONDENCE WITH RVCA



**Servicing Report  
Iridian Building  
2700 Swansea Crescent  
June 6, 2011  
Revision 2 – September 28, 2011**

**1. GENERAL**

**1.1 Executive Summary**

This report outlines servicing criteria and engineering calculations pertaining to the servicing of a proposed light industrial site located at 2700 Swansea Crescent in the Hawthorne Industrial Park.

The site was planned and serviced as part of the Hawthorne Industrial Park development.

The subject property is currently vacant, and has an area of 1.883 ha, and is situated on the northeast side of Swansea Crescent. The site has been identified for light industrial development since the area was developed.

The present proposal is to construct a single storey manufacturing facility and associated parking and landscaped features for Iridian Spectral Technologies. The developer is Canderel Realities Inc.

The proposed grading plan is shown on drawing C.01. Servicing is shown on Drawing C.02. A drainage area plan and construction notes are provided on Drawing C.03. The site plan, developed by the architect in coordination with the City planner, is shown on Drawing A.01.

The report was prepared utilizing servicing criteria obtained from the City of Ottawa, and outlines the design for water, sanitary wastewater, and stormwater facilities, including stormwater management.

The format of the report matches that of the development servicing study checklist found in section 4 of the city of Ottawa's Servicing Study Guidelines for Development Applications, November 2009. The report section headings therefore serve the purpose of a checklist.

The September 4, 2011 revision of this report provides changes arising from alterations to the site plan, including modification of the parking area, driveway location and a minor shift in the building location.

The September 28, 2011 revision accounts for the change in impervious area associated with a widening of the private sidewalk located along the building front. Other minor site plan changes for landscape planters and a change at the loading door are reflected on updated engineering

drawings (Revision 2 – September 26, 2011). A statement regarding downstream storm sewer routing has been added to Section 4.14 as requested by the Ontario Ministry of the Environment.

## **1.2 Date and Revision Number**

This version of the report is the third issue, dated September 28, 2011.

## **1.3 Location Map and Plan**

Drawings C.01 and C.02 provide the proposed development of the site, including municipal address, site boundary and layout for the portion of the site being developed. Drawings C.01, C.02 and C.03 include a location plan. Drawing C.03 shows the entire parcel of land, including the northern section that is not being developed at this time.

## **1.4 Adherence to Zoning and Related Requirements**

The site zoning is IG3. The proposed use of the site for a manufacturing facility is in conformance with the zoning. Density statistics (site area, building area and percent lot coverage) are provided on Drawing A.01 (Site Plan) produced by Pye & Richards Architects Inc.

Water and sanitary services will be in accordance with City of Ottawa guidelines.

Stormwater quantity management will be provided on site as noted in Section 4. On-site quality treatment is not required as confirmed by the City of Ottawa.

## **1.5 Pre-Consultation Meetings**

A pre-consultation meeting was held with representatives of the City of Ottawa, Owner and the consultant design team on May 16, 2011. Notes of the proceedings from this meeting are attached to this report.

## **1.6 Higher Level Studies**

No higher level studies were found within after requests to the developer (Canderel) or the City of Ottawa. Sanitary and water servicing were therefore designed in accordance with the City of Ottawa Sewer Design Guidelines and Ottawa Design Guidelines - Water Distribution. Stormwater quantity management is designed as per instructions provided by the City at the pre-consultation meeting.

## **1.7 Statement of Objectives and Servicing Criteria**

The objective of the site servicing is to meet the requirements for the proposed building while achieving the design objectives of the City of Ottawa.



## **1.8 Available Existing and Proposed Infrastructure**

Site storm, sanitary and water connections will connect to the locations of existing infrastructure shown on plan and profile drawings provided by the City of Ottawa for Swansea Crescent. Reference to the specific existing infrastructure is provided in subsequent sections of this report. Water, sanitary and storm mains are available on Swansea Crescent.

The site entrances will be located off of Swansea Crescent which is presently fully developed to an urban cross section. The west entrance will be one-way in only. The east driveway will be two-way.

## **1.9 Environmentally Significant Areas, Watercourses and Municipal Drains**

The development is not occurring in an Environmentally Significant Area. There are no watercourses or Municipal Drains on the subject property, and the site drains to existing City storm sewers.

## **1.10 Concept Level Master Grading Plan**

As the design has been submitted for site plan approval, the grading plan has been developed to the final design level. The existing and proposed grading is shown on Drawing C.01 - Grading Plan. The grading plan confirms the feasibility of the proposed stormwater management, drainage, soil removal and fills. Site boundary proposed elevations match with existing elevations on the west, east and south boundaries. The north property boundary proposed elevations have been developed in consideration of possible severance of the north property parcel. A future property line has been noted dividing the south and north parcels.

Grading of the lot will take advantage of the general overland flow direction on the site, which is from north to south, and west to east. No overland flow presently enters from or exits to private properties to the north and east.

The south portion of the lot will continue to accept the existing drainage from the north portion of the lot until such time as the north lot is severed and developed.

## **1.11 Impacts on Private Services**

There are no existing private services (septic systems and wells) on adjacent properties, as the entire area is on municipal services. The proposed pipe servicing system for the site will therefore not impact private services.

## **1.12 Development Phasing**

No future development is currently anticipated for the south part of the site. An entirely separate development is possible on the north part of the site, if the area is severed. The stormwater management calculations have allowed for both interim and future conditions.

### **1.13 Geotechnical Study**

A geotechnical study was prepared by Golder Associates, Report No. 021-2214, 2002. Supplementary memos were prepared in 2006 and 2007, under project numbers 06-1120-030-2000 and 07-1121-0135 respectively. Copies of these reports are submitted with the site plan application.

### **1.14 Drawing Requirement**

The submitted Site Plan A.01 by Pye & Richards Architects provides a metric scale, north arrow, construction north arrow, key plan, name of Owner, contact information for owner's representative (Pye & Richards Architects Inc.), property limits including bearings and dimensions, existing and proposed structures and parking areas, easements, road widening (none noted as being required) rights of way (none noted), and adjacent street names.

## **2. WATER SERVICING**

### **2.1 Consistency with Master Servicing Study and Availability of Public Infrastructure.**

The site water service will draw from the 300 mm diameter watermain located on Swansea Crescent, which is part of a looped system constructed for the industrial park..

### **2.2 System Constraints and Boundary Conditions**

There are no specific system constraints pertaining to the proposed development. Boundary conditions as prepared by the City of Ottawa are attached to this report. Available fire flows and pressures at adjacent hydrants are noted below.

### **2.3 Confirmation of Adequate Domestic Supply and Pressure**

The continuous process water demand for the site has been estimated for the proposed operation as 0.47 L/s. An emergency process use allowance of 0.67 L/s is also required, but can be regarded similar to fire flow requirements. To the daily process amount, a demand of 35,000 L/gross ha should be provided as noted in Table 4.2 of the Ottawa Design Guidelines – Water Distribution. The area being developed is 0.8953 ha, and therefore is assigned an average water demand of 31,336 L/day, or 0.36 L/s excluding the process flow. Total average demand is therefore estimated as  $0.47 + 0.36 = 0.83$  L/s.

Maximum day demand is estimated as 1.25 L/s based on  $1.5 \times$  average demand.

Peak hour demand is estimated as 2.25 L/s based on  $1.8 \times$  maximum day demand.

Available supply pressure and flow is noted in the following section. As the supply can meet the larger fire flow requirement, it is therefore capable of supplying the much lower domestic flow requirement.

## **2.4 Confirmation of Adequate Fire flow Protection**

The new building requires a 150 mm diameter water service based on anticipated domestic and fire flow demands established by the mechanical engineer.

Hydrant test results were obtained from the City of Ottawa for the hydrants west of the site on Swansea Crescent. Static pressures of 64 psi were noted, and dynamic pressures of 54 to 56 psi at flows of 950 Igpm (4313 L/min or 71.9 L/s). Available flow at a pressure of 20 psi was a minimum of 2114 Igpm.

The available flow was reviewed against the recommendations for required fire flow provided by the Fire Underwriters Survey in their manual "Water Supply for Public Fire Protection, 1999". Fire flows were based on a floor area of 3174 m<sup>2</sup>. An estimate of 6000 L/min or 1322 Igpm is determined assuming a building of non-combustible construction, with limited combustible contents, with complete supervised automatic sprinkler protection, and with an exposure charge of 15% (allowing for future buildings within 20 metres). The available flow of 2114 Igpm exceeds the recommended flow minimum for the proposed building.

The emergency process flow of 0.67 L/s (8.9 Igpm) can also be added to the fire flow demand, and still results in the required flow being less than the available.

## **2.5 Check of High Pressures**

As noted in the previous section, current static and dynamic pressures are 64 psi, and 54 to 56 psi respectively. High pressure is therefore not of concern.

## **2.6 Phasing Constraints**

The construction of the building will not be phased.

## **2.7 Reliability Requirements**

A shut off valve will be provided for the building water service at the property line in accordance with city standards. The city watermain includes shutoff valves east and west of the site.

## **2.8 Need for Pressure Zone Boundary Modification**

As proposed water related work consists of a single site service, there is no need for a pressure zone boundary modification.

## **2.9 Capability of Major Infrastructure to Supply Sufficient Water**

This requirement was addressed in subsections .3 and .4 above.

## **2.10 Description of Proposed Water Distribution Network**

A single water service will be provided to the single building on the site. As the fire department connection is within 45 metres from an existing hydrant, a new site hydrant is not a requirement.

## **2.11 Off-site Requirements**

No off-site improvements to existing watermains, feeder mains, pumping stations, or other water infrastructure are required to service the site.

## **2.12 Calculation of Water Demands**

Water domestic demands were calculated using Ottawa Design Guidelines as noted in Section 2.3. The fire demand was estimated using the Fire Underwriters Survey's "Water Supply for Public Fire Protection".

## **2.13 Model Schematic**

As the proposed water works consist of a single building service, a model schematic is not required.

# **3. WASTEWATER SERVICING**

## **3.1 Design Criteria**

The city of Ottawa Sewer Design Guidelines recommend a sanitary flow allowance of 35,000 L/ha/day for light industrial uses, with a peaking factor of 6.7 for an area of 0.89 hectares. The peak flow allowed for the site calculated using the guidelines is therefore 2.4 L/s. The extraneous flow allowance is 0.28 L/s/ha, raising the peak estimated allowable flow to 2.65 L/s.

## **3.2 Consistency with Master Servicing Study**

A conservative reasonable estimate for the maximum sewage flow can be obtained from the peak water demand of 2.25 L/s estimated in Section 2.3, assuming that none of the water demand is used up in the process, and assuming that the sewage peak is equal to the water demand peak. Adding the extraneous flow allowance of 0.25 L/s, the estimated peak flow is 2.50 L/s, which is below the allowed flow, and well within the pipe capacity of the service being provided.

Based on a conversation with Eric Tousignant of the City of Ottawa, there is no requirement to assess the capacity of downstream sewers if the anticipated sewage flow from the site is within the guideline values for light industrial land.

## **3.3 Review of Soil Conditions**

Based on the geotechnical report by Golder, there are no specific local subsurface conditions that suggest the need for a higher extraneous flow allowance. The site sewers will be new, and therefore will be less susceptible to leakage when compared with older networks.

### **3.4 Description of Existing Sanitary Sewer**

The outlet storm sanitary sewer is a 250 mm diameter sewer located on Swansea Crescent. The connection point for the building sanitary service will be near the proposed east driveway.

### **3.5 Verification of Available Capacity in Downstream Sewer**

As noted in Section 3.2, the estimated sanitary flow from the site is less than the amount that would have been used for design purposes using the Ottawa Sewer Design Guidelines. The flow allocation for the site will therefore not be exceeded.

### **3.6 Calculations for Sanitary Sewers**

The proposed 150 mm diameter sanitary service has a minimum slope of 1% and therefore a minimum capacity of 15 L/s. The maximum slope is 8% from the monitoring manhole to the receiving main, which would yield a velocity of 2.4 m/s if the sewer service was running full.

### **3.7 Description of Proposed Sewer Network**

The sanitary sewer system proposed consists of 150 mm diameter piping and a single monitoring manhole to convey sewage from the building to the outlet City sewer. No pumping stations or forcemains are required specifically for this development.

### **3.8 Environmental Constraints**

There are no previously identified environmental constraints that impact the sanitary servicing design in order to preserve the physical condition of watercourses, vegetation, or soil cover, or to manage water quantity or quality.

### **3.9 Pumping Requirements**

The proposed development will have no impact on existing pumping stations and will not require new pumping facilities.

### **3.10 Force-mains**

No force-mains are required specifically for this development.

### **3.11 Emergency Overflows from Sanitary Pumping Stations**

No pumping stations are required for this site.

### **3.12 Special Considerations**

Site investigations have not yielded the need for special considerations for sanitary sewer design related to contamination, corrosive environments, or any other issue.

## **4. STORMWATER SERVICING**

### **4.1 Description of Drainage Outlets and Downstream Constraints**

The site currently drains overland towards Swansea Crescent. Some low areas exist in the east part of the site.

In the absence of site specific criteria, the flow constraint for the site is based on that produced using a runoff coefficient of 0.5, and a 5 year rainfall event with a time of concentration of 20 minutes (or lower if calculated). Estimated times of concentration from the limits of the drainage path to the entry point into the proposed storm sewer system exceed 20 minutes, and therefore the 20 minute rainfall intensity will be used.

### **4.2 Analysis of Available Capacity in Existing Public Infrastructure**

The allowable release rate from the site has been established by the City of Ottawa using the criteria indicated above. No site specific studies are available to justify any higher allowable release rates.

### **4.3 Drainage Drawing**

Drawing C.01 provides proposed grading and drainage, and includes existing grading information. Drawing C.02 shows the receiving storm sewer and proposed storm sewer network. A drainage sub-area plan is provided on Drawing C.03. Sub-area information is also provided on the storm sewer design sheet attached to this report.

### **4.4 Water Quantity Control Objective**

The site must be examined under two scenarios. Under the interim scenario, the entire 1.883 ha will drain into the proposed storm sewer network to be established in the south part of the site. Under the future scenario, the north sector will be severed, and all runoff from the 0.9877 ha north sector will be handled independently of the south sector. Under the future scenario, the 0.8953 ha south area is treated independently from the north.

Both of these scenarios were examined to determine which resulted in the lowest allowable flow, and which provided the highest level of required storage.

It should be noted that sub-area 10 in the northwest part of the site drains uncontrolled towards the west, and therefore must be deducted from the allowed discharge in the interim calculations and storm sewer design for the south sector.

Sub-area 11 at the south end of the proposed east driveway is captured by a site catchbasin, but is discharged to the storm sewer downstream of the flow control location. The uncontrolled flow from subarea 11 therefore also has to be deducted from the allowable discharge in both the interim and ultimate calculations.

Flows are calculated using the Rational Method with the formula  $Q = 2.78 \times C \times I \times A$ , where

- Q = flow in litres per second
- C = runoff coefficient
- I = rainfall intensity (from City of Ottawa Sewer Design Guidelines)
- A = drainage area in hectares

The flow from subarea 11 is calculated assuming 100 year conditions, with a runoff coefficient of 1.0, an area of 0.0034 ha, and a 5 minute rainfall intensity of 242.6 mm/hour. The resulting flow from subarea 11 is 2.3 L/s.

### **Interim Condition**

Allowable runoff for the whole site =  $2.78 C I A = 2.78 \times 0.5 \times 70.25 \times 1.883 = 183.9$  L/s.

Uncontrolled runoff from subarea 10 under 100 year conditions is calculated using a runoff coefficient of 0.25 increased by 25%, a 20 minute rainfall intensity of 119.95 L/s, and an area of 0.2787 ha.

Runoff from subarea 10 =  $2.78 \times 0.25 \times 1.25 \times 119.95 \times .2787 = 29.0$  L/s.

Runoff from subarea 11 is 2.3 L/s

Allowable release rate to the City storm sewer =  $183.9 - 29.0 - 2.3 = 152.6$  L/s.

### **Future Condition**

Under future conditions, flow contributions from the north sector do not need to be considered. The allowable flow release from the south sector of 0.8953 ha is therefore

$Q = 2.78 \times 0.5 \times 70.25 \times 0.8953 = 87.4$  L/s

A deduction of 2.3 L/s is made from this amount to allow for the uncontrolled release from subarea 11. The net allowable release from the controlled portion of the site under future conditions is therefore 85.1 L/s

Storage requirements for interim and future conditions are provided in Section 4.10 of this report.

## **4.5 Water Quality Control Objective**

The site is not required to achieve water quality objectives. Water quality objectives are achieved through downstream communal works providing quality treatment for the area. An e-mail noting this situation is attached to this report.

## **4.6 Description of Stormwater Management Concept**

The proposed drainage system consists of a series of manholes, catchbasins and storm sewers leading to the existing 900 mm diameter City storm sewer on Swansea Crescent. A drainage area plan and a storm sewer calculation sheet are attached.

CBMH2 will be provided with a restricted outlet, limiting discharge to 85.1 L/s which is the lowest of the two release rates calculated in Section 4.4 above. Normally dry surface storage areas will be located in the south part of the site, and roof top storage will also be provided.

#### **4.7 Set-Back from Private Sewage Disposal Systems, Water Courses, and Hazard Lands**

As there are no adjacent or on-site private sewage disposal systems, watercourses or hazard lands, there are no required setbacks.

#### **4.8 Pre-Consultation with Ontario Ministry of the Environment and Conservation Authority**

Pre-consultation with the Ontario Ministry of the Environment has been undertaken, and the requirement for a Certificate of Approval for sewage works has been confirmed for the stormwater management components. A copy of the MOE response is attached. The Rideau Valley Conservation Authority was consulted, and their e-mail response is attached to this report.

#### **4.9 Consistency with Higher Level Studies**

As noted previously, the stormwater management design for the site is consistent with the requirements of the City of Ottawa.

#### **4.10 Storage Requirements and Conveyance Capacity**

Storage requirements must be estimated under both interim and future scenarios, with the largest calculated storage volume being carried forward for the design.

##### **Interim Conditions**

Total area (flow controlled) connected to the storm sewer consists of sub-areas 1 to 9, and equals 1.6009 ha. This area includes 0.6087 ha of impervious surface and 0.9922 ha of pervious surface. The weighted average runoff coefficient is 0.497 based on 0.9 for impervious areas and 0.25 for pervious areas. Under 100 year conditions, the pervious area coefficient is increased by 25%, and the impervious coefficient is increased to 1.0, yielding a weighted average coefficient of 0.574.

The required volume of storage is calculated using the modified Rational Method as indicated in the following tables.

Required storage is calculated by determining the difference between actual and allowable flow rates for the school site, and multiplying by the associated duration.



For 5 year storm event (C = 0.497 and area = 1.6009 ha)

Duration Minutes	Intensity mm/hr	Q L/s	Q allowable	Difference	Storage m3
5	140.2	310.1	152.6	157.5	47.3
10	104.4	230.9	152.6	78.3	47.0
15	85.6	189.3	152.6	36.7	33.0
20	70.25	155.4	152.6	2.8	0.3
25	60.9	134.7	152.6		
30	53.9	119.2	152.6		
35	48.52	107.3	152.6		
40	44.18	97.7	152.6		
60	32.0	70.8	152.6		

For 100 year storm event (C = 0.574 and area = 1.6009 ha)

Duration Minutes	Intensity mm/hr	Q L/s	Q allowable	Difference	Storage m3
5	242.6	619.7	152.6	467.1	140.1
10	179.0	457.3	152.6	304.7	182.8
15	146.8	375.0	152.6	222.4	200.2
20	119.95	306.4	152.6	153.8	184.6
25	103.85	265.3	152.6	112.7	169.1
30	91.9	234.8	152.6	82.2	148.0
35	82.58	211.0	152.6	58.4	122.6
40	75.15	192.0	152.6	39.4	94.6
60	53.2	135.9	152.6	0	0

### Future Conditions

Under future conditions, parts of sub-areas 7 and 9 totaling 0.709 ha will remain with the north sector. Total area connected to the storm sewer in the south sector will be 0.8919 ha, consisting of 0.6087 ha of impervious surface and 0.2832 ha of pervious surface. The weighted average runoff coefficient is 0.694 based on 0.9 for impervious areas and 0.25 for pervious areas. Under 100 year conditions, the pervious area coefficient is increased by 25%, and the impervious coefficient is increased to 1.0, yielding a weighted average coefficient of 0.782.

For 5 year storm event (C = 0.694 and area = 0.8919 ha)

Duration Minutes	Intensity mm/hr	Q L/s	Q allowable	Difference	Storage m3
5	140.2	241.3	85.1	156.2	46.9
10	104.4	179.6	85.1	94.5	56.7
15	85.6	147.3	85.1	62.2	56.0
20	70.25	120.9	85.1	35.8	43.0
25	60.9	104.8	85.1	19.7	29.6
30	53.9	92.7	85.1	7.6	13.7
35	48.52	83.5	85.1		0
40	44.18	76.0	85.1		0
60	32.0	55.1	85.1		0

For 100 year storm event (C = 0.782 and area = 0.8919 ha)

Duration Minutes	Intensity mm/hr	Q L/s	Q allowable	Difference	Storage m3
5	242.6	470.4	85.1	385.3	115.6
10	179.0	347.1	85.1	262.0	157.2
15	146.8	284.6	85.1	199.5	179.6
20	119.95	232.6	85.1	147.5	177.0
25	103.85	201.4	85.1	116.3	174.5
30	91.9	178.2	85.1	93.1	167.6
35	82.58	160.1	85.1	75.0	157.5
40	75.15	145.7	85.1	60.6	145.4
60	53.2	103.2	85.1	18.1	65.2

The required storage based on the largest storage volume calculated in either of the two scenarios above is 56.7 m<sup>3</sup> for the 5 year and 200.2 m<sup>3</sup> for the 100 year event.

### Roof Storage

Stormwater storage will be provided on the roof by employing flow control roof drains, with a maximum storage depth of 150 mm at the 8 drain locations. The flow at each drain is limited to 1.89 L/s at the maximum 150 mm depth. The proposed roof drains are Watts Drainage Model RD-100, equipped with an Accutrol single weir flow control insert.

The theoretical storage on the roof of 3174 m<sup>2</sup> assuming a 150 mm depth at the drains and 0 mm depth at the perimeter would be 158.7 m<sup>3</sup>.

Actual storage on the roof can be estimated under 5 and 100 year conditions using the Modified Rational Method, assuming a fixed outflow of 15.1 L/s (8 drains x 1.89 L/s per drain). The runoff

coefficient for 5 year conditions is assumed to be 0.9, and for 100 year conditions is assumed to be 1.0.

For 5 year storm event on roof (C = 0.9 and area = 0.3174 ha)

Duration Minutes	Intensity mm/hr	Q L/s	Q allowable	Difference	Storage m3
5	140.2	111.3	15.1	96.2	28.9
10	104.4	82.9	15.1	67.8	40.7
15	85.6	68.0	15.1	52.9	47.6
20	70.25	55.8	15.1	40.7	48.8
25	60.9	48.4	15.1	33.3	50.0
30	53.9	42.8	15.1	27.7	49.9
35	48.52	38.5	15.1	23.4	49.1
40	44.18	35.1	15.1	20.0	48.0
60	32.0	25.4	15.1	10.3	37.1

For 100 year storm event on roof (C = 1.0 and area = 0.3174 ha)

Duration Minutes	Intensity mm/hr	Q L/s	Q allowable	Difference	Storage m3
5	242.6	214.1	15.1	199.0	59.7
10	179.0	157.9	15.1	142.8	85.7
15	146.8	129.5	15.1	114.4	103.0
20	119.95	105.8	15.1	90.7	108.8
25	103.85	91.6	15.1	76.5	114.8
30	91.9	81.1	15.1	66.0	118.8
35	82.58	72.9	15.1	57.8	121.4
40	75.15	66.3	15.1	51.2	122.9
60	53.2	46.9	15.1	31.8	114.5

Available roof storage is estimated as 50.0 m3 for 5 year conditions and 122.9 m3 for 100 year conditions.

The proposed four ground surface storage areas are shown on Drawing C.01. These areas will normally be dry, and water will be temporarily stored on the ground surface for storm events exceeding the allowable discharge to the City storm sewer. The maximum water surface elevation is defined by the overflow elevation of 81.55 m. The maximum ponding depth will be 250 mm in the parking areas, and 600 mm in the landscaped area. Five year storage depths are approximately 50 mm in the parking areas and 400 mm in the landscaped basin.

Available ground surface storage capacity under 100 year conditions is estimated as 110 m3. Under 5 year conditions, ground level surface storage is estimated as 26 m3.

Adding in the available roof storage, the total 100 year storage is 232.9 m<sup>3</sup> for the 100 year event, and 76 m<sup>3</sup> for the 5 year event. These values meet the required storage amounts.

Outflow from DCBMH3 will be regulated by a Hydrovex 250 VHV-2 flow regulator as noted on the drawings. A flow curve indicating the operating point is attached to this report.

The conveyance capacity of the minor storm sewer system is outlined in the attached storm sewer design sheet. The site major system allows for overland overflow out the southeast corner of the site via the driveway. The proposed building is located at the high point of the site, and is therefore above the overland flow route.

#### **4.11 Watercourses**

There are no watercourses on or adjacent to the site.

#### **4.12 Pre and Post Development Peak Flow Rates**

The pre-development condition of the site is undeveloped with no impervious areas. Peak flow rates can be calculated for the 1.883 hectare site using the Rational Method assuming a runoff coefficient of 0.25 and a time of concentration of 20 minutes. Rainfall intensities are provided in the Ottawa Sewer Design Guidelines, and are 70.25 mm/hour for the five year event, and 119.95 mm/hour for the 100 year event.

Pre-development 5 year peak flow =  $2.78 \times C \times I \times A = 2.78 \times 0.25 \times 70.25 \times 1.883 = 91.9 \text{ L/s}$

Pre-development 100 year peak flow =  $2.78 \times C \times I \times A = 2.78 \times 0.25 \times 119.95 \times 1.883 = 157 \text{ L/s}$

Post-development peak flow rates are provided in Section 4.10 above for several different return periods as part of the storage calculations.

The attached drainage area plan, and the storm sewer design sheet describe the post-development drainage areas and extent of imperviousness.

#### **4.13 Diversion of Drainage Catchment Areas**

There are no proposed diversions of drainage catchment areas from one outlet to another.

#### **4.14 Minor and Major Systems**

Proposed minor and major systems are shown on Drawing C.02, and have been described in previous sections of the report. The minor site storm sewer system is described on the attached storm sewer calculation sheet. The proposed stormwater management facility consists of four surface storage areas in the southeast corner of the site, roof top storage, and a flow regulator at DCBMH3.

The storm service from the site discharges to a 900 mm diameter City storm sewer on Swansea Crescent. The 900 mm sewer flows easterly, and connects into a 3600 mm diameter trunk sewer south of the intersection of Swansea Crescent and Stevenage Drive (west intersection).

The 3600 mm trunk sewer runs easterly, crosses under Hawthorne Road, turns southerly, and discharges to MacEwen Creek between Russell Road and Hawthorne Road. A communal stormwater management pond providing quality control is located at short distance downstream near Hunt Club Road.

#### **4.15 Downstream Capacity Where Quantity Control Is Not Proposed**

This checklist item is not applicable to this proposed development as quantity control is provided.

#### **4.16 Impacts to Receiving Watercourses**

No measurable impact is anticipated to downstream receiving watercourses due the separation of the site from the eventual receiving watercourse as a result of discharge through City owned storm sewers and stormwater management facilities.

#### **4.17 Municipal Drains and Related Approvals**

There are no municipal drains on the site or associated with the drainage from the site.

#### **4.18 Means of Conveyance and Storage Capacity**

The means of flow conveyance and storage capacity are described in Sections 4.10 and 4.14 above.

#### **4.19 100 Year Flood Levels and Major Flow Routing**

The maximum water ponding level on the site is El. 81.55 m prior to overflow. The proposed building finished floor of 83.20 m is higher than the area surrounding the building, and significantly higher than the maximum ponding level. The vestibule floor level at the staff entrance is at 82.30 m, and is therefore also well above the overflow water level of 81.55 m. All perimeter areas outside of the building slope away from the building.

#### **4.20 Hydraulic Analysis**

Hydraulic calculations for the site storm sewers are provided in the storm sewer design sheet. The maximum hydraulic grade line is defined by the maximum stormwater storage elevation of 81.55 m.

#### **4.21 Erosion and Sediment Control Plan**

This document addresses the City of Ottawa's requirement for an Erosion and Sediment Control Plan for the proposed construction.

The drawings include requirements for the Contractor to implement Best Management Practices to minimize erosion and sediment release during construction activities. Specific measures are dictated including a geotextile under catch basin grates, and a temporary silt fence on the down gradient property lines.

The Architect, as lead consultant, is responsible for ensuring contractual compliance with the construction specifications, including erosion and sediment control.

It is anticipated that the measures outlined above will prove adequate for erosion and sediment control. Site inspection personnel will have the authority based on the Contract Documents to require additional control measures as necessary should the contractor's operations result in soil tracking or other offsite transfer of sediment and soil.

#### **4.22 Identification of Floodplains**

There are no designated floodplains on the site of this development.

#### **4.23 Fill Constraints**

There are no fill constraints applicable to this site related to any floodplain or site soil conditions as identified in the geotechnical investigation results available to date.

### **5. APPROVAL AND PERMIT REQUIREMENTS**

The proposed development is subject to site plan approval and building permit approval. There are no required approvals under the Ontario Environmental Protection Act, or Conservation Authorities Act. As noted earlier, a Certificate of Approval for Sewage Works is required under the Ontario Water Resources Act for the stormwater management works.

No approvals related to municipal drains are required.

No permits or approvals are required from the Ontario Ministry of Transportation, National Capital Commission, Parks Canada, Public Works and Government Services Canada, or any other provincial or federal regulatory agency except as noted above.

### **6. CONCLUSION CHECKLIST**

#### **6.1 Conclusions and Recommendations**

It is concluded that the proposed development can meet all required servicing constraints and associated requirements. It is recommended that this report be re-submitted to the City of Ottawa in support of the application for site plan approval.

#### **6.2 Comments Received from Review Agencies**

Preliminary comments have been received from the Rideau Valley Conservation Authority, the Ministry of the Environment and the City of Ottawa, and copies are attached to this report.

### 6.3 Signature and Professional Stamp

Report prepared by:

GENIVAR

James C. Johnston, P.Eng.

15 Fitzgerald Road, Nepean, Ontario K2H 9G1



# P&R

## PYE & RICHARDS ARCHITECTS INC.

824 MEATH STREET, OTTAWA, ONTARIO. CANADA. K1Z 6E8. TEL: 613-724-7700 FAX: 613-724-1289  
E-MAIL: staff@pnrarch.com WEB: www.pyeandrichardsarchitects.com

### PROJECT MEETING

---

The following text represents a fair recording of all matters discussed and shall be deemed official for project record purposes unless advised to the contrary within seven (7) days.

PROJECT - Irideon Site Plan - 2700 Swansea Crescent

PROJECT NO. - 11-48

PROJECT STAGE - Preliminary Design

MEETING NO. - Pre-consultation Meeting 1

DATE - 16 May 2011

PLACE - City of Ottawa

IN ATTENDANCE	Name	Firm	E-Mail
	Jeff Kubacki	Canderel Realities.	jkubacki@canderel.com
	Denis Charron	City of Ottawa	denis.charron@ottawa.ca
	Abdul Mottalib	City of Ottawa - Infrastructure	abdul.mottalib@ottawa.ca
	Marietta Ruhland	Landscape Architect	dalamr@magma.ca
	Jim Johnston	Genivar	jim.johnston@genivar.com
	Scott Hayward	Pye & Richards Architects Inc.	scott.hayward@pnrarch.com

#### 1.1 Site Plan Design

Scott Hayward presented the preliminary Site plan design drawing for discussion. The following comments were noted:

- A minimum 5.0 m. wide landscape strip is provided along the property line facing Swansea Crescent. The building's south west corner, which projected into this landscape strip on the drawings which were reviewed, has now been shifted back to maintain the 5.0 m requirement.
- Zoning regulations require minimum 3.0 m front and side yard setback.
- Zoning regulations for loading dock requirements to be maintained.
- Possible extension of driveway at western site entry to be investigated to allow for greater visibility when exiting site.
- To avoid vehicular congestion at the western entry/exit, a dedicated barrier free and courier parking spot is to be planned.
- Ensure exterior garbage facilities are completely screened from the street by extensive landscaping.
- Make sidewalk connection from parking to office entrance. Landscape along sidewalk adjacent to building.
- Provide bicycle parking at perimeter of the Site.
- Loading dock area and door to be screened from Swansea Crescent by extensive landscaping. Landscaping at staff entry to help in screening loading area. Pye and Richards to forward perspectives to illustrate how building geometry screens loading area.
- Integrate loading bay door into overall building design. Downplay visual impact of door.
- Provide berms and planting as per Hawthorne Business Park Guidelines along street.
- No 30 cm reserve along Swansea Crescent exists.



## 1.2 Traffic and Access

- A traffic brief will be required for the Site.

## 1.3 Site Servicing

- MOE approval required for site development (SWM) due to the occupancy being a light industrial use. In order to avoid a two to three month approval period, a conditional permit allowing work to proceed on site before the winter season will be requested. This conditional permit would be issued before final Site Plan and MOE approval are issued.
- On site monitoring of MHs for sewers required.
- Consultant to investigate downstream sewer constraints.
- Required information for water boundry conditions include : location of service, type of development and fire flow, average daily demand, maximum daily demand, maximum hourly demand.
- Stormwater Management criteria for draining to the City separated storm sewer system, SWM criteria are required to prepare serviceability study (Quantity control criteria).
  - Allowable release rate will be 5 year pre-development rate.
  - C Coefficient of runoff will need to be determined as per existing conditions but in no case more than 0.5
  - TC =20 minutes or can be calculated , for calculation minimum inlet time will be 10 minutes
  - Any storm events greater than 5 year up to 100 year and including 100 year storm events need to be stored on site.
  - Consultant to check with RVCA for Quantity Control Issues.

## 1.4 Landscaping

- Consultants to provide existing plant inventory with proposed new planting plan.
- Provide 5.0m landscape buffer strip along street frontages. Hawthorne Business Park Design Guidelines to be implemented along Swansea Crescent landscaping.
- Develop pedestrian route from parking to main building entry.
- Develop landscape screening for loading dock and garbage container.
- Developed landscaped entry plaza and staff outdoor patio.

## 1.5 Approval Process

- Site Plan Application required; Consultant advised to check guidelines in Bylaw for full list of requirements.
  - Reports required include the following:
    - Geotechnical Report
    - SWM report Plan
    - Phase 1 Environmental Report
    - Site Servicing Report
    - Planning Rationale
    - Traffic Study
    - Building Plans and Elevations
    - Site Plans: Architectural, Landscape and Civil
    - Erosion and Sediment Control Plan (can be combined with grading plan)
- Provide Composite Utility Plan.
- Municipal consent required for any required road cut permit.

## 1.6 Site Lighting


- Provide Site lighting letter to confirm fuel cut-off at property lines.

**Meeting adjourned.**

Scott Hayward  
PYE & RICHARDS ARCHITECTS INC.

Distribution:  
All present



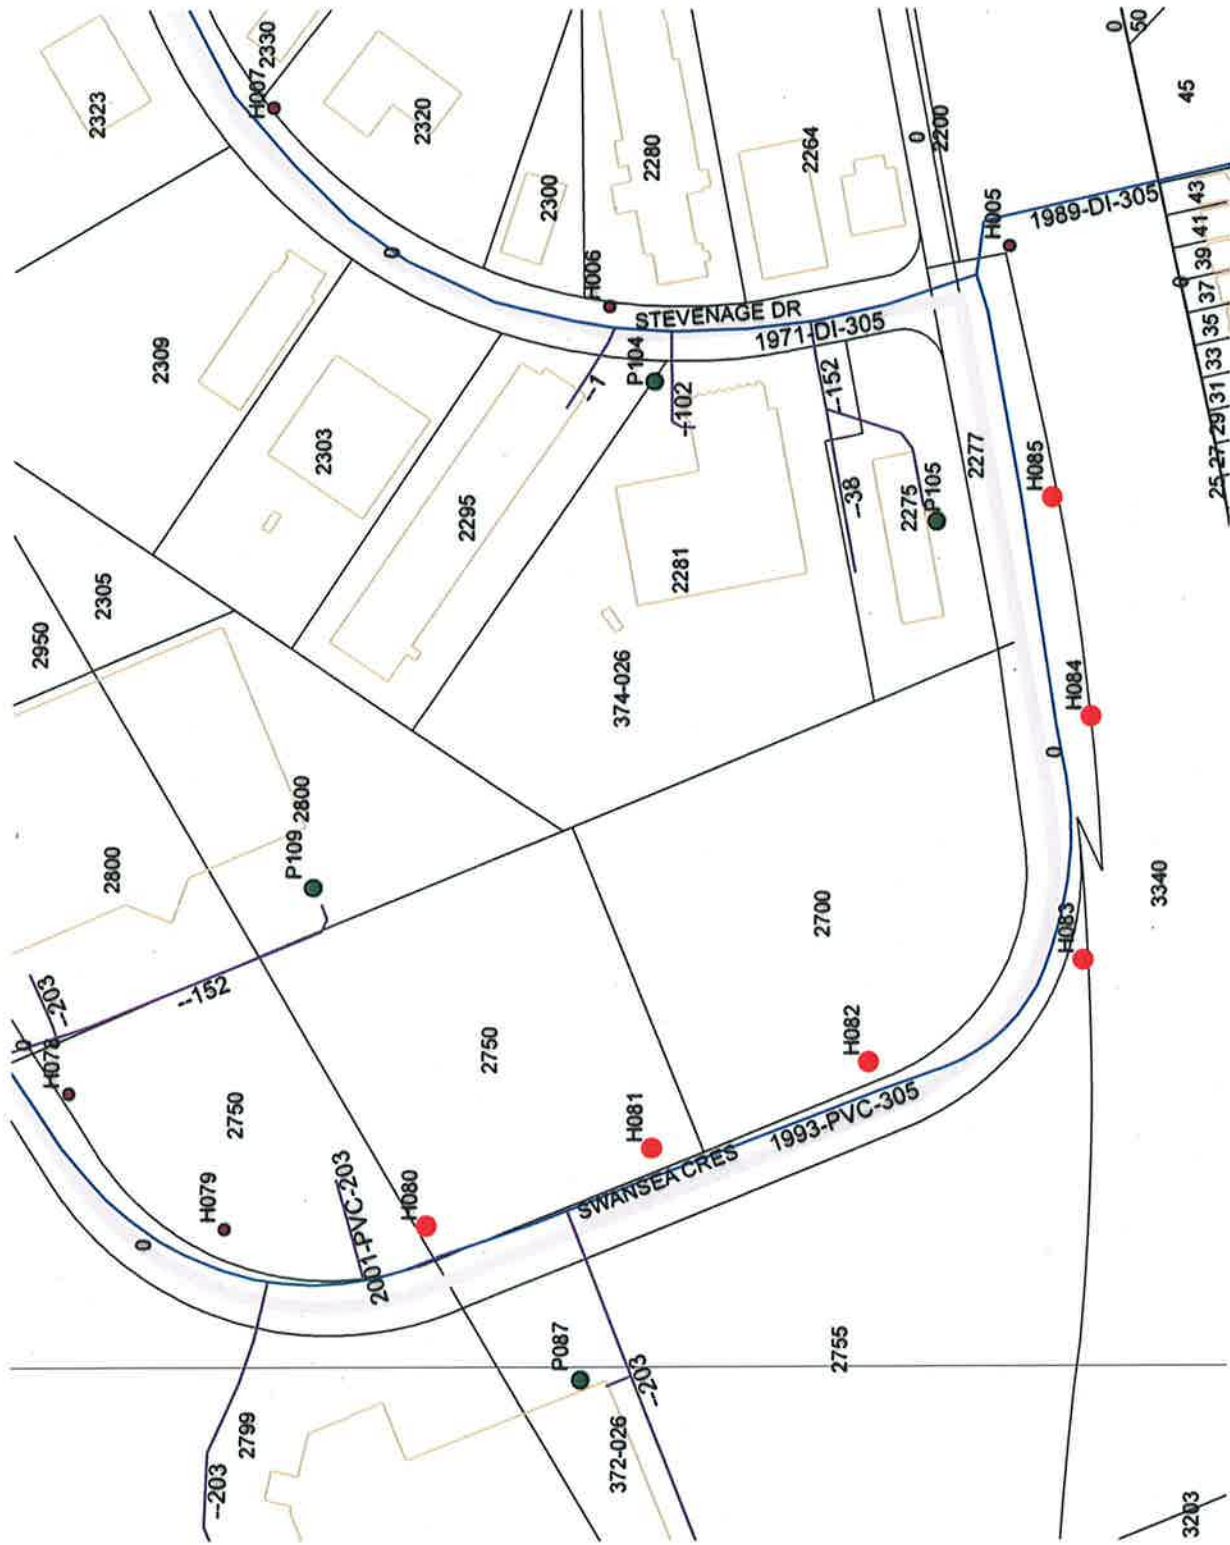

STORM SEWER DESIGN TABLE

Local Drainage Area	From	To	Area with R=25 (ha)	Area with R=9 (ha)	Local 2.78 AR	Cumulative 2.78 AR	Time of Concentration (min)	Intensity (mm/hour)	Peak Flow (L/s)	Diameter (mm)	Slope (%)	Length (m)	Capacity (L/s) n=0.013	Velocity (m/s)	Time of Flow (min)	Upstream Invert (m)	Downstream Invert (m)
7	CB1	CB2	.1961	.0016	.1403	.1403	20	70.25	9.9	200	1.0	13.5	34.2	1.06	.25	80.58	80.44
6A	CB2	CBMH1		.0103	.0258	.1661	20	70.25	11.7	250	1.7	32.7	80.0	1.58	.34	80.39	79.83
8	BLDG	MAIN		.3174	.7941	.7941	10	104.4	82.9	200	6.0	13.5	83.8	2.58	.09	80.16	79.35
4	DICB3	DCB4	.0850		.0591	.0591	10	104.4	6.2	300	1.0	5.0	100.9	1.38	.06	79.64	79.59
5	DCB4	MAIN	.0124	.1047	.2706	.3297	10	104.4	34.4	300	1.0	7.2	100.9	1.38	.09	79.54	79.47
2	DCB7	MAIN	.0031	.0322	.0827	.0827	10	104.4	8.6	200	1.0	18.0	34.2	1.06	.28	79.49	79.31
6B	CBMH1	CBMH2	.0066	.0393	.1029	1.4755	20	70.25	103.7	300	1.1	64.0	105.1	1.44	.74	79.784	79.08
Part of 3	CB9	MAIN		.0182	.0455	.0455	10	104.4	4.8	200	1.0	8.0	34.2	1.06	.13	79.71	79.63
9	DICB5	CBMH2	.6340	.0095	.4644	.5099	20	70.25	35.8	200	2.0	56.0	48.4	1.49	.63	80.57	79.45
1	CB6	CBMH2	.0383		.0266	.0266	10	104.4	2.8	200	1.0	11.0	34.2	1.06	.17	78.31	79.20
11	CB8	MAIN		.0034	.0085	.0085	10	104.4	0.9	200	1.0	9.0	34.2	1.06	.14	79.40	79.31
Part of 3	CBMH2	STMH3	.0167	.0755	.2005	2.221	20	70.25	156.0*	375	0.74	31.0	157.3	1.38	.37	79.01	78.78
2	STMH3	CITY MAIN				2.221	20	70.25	156.0*	375	0.74	11.6	157.3	1.38	.14	78.77	78.68
		Totals	.9922	.6121	2.221												

\*Outflow from CBMH2 restricted to 85.1 L/s.

Designed by: James Johnston

For sewer sizing purposes, no roof flow controls are assumed. Controlled flow roof drains will result in lower flow than indicated. Rainfall intensities, sewer capacities and velocities from Ottawa Sewer Design Guidelines.

Revised September 28, 2011

## James Johnston

---

**From:** James Johnston  
**Sent:** Friday, June 03, 2011 10:44 AM  
**To:** 'Mottalib, Abdul'  
**Cc:** 'Taracha, Jacek'; Buchanan, Richard  
**Subject:** FW: 2700 Swansea Crescent - SWM Quality Treatment

Abdul,

As per the message below, I have contacted Richard Buchanan regarding 2700 Swansea Crescent. Richard has confirmed today by telephone that quality treatment for this address is provided in a communal pond off-site, and that no no-site SWM quality treatment is required.



**James (Jim) Johnston, P.Eng., LEED® AP**  
GENIVAR | *Constructive people*  
15 Fitzgerald Road, Nepean, Ontario K2H 9G1  
T 613.829-2800 x349 | F 613.829-8299 | C 613.298-5960  
[www.genivar.com](http://www.genivar.com)

---

**From:** Taracha, Jacek [<mailto:Jacek.Taracha@ottawa.ca>]  
**Sent:** Tuesday, May 31, 2011 9:22 AM  
**To:** James Johnston  
**Cc:** Buchanan, Richard  
**Subject:** RE: 2700 Swansea Crescent

Hi Jim,

Thanks for your message, I had a chance to talk to Richard Buchanan and I understand that there was an exchange between RVCA and him in respect to the quality treatment for the subject site. If you have not received the reply either from Abdul or Richard I would suggest to contact Richard directly at extension 27801.

Jacek

---

**From:** Jocelyn Chandler [<mailto:jocelyn.chandler@rvca.ca>]  
**Sent:** Monday, May 09, 2011 4:29 PM  
**To:** James Johnston  
**Subject:** RE: 2700 Swansea Crescent

Hello James,

According to my October 2000 'McEwen Creek Water Quality and Erosion Control Study, Functional Design report (which is stamped DRAFT) prepared by CG & S, the property is identified as future/proposed industrial and outlets to the Eastern Community Trunk Sewer. The City of Ottawa is currently in the design process of preparing to construct a SWM pond just east of Hawthorn Road which will receive flows from the Eastern Community Trunk Sewer. I have no idea at this point what the function of this pond is...but I BELIEVE it was intended to provide quality controls for the receiver (McEwen Creek and ultimately Green's Creek). If this is the case, the RVCA will not require quality controls on the site. Please check with infrastructure at the City of Ottawa with respect to the intended pond function and the timing of its construction. Jocelyn.

Jocelyn Chandler M.Pl. MCIP, RPP.  
Planner, RVCA  
613.692.3571 x1137  
[jocelyn.chandler@rvca.ca](mailto:jocelyn.chandler@rvca.ca)

[www.rvca.ca](http://www.rvca.ca)

mail: Box 599 3889 Rideau Valley Dr., Manotick, ON K4M 1A5

courier: 3889 Rideau Valley Dr., Nepean, ON K2C 3H1

*This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the Municipal Freedom of Information & Protection of Privacy Act. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.*

---

## James Johnston

---

**From:** Goulet, Charles (ENE) [Charles.Goulet@ontario.ca]  
**Sent:** Wednesday, September 21, 2011 2:15 PM  
**To:** James Johnston  
**Cc:** Robertson, Syd  
**Subject:** RE: Swansea Cr\_2700 - Documents for the MOE Pre-submission meeting

James,

I briefly reviewed the servicing report.

Would you please provide more details about the sequence of events between the site and the receiving watercourse? In other words, the storm sewer servicing Swansea Crescent is connected to what other infrastructure before discharge to the newly commissioned McEwan Creek SWMF, just off the extension of Hunt Club Road?

It is my understanding that the SWM approach for this proposed industrial property will be through a combination of ponding on the roof and on a portion of the parking lot (southeast corner). Thus, an approval is required under Section 53 of the Ontario Water Resources Act.

Once you have amended your servicing report with the clarification requested just above, you may use this e-mail as a record of pre-application consultation.

Should you have any questions, please feel free to contact me.

Regards,  
Charles Goulet, P. Eng.  
District Engineer  
MOE Ottawa District Office  
2430 Don Reid Drive  
Ottawa ON  
K1H 1E1

DL (613) 521-3450 ext. 246  
TF (800) 860-2195 ext. 246  
F (613) 521-5437



*Please consider the environment before printing this email.  
Est-il vraiment nécessaire d'imprimer ce courriel?*

---

**From:** Robertson, Syd [mailto:Syd.Robertson@ottawa.ca]  
**Sent:** September 16, 2011 4:08 PM  
**To:** Goulet, Charles (ENE)  
**Cc:** james.johnston@genivar.com  
**Subject:** Swansea Cr\_2700 - Documents for the MOE Pre-submission meeting

Hi Charles:

Attached please find the engineering documents for the above noted site. Jim Johnston, P.Eng., Genivar will be contacting you regarding this in advance of his MOE submission for approval of municipal & private Sewage Works (Industrial)

Please call me if you have any questions.

<<Sweansea Cr\_2700 - Drainage Area Plan.pdf>> <<Sweansea Cr\_2700 - Grading Erosion & Sed Control Plan.pdf>>  
<<Swansea Cr\_2700 - Servicing Report.pdf>> <<Sweansea Cr\_2700 - Servicing Plan.pdf>>

Thanks,

**Syd Robertson, C.E.T.**

Project Manager, Infrastructure Approvals

DRP, Urban Services Branch, Outer Core

Planning & Growth Management Department

110 Laurier Ave. W., 4th Floor E

Ottawa, ON K1P 1J1

(613) 580-2424 ext/poste 27916

[Syd.Robertson@ottawa.ca](mailto:Syd.Robertson@ottawa.ca)

[www.ottawa.ca](http://www.ottawa.ca)

This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. If you are not the intended recipient, please notify me at the telephone number shown above or by return e-mail and delete this communication and any copy immediately. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Si vous avez reçu le message par erreur, veuillez m'en aviser par téléphone (au numéro précité) ou par courriel, puis supprimer sans délai la version originale de la communication ainsi que toutes ses copies. Je vous remercie de votre collaboration.





File Number: D07-12-11-0119

24 Aug 2011

Genivar  
15 Fitzgerald Rd, Suite 100  
Ottawa, ON K2H 9G1  
Attention: Jim Johnston, P.Eng.

Dear Jim:

Re: **Preliminary Engineering Review – 2700 Swansea Cr., Ward 10, Ottawa, ON  
*Proposed two-storey office / industrial manufacturing building.***

The following comments are provided in response to the engineering submission for your project number 111-16558-00 dated 06 June 2011 with the development application to the City of Ottawa:

#### General

1. Provide a Key Plan showing the location of the site with respect to the local street network.
2. List all the symbols in the Legend that are used in the drawing. What does the IP & SF symbol represent on Dwg C-02?
3. Delete the line 'SF' which runs along the Swansea Rd frontage – Dwg No. C-02 (requested by the Planner).
4. In the title block, include the name of Owner, full address including Postal Code; telephone no.  
2700 Swansea Crescent Property Inc.  
425 Leggett Dr., Ste 200  
Ottawa, ON K1G 6R8  
Phone: 613 287-3449
5. Clearly show the property lines using the same line intensity/thickness & line type as the one used for the landscape setback.
6. Provide a reference, on Dwg No. C-01 & C-02, to the General, Sewer & Water Notes listed on Dwg No. C-03.
7. Revise the leader note regarding the existing plywood fence, adjacent to the future parking area, stating, "Encroaching portion of the plywood fence to be removed from the subject site and reinstalled on the adjacent property to the west.

*Shaping our future together  
Ensemble, formons notre avenir*

City of Ottawa  
Planning & Growth Management  
Development Review- Urban  
Services  
110 Laurier Avenue West  
Ottawa, ON. K1P 1J1  
Tel: (613) 580-2424  
Fax: (613) 560-6006  
[www.ottawa.ca](http://www.ottawa.ca)

Ville d'Ottawa  
Planification et Gestion de la croissance  
Examen de l'aménagement - Services  
d'urbanisme  
110, avenue Laurier Ouest  
Ottawa, ON. K1P 1J1  
Tél: (613) 580-2424  
Télé: (613) 560-6006  
[www.ottawa.ca](http://www.ottawa.ca)

8. Consult with the architect to ensure that the Engineering Plans contain all the revisions made to the footprint of the site, including but not limited to the private approaches & the relocation of the fence at the southeast corner of the site.

**Servicing Plan, Dwg No. C-02, Rev 0.**

9. Provide the details of the SWM design for the roof of the proposed building (number of roof drains, restricted flows from the roof (per drain and total from all drains), maximum ponding volumes & depth for the 5-yr & 100-Yr storm events.
10. Confirm if there are weeping tiles and ensure that the foundation drain is connected downstream of any inlet control devices.
11. Show all existing and proposed public utilities both on-site & off-site. Information can be obtained from the City's Information Centre by phone at (613) 580-2424 x.44455 or by email @ [informationcentre@ottawa.ca](mailto:informationcentre@ottawa.ca).

The following information should be included:

- Bell, Gas, Hydro, Cablevision
- Pedestals, Transformers
- Streetlighting

12. Provide a pipe conflict table which includes all proposed pipe crossings.
13. Hatch the area on the water service where thermal insulation will be required (ie. STA 0+000 to STA 0+004) *Based on the water service profile data.*
14. Specify a TVS connection for the proposed water service connection to the City watermain.
15. Revise the Water Service profile Table to include STA 0+020 & 0+040. List all stations in the correct format (eg. 0+000, 0+002.4 etc).
16. Show the water meter and remote on plan.
17. Address the last sentence of comment 35 below.

**Grading Plan, Dwg No. C-01, Rev 0**

18. Revise the name of this drawing to, Grading, Sediment & Erosion Control Plan.
19. Show the location of the sediment & erosion control measures to be implemented.
20. Relocate the Sediment & Erosion Control Notes from Dwg No. C-03 to C-01.
21. Ensure that the notes include the following wording:  
*The contractor shall implement best management practices, to provide for protection of the area drainage system and the receiving watercourse, during construction activities. This includes limiting the amount of exposed soil, using filter cloth under the grates of catch basins and manholes and installing silt fences and other effective sediment traps. The contractor acknowledges that failure to*

*Preliminary Engineering Review  
2700 Swansea Cr., Ward 10, Ottawa, ON  
Proposed Two-storey office / industrial manufacturing building*

*implement appropriate erosion and sediment control measures may be subject to penalties imposed by any applicable regulatory agency.*

22. The General Notes on Dwg No. C-01 should be consistent with the General Notes on Dwg No. C03. Revise accordingly.
23. Consider extending the HD Pavement area along the access lane which connects the two private approaches.
24. Provide grading arrows with percent grade which clearly shows the drainage pattern throughout the site including the parking and landscaped areas and along the two private approaches (with the break point at the property line).
25. Include the elevation of the ponding limits for all of the 5-yr ponding areas.

**Drainage Area Plan & Notes, Dwg No. C-03, Rev 0**

26. Revise General Note 9, "Concrete barrier curbs as per Std Dwg SC1.1; Concrete barrier curb with sidewalk as per Std Dwg SC1.4.
27. Add General Note 12, "Road Cut Reinstatements as per Std Dwg R10.
28. Add General Note 13, "Refer to the Geotechnical Investigation, Report No. 021-2214, prepared by Golder Associates, for addition information regarding Pavement Design & Site Servicing."
29. Revise Sewer Note 1 to read, "... as per City of Ottawa & Ontario Provincial Standards & Specification (Delete Ministry of the Environment Standards).
30. Revise Sewer Note 8 to include, "Sanitary connection as per Std Dwg S11.1; Storm connection as per Std Dwg S11.2."
31. Add Sewer Note 13, "Provide a watertight MH cover for SAN MH 1 as per OPSD 401.030. (*This is required since the MH is partially located in a SWM Ponding area*).
32. Add Water Note 5, ""Water service connection, to City watermain, by City forces. Excavation, backfilling and reinstatement by contractor"
33. Add Water Note 6, "Provide a minimum clearance of 2.0 m between the proposed watermain and any tree or utility plant.
34. Provide the weighted 'C' value for each of the drainage areas and show these values on the Drainage Plan.
35. Revise the Fire Hydrant Note regarding the Unobstructed Path of Travel . It should be between the Fire Hydrant & the Fire Department Connection and not the principal entrance of the building. The distance scaled from Dwg C-03 is 39m, not 27m as per your note. The distance is unobstructed therefore is not a straight line distance between the two points (not over snow banks). Also this note should appear on the Servicing Plan, not the Drainage Plan.

*Preliminary Engineering Review  
2700 Swansea Cr., Ward 10, Ottawa, ON  
Proposed Two-storey office / industrial manufacturing building*

**Other Comments:**

- i. **MOE Approval**
  - Required. Please contact Charles Goulet, MOE Ottawa District Engineer, & arrange a pre-submission meeting.
  - Forward four-copies of the MOE Application for Approval of Sewage Works, to my attention, so I can process it as a Direct Submission. Also please include a cheque in the amount of \$2,200.00, payable to the Minister of Finance to cover the related application fee.
- ii. **Servicing Report**
  - Include the Water Boundary Conditions, provided by the City in the Appendix of the Report.
- iii. **Water Card**
  - Complete a Water Data Card (using version 2-010)
- iv. **Site Lighting Certificate**
  - Provide a Site Lighting Certificate, sealed by a P.Eng. to satisfy the following condition:

Prior to the Site Plan Approval, the applicant shall provide a certificate, from an acceptable professional engineer, that the site lighting has been designed to meet the following criteria:

- It must be designed using only fixtures that meet the criteria for Full Cut-Off (Sharp cut-off) Classification, as recognized by the Illuminating Engineering Society of North America (IESNA or IES), and;
- It must result in minimal light spillage onto adjacent properties. As a guideline, 0.5 fc is normally the maximum allowable spillage.

Your cover letter must indicate how each of the comments has been addressed on the resubmission. Any revisions or addendums to any studies must be accompanied by a pdf copy of the report (either by CD or e-mail).

Should you wish to contact me regarding any questions or a follow up meeting you may reach me at 580-2424 ext. (27916).

Sincerely,

---

Syd Robertson, Project Manager, Infrastructure Approvals  
Development Review Urban Services Branch  
Planning & Growth Management Dept.  
City of Ottawa

- cc. Prescott McDonald, Planner  
Scott Hayward, Applicant/Agent, Pye & Richards Architects Inc.



# VHV Vertical Vortex Flow Regulator

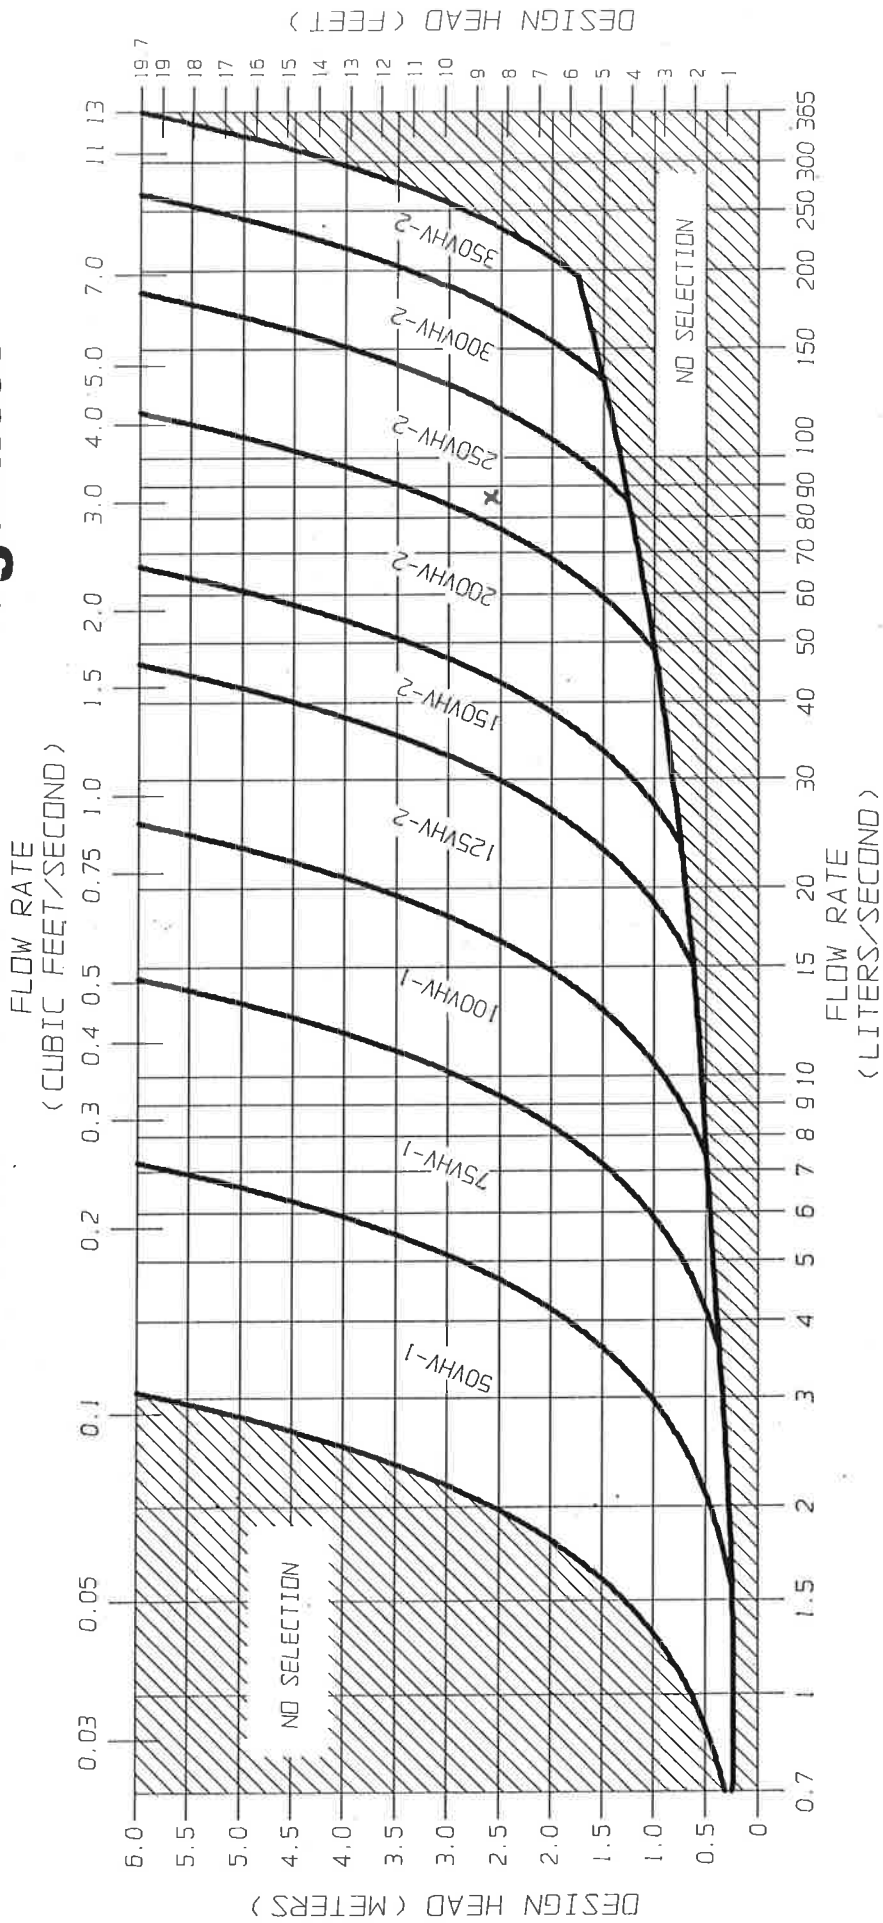


FIGURE 3 - VHV

JOHN MEUNIER

## Zhang, Jingwei

---

**From:** Ezzio, Sarah <sarah.ezzio@ottawa.ca>  
**Sent:** October 1, 2021 2:58 PM  
**To:** Rickson Outhet  
**Cc:** Mike Chenier; george.laframboise@iridian.ca; Modi, Urja; george.laframboise@iridian.ca; Cassidy, Tyler; McMahon, Patrick  
**Subject:** 2700 Swansea Pre-Application Consultation Follow Up Notes  
**Attachments:** 2700 Swansea Crescent Iridian Spectral Technologies Concept Site Plan, Plans, Elevations Sept 8, 2021.pdf; design\_brief\_submission requirements\_2700 Swansea.pdf

Good morning Rickson,

Please refer to the below notes regarding the Pre-Application Consultation Meeting held on September 23, 2021 for the site at 2700 Swansea Crescent.

### **Project:**

During the meeting, a proposal to construct two phased additions to the existing 2-storey light manufacturing facility at 2700 Swansea Crescent was discussed. The first phase is approximately 1,420 square metres large and will be constructed above the parking lot and as an addition to the south side of second storey of the existing facility. The second phase is approximately 780 square metres and will be constructed as an addition to the east side of the second storey to the existing building. The purposes of these additions are to provide more storage and office space and to expand current operations, and no change to the existing parking and site accesses is required.

Below are staff's preliminary comments:

### **Policies/Designations of the site**


- Official Plan – designated Urban Employment Area
- Zoning – General Industrial, Subzone 3, IG3
  - Within Area C for Minimum Parking Requirements (Schedule 1A)

### **Engineering**

Please note the following information regarding the engineering design submissions for the above noted site:

1. The Servicing Study Guidelines for Development Applications are available at the following address:  
<https://ottawa.ca/en/city-hall/planning-and-development/how-develop-property/development-application-review-process-2/guide-preparing-studies-and-plans>
2. Servicing and site works shall be in accordance with the following documents:
  - Ottawa Sewer Design Guidelines (October 2012) and all the Technical Bulletins including, Technical Bulletin PIEDTB-2016-01 and ISTB-2018-01
  - Ottawa Design Guidelines – Water Distribution (2010) and Technical Bulletins ISD-2010-2, ISDTB-2014-02 and ISTB-2018-02
  - Geotechnical Investigation and Reporting Guidelines for Development Applications in the City of Ottawa (2007)
  - City of Ottawa Slope Stability Guidelines for Development Applications (revised 2012)
  - City of Ottawa Environmental Noise Control Guidelines (January, 2016)
  - City of Ottawa Park and Pathway Development Manual (2012)
  - City of Ottawa Accessibility Design Standards (2012)

- Ottawa Standard Tender Documents (latest version)
  - Ontario Provincial Standards for Roads & Public Works (2013)
3. Record drawings and utility plans are also available for purchase from the City (Contact the City's Information Centre by email at [InformationCentre@ottawa.ca](mailto:InformationCentre@ottawa.ca) or by phone at (613) 580-2424 x 44455
  4. The Stormwater Management Criteria, for the subject site, is to be based on the following (as established in the Servicing Report prepared by GENIVAR, dated June 6, 2011):
    - The allowable release rate for this site, as determined through the 2011 SPC application from the Servicing Report prepared by GENIVAR, dated June 6, 2011, is 87.4 L/s.
    - Flows to the storm sewer in excess of the 5-year storm release rate, up to and including the 100-year storm event, must be detained on site
    - Ensure no overland flow for all storms up to and including the 100-year event.
    - The 2-yr storm or 5-yr storm event using the IDF information derived from the Meteorological Services of Canada rainfall data, taken from the MacDonald Cartier Airport, collected 1966 to 1997.
    - **A calculated time of concentration (Cannot be less than 10 minutes).**
    - Quality control requirements to be provided by Rideau Valley Conservation Authority (RVCA).
  5. Deep Services:

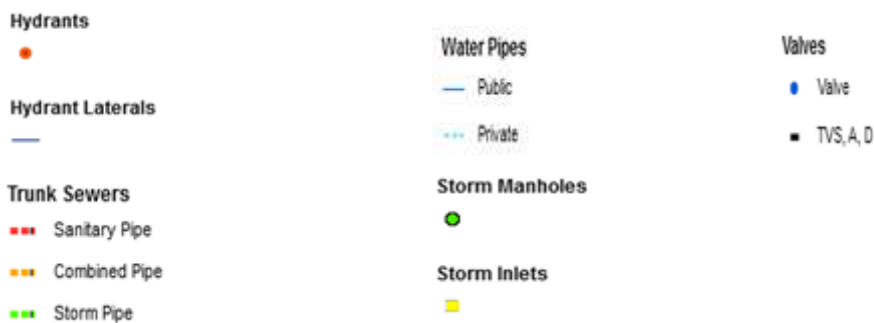

- i. *A plan view of the approximate services may be seen above. Services should ideally be grouped in a common trench to minimize the number of road cuts. The sizing of available future services is:*
  - a. Connections (Swansea Crescent):
    - i. Existing 900 mm dia. STM (Conc.)
    - ii. Existing 305 mm dia. Watermain (PVC)
    - iii. Existing 250 mm dia. SAN (PVC)
  - ii. *Provide existing servicing information and the recommended location for the proposed connections. Services should ideally be grouped in a common trench to minimize the number of road cuts.*
  - iii. *Provide information on the monitoring manhole requirements – should be located in an accessible location on private property near the property line (ie. Not in a parking area).*
  - iv. *Provide information on the type of connection permitted*  
Sewer connections to be made above the springline of the sewermain as per:
    - a. Std Dwg S11.1 for flexible main sewers – *connections made using approved tee or wye fittings.*
    - b. Std Dwg S11 (For rigid main sewers) – *lateral must be less than 50% the diameter of the sewermain,*
    - c. Std Dwg S11.2 (for rigid main sewers using bell end insert method) – *for larger diameter laterals where manufactured inserts are not available; lateral must be less than 50% the diameter of the sewermain,*
    - d. Connections to manholes permitted when the connection is to rigid main sewers where the lateral exceeds 50% the diameter of the sewermain. – Connect obvert to obvert with the outlet pipe unless pipes are a similar size.
    - e. *No submerged outlet connections.*
6. Civil consultant must request boundary conditions from the City's assigned Project Manager prior to first submission. Water Boundary condition requests must include the location of the service and the expected loads required by the proposed development. Please provide the following information:
  - i. Location of service(s)
  - ii. Type of development and the amount of fire flow required (as per FUS, 1999).
  - iii. Average daily demand: \_\_\_ l/s.
  - iv. Maximum daily demand: \_\_\_ l/s.
  - v. Maximum hourly daily demand: \_\_\_ l/s.
  - vi. Hydrant location and spacing to meet City's Water Design guidelines.
  - vii. Water supply redundancy will be required for more than 50 m<sup>3</sup>/day water demand.
7. Phase 1 ESAs and Phase 2 ESAs must conform to clause 4.8.4 of the Official Plan that requires that development applications conform to Ontario Regulation 153/04.
8. If applicable, MECP ECA Requirements –  
All development applications should be considered for an Environmental Compliance Approval (ECA) by the Ministry of the Environment, Conservation, and Parks (MECP);
  - a. Consultant determines if an approval for sewage works under Section 53 of OWRA is required. Consultant then determines what type of application is required and the City's project manager confirms. (If the consultant is not clear if an ECA is required, they will work with the City to determine what is required. If the consultant it is still unclear or there is a difference of opinion only then will the City PM approach the MECP.
  - b. The project will be either transfer of review (standard), transfer of review (additional), direct submission, or exempt as per O. Reg. 525/98.



- c. Standard Works ToR Draft ECA's are sent to the local MECP office ([moeccottawasewage@ontario.ca](mailto:moeccottawasewage@ontario.ca)) for information only
- d. Additional ToR draft ECAs require a project summary/design brief and require a response from the local MECP (10 business day window)
- e. Site plan Approval, or Draft Approval, is required before an application is sent to the MECP

### **Planning**

- The project triggers a Complex Site Plan Control application with public consultation, the size threshold between standard and complex subtypes are 1,860 square metres.
- A planning cover letter will be required rather than a planning rationale for this application.
- Warehouse and light industrial uses are permitted; Applicant must ensure that the uses on the site are represented correctly.
- Site is located along a bus route of the business park. All new development within the business park must include a sidewalk, along Swansea Crescent. City staff might ask the Applicant to upgrade the bus stop adjacent to the site depending on its condition and usage, further discussions will take place through the review of the site plan application.
- Incorporate pedestrian connections on site as well.
- Make property line on required submissions clear when coming in with an application.
- Ensure that the two accessible parking spaces meet the City's Accessibility Design Guidelines (must have ramp/depressed curb).
- Please show snow storage locations on the Site Plan.
- Retain trees where possible, we are pleased this can be done below the additions.
- We are pleased to see solar panels being incorporated into the development, and applaud your efforts towards sustainability!
- Consult with ward councilor, Diane Deans, and applicable community associations before application submission.

### **Urban Design**

- A Design Brief will be required. Please see the attached terms of reference for requirements.
- Please ensure that the ground floor underneath the proposed additions is well-lit (for both daytime and nighttime uses), and that Crime Prevention through Environmental Design (CPTED) is well considered.
- As the proposal will likely result in the removal of some landscaping and vegetation, it is strongly recommended that the proposal incorporate sustainable design features and/or green infrastructure to make up for this loss. Please also consider opportunities to improve landscaping elsewhere on site.
- It is strongly recommended that improvements be made to the existing bus stop adjacent to this property. This area can benefit from additional seating and signage.
- Please ensure that pedestrian circulation is considered, and that sidewalks and bicycle parking are provided.
- etc.
- Should you have any questions on the Urban Design comments, please contact Adrian van Wyk at [Adrian.vanwyk@ottawa.ca](mailto:Adrian.vanwyk@ottawa.ca)

### **Transportation**

- As shown in the screening form, no Transportation Impact Assessment is required for this application.
- No noise impact study is required.
- On site plan:
  - Show all details of the roads abutting the site up to and including the opposite curb; include such items as pavement markings, accesses, throat length and/or sidewalks.
  - Turning templates will be required for all accesses showing the largest vehicle to access the site; required for internal movements to the loading zone and at all accesses (entering and exiting and going in both directions).

- Show all curb radii measurements; ensure that all curb radii are reduced as much as possible.
- Show lane/aisle widths.
- AODA legislation applies to any portion of the site accessible to the general public.
- Ensure that sufficient bicycle parking (1/1000m<sup>2</sup>) is available on site, preferably in a covered and secure area.
- Correct the site plan, parking requirements of 0.8/100m<sup>2</sup> only apply for the first 5000m<sup>2</sup>. Any amount over 5000m<sup>2</sup> requires 0.4/100m<sup>2</sup>.
- Should you have any follow-up questions on the Transportation comments, please feel free to contact Patrick McMahon at [Patrick.McMahon@ottawa.ca](mailto:Patrick.McMahon@ottawa.ca)

### **Rideau Valley Conservation Authority**

- Please contact the RVCA for their water quality targets for the site.

### **Parks & Facilities Planning**

- Cash in lieu of parkland will be required at the rates set out in the City's Parkland Dedication by-law [here](#).

### **Environmental Planning**

- Please review the City's new Bird-Safe Design Guidelines: Bird-safe glass or integrated protection measures may be required through conditions of site plan approval for projects involving large expanses of glazing. However, it is important that the Bird-Safe Design Guidelines do not have a significant impact on the affordability or timelines of the respective project. Recognize that corporate standards or other design requirements may limit or preclude use of bird-safe glass or integrated protection measures in cases of small-scale commercial buildings (e.g. restaurant, retail pads).

### **Forestry & Trees**

1. a Tree Conservation Report (TCR) must be supplied for review along with the suite of other plans/reports required by the City
  - a. an approved TCR is a requirement of Site Plan approval.
  - b. The TCR may be combined with the LP provided all information is supplied.
2. As of January 1 2021, any removal of privately-owned trees 10cm or larger in diameter, or publicly (City) owned trees of any diameter requires a tree permit issued under the Tree Protection Bylaw (Bylaw 2020 – 340); the permit will be based on an approved TCR and made available at or near plan approval.
3. The Planning Forester from Planning and Growth Management as well as foresters from Forestry Services will review the submitted TCR
  - a. If tree removal is required, both municipal and privately-owned trees will be addressed in a single permit issued through the Planning Forester
  - b. Compensation may be required for city owned trees – if so, it will need to be paid prior to the release of the tree permit
4. the TCR must list all trees on site by species, diameter and health condition
5. please identify trees by ownership – private onsite, private on adjoining site, city owned, co-owned (trees on a property line)
6. the TCR must list all trees on adjacent sites if they have a critical root zone that extends onto the development site
7. If trees are to be removed, the TCR must clearly show where they are, and document the reason they cannot be retained
8. All retained trees must be shown and all retained trees within the area impacted by the development process must be protected as per City guidelines available at [Tree Protection Specification](#) or by searching Ottawa.ca
  - a. the location of tree protection fencing must be shown on a plan
  - b. show the critical root zone of the retained trees
  - c. if excavation will occur within the critical root zone, please show the limits of excavation
9. the City encourages the retention of healthy trees; if possible, please seek opportunities for retention of trees that will contribute to the design/function of the site.

10. For more information on the process or help with tree retention options, contact Mark Richardson [mark.richardson@ottawa.ca](mailto:mark.richardson@ottawa.ca) or on [City of Ottawa](#)

**LP tree planting requirements:**

- For additional information on the following please contact [tracy.smith@Ottawa.ca](mailto:tracy.smith@Ottawa.ca)
- Minimum Setbacks
  - Maintain 1.5m from sidewalk or MUP/cycle track.
  - Maintain 2.5m from curb
  - Coniferous species require a minimum 4.5m setback from curb, sidewalk or MUP/cycle track/pathway.
  - Maintain 7.5m between large growing trees, and 4m between small growing trees. Park or open space planting should consider 10m spacing.
  - Adhere to Ottawa Hydro’s planting guidelines (species and setbacks) when planting around overhead primary conductors.
- Tree specifications
  - Minimum stock size: 50mm tree caliper for deciduous, 200cm height for coniferous.
  - Maximize the use of large deciduous species wherever possible to maximize future canopy coverage
  - Tree planting on city property shall be in accordance with the City of Ottawa’s Tree Planting Specification; and include watering and warranty as described in the specification (can be provided by Forestry Services).
  - Plant native trees whenever possible
  - No root barriers, dead-man anchor systems, or planters are permitted.
  - No tree stakes unless necessary (and only 1 on the prevailing winds side of the tree)
- Hard surface planting
  - Curb style planter is highly recommended
  - No grates are to be used and if guards are required, City of Ottawa standard (which can be provided) shall be used.
  - Trees are to be planted at grade

• Soil Volume

- Please ensure adequate soil volumes are met:

Tree Type/Size	Single Tree Soil Volume (m3)	Multiple Tree Soil Volume (m3/tree)
Ornamental	15	9
Columnar	15	9
Small	20	12
Medium	25	15
Large	30	18
Conifer	25	15

Please note that these soil volumes are not applicable in cases with Sensitive Marine Clay.

- Sensitive Marine Clay
  - Please follow the City’s 2017 Tree Planting in Sensitive Marine Clay guidelines

This proposal is subject to **Site Plan Control application** (Complex, Staff Approval). The required Plans & Study List is below. Please refer to the City’s Site Plan Control By-Law to determine whether a site plan control application is required.

Required Plans and Studies:

1. Site Servicing Plan
2. Grading Plan
3. Erosion and Sediment Control Plan
4. Storm Drainage / Ponding Plan
5. Stormwater Management and Site Servicing Report
6. Geotechnical Investigation Report
7. Site Plan
8. Planning Cover Letter
9. Landscape Plan

10. TCR (Landscape Plan and TCR can be combined)
11. Design Brief (Terms of Reference attached)
12. Plan of Survey
13. Site Lighting Plan and letter (will be required as condition of approval, not a submission requirement)
14. Building Elevations
15. Phase I ESA

Please refer to the links to “[Guide to preparing studies and plans](#)” and [fees](#) for general information. Additional information is available related to [building permits](#), [development charges](#), and the [Accessibility Design Standards](#). Be aware that other fees and permits may be required, outside of the development review process. You may obtain background drawings by contacting [informationcentre@ottawa.ca](mailto:informationcentre@ottawa.ca).

These pre-con comments are valid for one year. If you submit a development application(s) after this time, you may be required to meet for another pre-consultation meeting and/or the submission requirements may change. You are as well encouraged to contact us for a follow-up meeting if the plan/concept will be further refined.

We are happy to discuss further or answer any follow-up questions.

Have a great weekend, and all the best,

**Sarah Ezzio**

Planner I | Urbaniste I

Development Review (South Services) | Examen des projets d'aménagement (services sud)

Planning, Infrastructure and Economic Development | Services de planification, d'infrastructure et de développement économique

City of Ottawa | Ville d'Ottawa

 613.580.2400 ext./poste 23493

[ottawa.ca/planning](http://ottawa.ca/planning) / [ottawa.ca/urbanisme](http://ottawa.ca/urbanisme)

This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.



**TOPOGRAPHICAL PLAN OF SURVEY OF  
PART OF LOT 3  
CONCESSION 5 (Rideau Front)  
Geographic Township of Gloucester  
CITY OF OTTAWA**  
Surveyed by Annis, O'Sullivan, Vollebek Ltd.

PLAN REVISED OCTOBER 24, 2012  
TO ILLUSTRATE NEW TOPOGRAPHIC DATA  
TO ILLUSTRATE NEW ELEVATION AND VESTIBULAR  
PROPERTY LINES.

PLAN REVISED MARCH 14, 2022  
TO ILLUSTRATE NEW TOPOGRAPHIC DATA  
TO ILLUSTRATE NEW ELEVATION AND VESTIBULAR  
PROPERTY LINES.

Scale 1 : 150  
METRIC  
DIMENSIONS SHOWN ON THIS PLAN ARE IN METRES AND  
CAN BE CONVERTED TO FEET BY DIVIDING BY 0.3048

**Surveyor's Certificate**  
I, **Michael J. O'Sullivan**,  
1. Act as Surveyor and the Land Titles Act and the regulations  
thereunder thereon;  
2. This survey was completed on the 24th day of March, 2022.  
Michael J. O'Sullivan  
Ontario Land Surveyor

**Notes & Legend**

- Legend**
- Survey Monument Planted
  - Survey Monument Found
  - Survey Monument
  - Short Standard Iron Bar
  - Witness
  - Witness
  - Annis, O'Sullivan, Vollebek Ltd.
  - Maintenance Hole (Storm Sewer)
  - Maintenance Hole (Sanitary)
  - Maintenance Hole (Other)
  - Fire Hydrant
  - Gas Meter
  - Decorative Tree
  - Coniferous Tree
  - Location of Elevations
  - Top of Curb Elevations
  - Top of Road Elevations
  - Decorative Curb
  - Island
  - Water Valve
  - Centre-line
  - New Elevations Observed October 24, 2012

**ELEVATION NOTES**

- Elevations shown are referred to specific datum, derived from City of Ottawa
- It is the responsibility of the user of this information to verify that the job benchmark
- is the same as the benchmark used in the original survey and to provide a description
- of the benchmark used in the original survey.

**UTILITY NOTES**

- The utility locations shown on this drawing are based on the information provided by the utility owners and are not to be taken as a guarantee of the location or depth of the utility.
- The utility locations shown on this drawing are not to be taken as a guarantee of the location or depth of the utility.
- A field location of underground part by the permit utility authority is mandatory unless any work involving existing power, utility, plumbing, sewerage etc.





## James Johnston

---

**From:** James Johnston  
**Sent:** Friday, June 03, 2011 10:44 AM  
**To:** 'Mottalib, Abdul'  
**Cc:** 'Taracha, Jacek'; Buchanan, Richard  
**Subject:** FW: 2700 Swansea Crescent - SWM Quality Treatment

Abdul,

As per the message below, I have contacted Richard Buchanan regarding 2700 Swansea Crescent. Richard has confirmed today by telephone that quality treatment for this address is provided in a communal pond off-site, and that no no-site SWM quality treatment is required.



**James (Jim) Johnston, P.Eng., LEED® AP**  
GENIVAR | *Constructive people*  
15 Fitzgerald Road, Nepean, Ontario K2H 9G1  
T 613.829-2800 x349 | F 613.829-8299 | C 613.298-5960  
[www.genivar.com](http://www.genivar.com)

---

**From:** Taracha, Jacek [<mailto:Jacek.Taracha@ottawa.ca>]  
**Sent:** Tuesday, May 31, 2011 9:22 AM  
**To:** James Johnston  
**Cc:** Buchanan, Richard  
**Subject:** RE: 2700 Swansea Crescent

Hi Jim,

Thanks for your message, I had a chance to talk to Richard Buchanan and I understand that there was an exchange between RVCA and him in respect to the quality treatment for the subject site. If you have not received the reply either from Abdul or Richard I would suggest to contact Richard directly at extension 27801.

Jacek

---

**From:** Jocelyn Chandler [<mailto:jocelyn.chandler@rvca.ca>]  
**Sent:** Monday, May 09, 2011 4:29 PM  
**To:** James Johnston  
**Subject:** RE: 2700 Swansea Crescent

Hello James,

According to my October 2000 'McEwen Creek Water Quality and Erosion Control Study, Functional Design report (which is stamped DRAFT) prepared by CG & S, the property is identified as future/proposed industrial and outlets to the Eastern Community Trunk Sewer. The City of Ottawa is currently in the design process of preparing to construct a SWM pond just east of Hawthorn Road which will receive flows from the Eastern Community Trunk Sewer. I have no idea at this point what the function of this pond is...but I BELIEVE it was intended to provide quality controls for the receiver (McEwen Creek and ultimately Green's Creek). If this is the case, the RVCA will not require quality controls on the site. Please check with infrastructure at the City of Ottawa with respect to the intended pond function and the timing of its construction. Jocelyn.

Jocelyn Chandler M.Pl. MCIP, RPP.  
Planner, RVCA  
613.692.3571 x1137  
[jocelyn.chandler@rvca.ca](mailto:jocelyn.chandler@rvca.ca)

WWW.IVCA.CA

mail: Box 599 3889 Rideau Valley Dr., Manotick, ON K4M 1A5

courier: 3889 Rideau Valley Dr., Nepean, ON K2C 3H1

*This message may contain information that is privileged or confidential and is intended to be for the use of the individual(s) or entity named above. This material may contain confidential or personal information which may be subject to the provisions of the Municipal Freedom of Information & Protection of Privacy Act. If you are not the intended recipient of this e-mail, any use, review, revision, retransmission, distribution, dissemination, copying, printing or otherwise use of, or taking of any action in reliance upon this e-mail, is strictly prohibited. If you have received this e-mail in error, please contact the sender and delete the original and any copy of the e-mail and any printout thereof, immediately. Your cooperation is appreciated.*

---

# APPENDIX

## B

- FIRE UNDERWRITERS SURVEY – FIRE FLOW CALCULATION FOR BUILDING
- WATER DEMAND CALCULATION
- UPDATED BOUNDARY CONDITION





**Water Demand Calculation Sheet**

**Project:** Light Facility Addition  
**Location:** 2700 Swansea Crescent , Ottawa, ON

**Date:** 3/5/2023  
**Design:** JZ



Proposed Buildings	Residential				Non-Residential			Average Daily			Maximum Daily			Maximum Hourly			Fire Demand (l/s)		
	Units			Beds	Industrial	Institutional	Commercial	Demand (l/s)			Demand (l/s)			Demand (l/s)					
	SF	APT	ST		(ha)	(ha)	(ha)	Res.	Non-Res.	Total	Res.	Non-Res.	Total	Res.	Non-Res.	Total			
Light Facility Existing and Addition					0.8867													133	
										0.36	0.36		0.54	0.54			0.97	0.97	133
										0.47	0.47		0.71	0.71			1.27	1.27	133
											0.83			1.24				2.24	

**Population Densities**

Single Family	3.4 person/unit
Semi-Detached	2.7 person/unit
Duplex	2.3 person/unit
Townhome (Row)	2.7 person/unit
Bachelor Apartment	1.4 person/unit
1 Bedroom Apartment	1.4 person/unit
2 Bedroom Apartment	2.1 person/unit
3 Bedroom Apartment	3.1 person/unit
4 Bedroom Apartment	4.1 person/unit
Avg. Apartment	1.8 person/unit

**Average Daily Demand**

Residential	280 l/cap/day
Industrial	35000 l/ha/day
Institutional	28000 l/ha/day
Commercial	28000 l/ha/day

**Maximum Daily Demand**

Residential	2.5 x avg. day
Industrial	1.5 x avg. day
Institutional	1.5 x avg. day
Commercial	1.5 x avg. day

**Maximum Hourly Demand**

Residential	2.2 x max. day
Industrial	1.8 x max. day
Institutional	1.8 x max. day
Commercial	1.8 x max. day



Date: 3-May-23

**Light Facility Addition**  
**Fire Flow Requirements Based on Fire Underwriters Survey (FUS) 2020**

1. An estimate of the Fire Flow required for a given fire area may be estimated by:  $F = 220 C \sqrt{A}$

F = required fire flow in litres per minute  
 C = coefficient related to the type of construction  
     1.5 for wood construction (structure essentially combustible)  
     1.0 for ordinary construction (brick or other masonry walls, combustible floor and interior)  
     0.8 for noncombustible construction (unprotected metal structural components, masonry or metal walls)  
     0.6 for fire-resistive construction (fully protected frame, floors, roof)  
 A = total floor area in square metres (including all storeys, but excluding basements at least 50% below grade)

A = 5498 m<sup>2</sup>  
 C = 0.8  
 F = 13050.1 L/min  
 rounded off to 14,000 L/min (min value of 2000 L/min)

2. The value obtained in 1. may be reduced by as much as 25% for occupancies having a low contents fire hazard.

Non-combustible	-25%
Limited Combustible	-15%
Combustible	0%
Free Burning	15%
Rapid Burning	25%

Reduction due to low occupancy hazard -15% x 14,000 = 11,900 L/min

3. The value obtained in 2. may be reduced by as much as 50% for buildings equipped with automatic sprinkler protection.

Adequate Sprinkler confirms to NFPA13	-30%
Water supply common for sprinklers & fire hoses	-10%
Fully supervised system	-10%
No Automatic Sprinkler System	0%

Reduction due to Sprinkler System -50% x 11,900 = 5,950 L/min

4. The value obtained in 2. is increased for structures exposed within 45 metres by the fire area under consideration.

<u>Separation</u>	<u>Charge</u>
0 to 3 m	25%
3.1 to 10 m	20%
10.1 to 20 m	15%
20.1 to 30 m	10%
30.1 to 45 m	5%

Side 1	11	15% north side
Side 2	36	5% east side
Side 3	50	0% south side
Side 4	50	0% west side

20% (Total shall not exceed 75%)

Increase due to separation 20% x 11,900 = 2,380 L/min

5. The flow requirement is the value obtained in 2., minus the reduction in 3., plus the addition in 4.

The fire flow requirement is 8,000 L/min (Rounded to nearest 1000 L/min)  
 or **133 L/sec**  
 or 2,113 gpm (us)  
 or 1,760 gpm (uk)

## Zhang, Jingwei

---

**From:** Cassidy, Tyler <tyler.cassidy@ottawa.ca>  
**Sent:** Monday, June 13, 2022 2:52 PM  
**To:** Zhang, Jingwei  
**Subject:** RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request  
**Attachments:** 2700 Swansea Crescent June 2022.pdf

**Follow Up Flag:** Follow up  
**Flag Status:** Flagged

Hi Jingwei,

Please find below the boundary conditions for the proposed addition at 2700 Swansea Crescent. Please note that two service connections, separated by an isolation valve, is required to avoid the creation of a vulnerable service area.

The following are boundary conditions, HGL, for hydraulic analysis at 2700 Swansea Crescent (zone 2W2C) assumed to be connected to the 305 mm on Swansea Crescent (see attached PDF for location).

Minimum HGL: 123.8 m

Maximum HGL: 130.7 m

Max Day + Fire Flow (133.3 L/s): 123.7 m

These are for current conditions and are based on computer model simulation.

*Disclaimer: The boundary condition information is based on current operation of the city water distribution system. The computer model simulation is based on the best information available at the time. The operation of the water distribution system can change on a regular basis, resulting in a variation in boundary conditions. The physical properties of watermains deteriorate over time, as such must be assumed in the absence of actual field test data. The variation in physical watermain properties can therefore alter the results of the computer model simulation.*

Thank you,

**Tyler Cassidy, EIT**

Infrastructure Project Manager,  
Planning, Real Estate and Economic Development Department / Direction générale de la planification, des biens immobiliers et du développement économique - South Branch  
City of Ottawa | Ville d'Ottawa  
110 Laurier Avenue West Ottawa, ON | 110, avenue. Laurier Ouest. Ottawa (Ontario) K1P 1J1  
613.580.2424 ext./poste 12977, [Tyler.Cassidy@ottawa.ca](mailto:Tyler.Cassidy@ottawa.ca)

---

**From:** Zhang, Jingwei <Jingwei.Zhang@wsp.com>  
**Sent:** June 02, 2022 3:48 PM  
**To:** Cassidy, Tyler <tyler.cassidy@ottawa.ca>  
**Subject:** RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

**CAUTION: This email originated from an External Sender. Please do not click links or open attachments unless you recognize the source.**

**ATTENTION : Ce courriel provient d'un expéditeur externe. Ne cliquez sur aucun lien et n'ouvrez pas de pièce jointe, excepté si vous connaissez l'expéditeur.**

Hi Tyler,

It is 133 L/s (8000 L/min). I also updated the table below. Thank you for asking.

Regards,



**Jingwei Zhang, M.Eng., P.Eng.**  
Senior Project Engineer  
Municipal Engineering - Ottawa

T+ 1 613-690-1245

WSP Canada Inc.  
2611 Queensview Drive, Suite 300  
Ottawa, Ontario,  
K2B 8K2 Canada

[wsp.com](http://wsp.com)

---

**From:** Cassidy, Tyler <[tyler.cassidy@ottawa.ca](mailto:tyler.cassidy@ottawa.ca)>  
**Sent:** Thursday, June 2, 2022 3:40 PM  
**To:** Zhang, Jingwei <[Jingwei.Zhang@wsp.com](mailto:Jingwei.Zhang@wsp.com)>  
**Subject:** RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

Hi Jingwei,

Can you confirm that the last column (Fire Demand (L/min)) in the table below should read **133 L/sec** and not 1333 L/min?

Thank you,

**Tyler Cassidy, EIT**

Infrastructure Project Manager,  
Planning, Real Estate and Economic Development Department / Direction générale de la planification, des biens immobiliers et du développement économique - South Branch  
City of Ottawa | Ville d'Ottawa  
110 Laurier Avenue West Ottawa, ON | 110, avenue. Laurier Ouest. Ottawa (Ontario) K1P 1J1  
613.580.2424 ext./poste 12977, [Tyler.Cassidy@ottawa.ca](mailto:Tyler.Cassidy@ottawa.ca)

---

**From:** Zhang, Jingwei <[Jingwei.Zhang@wsp.com](mailto:Jingwei.Zhang@wsp.com)>  
**Sent:** June 02, 2022 11:00 AM  
**To:** Cassidy, Tyler <[tyler.cassidy@ottawa.ca](mailto:tyler.cassidy@ottawa.ca)>  
**Subject:** RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

**CAUTION: This email originated from an External Sender. Please do not click links or open attachments unless you recognize the source.**

**ATTENTION : Ce courriel provient d'un expéditeur externe. Ne cliquez sur aucun lien et n'ouvrez pas de pièce jointe, excepté si vous connaissez l'expéditeur.**

Good morning Tyler,

Could you please provide the boundary conditions with the updated following water demands?

Proposed Building	Average Daily Demand (l/s)	Maximum Daily Demand (l/s)	Maximum Hourly Demand (l/s)	Fire Demand (L/s)
Elementary School	0.83	1.24	2.24	133

Thanks,



**Jingwei Zhang, M.Eng., P.Eng.**

Senior Project Engineer  
Municipal Engineering - Ottawa

T+ 1 613-690-1245

WSP Canada Inc.  
2611 Queensview Drive, Suite 300  
Ottawa, Ontario,  
K2B 8K2 Canada

[wsp.com](http://wsp.com)

---

**From:** Cassidy, Tyler <[tyler.cassidy@ottawa.ca](mailto:tyler.cassidy@ottawa.ca)>

**Sent:** Tuesday, March 29, 2022 2:40 PM

**To:** Zhang, Jingwei <[Jingwei.Zhang@wsp.com](mailto:Jingwei.Zhang@wsp.com)>

**Cc:** Jafferjee, Ishaque <[Ishaque.Jafferjee@wsp.com](mailto:Ishaque.Jafferjee@wsp.com)>; Ezzio, Sarah <[sarah.ezzio@ottawa.ca](mailto:sarah.ezzio@ottawa.ca)>

**Subject:** RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

Hi Jingwei,

Please find below the boundary conditions for the proposed development at 2700 Swansea Crescent:

The following are boundary conditions, HGL, for hydraulic analysis at 2700 Swansea Crescent (zone 2W2C) assumed to be connected to the 305 mm on Swansea Crescent (see attached PDF for location).

Minimum HGL: 123.8 m

Maximum HGL: 130.1 m

Max Day + Fire Flow (133.3 L/s): 123.7 m

These are for current conditions and are based on computer model simulation.

*Disclaimer: The boundary condition information is based on current operation of the city water distribution system. The computer model simulation is based on the best information available at the time. The operation of the water distribution system can change on a regular basis, resulting in a variation in boundary conditions. The physical properties of watermains deteriorate over time, as such must be assumed in the absence of actual field test data. The variation in physical watermain properties can therefore alter the results of the computer model simulation.*

Thank you,

**Tyler Cassidy, EIT**

Infrastructure Project Manager,  
Planning, Real Estate and Economic Development Department / Direction générale de la planification, des biens immobiliers et du développement économique - South Branch  
City of Ottawa | Ville d'Ottawa  
110 Laurier Avenue West Ottawa, ON | 110, avenue. Laurier Ouest. Ottawa (Ontario) K1P 1J1  
613.580.2424 ext./poste 12977, [Tyler.Cassidy@ottawa.ca](mailto:Tyler.Cassidy@ottawa.ca)

---

**From:** Zhang, Jingwei <[Jingwei.Zhang@wsp.com](mailto:Jingwei.Zhang@wsp.com)>

**Sent:** March 23, 2022 1:00 PM

**To:** Cassidy, Tyler <[tyler.cassidy@ottawa.ca](mailto:tyler.cassidy@ottawa.ca)>

Cc: Jafferjee, Ishaque <[ishaque.jafferjee@wsp.com](mailto:ishaque.jafferjee@wsp.com)>; Ezzio, Sarah <[sarah.ezzio@ottawa.ca](mailto:sarah.ezzio@ottawa.ca)>  
Subject: RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

**CAUTION: This email originated from an External Sender. Please do not click links or open attachments unless you recognize the source.**

**ATTENTION : Ce courriel provient d'un expéditeur externe. Ne cliquez sur aucun lien et n'ouvrez pas de pièce jointe, excepté si vous connaissez l'expéditeur.**

Hi Tyler,

Thank you for your email. As requested, I attached the fire flow calculation spreadsheet for this site.

Please let me know if you need any further information.

Regards,



**Jingwei Zhang, M.Eng., P.Eng.**

Senior Project Engineer  
Municipal Engineering - Ottawa

T+ 1 613-690-1245

WSP Canada Inc.  
2611 Queensview Drive, Suite 300  
Ottawa, Ontario,  
K2B 8K2 Canada

[wsp.com](http://wsp.com)

---

**From:** Cassidy, Tyler <[tyler.cassidy@ottawa.ca](mailto:tyler.cassidy@ottawa.ca)>

**Sent:** March 23, 2022 12:48 PM

**To:** Zhang, Jingwei <[Jingwei.Zhang@wsp.com](mailto:Jingwei.Zhang@wsp.com)>

**Cc:** Jafferjee, Ishaque <[Ishaque.Jafferjee@wsp.com](mailto:Ishaque.Jafferjee@wsp.com)>; Ezzio, Sarah <[sarah.ezzio@ottawa.ca](mailto:sarah.ezzio@ottawa.ca)>

**Subject:** RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

Hi Jingwei,

I'll send the boundary condition request to our Water Resources group. Before I do that, do you mind submitting your calculations for the FUS fire flow?

Once I have the fire flow calculations, it usually takes the Water Resource group up to 10 business days to fulfill the request. I will forward the results as soon as they are available to me.

Please let me know if you have any additional questions.

Thank you,

**Tyler Cassidy, EIT**

Infrastructure Project Manager,

Planning, Real Estate and Economic Development Department / Direction générale de la planification, des biens immobiliers et du développement économique - South Branch

City of Ottawa | Ville d'Ottawa

110 Laurier Avenue West Ottawa, ON | 110, avenue. Laurier Ouest. Ottawa (Ontario) K1P 1J1

613.580.2424 ext./poste 12977, [Tyler.Cassidy@ottawa.ca](mailto:Tyler.Cassidy@ottawa.ca)

---

**From:** Ezzio, Sarah <[sarah.ezzio@ottawa.ca](mailto:sarah.ezzio@ottawa.ca)>

**Sent:** March 23, 2022 11:08 AM

To: Zhang, Jingwei <[Jingwei.Zhang@wsp.com](mailto:Jingwei.Zhang@wsp.com)>  
Cc: Jafferjee, Ishaque <[ishaque.jafferjee@wsp.com](mailto:ishaque.jafferjee@wsp.com)>; Cassidy, Tyler <[tyler.cassidy@ottawa.ca](mailto:tyler.cassidy@ottawa.ca)>  
Subject: RE: 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

Hi Jingwei,

Thank you for your email. I am copying Tyler Cassidy, who worked on the pre-consult with me, to this email here. He will help you with your boundary conditions request.

Best,

**Sarah Ezzio**

Planner II, Development Review (West Services)  
Urbaniste II, Examen des projets d'aménagement (services ouest)

City of Ottawa | Ville d'Ottawa  
☎ 613.580.2424 ext. | poste 23493  
[ottawa.ca/planning](http://ottawa.ca/planning) / [ottawa.ca/urbanisme](http://ottawa.ca/urbanisme)

---

**From:** Zhang, Jingwei <[Jingwei.Zhang@wsp.com](mailto:Jingwei.Zhang@wsp.com)>  
**Sent:** March 23, 2022 10:17 AM  
**To:** Ezzio, Sarah <[sarah.ezzio@ottawa.ca](mailto:sarah.ezzio@ottawa.ca)>  
**Cc:** Jafferjee, Ishaque <[ishaque.jafferjee@wsp.com](mailto:ishaque.jafferjee@wsp.com)>  
**Subject:** 221-02216-00 2700 Swansea Crescent - Water Boundary Condition Request

**CAUTION: This email originated from an External Sender. Please do not click links or open attachments unless you recognize the source.**

**ATTENTION : Ce courriel provient d'un expéditeur externe. Ne cliquez sur aucun lien et n'ouvrez pas de pièce jointe, excepté si vous connaissez l'expéditeur.**

Hi Sarah,

We are currently working on grading design and servicing design for a site development project located at 2700 Swansea Crescent, Ottawa. The project is to construct an addition to the south side of second story of the existing 2-storey light manufacturing facility. I am sending this email to request the water boundary condition for this site. I do not know who is the City project manager for this project at this moment. Could you please forward this email to the right person?

The domestic water demands for this site were calculated using the City of Ottawa's Water Design Guidelines and fire demand were calculated using FUS 1999.

The results are summarized as follow:

Proposed Building	Average Daily Demand (l/s)	Maximum Daily Demand (l/s)	Maximum Hourly Demand (l/s)	Fire Demand (l/min)
Elementary School	0.36	0.54	0.97	8000

This site is currently serviced by an existing 150mm water service pipe at the location as shown on the screenshot below. We need the water boundary condition at this existing water service connection.





'  
'  
This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.

'  
'  
This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.

'  
'  
This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.

'  
'  
This e-mail originates from the City of Ottawa e-mail system. Any distribution, use or copying of this e-mail or the information it contains by other than the intended recipient(s) is unauthorized. Thank you.

Le présent courriel a été expédié par le système de courriels de la Ville d'Ottawa. Toute distribution, utilisation ou reproduction du courriel ou des renseignements qui s'y trouvent par une personne autre que son destinataire prévu est interdite. Je vous remercie de votre collaboration.





# APPENDIX

## C

- STORM SEWER DESIGN SHEET
- STORM DRAINAGE AREA PLAN C04
- STORMWATER MANAGEMENT CALCULATIONS
- DWG C01 - GRADING PLAN
- DWG C02 - SERVICING PLAN




**EXISTING ON-SITE STORM SEWER CAPACITY CHECKING CALCULATION SPREADSHEET**

Job Name:		Light Facility Addition 2700 Swansea Crescent																									
Job Number:		221-02216-00																									
Date:		3-May-2023																									
																				Design Storm: City of Ottawa 2 year Design Storm							
																				Calculation Method: Rational Method							
U/S MH	D/S MH	Catchment ID	C=0.25 Catchment Area (m <sup>2</sup> )	Grass C=0.25	C=0.5 Catchment Area (m <sup>2</sup> )	Gravel C=0.5	C=0.9 Catchment Area (m <sup>2</sup> )	Pavement C=0.9	C x Area (m <sup>2</sup> )	U/S Total C x Area (m <sup>2</sup> )	Time of Concentration (min)	Total Time (min)	Rainfall Intensity (mm/hr)	Peak Flow (m <sup>3</sup> /s)	Pipe Diameter (mm)	Pipe Length (m)	Pipe Slope (%)	Manning's "n"	Capacity (m <sup>3</sup> /s)	Velocity (m/s)	Travel Time (min)	Invert U/S MH (m)	Invert D/S MH (m)	Manhole Drop (m)	Ground U/S MH (m)	Bury Depth U/S MH (m)	Q/Q full Ratio %
EX CB1	EX CB2	S-7	784	0.25	86	0.5	46	0.90	280	280	10.00	20.00	52.03	0.0041	200	13.7	0.80%	0.013	0.0294	0.94	0.24	80.560	80.450	0.05	82.37	1.81	13.8%
EX CB2	EX CBMH1	S-6A	4	0.25	0	0.5	129	0.90	117	398	10.00	20.24	51.64	0.0057	250	33.0	1.79%	0.013	0.0795	1.62	0.34	80.400	79.810	0.06	82.60	2.20	7.2%
EX CBMH1	Main 1	S-6B	7	0.25	0	0.5	177	0.90	161	559	10.00	20.58	51.11	0.0079	300	29.0	1.20%	0.013	0.1060	1.50	0.32	79.750	79.402	0.00	82.08	2.33	7.5%
EX CB 3	EX CB4	S-4	710	0.25	0	0.5	0	0.90	178	178	10.00	10.00	76.81	0.0038	300	4.4	1.14%	0.013	0.1031	1.46	0.05	79.670	79.620	0.06	80.82	1.15	3.7%
EX CB 4	Main 1	S-6C & S-6D	0	0.25	5	0.5	105	0.90	97	275	10.05	10.05	76.61	0.0058	300	7.2	2.20%	0.013	0.1434	2.03	0.06	79.560	79.402	0.00	81.27	1.71	4.1%
Main 1	New conn 1		0	0.25	0	0.5	0	0.90	0	833	0.00	0.00	167.22	0.0387	300	6.3	1.20%	0.013	0.1060	1.50	0.07	79.553	79.477	0.00	81.47	1.92	36.5%
RD Outlet 1	New conn 1	S-5A	0	0.25	0	0.5	1000	0.90	900	900	10.00	10.00	76.81	0.0192	200	6.4	1.10%	0.013	0.0344	1.10	0.10	79.610	79.540	0.00	81.27	1.66	55.8%
New conn 1	New conn 2		0	0.25	0	0.5	0	0.90	0	1733	20.24	20.24	51.64	0.0249	300	6.3	1.20%	0.013	0.1060	1.50	0.07	79.477	79.402	0.00	81.47	1.99	23.5%
RD Outlet 2	New conn 2	S-5B	0	0.25	0	0.5	500	0.90	450	450	10.00	10.00	76.81	0.0096	200	14.2	1.06%	0.013	0.0338	1.07	0.22	79.610	79.460	0.00	81.27	1.66	28.4%
New conn 2	Main 2		0	0.25	0	0.5	0	0.90	0	2183	20.91	20.91	50.62	0.0307	300	7.3	1.20%	0.013	0.1060	1.50	0.08	79.402	79.314	0.00	81.47	2.07	29.0%
Building	Main 2	S-8	0	0.25	0	0.5	3174	0.90	2,857	2857	10.00	10.00	76.81	0.0609	250	13.6	4.16%	0.013	0.1213	2.47	0.09	79.930	79.364	0.05	82.30	2.37	50.2%
Main 2	Main3		0	0.25	0	0.5	0	0.90	0	5040	20.99	20.99	50.50	0.0707	300	8.1	1.20%	0.013	0.1060	1.50	0.09	79.314	79.217	0.00	81.50	2.19	66.7%
EX CB7	Main3	S-2	0	0.25	0	0.5	300	0.90	270	270	10.00	10.00	76.81	0.0058	200	18.0	1.00%	0.013	0.0328	1.04	0.29	79.510	79.330	0.11	81.37	1.86	17.6%
Main3	EX CBMH2		0	0.25	0	0.5	0	0.90	0	5310	21.08	21.08	50.36	0.0743	300	12.2	1.20%	0.013	0.1060	1.50	0.00	79.217	79.070	0.06	81.62	2.40	70.1%
EX CB5	Main4	S-9 & S-3A	95	0.25	0	0.5	493	0.90	467	467	10.00	10.00	76.81	0.0100	200	47.3	2.01%	0.013	0.0465	1.48	0.53	80.560	79.611	0.00	82.58	2.02	21.5%
EX CB9	Main4	S-3C	0	0.25	0	0.5	318.0	0.9	286	286	10.00	10.00	76.81	0.0061	200	8.0	1.00%	0.013	0.0328	1.04	0.13	79.691	79.611	0.00	81.80	2.11	18.6%
Main4	EX CBMH2		0	0.25	0	0.5	0	0.90	0	754	10.53	10.53	74.82	0.0157	200	8.5	2.01%	0.013	0.0465	1.48	0.10	79.611	79.440	0.09	82.00	2.39	33.7%
EX CB6	EX CBMH2	S-1	382	0.25	0	0.5	0	0.90	96	96	10.00	10.00	76.81	0.0020	200	11.0	1.45%	0.013	0.0396	1.26	0.15	79.350	79.190	0.18	80.97	1.62	5.2%
EX CBMH2	Main5	S-3B	198	0.25	0	0.5	309	0.90	328	6486	21.08	21.08	50.36	0.0907	375	28.3	0.81%	0.013	0.1580	1.43	0.00	79.010	78.780	0.00	81.72	2.71	57.4%
Main5	EX STMH3		0	0.25	0	0.5	0	0.90	0	6582	21.08	21.08	50.36	0.0921	375	2.5	0.81%	0.013	0.1580	1.43	0.03	78.780	78.760	0.01	81.50	2.72	58.3%
Drain	EX STMH3		0	0.25	0	0.5	0	0.90	0	96	10.00	10.00	76.81	0.0020	150	38.0	4.26%	0.013	0.0314	1.78	0.36	80.75	79.13	0.38	82.20	1.45	6.5%
EX STMH3	City Main		0	0.25	0	0.5	0	0.90	0	6677	21.11	21.11	50.32	0.0933	375	11.6	0.60%	0.013	0.1358	1.23	0.16	78.75	78.680	0.00	81.76	3.01	68.7%




**LEGEND**

- 83.24x EXISTING GRADE ELEVATION
- CBCD EXISTING CATCHBASIN
- MH-ST EXISTING MANHOLE
- WV-88 EXISTING VALVE AND BOX
- FH EXISTING FIRE HYDRANT
- ST EXISTING STORM SEWER
- S EXISTING SANITARY SEWER
- w EXISTING WATERMAIN
- 82.82 PROPOSED GRADE ELEVATION
- 82.03C PROPOSED TOP AND BOTTOM OF CURB
- TG82.82 PROPOSED TOP OF GRATE
- 1.8% PROPOSED GRADE SLOPE
- PROPOSED CATCHBASIN
- PROPOSED MANHOLE
- PROPOSED CATCHBASIN MANHOLE
- STM PROPOSED STORM SEWER
- SAN PROPOSED SANITARY SEWER
- w PROPOSED WATER SERVICE
- PROPOSED FIRE HYDRANT
- SF LIGHT DUTY SILT FENCE
- FILTER CLOTH
- PROPOSED ROOF DRAIN
- PROJECT BOUNDARY
- OVERLAND FLOW
- RD ROOF DRAIN

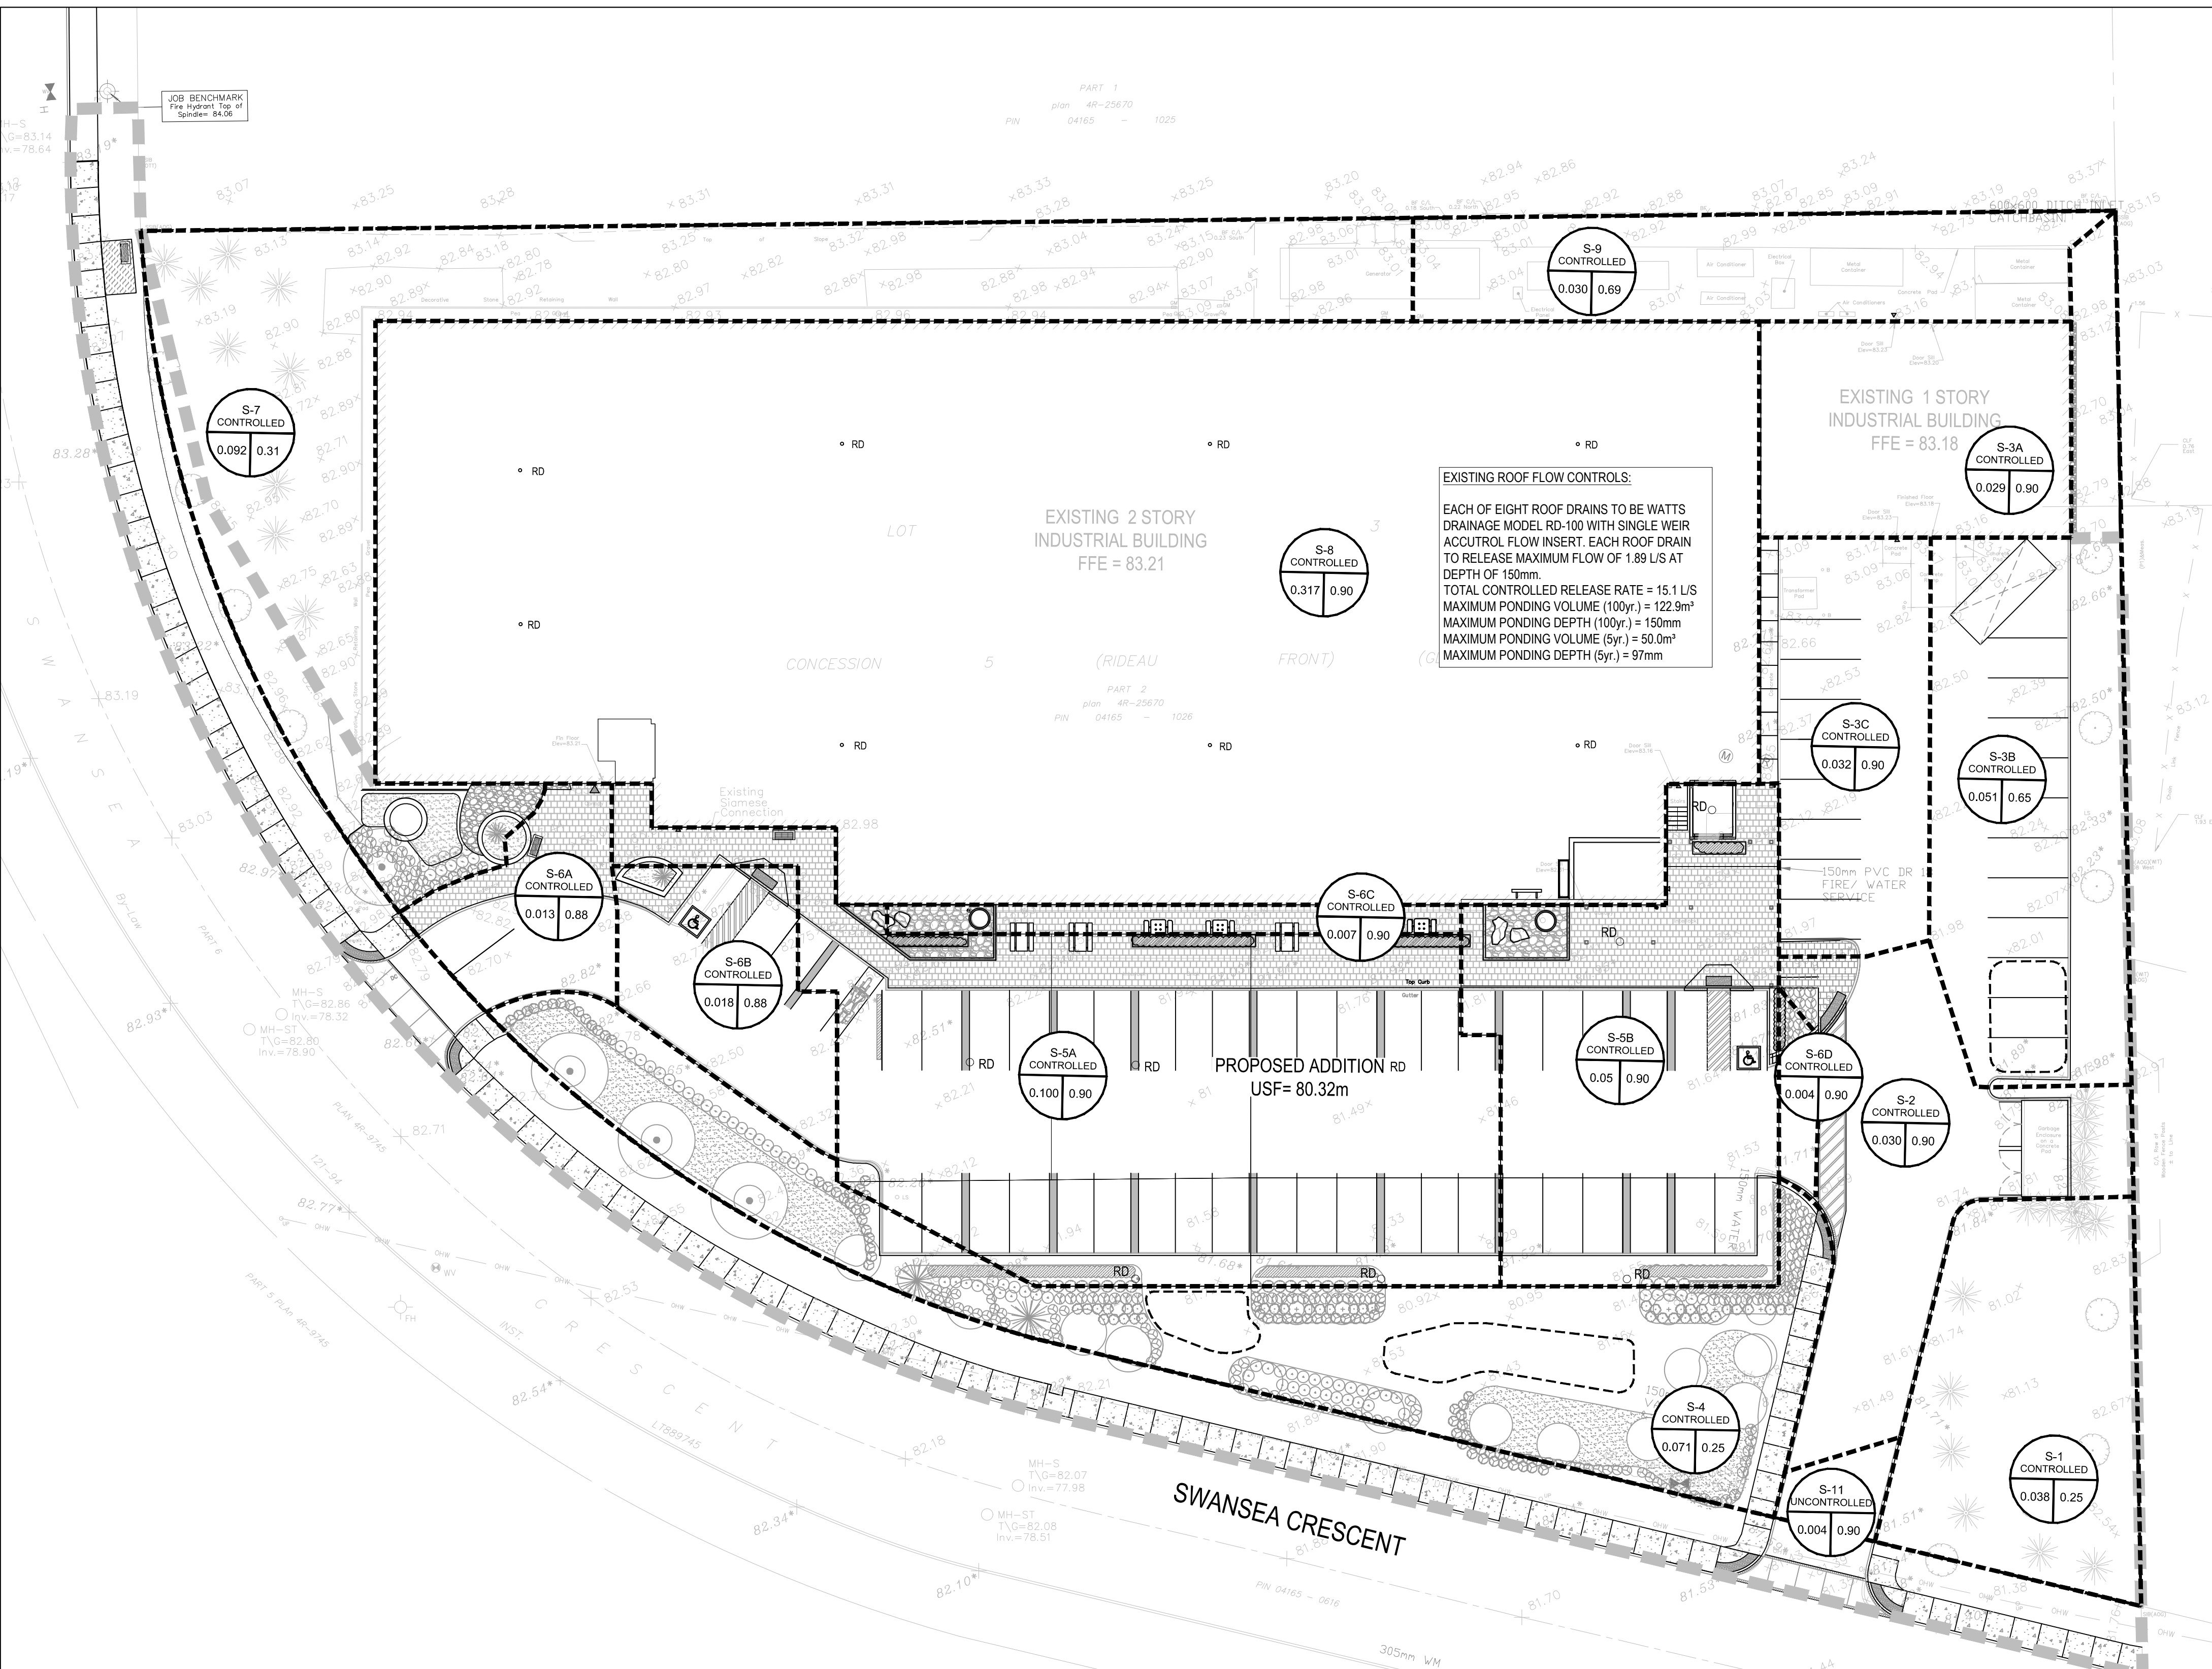

**1 DRAINAGE PLAN**  
C004 SCALE= 1:250

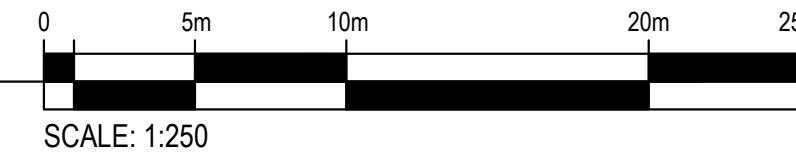

2	REISSUED FOR SPA	2023-05-03
1	ISSUED FOR SPA	2022-10-13

No.	Revision	Date
2	REISSUED FOR SPA	2023-05-03
1	ISSUED FOR SPA	2022-10-13

Project Title: IRIDIAN SPECTRAL TECHNOLOGIES  
Project: 2700 SWANSEA OTTAWA, ONTARIO.

Professional Engineer Seal: Y. TENG, 100226367, 2023-05-03, PROVINCE OF ONTARIO

Professional Engineer Seal: J. W. ZHANG, 100155766, 2023-05-03, PROVINCE OF ONTARIO

Project Title: IRIDIAN SPECTRAL TECHNOLOGIES  
Project: 2700 SWANSEA OTTAWA, ONTARIO.

**DRAINAGE PLAN**

Designed by:	J.Z.	Conçu par
Date:	MAY 3, 2023	
Drawn:	B.N.	Dessiné
Date:	MAY 3, 2023	
Approved:	J.Z.	Approuvé
Date:	MAY 3, 2023	
Project no.:	221-02216-00	No. du projet

Scale: AS NOTED  
Drawing no.: C004  
No. du dessin



Light Facility Addition  
 2700 Swansea Crescent , Ottawa, ON  
 Project: 221-02216-00  
 Date: May 3, 2023

**Storage Required for Light Facility Addition (Proposed Condition)**

Maximum Allowable Release Rate to the Existing Storm System on Swansea Crescent:  
 87.40 l/s

Post Dev run-off Coefficient "C"

Area	Surface	Ha	2 & 5 Year Event		100 Year Event	
			"C"	C <sub>avg</sub>	"C" x 1.25	C <sub>100 avg</sub>
0.889	Roof	0.488	0.90	0.73	0.99	0.81
	Pavement	0.156	0.90			
	Gravel	0.016	0.50			
	Grass	0.229	0.25			

**Runoff Coefficient Equation**

$$C = (A_{hard} \times 0.9 + A_{soft} \times 0.2) / A_{tot}$$

$$*C = (A_{hard} \times 1.0 + A_{soft} \times 0.25) / A_{tot}$$

\*Runoff coefficients increased by 25% up to a maximum value of 0.99 for the 100-Year event

\*Areas are approximate based on Architectural site plan and Storm Drainage Area Plan

**QUANTITY STORAGE REQUIREMENTS - 5 Year**

0.889 = Area(ha)  
 0.73 = C  
 87.4 l/s = max allowable release rate

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
5 YEAR	10	104.19	187.89	87.40	100.49	60.30	213.87
	20	70.25	126.69	87.40	39.29	47.14	213.87
	30	53.93	97.25	87.40	9.85	17.73	213.87
	40	44.18	79.68	87.40	-7.72	-18.53	213.87
	50	37.65	67.90	87.40	-19.50	-58.50	213.87
	60	32.94	59.41	87.40	-27.99	-100.77	213.87

**QUANTITY STORAGE REQUIREMENTS - 100 Year**

0.889 = Area(ha)  
 0.81 = C  
 87.4 l/s = max allowable release rate

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
100 YEAR	10	178.56	357.29	87.40	269.89	161.93	213.87
	20	119.95	240.01	87.40	152.61	183.14	213.87
	30	91.87	183.82	87.40	96.42	173.56	213.87
	40	75.15	150.36	87.40	62.96	151.11	213.87
	50	63.95	127.97	87.40	40.57	121.71	213.87
	60	55.89	111.84	87.40	24.44	87.99	213.87
	70	49.79	99.63	87.40	12.23	51.35	213.87

**Equations:**

**Flow Equation**

$$Q = 2.78 \times C \times I \times A$$

Where:

- C is the runoff coefficient
- I is the intensity of rainfall, City of Ottawa IDF
- A is the total drainage area

Light Facility Addition  
 2700 Swansea Crescent , Ottawa, ON  
 Project: 19M-00179-00  
 Date: May 3, 2023



**Uncontrolled Surface Flow to Onsite CB**

**Post Dev run-off Coefficient "C"**

Area	Surface	Ha	2 & 5 Year Event		100 Year Event	
			"C"	C <sub>avg</sub>	"C"+25%	*C <sub>avg</sub>
Total 0.004	Asphalt	0.004	0.90	0.90	0.99	0.99
	Roof	0.000	0.90		0.99	
	Grass	0.000	0.25		0.31	

**Runoff Coefficient Equation**

$$C = (A_{hard} \times 0.9 + A_{soft} \times 0.2) / A_{tot}$$

$$*C = (A_{hard} \times 1.0 + A_{soft} \times 0.25) / A_{tot}$$

\*Runoff coefficients increased by 25% up to a maximum value of 0.99 for the 100-Year event

Post Dev Free Flow  
 5 Year Event

Pre Dev.	C	Intensity	Area
5 Year	0.90	104.19	0.004
2.78CIA= 1.04			
1.00 L/S			

\*\*Use a 10 minute time of concentration for 5 year

100 Year Event

Pre Dev.	C	Intensity	Area
100 Year	0.99	178.56	0.004
2.78CIA= 1.97			
2.00 L/S			

\*\*Use a 10 minute time of concentration for 100 year

**Controlled Flow to Swansea Crescent Storm System**

87.10 Total  
 2.00 Uncontrolled through Onsite LDS  
 85.10 Controlled Onsite LDS

Light Facility Addition  
 2700 Swansea Crescent , Ottawa, ON  
 Project: 221-02216-00  
 Date: May 3, 2023



**Storage Required for Light Facility Addition Building Roof (Existing)**

Maximum Allowable Release Rate to the Existing Storm System on Swansea Crescent:  
 15.12 l/s

Post Dev run-off Coefficient "C"

Area	Surface	Ha	2 & 5 Year Event		100 Year Event	
			"C"	C <sub>avg</sub>	"C" x 1.25	C <sub>100 avg</sub>
Total	Roof	0.317	0.90	0.90	0.99	0.99
0.317	Pavement		0.90		0.99	
	Gravel	0.000	0.50		0.63	
	Grass		0.25		0.31	

\*Areas are approximate based on Architectural site plan and Storm Drainage Area Plan

**Runoff Coefficient Equation**

$$C = (A_{hard} \times 0.9 + A_{soft} \times 0.2) / A_{tot}$$

$$*C = (A_{hard} \times 1.0 + A_{soft} \times 0.25) / A_{tot}$$

\*Runoff coefficients increased by 25% up to a maximum value of 0.99 for the 100-Year event

**QUANTITY STORAGE REQUIREMENTS - 5 Year**

0.317 = Area(ha)  
 0.90 = C  
 15.1 l/s = max allowable release rate

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
5 YEAR	10	104.19	82.74	15.12	67.62	40.57	158.70
	20	70.25	55.79	15.12	40.67	48.80	158.70
	30	53.93	42.83	15.12	27.71	49.87	158.70
	40	44.18	35.09	15.12	19.97	47.92	158.70
	50	37.65	29.90	15.12	14.78	44.35	158.70
	60	32.94	26.16	15.12	11.04	39.75	158.70

**QUANTITY STORAGE REQUIREMENTS - 100 Year**

0.317 = Area(ha)  
 0.99 = \*C  
 15.1 l/s = max allowable release rate

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
100 YEAR	10	178.56	155.98	15.12	140.86	84.52	158.70
	20	119.95	104.78	15.12	89.66	107.59	158.70
	30	91.87	80.25	15.12	65.13	117.24	158.70
	40	75.15	65.64	15.12	50.52	121.26	158.70
	50	63.95	55.87	15.12	40.75	122.24	158.70
	60	55.89	48.83	15.12	33.71	121.34	158.70
	70	49.79	43.49	15.12	28.37	119.17	158.70

**Equations:**

**Flow Equation**

$$Q = 2.78 \times C \times I \times A$$

Where:

- C is the runoff coefficient
- I is the intensity of rainfall, City of Ottawa IDF
- A is the total drainage area

Light Facility Addition  
 2700 Swansea Crescent , Ottawa, ON  
 Project: 221-02216-00  
 Date: May 3, 2023



**Storage Required for Light Facility Addition (Existing Condition)**

Maximum Allowable Release Rate to the Existing Storm System on Swansea Crescent:  
 87.40 l/s

Post Dev run-off Coefficient "C"

Area	Surface	Ha	2 & 5 Year Event		100 Year Event	
			"C"	C <sub>avg</sub>	"C" x 1.25	C <sub>100 avg</sub>
0.887	Roof	0.346	0.90	0.72	0.99	0.80
	Pavement	0.287	0.90		0.99	
	Gravel	0.023	0.50		0.63	
	Grass	0.230	0.25		0.31	

\*Areas are approximate based on Architectural site plan and Storm Drainage Area Plan

**QUANTITY STORAGE REQUIREMENTS - 5 Year**

0.887 = Area(ha)  
 0.72 = C  
 87.4 l/s = max allowable release rate

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
5 YEAR	10	104.19	184.90	87.40	97.50	58.50	0.00
	20	70.25	124.67	87.40	37.27	44.72	0.00
	30	53.93	95.70	87.40	8.30	14.94	0.00
	40	44.18	78.41	87.40	-8.99	-21.57	0.00
	50	37.65	66.82	87.40	-20.58	-61.74	0.00
	60	32.94	58.46	87.40	-28.94	-104.18	0.00

**QUANTITY STORAGE REQUIREMENTS - 100 Year**

0.887 = Area(ha)  
 0.80 = C  
 87.4 l/s = max allowable release rate

Return Period	Time (min)	Intensity (mm/hr)	Flow Q (L/s)	Controlled Runoff (L/s)	Net Runoff To Be Stored (L/s)	Storage Req'd m <sup>3</sup>	Storage Avail m <sup>3</sup>
100 YEAR	10	178.56	352.08	87.40	264.68	158.81	0.00
	20	119.95	236.52	87.40	149.12	178.94	0.00
	30	91.87	181.15	87.40	93.75	168.74	0.00
	40	75.15	148.17	87.40	60.77	145.85	0.00
	50	63.95	126.10	87.40	38.70	116.11	0.00
	60	55.89	110.21	87.40	22.81	82.13	0.00
	70	49.79	98.18	87.40	10.78	45.26	0.00

**Equations:**

**Flow Equation**

$Q = 2.78 \times C \times I \times A$

Where:

C is the runoff coefficient  
 I is the intensity of rainfall, City of Ottawa IDF  
 A is the total drainage area

**Runoff Coefficient Equation**

$C = (A_{hard} \times 0.9 + A_{soft} \times 0.2) / A_{tot}$

$*C = (A_{hard} \times 1.0 + A_{soft} \times 0.25) / A_{tot}$

\*Runoff coefficients increased by 25% up to a maximum value of 0.99 for the 100-Year event

**Orifice Sizing**

CBMH101

Event	Flow (L/s)	Head (m)	ORIFICE		
			AREA(m <sup>2</sup> )	SQUARE (1-side mm)	CIRC (mmØ)
5 Year	241.08	3.42	0.049	222	250
100 Year	248.04	3.61	0.049	222	250

**Orifice Control Sizing**

$Q = 0.6 \times A \times (2gh)^{1/2}$


Where:

Q is the release rate in m<sup>3</sup>/s  
 A is the orifice area in m<sup>2</sup>  
 g is the acceleration due to gravity, 9.81m/s<sup>2</sup>  
 h is the head of water above the orifice centre in m  
 d is the diameter of the orifice in m

Orifice Invert = 100.360 m  
 Ponding Elevation = 104.100 m  
 Top of CB Elevation = 103.900 m

Note: Orifice is located on the downstream invert of CBMH5



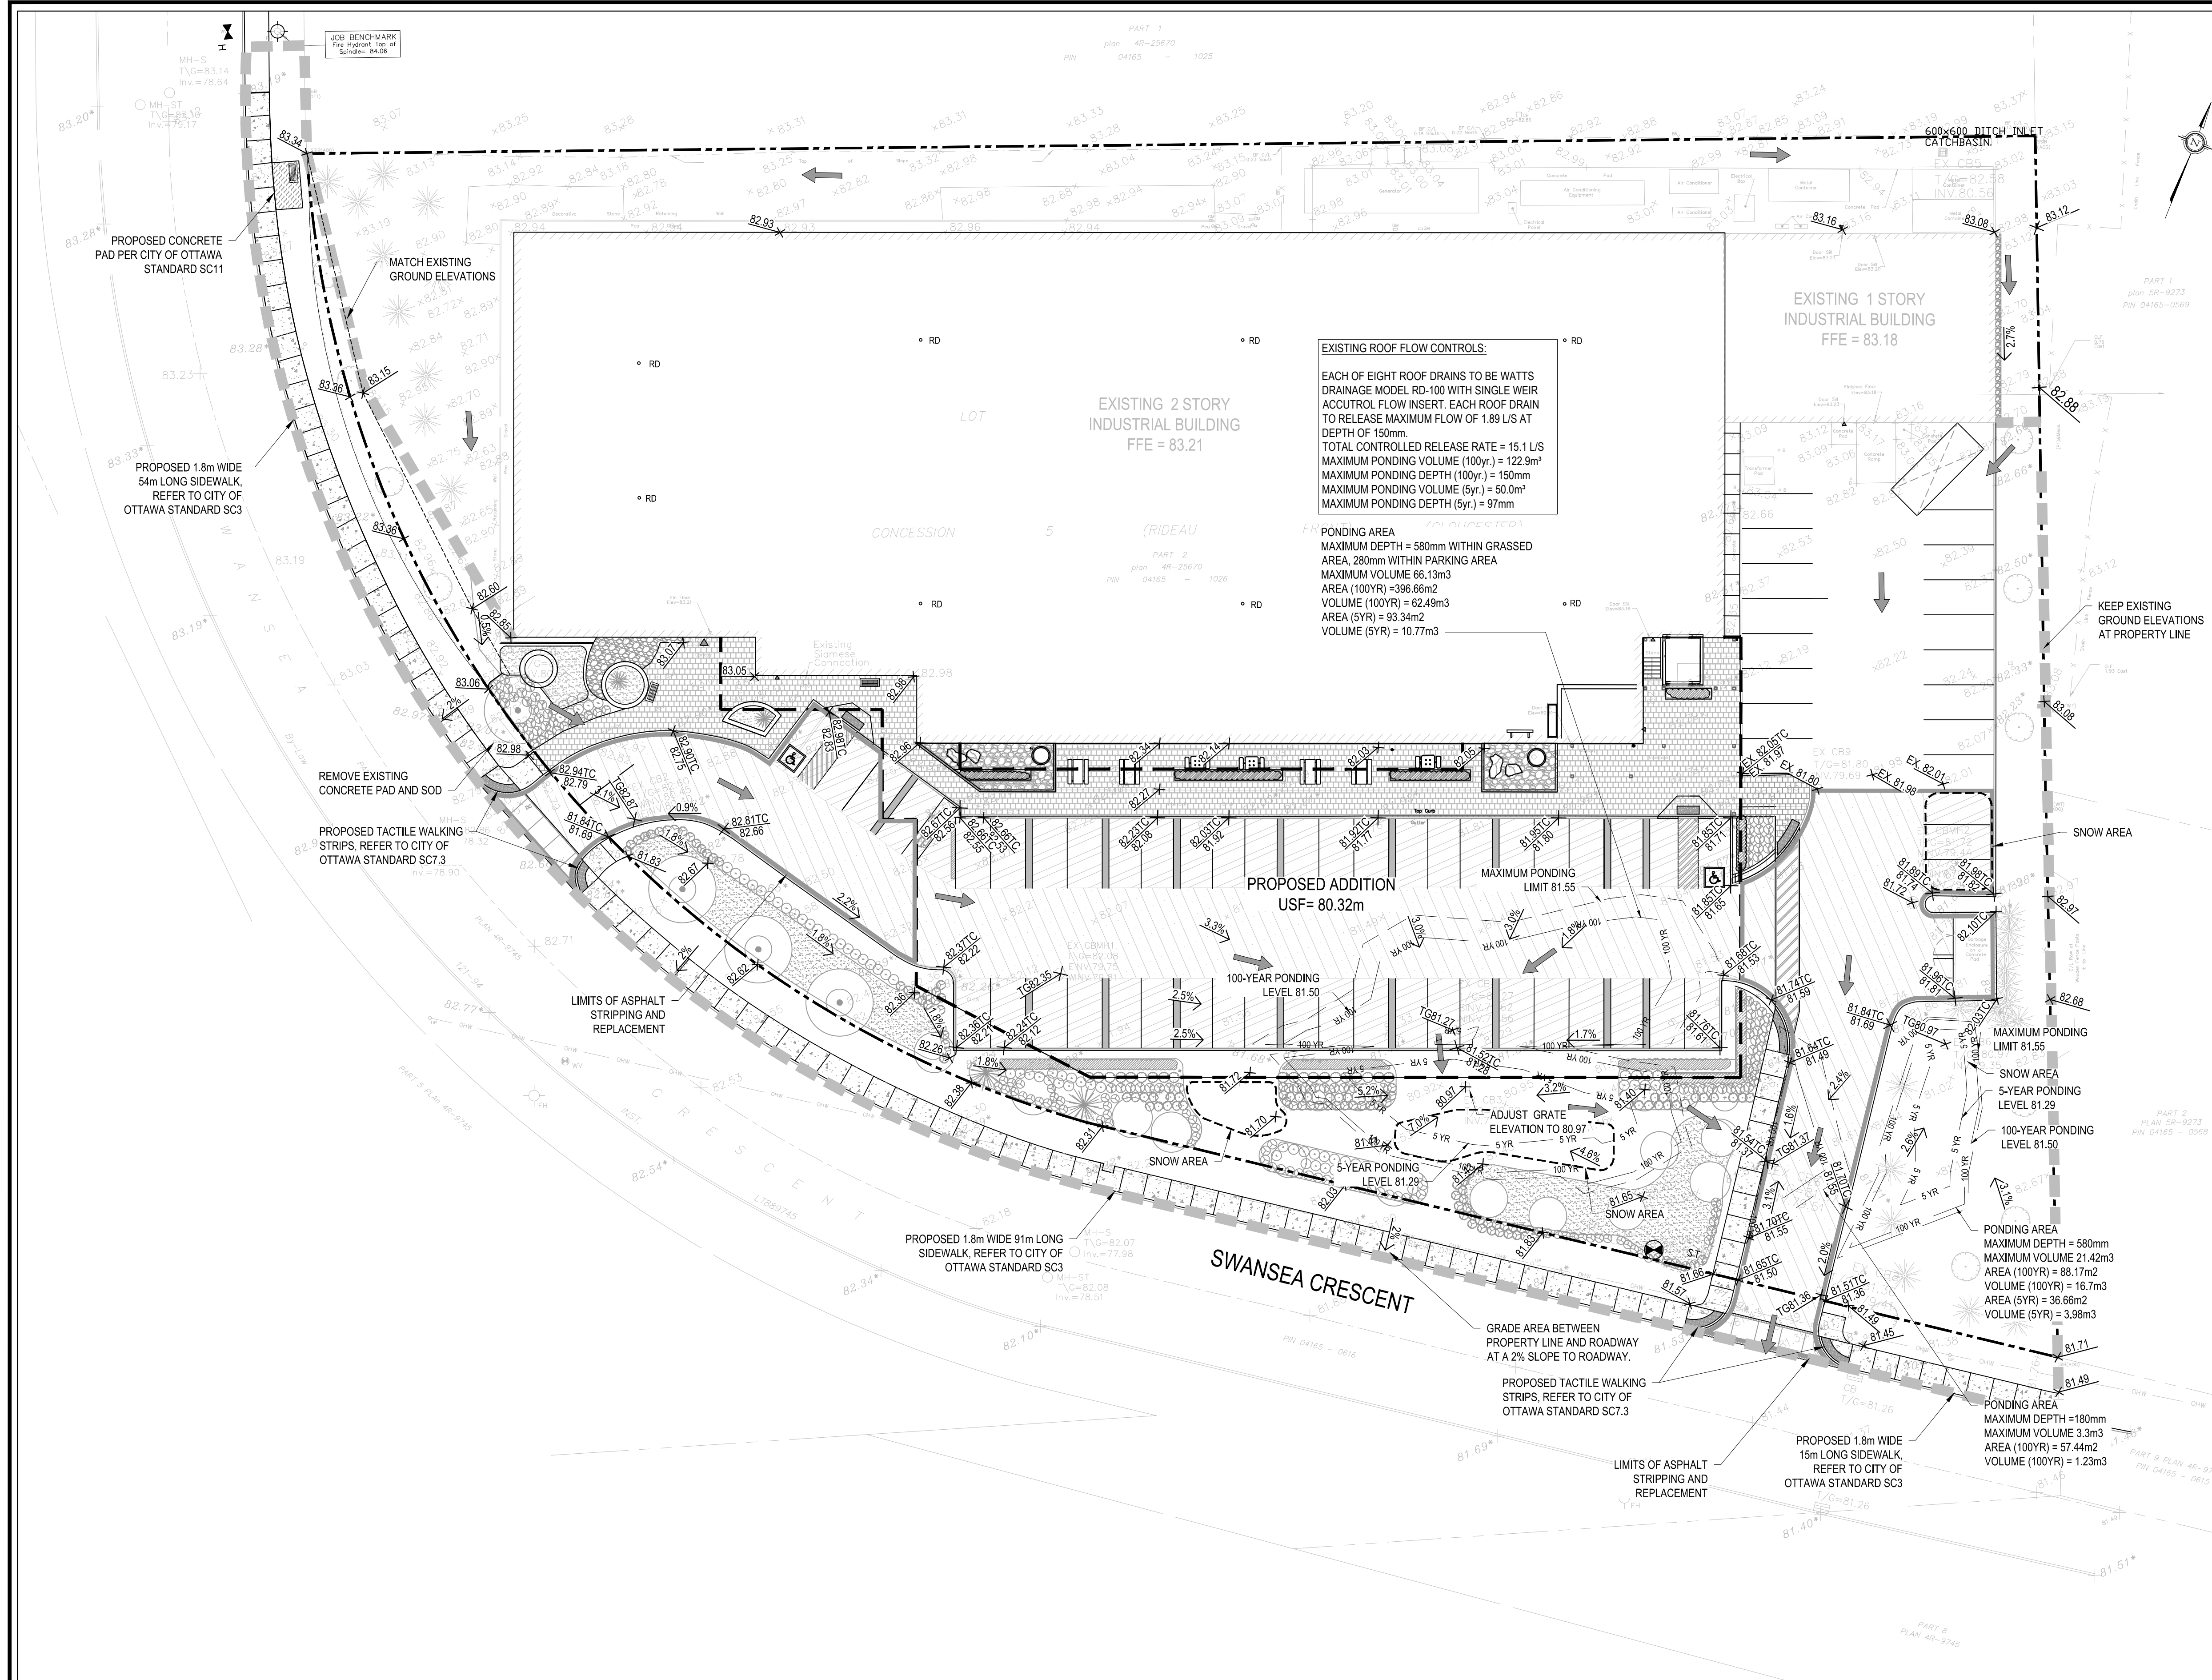

**EXISTING ROOF FLOW CONTROLS:**  
 EACH OF EIGHT ROOF DRAINS TO BE WATTS DRAINAGE MODEL RD-100 WITH SINGLE WEIR ACCUTROL FLOW INSERT. EACH ROOF DRAIN TO RELEASE MAXIMUM FLOW OF 1.89 L/S AT DEPTH OF 150mm.  
 TOTAL CONTROLLED RELEASE RATE = 15.1 L/S  
 MAXIMUM PONDING VOLUME (100yr.) = 122.9m<sup>3</sup>  
 MAXIMUM PONDING DEPTH (100yr.) = 150mm  
 MAXIMUM PONDING VOLUME (5yr.) = 50.0m<sup>3</sup>  
 MAXIMUM PONDING DEPTH (5yr.) = 97mm

**PONDING AREA**  
 MAXIMUM DEPTH = 580mm WITHIN GRASSED AREA, 280mm WITHIN PARKING AREA  
 MAXIMUM VOLUME 66.13m<sup>3</sup>  
 AREA (100YR) = 396.66m<sup>2</sup>  
 VOLUME (100YR) = 62.49m<sup>3</sup>  
 AREA (5YR) = 93.34m<sup>2</sup>  
 VOLUME (5YR) = 10.77m<sup>3</sup>

**NOTES: GENERAL**

- DRAWINGS TO BE READ IN CONJUNCTION WITH ARCHITECTURAL AND LANDSCAPE DRAWINGS
- ALL SERVICES, MATERIALS, CONSTRUCTION METHODS AND INSTALLATIONS SHALL BE IN ACCORDANCE WITH THE LATEST STANDARDS AND REGULATIONS OF THE CITY OF OTTAWA STANDARD SPECIFICATIONS AND DRAWINGS, ONTARIO PROVINCIAL SPECIFICATION STANDARD SPECIFICATION (OPSS) AND ONTARIO PROVINCIAL STANDARD DRAWINGS (OPSD), UNLESS OTHERWISE SPECIFIED, TO THE SATISFACTION OF THE CITY AND THE CONSULTANT
- THE POSITION OF EXISTING POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND ABOVEGROUND UTILITIES, STRUCTURES AND APPURTENANCES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWING, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL SATISFY HIMSELF OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES, AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM DURING THE COURSE OF CONSTRUCTION. ANY RELOCATION OF EXISTING UTILITIES REQUIRED BY THE DEVELOPMENT OF SUBJECT LANDS IS TO BE UNDERTAKEN AT CONTRACTOR'S EXPENSE.
- THE CONTRACTOR MUST NOTIFY ALL EXISTING UTILITY COMPANY OFFICIALS FIVE (5) BUSINESS DAYS PRIOR TO START OF CONSTRUCTION AND HAVE ALL EXISTING UTILITIES AND SERVICES LOCATED IN THE FIELD OR EXPOSED PRIOR TO THE START OF CONSTRUCTION, INCLUDING BUT NOT LIMITED TO POWER, COMMUNICATION AND GAS LINES.
- ALL TRENCHING AND EXCAVATIONS TO BE IN ACCORDANCE WITH THE LATEST REVISIONS OF THE OCCUPATIONAL HEALTH AND SAFETY ACT AND REGULATIONS FOR CONSTRUCTION PROJECTS AND AS PER THE RECOMMENDATIONS INCLUDED IN THE GEOTECHNICAL REPORT.
- REFER TO ARCHITECTS PLANS FOR BUILDING DIMENSIONS, LAYOUT AND REMOVALS. REFER TO LANDSCAPE PLAN FOR LANDSCAPED DETAILS AND OTHER RELEVANT INFORMATION. ALL INFORMATION SHALL BE CONFIRMED PRIOR TO COMMENCEMENT OF CONSTRUCTION.
- TOPOGRAPHIC SURVEY COMPLETED AND PROVIDED BY ANNIS, O'SULLIVAN, VOLLEBEKK LTD. DATED ON JULY 16, 2021. CONTRACTOR TO VERIFY IN THE FIELD PRIOR TO CONSTRUCTION OF ANY WORK AND NOTIFY THE ENGINEER OF ANY DISCREPANCIES.
- ALL ELEVATIONS ARE GEODETIC AND UTILIZE METRIC UNITS. VERIFY THAT JOB BENCHMARKS HAVE NOT BEEN ALTERED OR DISTURBED.
- ALL GROUND SURFACES SHALL BE EVENLY GRADED WITHOUT PONDING AREAS AND WITHOUT LOW POINTS EXCEPT WHERE APPROVED SWALE OR CATCH BASIN OUTLETS ARE PROVIDED.
- ALL EDGES OF DISTURBED PAVEMENT SHALL BE SAW CUT TO FORM A NEAT AND STRAIGHT LINE PRIOR TO PLACING NEW PAVEMENT. PAVEMENT REINSTATEMENT SHALL BE WITH STEP JOINTS OF 500MM WIDTH MINIMUM.
- ALL DISTURBED AREAS OUTSIDE PROPOSED GRADING LIMITS TO BE RESTORED TO ORIGINAL ELEVATIONS AND CONDITIONS UNLESS OTHERWISE SPECIFIED. ALL RESTORATION SHALL BE COMPLETED WITH THE GEOTECHNICAL REQUIREMENTS FOR BACKFILL AND COMPACTION.
- ABUTTING PROPERTY GRADES TO BE MATCHED UNLESS OTHERWISE SHOWN.
- CONTRACTOR SHALL OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE MUNICIPAL AUTHORITIES PRIOR TO COMMENCING CONSTRUCTION, INCLUDING WATER PERMIT AND ROAD CUT PERMIT.
- MINIMIZE DISTURBANCE TO EXISTING VEGETATION DURING THE EXECUTION OF ALL WORKS.
- REMOVE FROM SITE ALL EXCESS EXCAVATED MATERIAL UNLESS OTHERWISE DIRECTED FROM THE ENGINEER. EXCAVATE AND REMOVE ALL ORGANIC MATERIAL AND DEBRIS LOCATED WITHIN THE PROPOSED BUILDING, PARKING AND ROADWAY LOCATIONS.
- AT PROPOSED UTILITY CONNECTION POINTS AND CROSSINGS (I.E. STORM SEWER, SANITARY SEWER, WATER, ETC.) THE CONTRACTOR SHALL DETERMINE THE PRECISE LOCATION AND DEPTH OF EXISTING UTILITIES AND REPORT ANY DISCREPANCIES OR CONFLICTS TO THE ENGINEER BEFORE COMMENCING WORK.
- CONTRACTOR TO OBTAIN POST-CONSTRUCTION TOPOGRAPHIC SURVEY, COMPLETED BY OLS OR P ENG CONFIRMING COMPLIANCE WITH DESIGN GRADING AND SERVICING. SURVEY IS TO INCLUDE LOCATION AND INVERTS FOR BURIED UTILITIES.
- REPORT REFERENCES
  - SERVICING AND STORMWATER MANAGEMENT REPORT, PREPARED BY WSP CANADA INC, PROJ NO. 221-02216-00, MAY 3, 2023
  - GEOTECHNICAL INVESTIGATION REPORT, PREPARED BY WSP GOLDER, REPORT NO. 22514086EX, DECEMBER, 2022
- FULL DEPTH ASPHALT REPLACEMENT UNDER THE FOOTPRINT OF THE NEW ADDITION PER TABLE BELOW. IN AREAS OF ASPHALT STRIPPING AND REPLACEMENT DELINEATED ON PLAN VIEW, REMOVE AND REPLACE TOP LAYERS OF ASPHALT ONLY WITH THE LAYERS SHOWN IN THE TABLE BELOW.



**RICKSON OUTHET ARCHITECT**  
 319 Daly Avenue  
 Ottawa - Ontario - K1N 6G6  
 613.728-1637 - FAX 613.728-8501

**LEGEND**

83.24x	EXISTING GRADE ELEVATION
CB	EXISTING CATCHBASIN
MH-ST	EXISTING MANHOLE
WV	EXISTING VALVE AND BOX
FH	EXISTING FIRE HYDRANT
ST	EXISTING STORM SEWER
S	EXISTING SANITARY SEWER
W	EXISTING WATERMAIN
82.02	PROPOSED GRADE ELEVATION
82.03TC	PROPOSED TOP AND BOTTOM OF CURB
81.92	PROPOSED TOP OF GRATE
1.8%	PROPOSED GRADE SLOPE
CB	PROPOSED CATCHBASIN
MH	PROPOSED MANHOLE
MH	PROPOSED CATCHBASIN MANHOLE
ST	PROPOSED STORM SEWER
S	PROPOSED SANITARY SEWER
W	PROPOSED WATER SERVICE
FH	PROPOSED FIRE HYDRANT
SF	LIGHT DUTY SILT FENCE
FC	FILTER CLOTH
RD	PROPOSED ROOF DRAIN
---	PROJECT BOUNDARY
→	OVERLAND FLOW
○	ROOF DRAIN

2	REISSUED FOR SPA	2023-05-03
1	ISSUED FOR SPA	2022-10-13

No. Revision Date

Project Title: IRIDIAN SPECTRAL TECHNOLOGIES  
 2700 SWANSEA OTTAWA, ONTARIO.


Project: IRIDIAN SPECTRAL TECHNOLOGIES  
 2700 SWANSEA OTTAWA, ONTARIO.

Project no. 221-02216-00

Scale: AS NOTED

Drawing no. C001


PAVEMENT STRUCTURE LIGHT DUTY (PARKING AREAS) THICKNESS(mm)	MATERIAL DESCRIPTION (REFER TO SITE PLAN A-01 FOR LIMITS)
50	SUPERPAVE 12.5 ASPHALTIC CONCRETE
100	BASE-OPSS GRANULAR A CRUSHED STONE COMPACTED TO 100% SPMD
300	SUBBASE-OPSS GRANULAR B TYPE II COMPACTED TO 100% SPMD
490	SUBGRADE EITHER FILL IN-SITU SOIL OR OPSS GRANULAR B TYPE I OR II MATERIAL PLACED OVER IN-SITU SOIL OR FILL.
PAVEMENT STRUCTURE HEAVY DUTY THICKNESS(mm)	MATERIAL DESCRIPTION (REFER TO SITE PLAN A-01 FOR LIMITS)
40	SUPERPAVE 12.5 ASPHALTIC CONCRETE
50	SUPERPAVE 19 ASPHALTIC CONCRETE
100	BASE-OPSS GRANULAR A CRUSHED STONE COMPACTED TO 100% SPMD
150	SUBBASE-OPSS GRANULAR B TYPE II COMPACTED TO 100% SPMD
490	SUBGRADE EITHER FILL IN-SITU SOIL OR OPSS GRANULAR B TYPE I OR II MATERIAL PLACED OVER IN-SITU SOIL OR FILL.

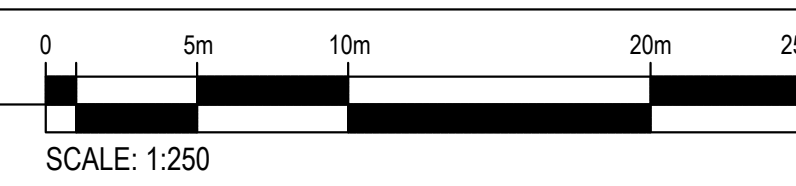

1 GRADING PLAN  
 C001 SCALE= 1:250

FILE NUMBER: D07-12-22-0179



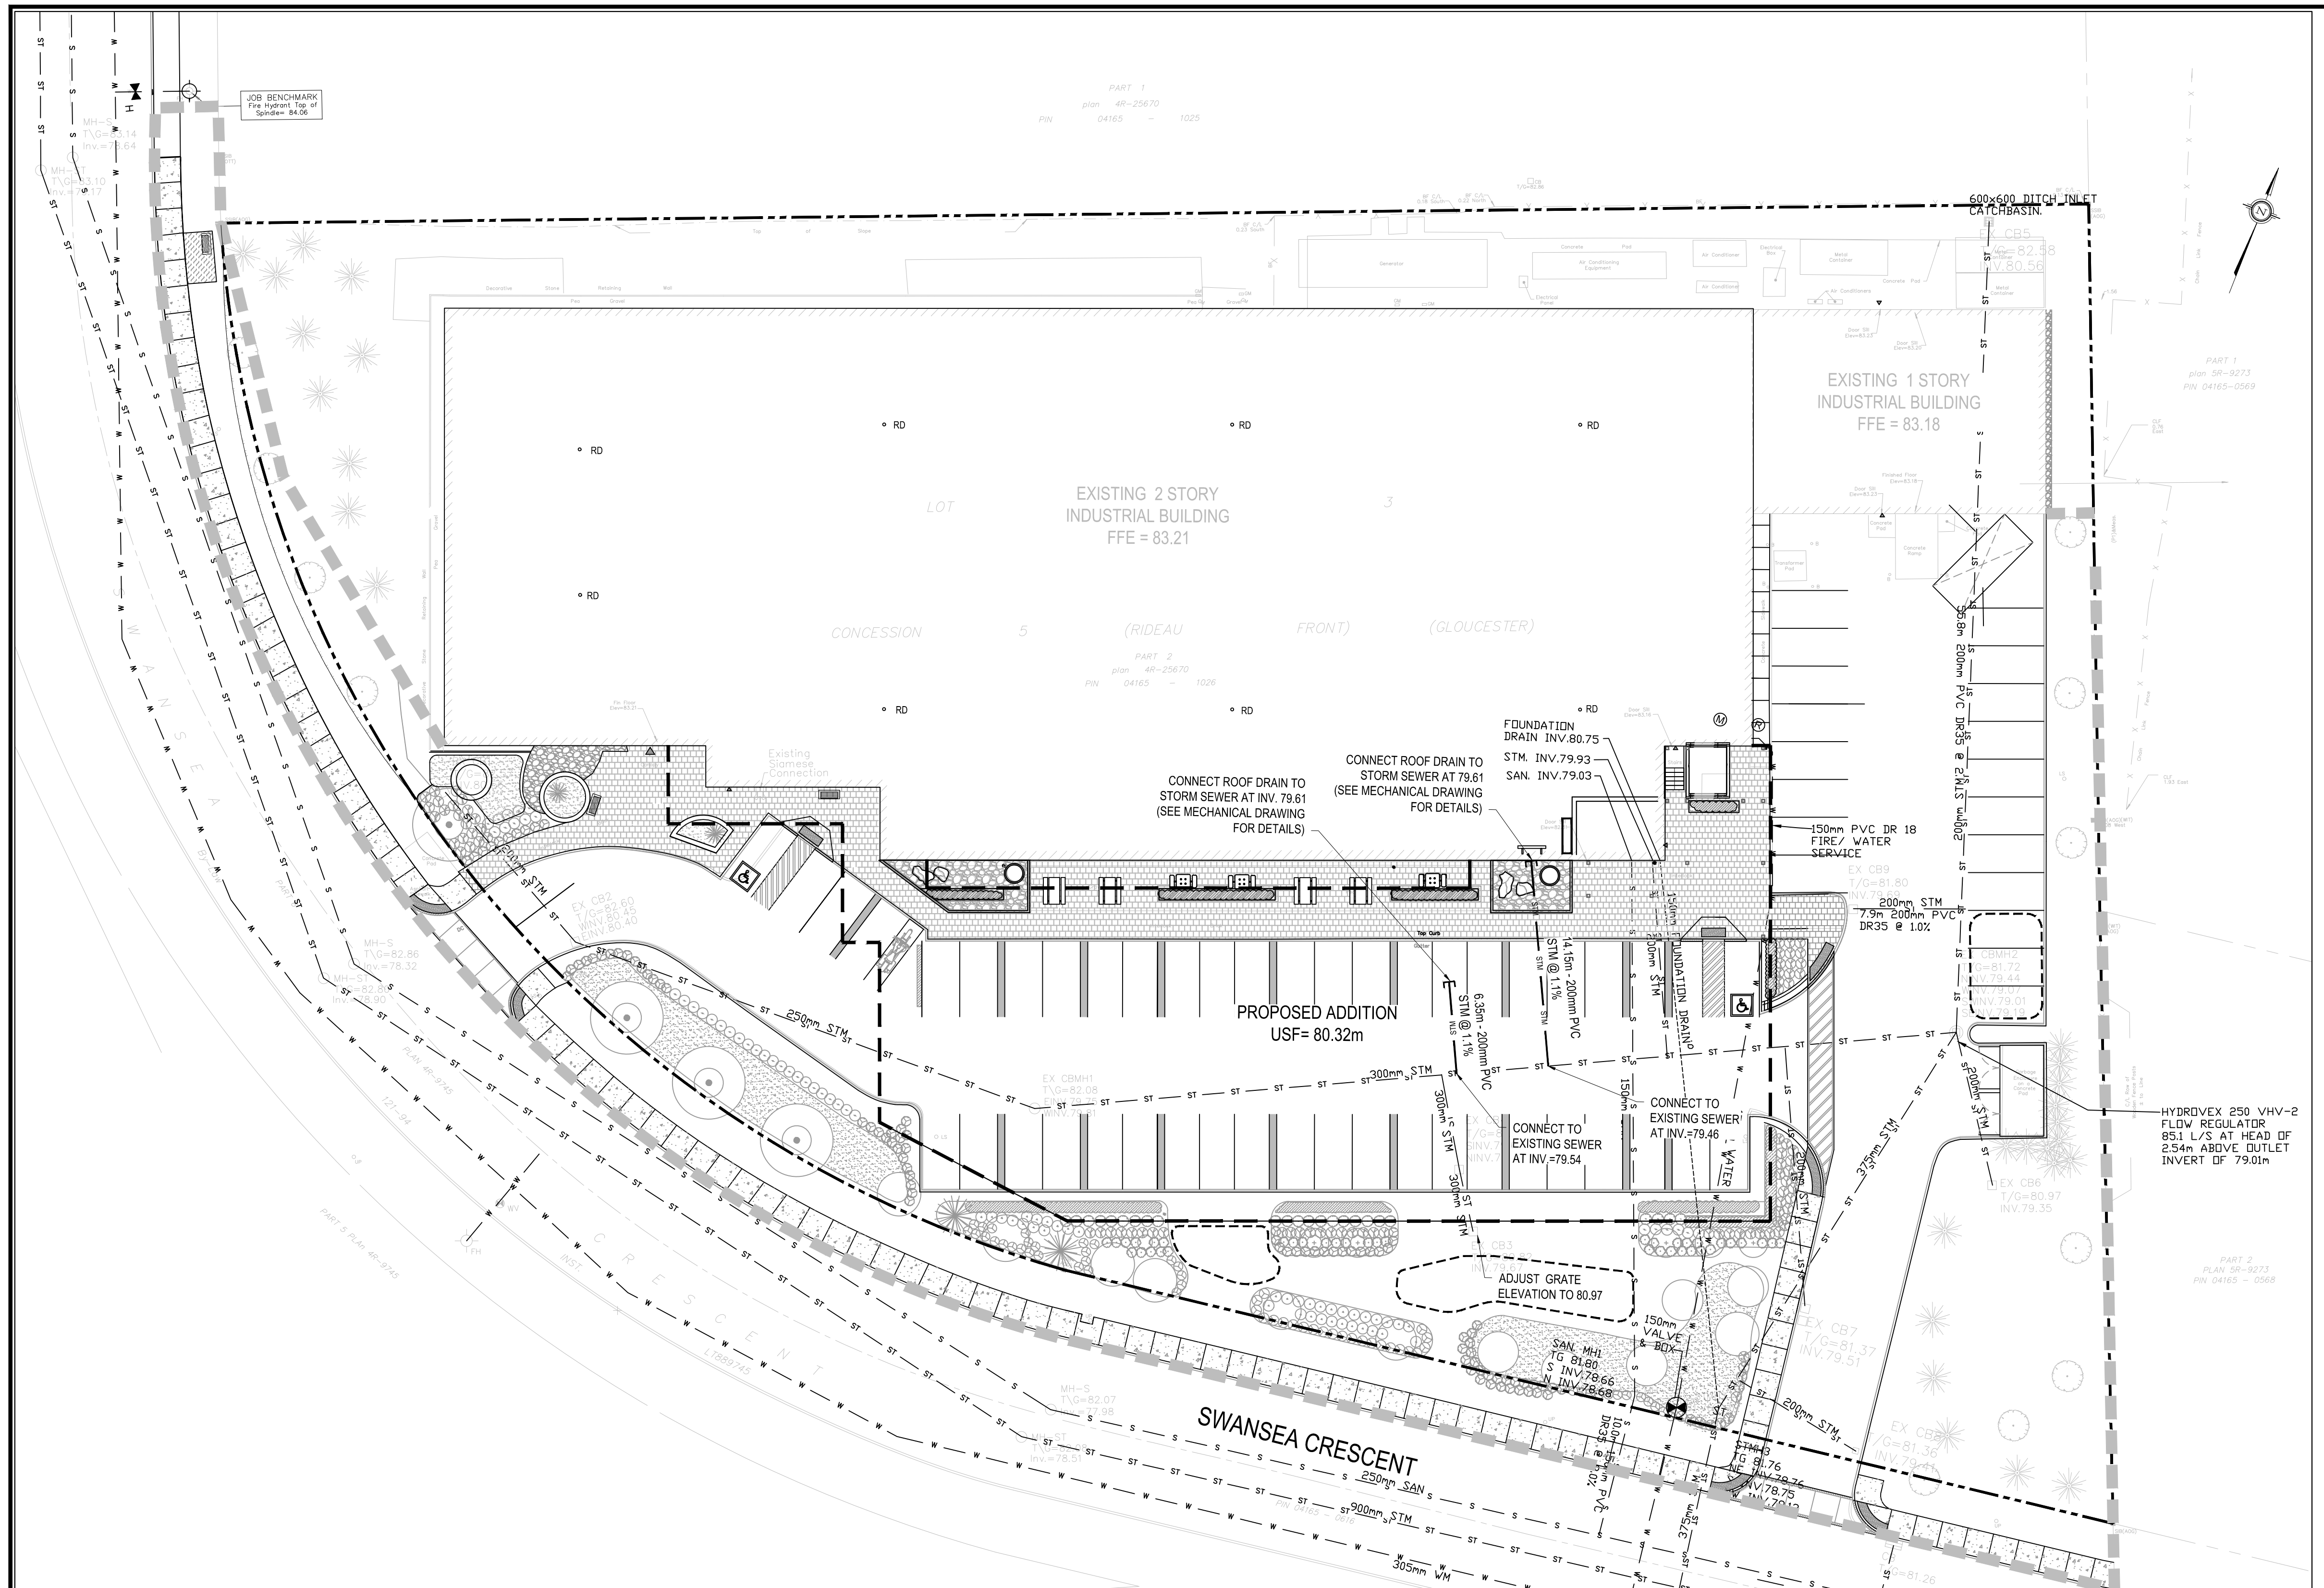

NOTES:

- 1 THE POSITION OF EXISTING POLE LINES, CONDUITS, WATERMANS, SEWERS AND OTHER UNDERGROUND AND ABOVEGROUND UTILITIES, STRUCTURES AND APPURTENANCES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWING, AND WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL SATISFY HIMSELF OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES, AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM DURING THE COURSE OF CONSTRUCTION. ANY RELOCATION OF EXISTING UTILITIES REQUIRED BY THE DEVELOPMENT OF SUBJECT LANDS IS TO BE UNDERTAKEN AT CONTRACTOR'S EXPENSE.
- 2 ALL STORM SEWER MATERIALS AND CONSTRUCTION METHODS SHALL CONFORM TO THE CURRENT CITY OF OTTAWA STANDARDS AND SPECIFICATIONS. PROVIDE CCTV INSPECTION REPORTS FOR ALL NEW STORM SEWERS.
- 3 STORM SEWERS 200mm DIAMETER SHALL BE PVC SDR-35, WITH RUBBER GASKET PER CSA A-257.3.
- 4 SEWER BEDDING AS PER CITY OF OTTAWA DETAIL S6.
- 5 ANY NEW OR EXISTING STORM SEWER WITH LESS THAN 2.0M COVER REQUIRES THERMAL INSULATION AS PER CITY OF OTTAWA STANDARD W22, OR APPROVED BY THE ENGINEER. ADD INSULATION ABOVE EXISTING STORM SEWER BETWEEN CBM109 AND CB114.
- 6 CB IN LANDSCAPE AREAS SHALL BE AS PER CITY OF OTTAWA STANDARD S29, S30 AND S31.

**wsp**  
 2011 QUEENSWAY DR. OTTAWA, ONTARIO CANADA K0B 0K2  
 T: 613-824-8800 F: 613-824-8200 WWW.WSP.CM

**RICKSON OUTHET ARCHITECT**

319 Daly Avenue  
 Ottawa - Ontario - K1N 6G6  
 613.728-1637 - FAX 613.728-8501

**LEGEND**

83.24x	EXISTING GRADE ELEVATION
CB	EXISTING CATCHBASIN
MH-ST	EXISTING MANHOLE
WV	EXISTING VALVE AND BOX
FH	EXISTING FIRE HYDRANT
ST	EXISTING STORM SEWER
S	EXISTING SANITARY SEWER
W	EXISTING WATERMAIN
82.02	PROPOSED GRADE ELEVATION
82.03TC	PROPOSED TOP AND BOTTOM OF CURB
TG82.82	PROPOSED TOP OF GRATE
1.8%	PROPOSED GRADE SLOPE
CB	PROPOSED CATCHBASIN
MH	PROPOSED MANHOLE
CBM	PROPOSED CATCHBASIN MANHOLE
STM	PROPOSED STORM SEWER
SAN	PROPOSED SANITARY SEWER
W	PROPOSED WATER SERVICE
FH	PROPOSED FIRE HYDRANT
SF	LIGHT DUTY SILT FENCE
FC	FILTER CLOTH
RD	PROPOSED ROOF DRAIN
█	PROJECT BOUNDARY
→	OVERLAND FLOW
○	RD

2	REISSUED FOR SPA	2023-05-03
1	ISSUED FOR SPA	2022-10-13

No. Revision Date

Y. TENG  
 100226367  
 2023-05-03  
 PROVINCE OF ONTARIO

J. W. ZHANG  
 100155766  
 2023-05-03  
 PROVINCE OF ONTARIO

Project Title: IRIDIAN SPECTRAL TECHNOLOGIES  
 2700 SWANSEA OTTAWA, ONTARIO.

1 SERVICING PLAN  
 C002 SCALE= 1:250



Designed by:	J.Z.	Conçu par
Date:	MAY 3, 2023	
Drawn:	B.N.	Dessiné
Date:	MAY 3, 2023	
Approved:	J.Z.	Approuvé
Date:	MAY 3, 2023	
Project no.:	221-02216-00	No. du projet
Scale:	AS NOTED	Echelle
Drawing no.:	C002	No. du dessin

FILE NUMBER: D07-12-22-0179 #18925



# APPENDIX


## D

- EROSION AND SEDIMENTATION CONTROL PLAN C03







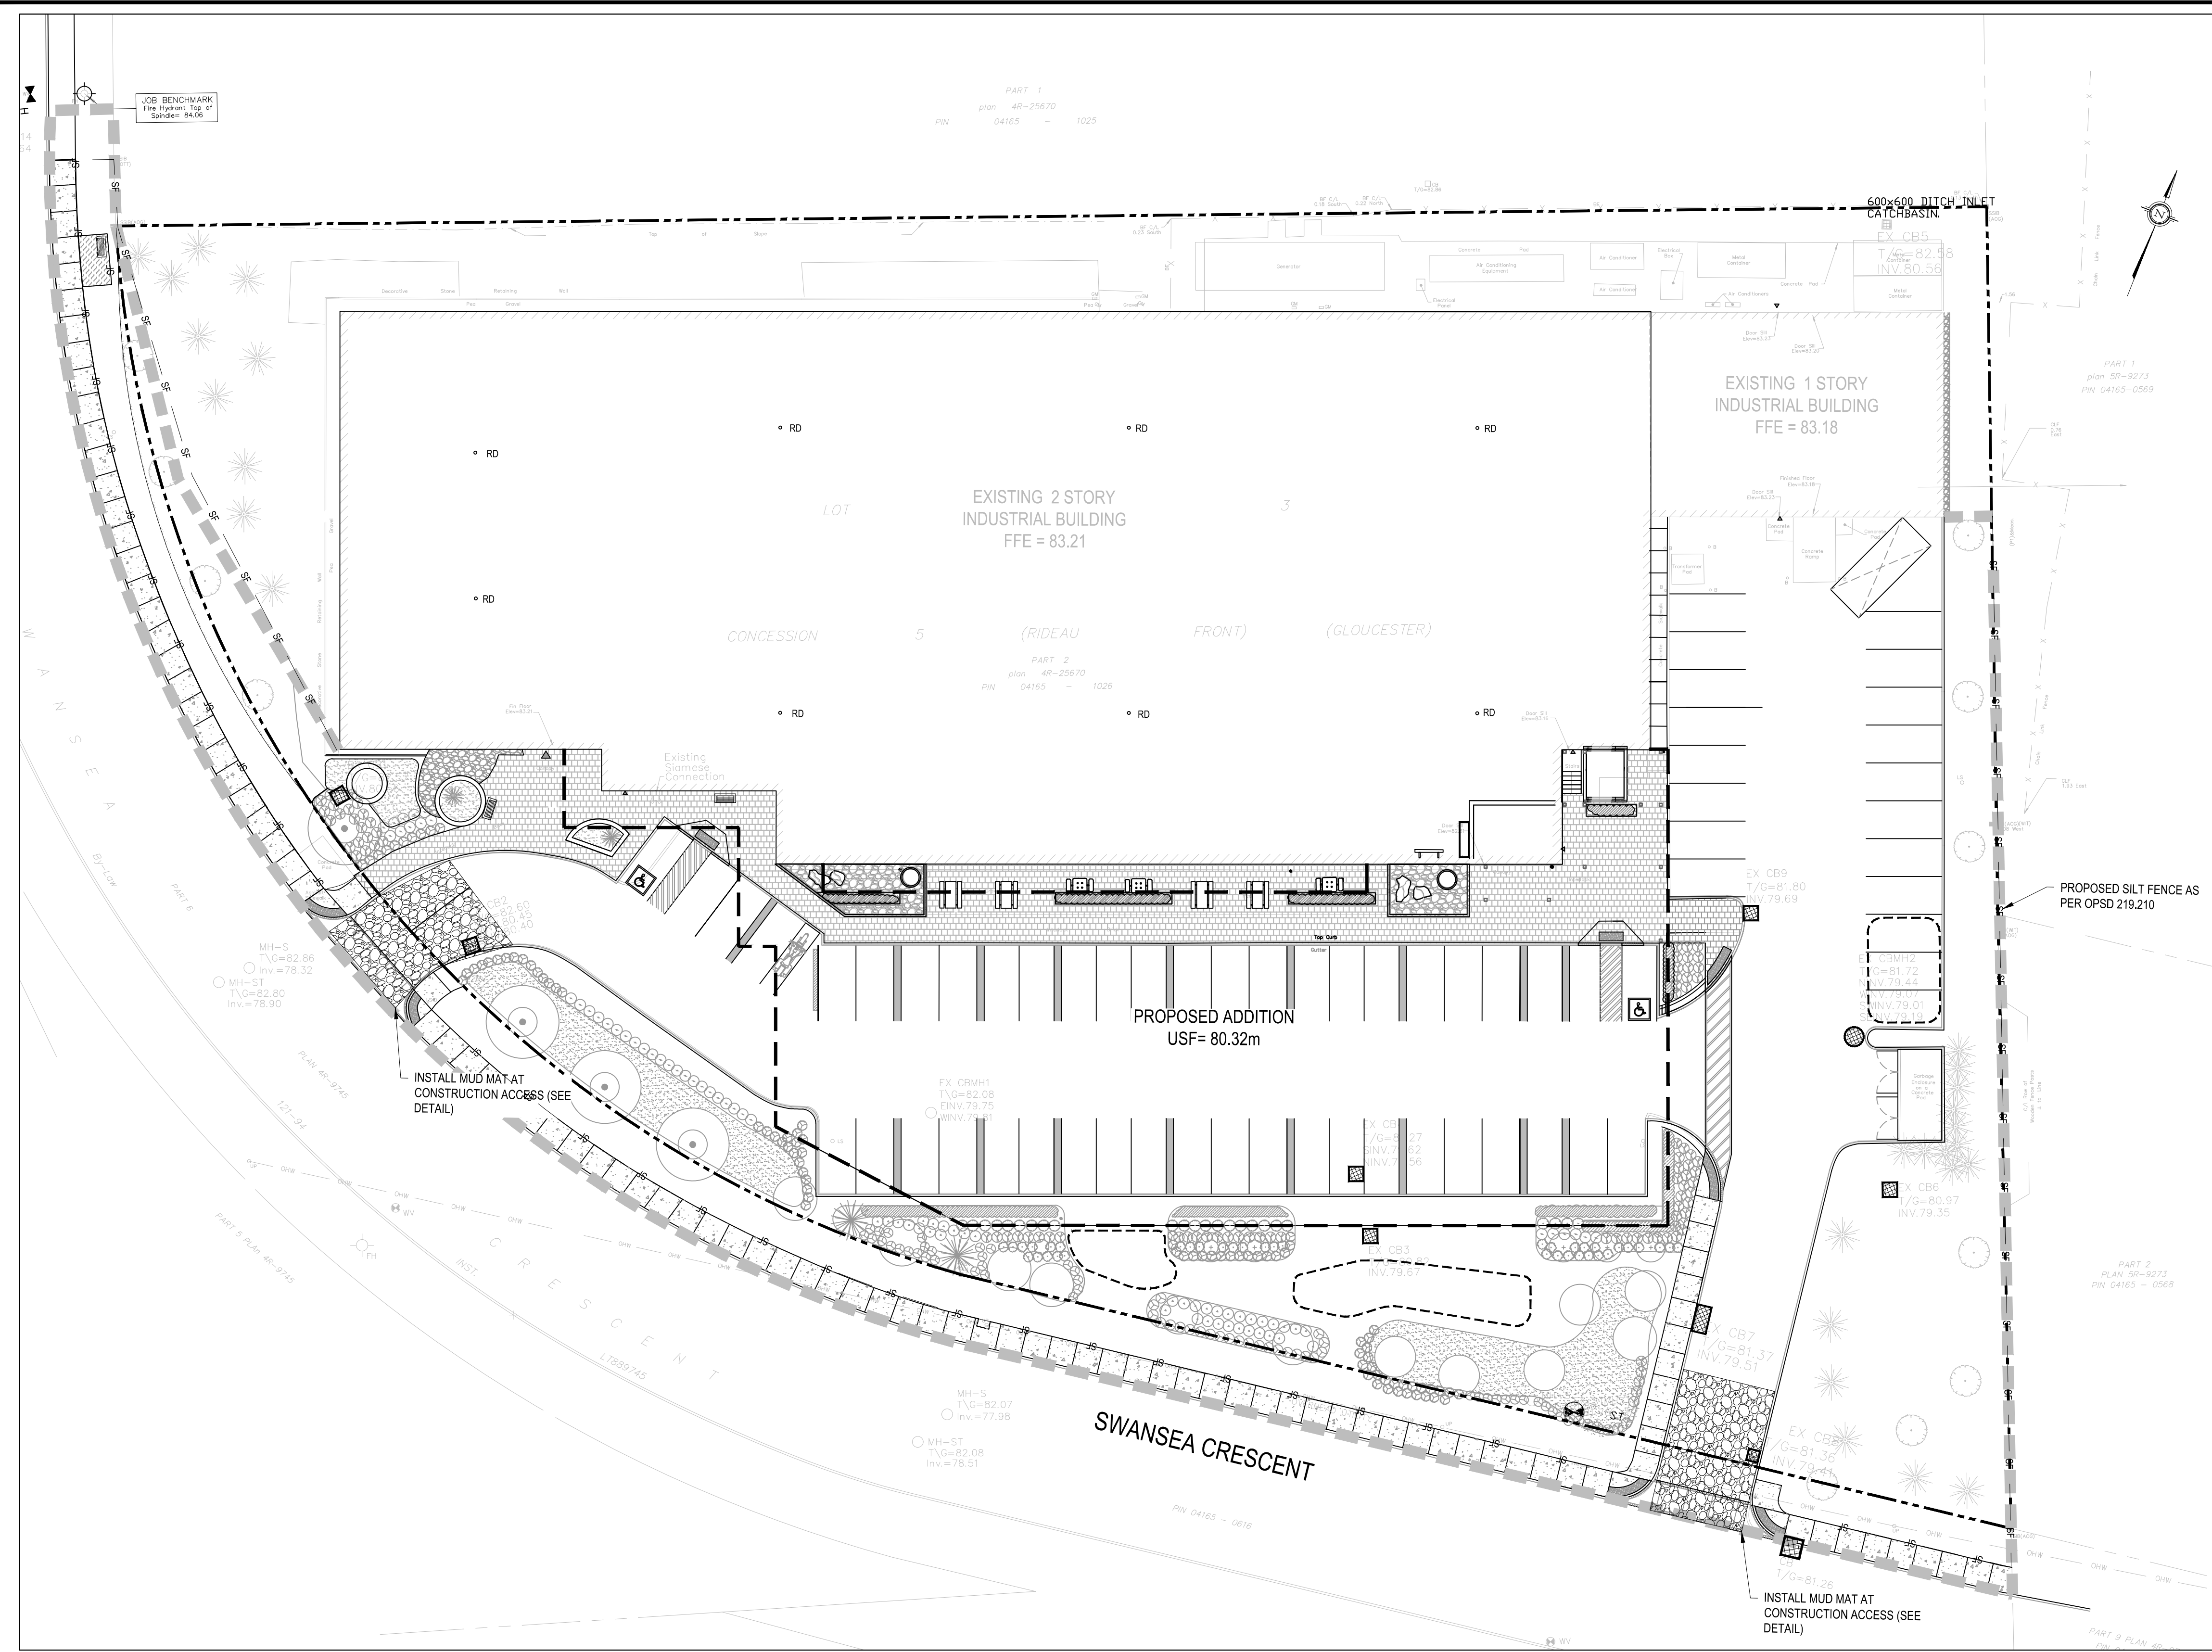

- NOTES: EROSION AND SEDIMENT CONTROL**
- \*\* CONTRACTOR IS RESPONSIBLE FOR ALL INSTALLATION, MONITORING, REPAIR AND REMOVAL OF ALL EROSION AND SEDIMENT CONTROL FEATURES. \*\*
- PRIOR TO START OF CONSTRUCTION:
    - INSTALL SILT FENCE IN LOCATION SHOWN ON DWG C003.
    - INSTALL FILTER FABRIC OR SILT BAG FILTERS IN ALL THE CATCHBASINS AND MANHOLES TO REMAIN DURING CONSTRUCTION WITHIN THE SITE (SEE TYPICAL DETAIL).
    - INSPECT MEASURES IMMEDIATELY AFTER INSTALLATION.
  - DURING CONSTRUCTION:
    - MINIMIZE THE EXTENT OF DISTURBED AREAS AND THE DURATION OF EXPOSURE AND IMPACTS TO EXISTING GRADING.
    - PERIMETER VEGETATION TO REMAIN IN PLACE UNTIL PERMANENT STORM WATER MANAGEMENT IS IN PLACE. OTHERWISE, IMMEDIATELY INSTALL SILT FENCE WHEN THE EXISTING SITE IS DISTURBED AT THE PERIMETER.
    - PROTECT DISTURBED AREAS FROM OVERLAND FLOW BY PROVIDING TEMPORARY SWALES TO THE SATISFACTION OF THE FIELD ENGINEER. TIE-IN TEMPORARY SWALE TO EXISTING CBS AS REQUIRED.
    - PROVIDE TEMPORARY COVER SUCH AS SEEDING OR MULCHING IF DISTURBED AREA WILL NOT BE REHABILITATED WITHIN 30 DAYS.
    - INSPECT SILT FENCES, FILTER FABRIC FILTERS AND CATCH BASIN SLUMPS WEEKLY AND WITHIN 24 HOURS AFTER A STORM EVENT. CLEAN AND REPAIR WHEN NECESSARY.
    - DRAWINGS TO BE REVIEWED AND REVISED AS REQUIRED DURING CONSTRUCTION.
    - EROSION CONTROL FENCING TO BE ALSO INSTALLED AROUND THE BASE OF ALL STOCKPILES.
    - DO NOT LOCATE TOPSOIL PILES AND EXCAVATION MATERIAL CLOSER THAN 2.5m FROM ANY PAVED SURFACE, OR ONE WHICH IS TO BE PAVED BEFORE THE PILE IS REMOVED. ALL TOPSOIL PILES ARE TO BE SEEDED IF THEY ARE TO REMAIN ON SITE LONG ENOUGH FOR SEEDS TO GROW (LONGER THAN 30 DAYS).
    - CONTROL WIND-BLOWN DUST OFF SITE BY SEEDING TOPSOIL PILES AND OTHER AREAS TEMPORARILY (PROVIDE WATERING AS REQUIRED AND TO THE SATISFACTION OF THE ENGINEER).
    - NO ALTERNATE METHODS OF EROSION PROTECTION SHALL BE PERMITTED UNLESS APPROVED BY THE FIELD ENGINEER.
    - CITY ROADWAY AND SIDEWALK TO BE CLEANED OF ALL SEDIMENT FROM VEHICULAR TRACKING AS REQUIRED.
    - DURING WET CONDITIONS, TIRES OF ALL VEHICLES/EQUIPMENT LEAVING THE SITE ARE TO BE SCRAPPED.
    - ANY MUD/MATERIAL TRACKED ONTO THE ROAD SHALL BE REMOVED IMMEDIATELY BY HAND OR RUBBER TIRE LOADER.
    - TAKE ALL NECESSARY STEPS TO PREVENT BUILDING MATERIAL, CONSTRUCTION DEBRIS OR WASTE BEING SPILLED OR TRACKED ONTO ADJUTING PROPERTIES OR PUBLIC STREETS DURING CONSTRUCTION AND PROCEED IMMEDIATELY TO CLEAN UP ANY AREAS SO AFFECTED.
    - ALL EROSION CONTROL STRUCTURE TO REMAIN IN PLACE UNTIL ALL DISTURBED GROUND SURFACES HAVE BEEN STABILIZED EITHER BY PAVING OR RESTORATION OF VEGETATIVE GROUND COVER.
    - THE CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES, TO PROVIDE FOR PROTECTION OF THE AREA DRAINAGE SYSTEM AND THE RECEIVING WATERCOURSE, DURING CONSTRUCTION ACTIVITIES. THE CONTRACTOR ACKNOWLEDGES THAT FAILURE TO IMPLEMENT APPROPRIATE EROSION AND SEDIMENT CONTROL MEASURES MAY BE SUBJECT TO PENALTIES IMPOSED BY ANY APPLICABLE REGULATORY AGENCY.





**RICKSON OUTHET ARCHITECT**

319 Daly Avenue  
Ottawa - Ontario - K1N 6G6  
613.728-1637 - FAX 613.728-8501


**LEGEND**

- 83.24x EXISTING GRADE ELEVATION
- CB EXISTING CATCHBASIN
- MH-ST EXISTING MANHOLE
- WV EX EXISTING VALVE AND BOX
- FH EX EXISTING FIRE HYDRANT
- ST EX EXISTING STORM SEWER
- S EX EXISTING SANITARY SEWER
- W EX EXISTING WATERMAIN
- 82.82 PROPOSED GRADE ELEVATION
- 82.03TC PROPOSED TOP AND BOTTOM OF CURB
- TC82.82 PROPOSED TOP OF GRATE
- 1.8% PROPOSED GRADE SLOPE
- PROPOSED CATCHBASIN
- PROPOSED MANHOLE
- PROPOSED CATCHBASIN MANHOLE
- STM PROPOSED STORM SEWER
- SAN PROPOSED SANITARY SEWER
- W PROPOSED WATER SERVICE
- FH PROPOSED FIRE HYDRANT
- SF LIGHT DUTY SILT FENCE
- FC FILTER CLOTH
- RD PROPOSED ROOF DRAIN
- PROJECT BOUNDARY
- OVERLAND FLOW
- RD ROOF DRAIN

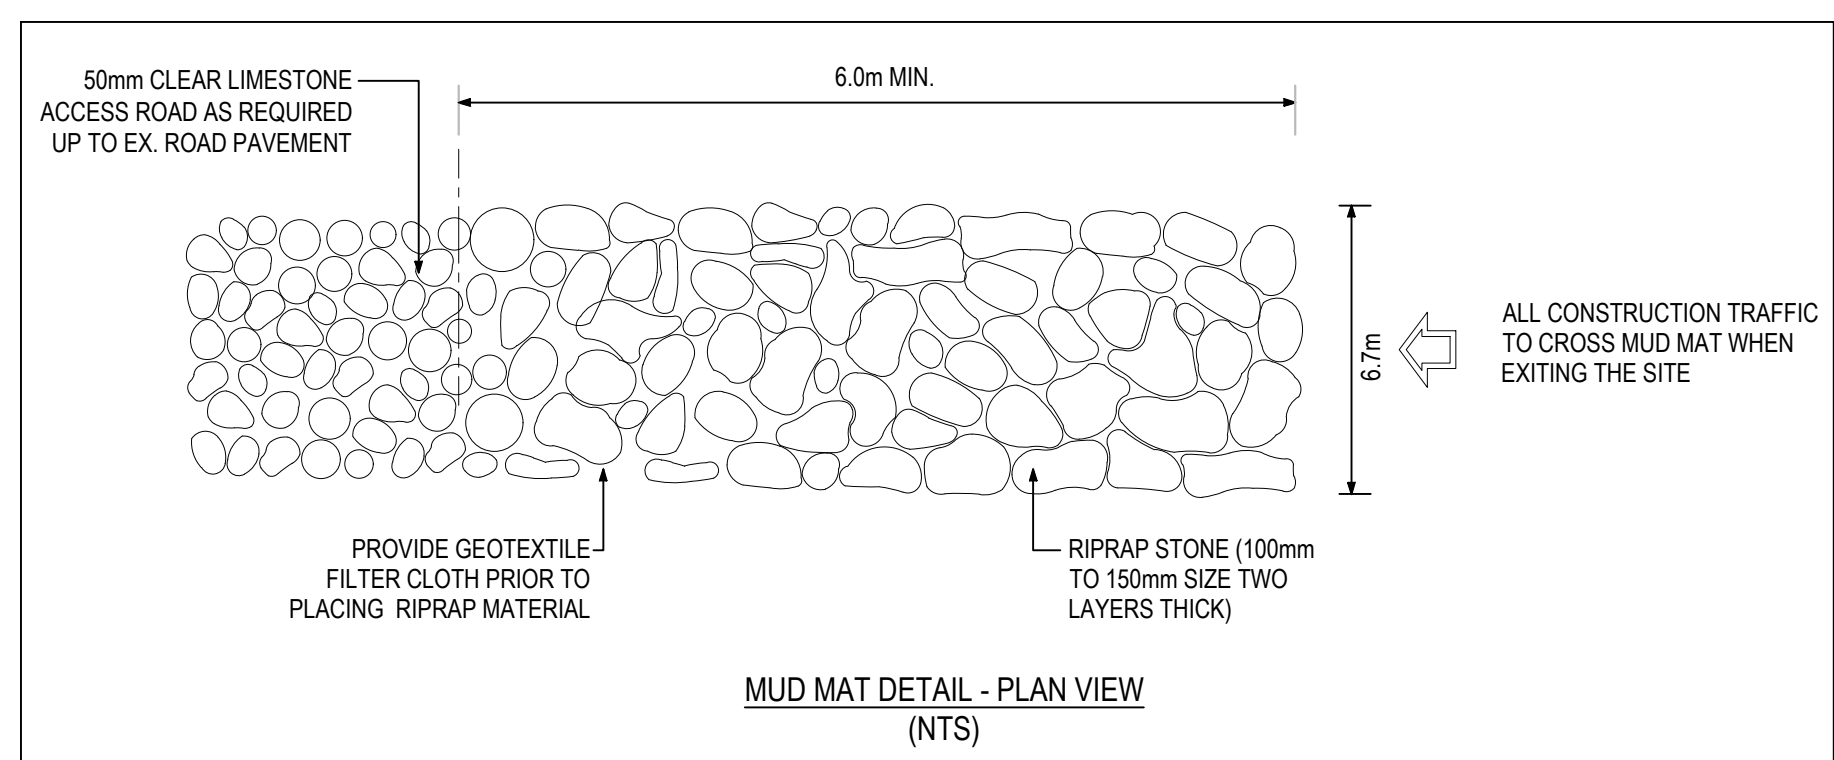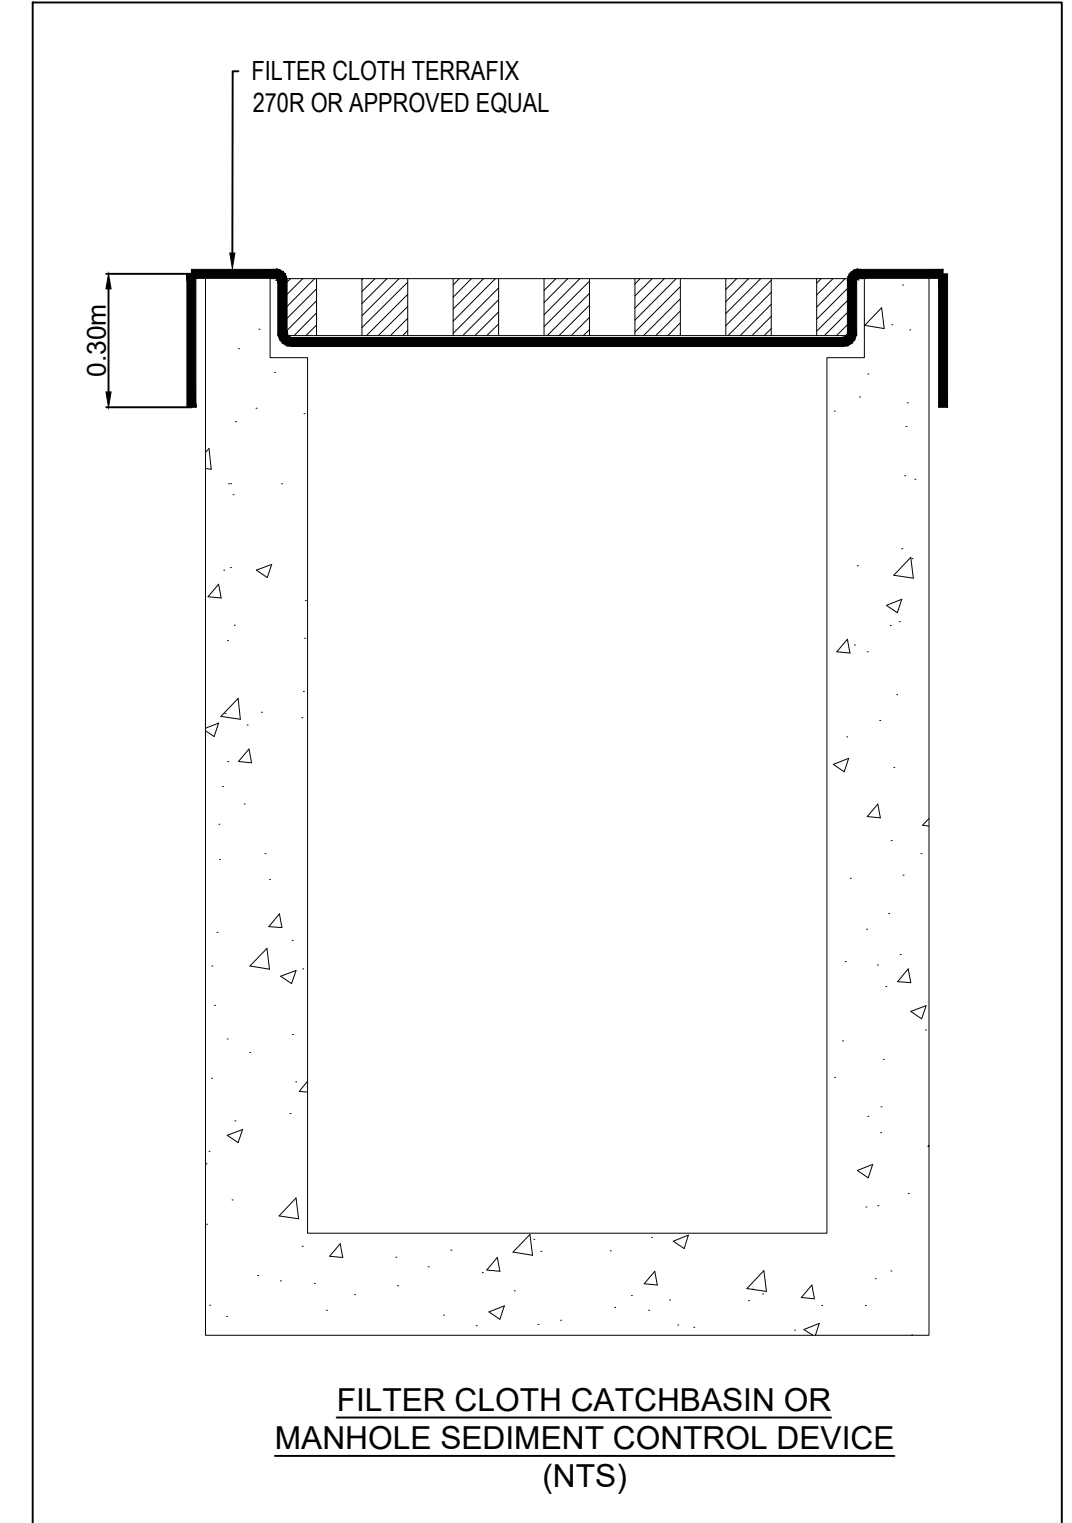

3 EROSION AND SEDIMENT CONTROL  
C003 SCALE= 1:250

No.	Revision	Date
2	REISSUED FOR SPA	2023-05-03
1	ISSUED FOR SPA	2022-10-13

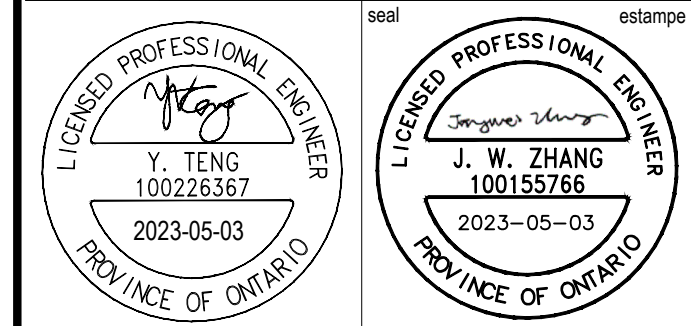

Project Title: IRIDIAN SPECTRAL TECHNOLOGIES  
2700 SWANSEA OTTAWA, ONTARIO.

**EROSION AND SEDIMENT CONTROL**

Designed by:	J.Z.	Conçu par
Date:	MAY 3, 2023	
Drawn:	B.N.	Dessiné
Date:	MAY 3, 2023	
Approved:	J.Z.	Approuvé
Date:	MAY 3, 2023	
Project no.:	221-02216-00	No. du projet

Scale: AS NOTED  
Drawing no.: C003

FILE NUMBER: D07-12-22-0179



# APPENDIX

## E

- SUBMISSION CHECK LIST

