
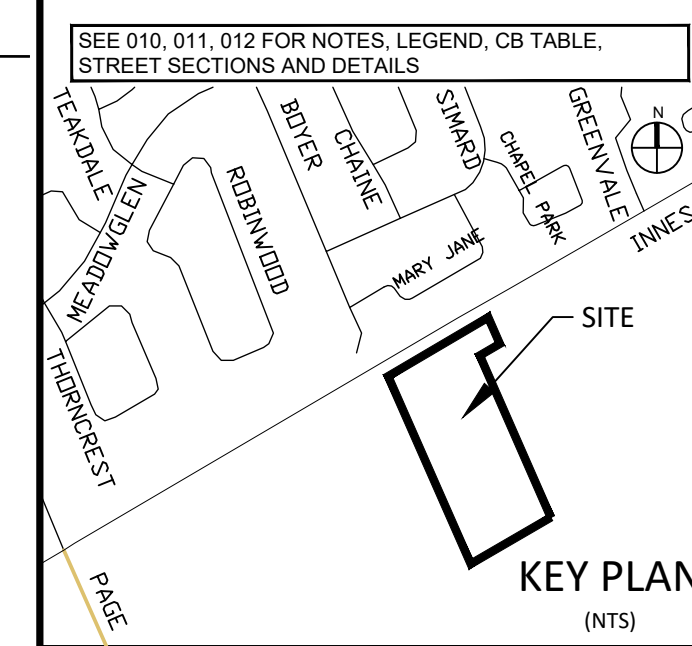


WATERMAIN SCHEDULE				
Station	Description	Finished Grade	Top of Watermain	As Built Watermain
A	0+000.00	200x150 TEE	90.380m	87.980m
	0+003.93	RED 150X50	90.472m	88.072m
	0+008.75	VB	90.584m	88.184m
	0+015.28	BEND	90.719m	88.319m
	0+023.77	BEND	90.832m	88.232m
	0+043.77		90.428m	88.028m
	0+083.77		90.394m	87.994m
	0+078.00	BEND	90.399m	87.999m
	0+087.70		90.879m	88.279m
	0+089.64	VB	90.724m	88.324m
B	0+096.54	BUILDING CONNECTION	90.775m	88.375m

DRAINAGE AREA	ICD TYPE	RESTRICTED FLOW (L/s)	100yr STORAGE REQUIRED (m ³)	STORAGE PROVIDED (m ³)
CB 9 & 10	Custom 168mm Dia. Orifice	100.64	58.7	63.25
CB 1 & 2	Tempest HMF 152mm	75.2	26.1	27.25
MH 6	Custom 207mm Dia. Orifice	174.57	239.55	245.24
CB 7	Tempest HMF 83mm	22.94	15.72	39.15
CB 6	Custom 187mm Dia. Orifice	118.29	70.93	71.09
TOTAL			491.64	507.72

STM STRUCTURE TABLE					
NAME	RIM ELEV.	INVERT IN AS-BUILT	INVERT OUT	INVERT OUT AS-BUILT	DESCRIPTION
CBMH5	90.05	NW88.058 NE88.218	S87.600		1200mm# OPSD-701.010
EXMH3	91.96	NE89.379	SE87.909 SW89.359		1200mm# OPSD-701.010
EXMH4	92.04	SE90.005	SW89.945		1200mm# OPSD-701.010
EXMH4	90.77	NE89.190			1200mm# OPSD-701.010
MH2	90.71	NW87.723	SE87.703		1200mm# OPSD-701.010
MH3	90.33	NW87.641 NE87.981	SE87.721		1500mm# OPSD-701.011
MH4	90.28	NW87.593 NE87.453	SW87.208		1800mm# OPSD-701.012
MH5	90.62	SE88.450	SW88.154		1200mm# OPSD-701.010
MH6	90.43	N87.565	SW87.535		1200mm# OPSD-701.010
MH152-Future	88.72	NE87.185	S86.975		1800mm# OPSD-701.012


RICHCRAFT HOMES LTD.
PART 8
PLAN 4R-29569
PIN 04404-0280

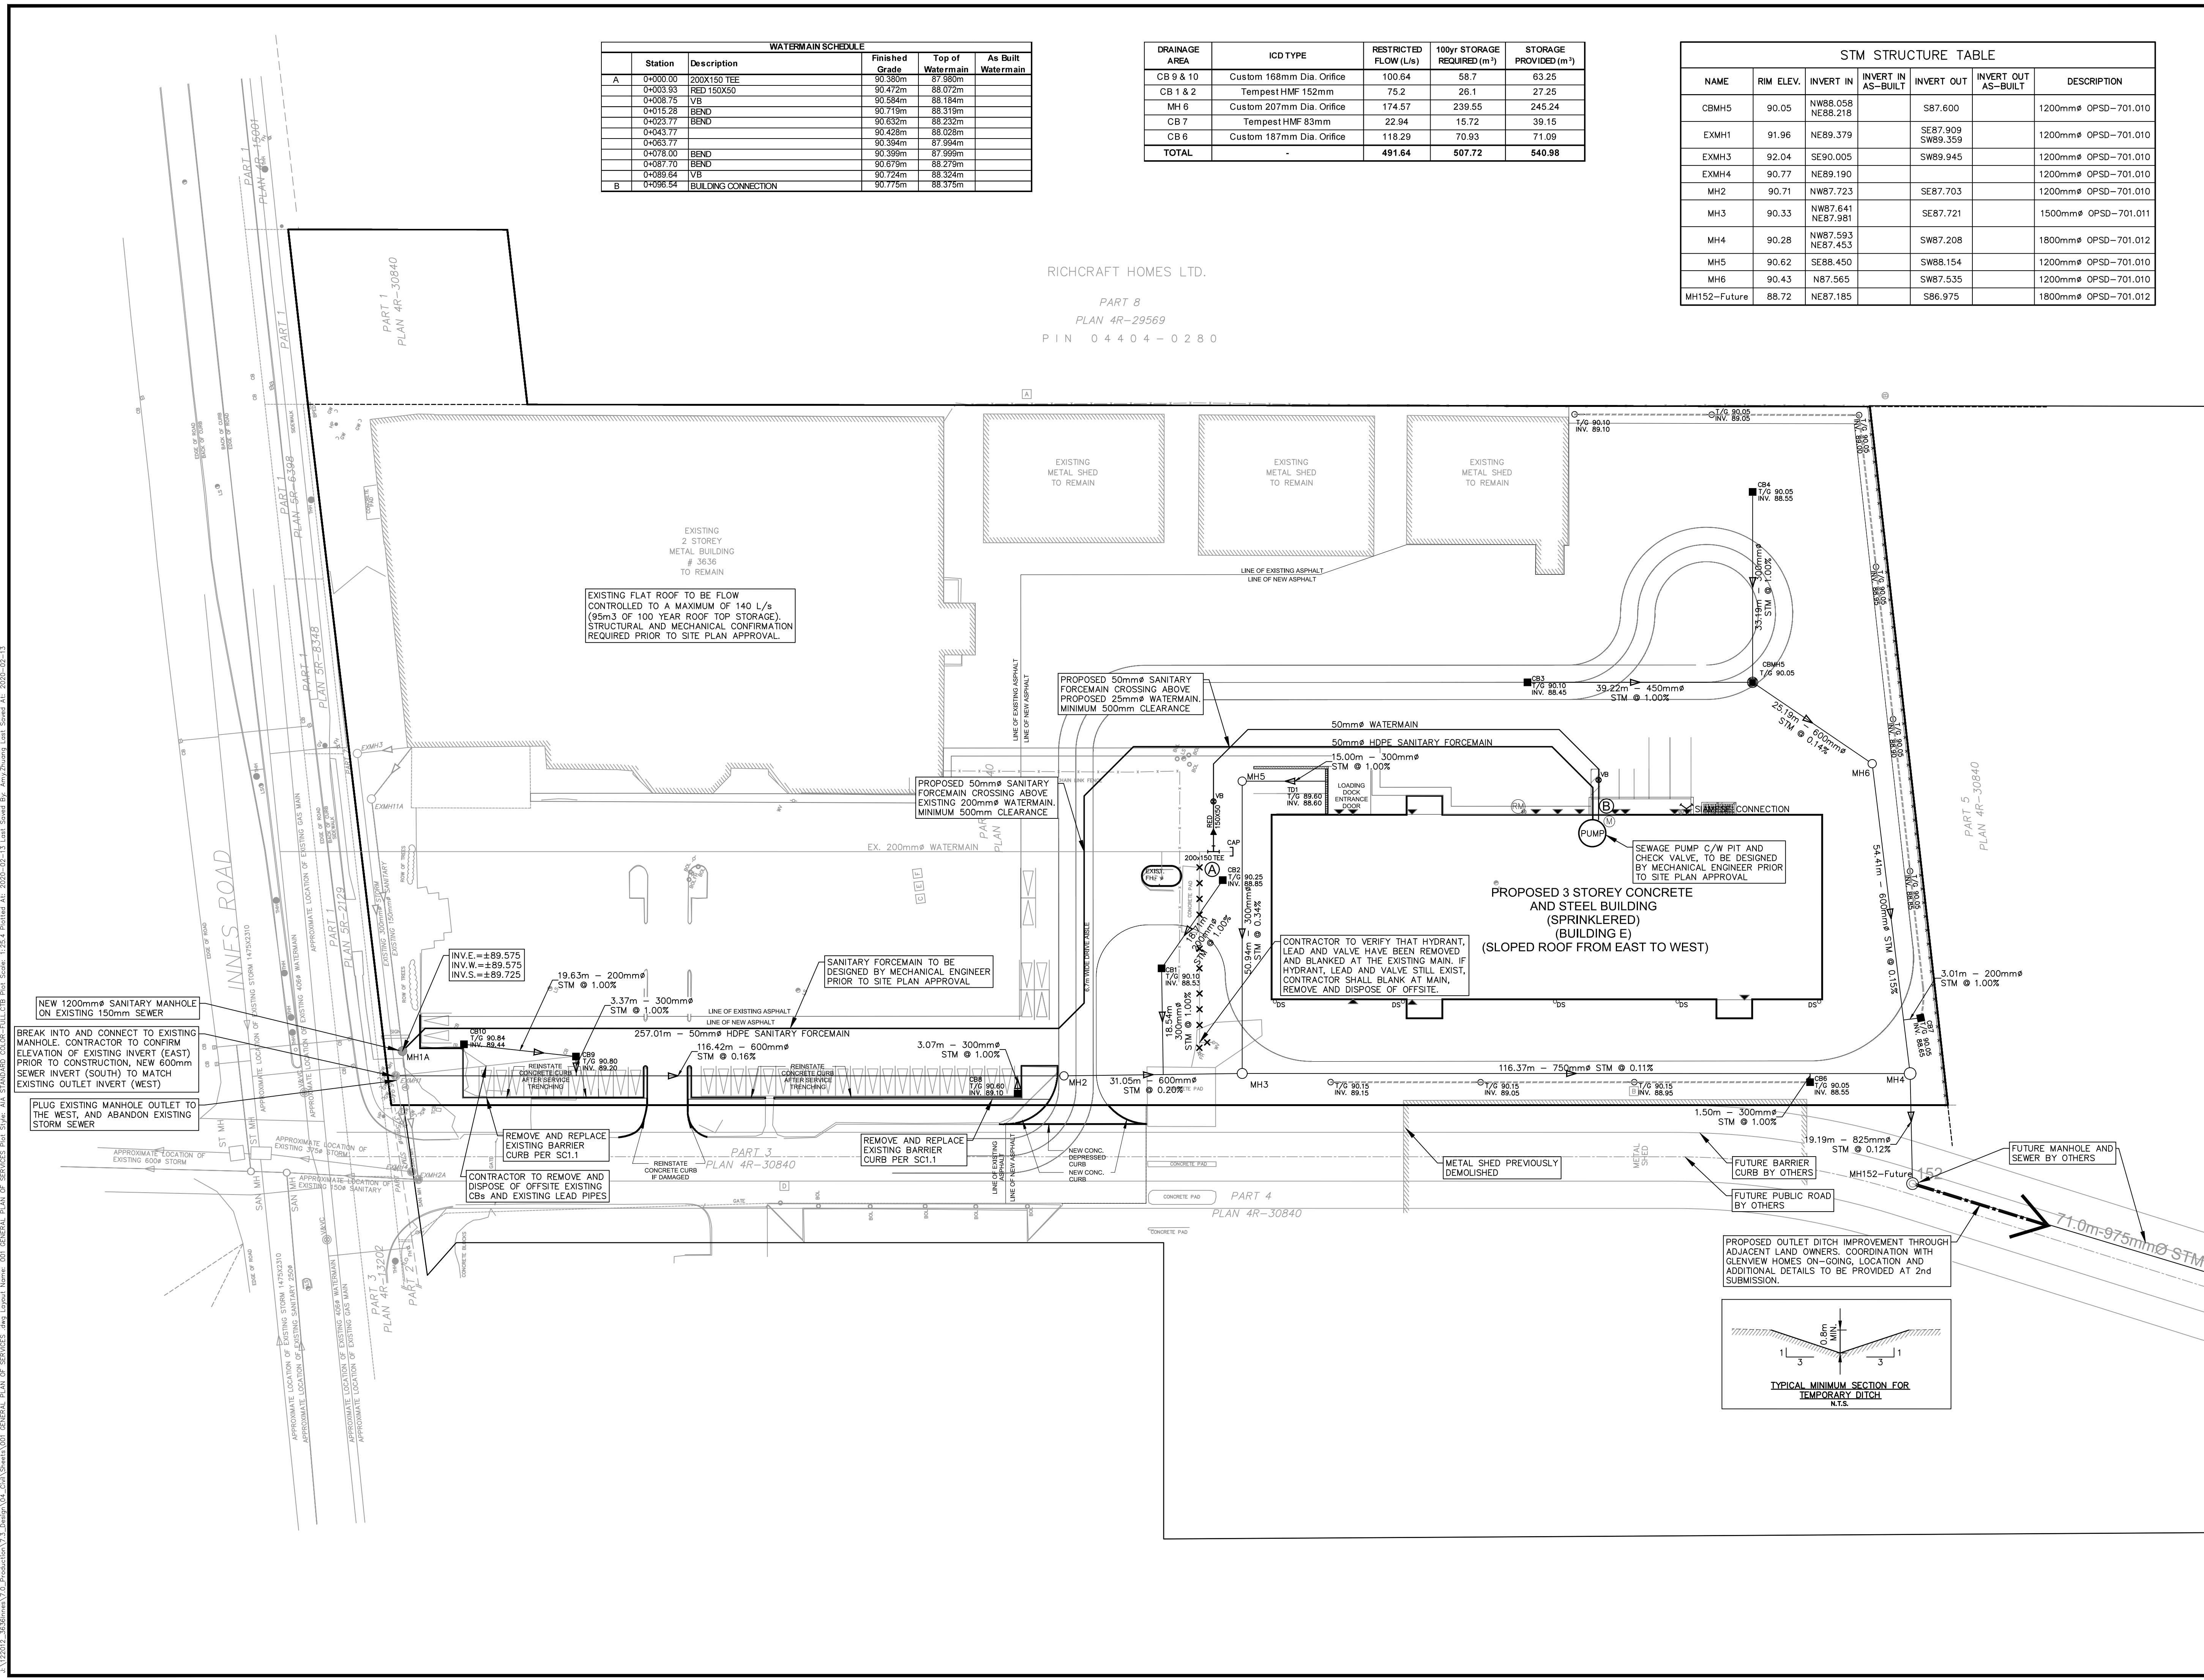

No.	REVISIONS	By	Date
1	ISSUED FOR SPA	DGY	2020-02-11

IBI GROUP
400 - 333 Preston Street
Ottawa ON K1S 5N4 Canada
tel 613 225 1311 fax 613 225 9888
ibigroup.com

U-HAUL
3636 INNES ROAD

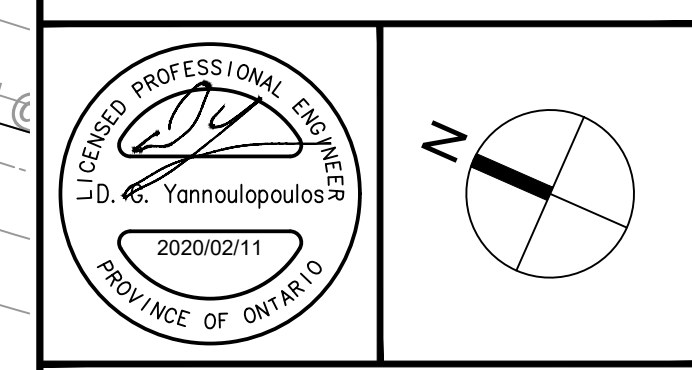

GENERAL PLAN OF SERVICES

Scale	1 : 500
Design	R.M.W.Z.
Date	JANUARY 2020
Drawn	E.H.
Checked	DGY
Project No.	122012
Drawing No.	001

CITY PLAN No.####
CITY FILE No.####