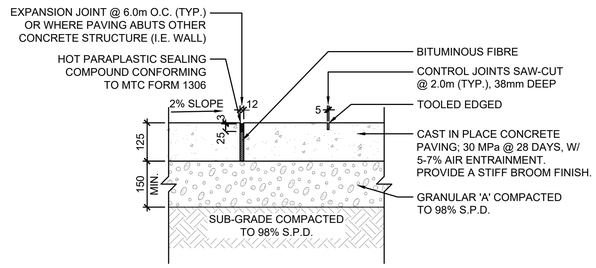

1 / L-500 C.I.P. CONCRETE PAVING (PEDESTRIAN LOAD)
1:10

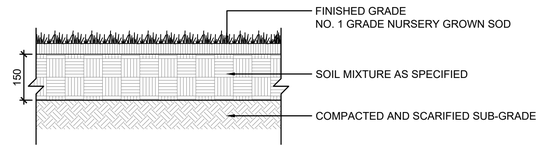

2 / L-500 C.I.P. CONCRETE PAVING (PEDESTRIAN LOAD)
1:10

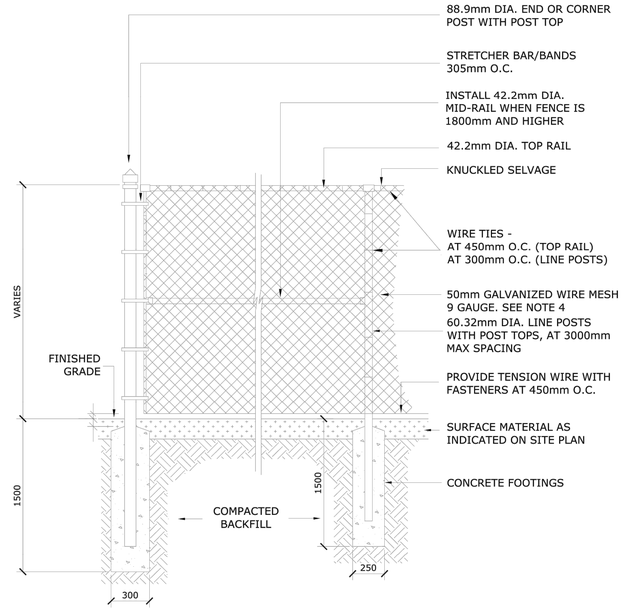

NOTES:

1. IF FENCE IS TO BE BLACK VINYL, THE FENCE SHOULD BE 9 GAUGE GALVANIZED WIRE CORE WITH BLACK VINYL COATING
2. POSTS, RAILS AND ALL OTHER HARDWARE SHOULD BE ELECTROSTATIC PAINTED
3. CONCRETE FOOTING SHALL BE CSA 30MPa CLASS F-1
4. FENCING ADJACENT TO PRIVATE RESIDENTIAL PROPERTY SHALL MEET THE POOL ENCLOSURE BY-LAW, NAMELY THE MESH SHALL BE 38mm AND THE GAUGE OF VINYL COATED 9 GAUGE GALVANIZED WIRE SHALL BE 6. COLOUR AS SPECIFIED

Ottawa	TITLE: CHAINLINK FENCE	DATE:	FEB 2013
		REV:	MAR 2014
		DWG No:	F9

3 / L-500 1.8m HT. CHAINLINK FENCE
1:30

NOTES:

- OBTAIN WRITTEN CONFIRMATION OF UTILITY LOCATES PRIOR TO COMMENCEMENT OF DIGGING.
- PREPARATION: EXCAVATE SHRUB BED TO SIZE OUTLINED ON DRAWINGS. MAINTAIN MINIMUM 450mm DEPTH.
- SET SHRUB 50mm HIGHER THAN SURROUNDING GRADE TO ALLOW FOR SETTLEMENT.
- ALL ROOT BALLS REMOVED FROM POTS TO BE SCARIFIED PRIOR TO SETTING IN GROUND.
- PRUNING TO SUIT SPECIES.
- TRIM BRANCHES AND TWIGS TO RETAIN NATURAL FORM OF SHRUB, DO NOT PRUNE LEADERS.
- SPACING AS DIRECTED.

FERTILIZER :

- APPLY APPROVED WATER SOLUABLE FERTILIZER AT A RATE OF 9kg PER 100m².
- ENSURE FERTILIZER IS CONTAINED WITHIN SAUCER AND EVENLY RAKED INTO PLANTING SOIL MIXTURE.

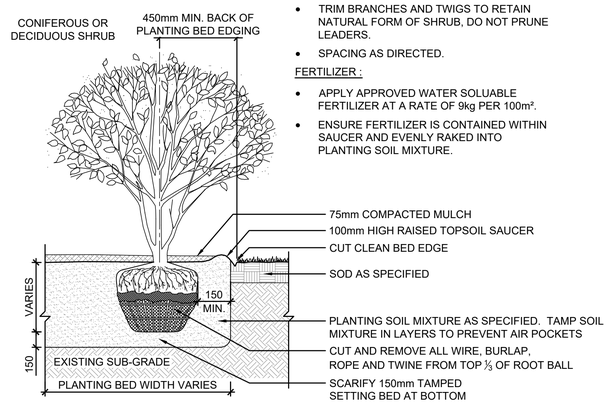

4 / L-500 SHRUB PLANTING
1:30

NOTES:

- PREPARATION: EXCAVATE PLANTING BED TO SIZE OUTLINED ON DRAWINGS. MAINTAIN MINIMUM 350mm DEPTH.
- PLANTING BED TO BE RAISED A MINIMUM OF 150mm ABOVE THE FINISHED GRADE OF SOD AND/OR SURROUNDING AREA.
- SET PERENNIAL 50mm HIGHER THAN SURROUNDING GRADE TO ALLOW FOR SETTLEMENT.
- PLANTING IN GROUPS SHALL BE SET IN EQUAL O.C. SPACING, AS DIRECTED.

FERTILIZER:

- APPLY APPROVED WATER SOLUABLE FERTILIZER AT A RATE OF 9kg PER 100m².
- ENSURE FERTILIZER IS CONTAINED WITHIN SAUCER AND EVENLY RAKED INTO PLANTING SOIL MIXTURE.

BARE ROOT (B.R. IN PLANT LIST):

- SET ALL PLANT MATERIAL SLIGHTLY HIGHER THAN ADJACENT GRADE. SET BARE ROOT PLANT MATERIAL SO THAT ROOTS LIE IN NATURAL STATE.
- GENTLY BACKFILL WITH SOIL MIXTURE, WORKING SOIL BETWEEN ROOTS. LIGHTLY TAMP SOIL TO ELIMINATE AIR POCKETS AND REDUCE SETTLEMENT. WATER PLANTING BED THOROUGHLY, IMMEDIATELY AFTER PLANTING.

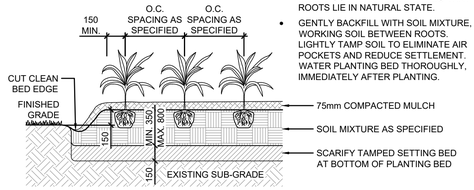

5 / L-500 PERENNIAL PLANTING
1:30

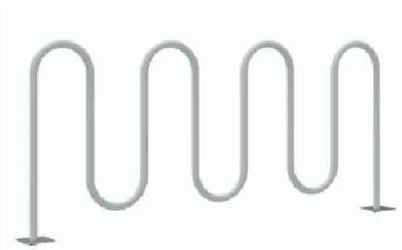

BIKE RACK - 9 BIKES
BY MAGLIN OR APPROVED EQUAL

MODEL: MBR-900-S
COLOUR: BLACK
MOUNTING: SURFACE MOUNT

6 / L-500 BIKE RACK
NTS

CLIENT
U-Haul Canada Inc.

COPYRIGHT

CONTRACTOR SHALL CHECK ALL DIMENSIONS ON THE WORK AND REPORT ANY DISCREPANCY TO THE CONSULTANT BEFORE PROCEEDING. THIS DRAWING IS NOT TO BE USED FOR CONSTRUCTION UNTIL AUTHORIZED IN WRITING BY CONSULTANT.

IBI Group (Canada) Inc.
is a member of the IBI Group of companies

ISSUES

No.	DESCRIPTION	DATE
01	ISSUED FOR SPA	2020-02-13

KEYPLAN



CONSULTANTS

SEAL

IBI GROUP
7th Floor-230 55 St. Clair Avenue West
Toronto ON M4V 2Y7 Canada
tel 416 596 1930 fax 416 596 0644
ibigroup.com

PROJECT
U-Haul Storage
3636 Innes Road,
Ottawa, ON
K1C

PROJECT NO: 122637	
DRAWN BY: **A.S.**	CHECKED BY: **L.L.**
PROJECT MGR: **N.K.**	APPROVED BY: **N.K.**

SHEET TITLE
LANDSCAPE DETAILS

SHEET NUMBER	ISSUE
L-500	

C:\Users\scott.kipp\Documents\REVIT2018\UHU-07-NewBldg_scott.kipp.rvt