

780 Baseline Road, 7-9 Hilliard Avenue Transportation Impact Assessment

Step 1 Screening Report

Step 2 Scoping Report

Step 3 Forecasting Report

Step 4 Strategy Report (ZBA) Revision #2

Prepared for:

Theberge Developments Ltd.
1600 Laperriere Avenue, Suite 205
Ottawa ON K1Z 8P5

Prepared by:



6 Plaza Court
Ottawa, ON K2H 7W1

June 2023

PN: 2021-083

Table of Contents

| | | |
|-------|--|----|
| 1 | Screening..... | 1 |
| 2 | Existing and Planned Conditions..... | 1 |
| 2.1 | Proposed Development..... | 1 |
| 2.2 | Existing Conditions..... | 3 |
| 2.2.1 | Area Road Network..... | 3 |
| 2.2.2 | Existing Intersections..... | 3 |
| 2.2.3 | Existing Driveways..... | 4 |
| 2.2.4 | Cycling and Pedestrian Facilities..... | 5 |
| 2.2.5 | Existing Transit..... | 8 |
| 2.2.6 | Existing Area Traffic Management Measures..... | 9 |
| 2.2.7 | Existing Peak Hour Travel Demand..... | 9 |
| 2.2.8 | Collision Analysis..... | 11 |
| 2.3 | Planned Conditions..... | 14 |
| 2.3.1 | Changes to the Area Transportation Network..... | 14 |
| 2.3.2 | Other Study Area Developments..... | 16 |
| 3 | Study Area and Time Periods..... | 16 |
| 3.1 | Study Area..... | 16 |
| 3.2 | Time Periods..... | 16 |
| 3.3 | Horizon Years..... | 16 |
| 4 | Exemption Review..... | 17 |
| 5 | Development-Generated Travel Demand..... | 17 |
| 5.1 | Mode Shares..... | 17 |
| 5.2 | Trip Generation..... | 18 |
| 5.3 | Trip Distribution..... | 19 |
| 5.4 | Trip Assignment..... | 19 |
| 6 | Background Network Travel Demands..... | 21 |
| 6.1 | Transportation Network Plans..... | 21 |
| 6.2 | Background Growth..... | 21 |
| 6.3 | Other Developments..... | 22 |
| 6.4 | Trip Reductions from Existing Site Land Uses..... | 22 |
| 7 | Demand Rationalization..... | 23 |
| 7.1 | 2034 Future Background Operations..... | 23 |
| 7.2 | 2034 Future Total Operations..... | 25 |
| 7.3 | 2034 Future Total Operations – Sensitivity Without Baseline Rapid Transit..... | 27 |
| 7.4 | Demand Rationalization Conclusions..... | 30 |
| 7.4.1 | Network Rationalization..... | 30 |
| 7.4.2 | Development Rationalization..... | 30 |
| 8 | Transportation Demand Management..... | 30 |
| 8.1 | Context for TDM..... | 30 |
| 8.2 | Need and Opportunity..... | 30 |
| 8.3 | TDM Program..... | 30 |
| 9 | Transit..... | 31 |

| | | |
|--------|--|----|
| 9.1 | Transit Priority | 31 |
| 10 | Network Intersection Design..... | 31 |
| 10.1 | Network Intersection Control..... | 31 |
| 10.2 | Network Intersection Design..... | 32 |
| 10.2.1 | 2034 Future Total Network Intersection Operations..... | 32 |
| 10.2.2 | Network Intersection MMLoS..... | 32 |
| 10.2.3 | Recommended Design Elements..... | 32 |
| 11 | Summary of Improvements Indicated and Modifications Options..... | 33 |
| 12 | Conclusion | 36 |

List of Figures

| | | |
|------------|--|----|
| Figure 1: | Area Context Plan | 1 |
| Figure 2: | Concept Plan..... | 2 |
| Figure 3: | Existing Driveways | 5 |
| Figure 4: | Study Area Pedestrian Facilities | 6 |
| Figure 5: | Study Area Cycling Facilities | 6 |
| Figure 6: | Existing Pedestrian Volumes | 7 |
| Figure 7: | Existing Cyclist Volumes | 7 |
| Figure 8: | Existing Study Area Transit Service..... | 8 |
| Figure 9: | Existing Study Area Transit Stops | 9 |
| Figure 10: | Existing Traffic Counts | 10 |
| Figure 11: | Study Area Collision Records – Representation of 2015-2019..... | 12 |
| Figure 12: | Baseline Road Rapid Transit Corridor..... | 15 |
| Figure 13: | Prince of Wales Drive at Baseline Road/Heron Road..... | 16 |
| Figure 14: | New Site Generation Auto Volumes..... | 20 |
| Figure 15: | Pass-By Auto Volumes..... | 21 |
| Figure 16: | Existing Retail Auto Volume Reductions | 23 |
| Figure 17: | 2034 Future Background Volumes | 24 |
| Figure 18: | 2034 Future Total Volumes | 26 |
| Figure 19: | 2034 Future Total Volumes – Fisher Avenue at Baseline Road Without Baseline Rapid Transit..... | 29 |

Table of Tables

| | | |
|-----------|---|----|
| Table 1: | Intersection Count Date..... | 9 |
| Table 2: | Existing Intersection Operations..... | 10 |
| Table 3: | Study Area Collision Summary, 2015-2019 | 12 |
| Table 4: | Summary of Collision Locations, 2015-2019..... | 13 |
| Table 5: | Fisher Avenue at Baseline Road Collision Summary..... | 13 |
| Table 6: | Baseline Road between Marson Street and Fisher Avenue Collision Summary | 14 |
| Table 7: | Fisher Avenue between McCooey Lane and Baseline Road Collision Summary..... | 14 |
| Table 8: | Exemption Review | 17 |
| Table 9: | TRANS Trip Generation Manual Recommended Mode Shares – Merivale | 17 |
| Table 10: | Proposed Development Mode Shares..... | 18 |

Table 11: Trip Generation Person Trip Rates 18

Table 12: Total Person Trip Generation 18

Table 13: Internal Capture Rates..... 18

Table 14: Trip Generation by Mode 19

Table 15: OD Survey Distribution – Merivale 19

Table 16: Trip Assignment 20

Table 17: TRANS Regional Model Projections – Study Area Growth Rates..... 22

Table 18: Study Area Growth Rates Applied 22

Table 19: Trip Generation Person Trip Rates by Peak Hour 22

Table 20: Estimated Existing Auto Trip Volumes vs Forecasted Auto Trip Volumes..... 23

Table 21: 2034 Future Background Intersection Operations 24

Table 22: 2034 Future Total Intersection Operations 27

Table 23: Trip Generation by Mode – Without Baseline Rapid Transit..... 28

Table 24: Proposed Site Generation Vehicle Trip Volumes Without BRT vs Proposed Site Generation Vehicle Trip Volumes With BRT 28

Table 25: 2034 Future Total Intersection Operations– Fisher Avenue at Baseline Road Without Baseline Rapid Transit..... 29

Table 26: Trip Generation by Transit Mode 31

Table 27: Forecasted Site-Generated Transit Ridership..... 31

Table 28: Study Area Intersection MMLoS Analysis 32

List of Appendices

- Appendix A – TIA Screening Form and Certification Form
- Appendix B – Turning Movement Count Data
- Appendix C – Synchro Intersection Worksheets – Existing Conditions
- Appendix D – Collision Data
- Appendix E – TRANS Model Plots
- Appendix F – Background Development Volumes
- Appendix G – Existing Site Generated Trip
- Appendix H – Synchro Intersection Worksheets – 2034 Future Background Conditions
- Appendix I – TDM Checklist
- Appendix J – Synchro Intersection Worksheets – 2034 Future Total Conditions
- Appendix K – Synchro Worksheets – Fisher Avenue at Baseline Road Without Baseline Rapid Transit
- Appendix L – MMLoS Analysis

1 Screening


This study has been prepared according to the City of Ottawa’s 2017 Transportation Impact Assessment (TIA) Guidelines. Accordingly, a Step 1 Screening Form has been prepared and is included as Appendix A, along with the Certification Form for the TIA Study PM. As shown in the Screening Form, a TIA is required including the Network Impact Component. This study has been prepared to support a zoning by-law amendment.

2 Existing and Planned Conditions

2.1 Proposed Development


The existing site, located at 780 Baseline Road, is zoned as General Mixed Use (GM) and includes a business strip consisting of retail, service, and restaurant land uses with surrounding surface parking lots. The proposed development is anticipated to include a total of 1,089 dwelling units and 30,650 sq. ft of commercial space in three mixed-used buildings to be constructed across multiple phases with an anticipated full build-out and occupancy horizon of 2034. The first phase is understood to consist of a 24-storey mixed-use building on the southern portion of the parcel in the present location of the surface parking lot. The remaining two phases are understood to include the demolition of the existing business strip and the construction of two mixed-use buildings, one 28-storey tower on the west side of the site, and one 32-storey tower at the Baseline Road and Fisher Avenue intersection, each on four-storey podia. The development proposes a right-in-only access on Baseline Road, the use of an existing full-movement access on Fisher Avenue, and a new full-movement access on Fisher Avenue. A total of 999 residential, 105 visitor, 45 commercial vehicle parking spaces, and 1089 residential and 32 commercial bicycle parking spaces are proposed. The site is located within the Carleton Heights Secondary Plan area. Figure 1 illustrates the Study Area Context. Figure 2 illustrates the proposed concept plan.

Figure 1: Area Context Plan

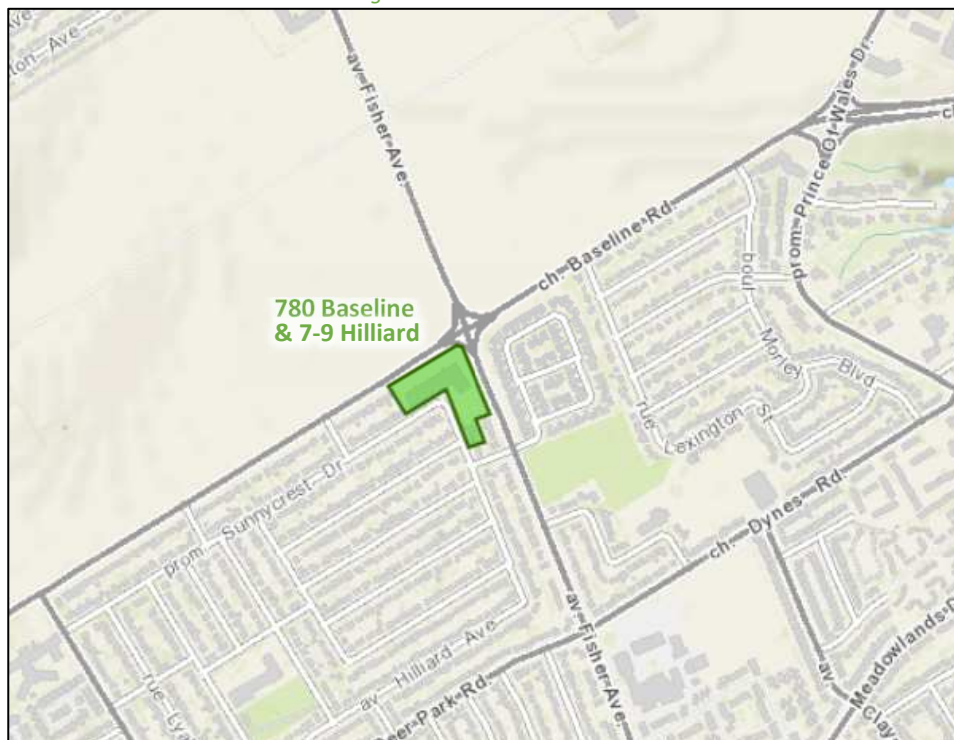


Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: May 24, 2023

Figure 2: Concept Plan

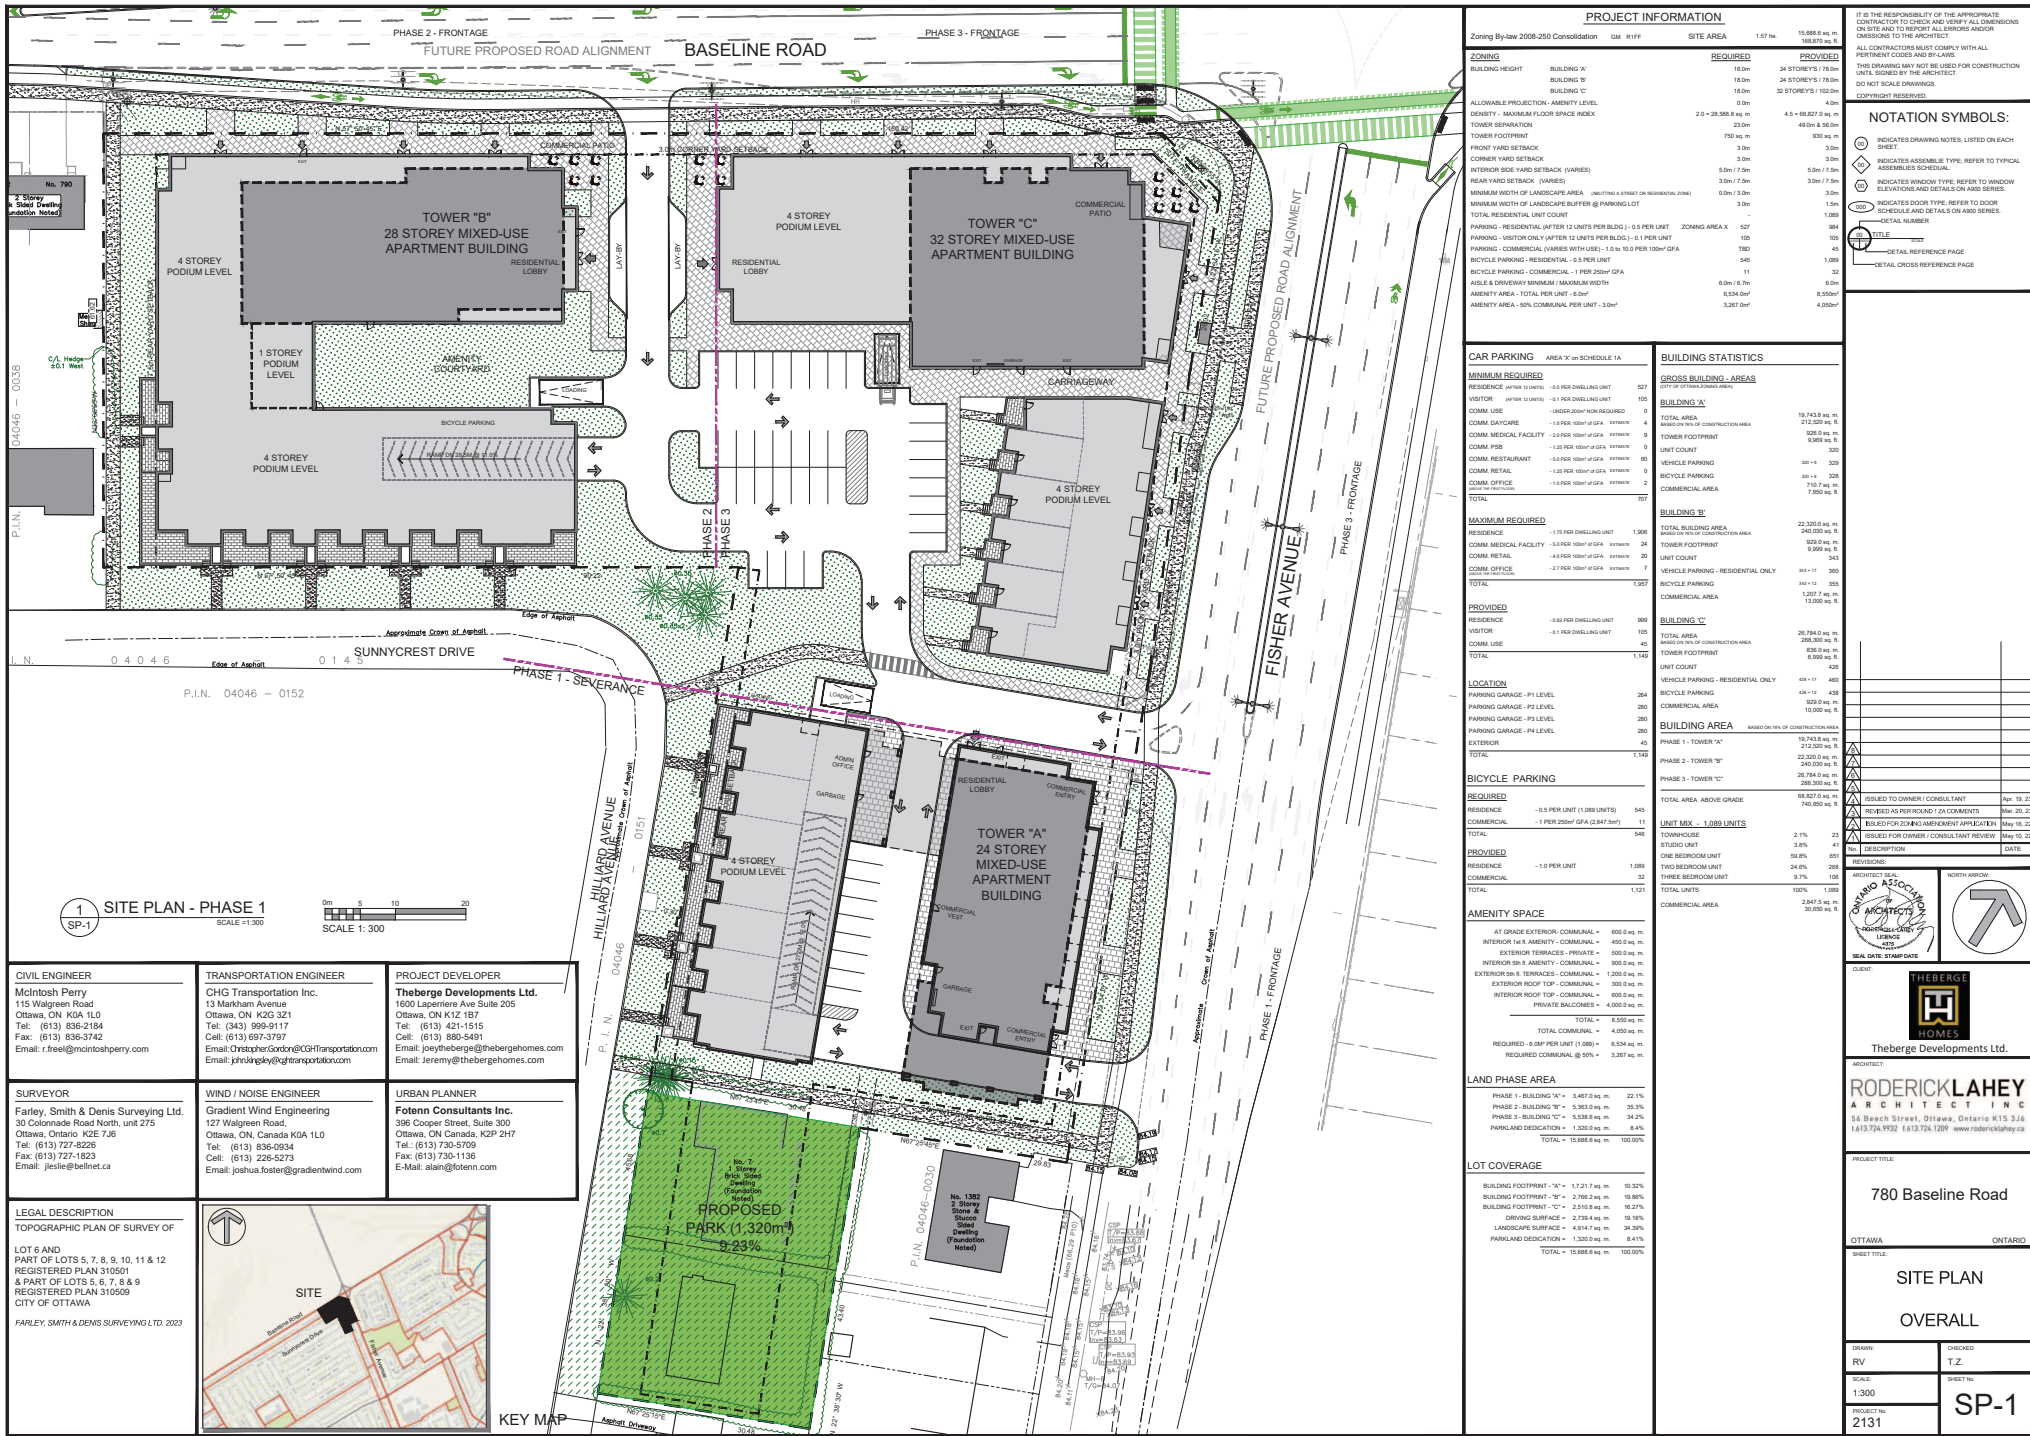

| PROJECT INFORMATION | |
|--|---------------------------------------|
| Zoning Bylaw 2008-250 Consideration | GM #1917 |
| SITE AREA | 1.97 ha |
| 10,888.0 sq. m. | 168,875 sq. ft. |
| ZONING | REQUIRED |
| BUILDING HEIGHT | BUILDING 'A' |
| BUILDING 'B' | 18.0m |
| BUILDING 'C' | 18.0m |
| ALLOWABLE PROJECTION- AMENITY LEVEL | 0.0m |
| IDENTITY - MAXIMUM FLOOR SPACE INDEX | 2.2 - 28,982.0 sq. m. |
| TOWER SEPARATION | 23.0m |
| TOWER FOOTPRINT | 750 sq. m. |
| FRONT YARD SETBACK | 3.0m |
| CORNER YARD SETBACK | 3.0m |
| INTERIOR SIDE YARD SETBACK (VARIES) | 5.0m / 7.5m |
| REAR YARD SETBACK (VARIES) | 3.0m / 7.5m |
| MINIMUM WIDTH OF LANDSCAPE AREA - (VERTICES OF CORNER OF RESIDENTIAL ZONE) | 3.0m |
| MINIMUM WIDTH OF LANDSCAPE BUFFER @ PARKING LOT | 3.0m |
| TOTAL RESIDENTIAL UNIT COUNT | 1,589 |
| PARKING - RESIDENTIAL (UPPER 12 UNITS PER BLOCK) @ 0.8 PER UNIT | 984 |
| PARKING - VISITOR ONLY (UPPER 12 UNITS PER BLOCK) @ 0.1 PER UNIT | 165 |
| PARKING - COMMERCIAL (VARIES WITH USE) - 1.0 TO 10.0 PER 100m ² GFA | 780 |
| BICYCLE PARKING - RESIDENTIAL - 0.5 PER UNIT | 545 |
| BICYCLE PARKING - COMMERCIAL - 1 PER 200m ² GFA | 11 |
| ASILE & DRIVEWAY MINIMUM / MAXIMUM WIDTH | 6.0m / 6.7m |
| AMENITY AREA - TOTAL PER UNIT - 6.0m ² | 6,534.0m ² |
| AMENITY AREA - 30% COMMERCIAL PER UNIT - 3.2m ² | 3,287.0m ² |
| PROVIDED | PROVIDED |
| 24 STOREYS / 78.0m | 24 STOREYS / 78.0m |
| 24 STOREYS / 78.0m | 24 STOREYS / 78.0m |
| 30 STOREYS / 102.0m | 30 STOREYS / 102.0m |
| 4.5 - 15.237.0 sq. m. | 4.5 - 15.237.0 sq. m. |
| 49.0m & 55.0m | 49.0m & 55.0m |
| 530 sq. m. | 530 sq. m. |
| 3.0m | 3.0m |
| 5.0m / 7.5m | 5.0m / 7.5m |
| 3.0m / 7.5m | 3.0m / 7.5m |
| 3.0m | 3.0m |
| 1.589 | 1,589 |
| 984 | 984 |
| 165 | 165 |
| 780 | 780 |
| 545 | 1,089 |
| 11 | 12 |
| 6.0m / 6.7m | 6.0m |
| 6,534.0m ² | 6,534.0m ² |
| 3,287.0m ² | 4,057.0m ² |
| CAR PARKING | AREA 'A' ON SCHEDULE 1A |
| MINIMUM REQUIRED | BUILDING STATISTICS |
| RESIDENCE - 0.8 PER DWELLING UNIT | GROSS BUILDING AREAS |
| VISITOR - 0.1 PER DWELLING UNIT | BASED ON NET GFA OF CONSTRUCTION AREA |
| COMM USE | BUILDING 'A' |
| COMM DAYCARE | 19,743.8 sq. m. |
| COMM MEDICAL FACILITY - 1.0 PER 100m ² GFA | 212,320 sq. m. |
| COMM FIBRE | 10,200.0 sq. m. |
| COMM RESTAURANT | 5,935 sq. m. |
| COMM RETAIL | 320 |
| COMM OFFICE | 90 + 325 |
| TOTAL | 90 + 328 |
| 757 | 757 |
| MAXIMUM REQUIRED | BUILDING 'B' |
| RESIDENCE - 1.0 PER DWELLING UNIT | TOTAL BUILDING AREA |
| VISITOR - 0.1 PER DWELLING UNIT | BASED ON NET GFA OF CONSTRUCTION AREA |
| COMM USE | 22,320.0 sq. m. |
| COMM DAYCARE | 243,000 sq. m. |
| COMM MEDICAL FACILITY - 1.0 PER 100m ² GFA | 10,200.0 sq. m. |
| COMM FIBRE | 5,935 sq. m. |
| COMM RESTAURANT | 320 |
| COMM RETAIL | 90 + 325 |
| COMM OFFICE | 90 + 328 |
| TOTAL | 90 + 335 |
| 1,587 | 1,587 |
| PROVIDED | BUILDING 'C' |
| RESIDENCE - 0.8 PER DWELLING UNIT | TOTAL BUILDING AREA |
| VISITOR - 0.1 PER DWELLING UNIT | BASED ON NET GFA OF CONSTRUCTION AREA |
| COMM USE | 26,764.0 sq. m. |
| TOTAL | 285,300.0 sq. m. |
| 1,740 | 1,740 |
| LOCATION | UNIT COUNT |
| PARKING GARAGE - P1 LEVEL | VEHICLE PARKING - RESIDENTIAL ONLY |
| PARKING GARAGE - P2 LEVEL | VEHICLE PARKING - COMMERCIAL AREA |
| PARKING GARAGE - P3 LEVEL | VEHICLE PARKING - RESIDENTIAL ONLY |
| EXTERIOR | VEHICLE PARKING - RESIDENTIAL ONLY |
| TOTAL | 428 |
| 1,430 | 428 |
| BICYCLE PARKING | BUILDING AREA |
| RESIDENCE - 0.5 PER UNIT (1,089 UNITS) | BASED ON NET GFA OF CONSTRUCTION AREA |
| COMMERCIAL - 1 PER 200m ² GFA (2,247.5m ²) | PHASE 1 - TOWER 'A' |
| TOTAL | 22,320.0 sq. m. |
| 545 | 243,000 sq. m. |
| 58 | 212,320 sq. m. |
| REQUIRED | PHASE 2 - TOWER 'B' |
| RESIDENCE - 0.5 PER UNIT | 22,320.0 sq. m. |
| COMMERCIAL - 1 PER 200m ² GFA (2,247.5m ²) | 243,000 sq. m. |
| TOTAL | 26,764.0 sq. m. |
| 1,121 | 285,300.0 sq. m. |
| AMENITY SPACE | UNIT MIX - 1,089 UNITS |
| AT GRADE EXTERIOR - COMMERCIAL - 650.0 sq. m. | TOWNHOUSE |
| INTERIOR IN 'A' AMENITY - COMMERCIAL - 450.0 sq. m. | RESIDENTIAL |
| EXTERIOR TERRACES - PRIVATE - 500.0 sq. m. | ONE BEDROOM UNIT |
| INTERIOR IN 'B' AMENITY - COMMERCIAL - 500.0 sq. m. | TWO BEDROOM UNIT |
| EXTERIOR TERRACES - COMMERCIAL - 1,200.0 sq. m. | THREE BEDROOM UNIT |
| EXTERIOR ROOF TOP - COMMERCIAL - 300.0 sq. m. | PRIVATE BALCONIES - 4,000.0 sq. m. |
| INTERIOR ROOF TOP - COMMERCIAL - 800.0 sq. m. | TOTAL |
| PRIVATE BALCONIES - 4,000.0 sq. m. | 1,089 |
| TOTAL - 8,550.0 sq. m. | 100% 1,089 |
| TOTAL COMMERCIAL - 4,950.0 sq. m. | COMMERCIAL AREA |
| REQUIRED - 6.0m ² PER UNIT (1,089) - 6,534.0 sq. m. | 2,847.5 sq. m. |
| REQUIRED COMMERCIAL @ 30% - 3,287.0 sq. m. | 30,800.0 sq. m. |
| LAND PHASE AREA | LOT COVERAGE |
| PHASE 1 - BUILDING 'A' - 3,467.0 sq. m. | 22.1% |
| PHASE 2 - BUILDING 'B' - 3,383.8 sq. m. | 31.3% |
| PHASE 3 - BUILDING 'C' - 5,539.2 sq. m. | 34.2% |
| PARKLAND DEDICATION - 1,330.0 sq. m. | 100.0% |
| TOTAL - 13,689.8 sq. m. | 100.0% |
| LOT COVERAGE | |
| BUILDING FOOTPRINT - 'A' - 1,227.7 sq. m. | 10.37% |
| BUILDING FOOTPRINT - 'B' - 2,762.2 sq. m. | 19.86% |
| BUILDING FOOTPRINT - 'C' - 2,518.8 sq. m. | 16.27% |
| DRIVING SURFACE - 2,778.4 sq. m. | 18.61% |
| LANDSCAPE SURFACE - 4,974.7 sq. m. | 34.30% |
| PARKLAND DEDICATION - 1,330.0 sq. m. | 8.41% |
| TOTAL - 15,688.8 sq. m. | 100.00% |

| | | |
|---|---|---|
| CIVIL ENGINEER McIntosh Perry 115 Walgreen Road Ottawa, ON K0A 1L0 Tel: (613) 836-2184 Fax: (613) 836-3742 Email: f.free@mcintoshperry.com | TRANSPORTATION ENGINEER CHG Transportation Inc. 13 Markham Avenue Ottawa, ON K2G 3Z1 Tel: (343) 909-9117 Cell: (613) 890-3797 Email: Christopher.Gordon@CHGTransportation.com John.Klay@chgtransportation.com | PROJECT DEVELOPER Theberge Developments Ltd. 1600 Lapier Avenue Suite 205 Ottawa, ON K1Z 1B7 Tel: (613) 821-1515 Cell: (613) 860-5491 Email: joey.theberge@theberghomes.com Jeremy@theberghomes.com |
| SURVEYOR Farley, Smith & Denis Surveying Ltd. 30 Colomade Road North, unit 275 Ottawa, Ontario K2E 7J6 Tel: (613) 727-8226 Fax: (613) 727-1823 Email: jps@fsd.ca | WIND / NOISE ENGINEER Gradient Wind Engineering 127 Walgreen Road, Ottawa, ON, Canada K0A 1L0 Tel: (613) 836-0934 Fax: (613) 226-5273 Email: joshua.foster@gradientwind.com | URBAN PLANNER Fotenn Consultants Inc. 308 Cooper Street, Suite 300 Ottawa, ON Canada, K2P 2H7 Tel: (613) 730-5709 Fax: (613) 730-1136 E-Mail: arian@fotenn.com |

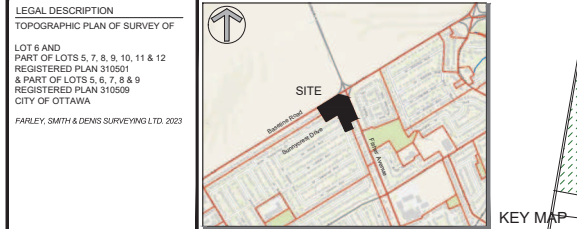

2.2 Existing Conditions

2.2.1 Area Road Network

Baseline Road: Baseline Road is a City of Ottawa arterial road with a divided four-lane urban cross-section. Sidewalks are provided on the south side of the roadway, at intersections and bus stops on the north side of the road to the west, and on both sides of the road to the east of Prince of Wales Drive. The posted speed limit is 60 km/h within the study area and the City-protected right of way is 44.5 metres. Baseline Road is designated as a truck route.

Heron Road: Heron Road is a City of Ottawa arterial road with a divided six-lane urban cross-section, including bus lanes and sidewalks on both sides of the road. Bike lanes are present over the Heron Bridge. The posted speed limit is 60 km/h within the study area and the City-protected right of way is 44.5 metres. Heron Road is designated as a truck route.

Fisher Avenue: Fisher Avenue is a City of Ottawa arterial road with a two-lane rural cross-section with paved shoulders on both sides of the road. North of Baseline Road, a sidewalk is present on the west side of the road and sidewalks are present on both sides of the road to the south. The posted speed limit is 50 km/h, the City-protected right of way is 34.0 metres north of Baseline Road, and the measured right of way varies between 24.5 and 30.0 metres south of Baseline Road within the study area. Fisher Avenue is designated as a truck route.

Prince of Wales Drive: Prince of Wales Drive is a City of Ottawa arterial road with a two-lane semi-urban cross-section to the north and a two-lane urban cross-section to the south of Baseline Road. To the north, a paved shoulder is provided on the west side of the road and a curbside bike lane with a sidewalk is provided on the east side of the road within the study area. South of Baseline Road, sidewalks are provided on both sides of the road and bike lanes transition to cycletracks. The posted speed limit is 60 km/h north of Baseline Road and 50 km/h south of Baseline Road. The city-protected right of way is 26.0 metres to the north, and the measured right of way varies between 28.5 and 73.5 metres to the south of Baseline Road. Prince of Wales Drive is designated as a truck route.

Deer Park Road: Deer Park Road is a City of Ottawa collector road with a two-lane urban cross-section. Sidewalks and bike lanes are present on both sides of the road east of Millbrook Crescent and on the south side of the road to the west. The posted speed limit is 40 km/h, and the City-protected right of way is 26.0 metres.

Dynes Road: Dynes Road is a City of Ottawa collector road with a two-lane urban cross-section. Sidewalks and bike lanes are present on both sides of the road. The posted speed limit is 50 km/h, and the measured right of way is 18.0 metres.

Sunnycrest Drive: Sunnycrest Drive is a City of Ottawa local road with a two-lane urban cross-section with on-street parking permitted on both sides of the road. The posted speed limit is 40 km/h, and the measured right of way is 20.0 metres.

Hilliard Avenue: Hilliard Avenue is a City of Ottawa local road with a two-lane urban cross-section with on-street parking permitted on both sides of the road. The posted speed limit is 40 km/h, and the measured right of way is 20.0 metres.

2.2.2 Existing Intersections

The existing signalized area intersections within 400 metres of the site have been summarized below and comprise only Baseline Road at Fisher Avenue. The intersection of Baseline Road/Heron Road at Prince of Wales Drive has additionally been included as a key intersection for the purposes of this study:

Fisher Avenue at Baseline Road

The intersection of Fisher Avenue at Baseline Road is a signalized intersection. Each approach consists of an auxiliary left-turn lane, two through lanes, and a channelized auxiliary right-turn lane. Eastbound and westbound U-turn movements are prohibited, and trucks are prohibited from making westbound left turns.

Prince of Wales Drive at Baseline Road/Heron Road

The intersection of Prince of Wales Drive at Baseline Road and Heron Road is a signalized intersection. The northbound and southbound approaches each consist of an auxiliary left-turn lane, two through lanes, a floating bike lane, and a channelized auxiliary right-turn lane. The eastbound approach consists of an auxiliary left-turn lane, two through lanes, an auxiliary through lane, and a channelized auxiliary right-turn lane, and the westbound approach consists of two auxiliary left-turn lanes, two through lanes, a transit queue-jump lane, and a channelized auxiliary right-turn lane. No turn restrictions were noted.

Fisher Avenue at Deer Park Road / Dynes Road

The intersection of Fisher Avenue at Deer Park Road/Dynes Road is a signalized intersection. The northbound approach consists of a shared left-turn/through lane and a right-turn lane, and the southbound approach consists of a shared left-turn/through lane and an auxiliary through/right-turn lane. The eastbound and westbound approaches each consist of a shared all-movement lane. Cycle tracks are provided on all approaches. No turn restrictions were noted.

2.2.3 Existing Driveways

Within 200 metres of the site accesses, eight driveways semi-detached and detached dwellings are located on the west side of Baseline Road. Eight driveways semi-detached and detached dwellings are present on the south side of Fisher Avenue. None of the driveways within the area of consideration are significant traffic generators. Figure 3 illustrates the existing driveways.

Figure 3: Existing Driveways



Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: May 24, 2023

2.2.4 Cycling and Pedestrian Facilities

Figure 4 illustrates the pedestrian facilities in the study area and Figure 5 illustrates the cycling facilities.

Sidewalks are provided along the south side of Baseline Road and Deer Park Road west of Millbrook Crescent, on the east side of Prince of Wales Drive, on the west side of Fisher Avenue north of Baseline Road, on both sides of Fisher Avenue south of Baseline Road, Dynes Road, and Deer Park Road east of Millbrook Crescent. Sidewalks are also present at intersections and bus stops on the north side of Baseline Road to the west of Fisher Avenue.

A paved shoulder is present on both sides of Fisher Avenue except through the intersection with Baseline Avenue where bike lanes are present and on the east side of the road between Malibu Terrace and the auxiliary northbound right turn lane taper at Baseline Road where a cycletrack is present. Cycletracks are also present at the Fisher Avenue at Deer Park Road/Dynes Road intersection, and bike lanes are present along Dynes Road and Deer Park Road east of Millbrook Crescent.


Fisher Avenue, Prince of Wales Drive, Baseline Road, and Heron Road are spine routes. Baseline Road, Heron Road and Prince of Wales Drive are cross-town bikeways. Malibu Terrace west of Fisher Avenue, Hilliard Avenue north of Malibu Terrace, Sunnycrest Drive, Deer Park Road, Dynes Road, and McCooey Lane are local routes.

Figure 4: Study Area Pedestrian Facilities



Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: May 24, 2023

Figure 5: Study Area Cycling Facilities

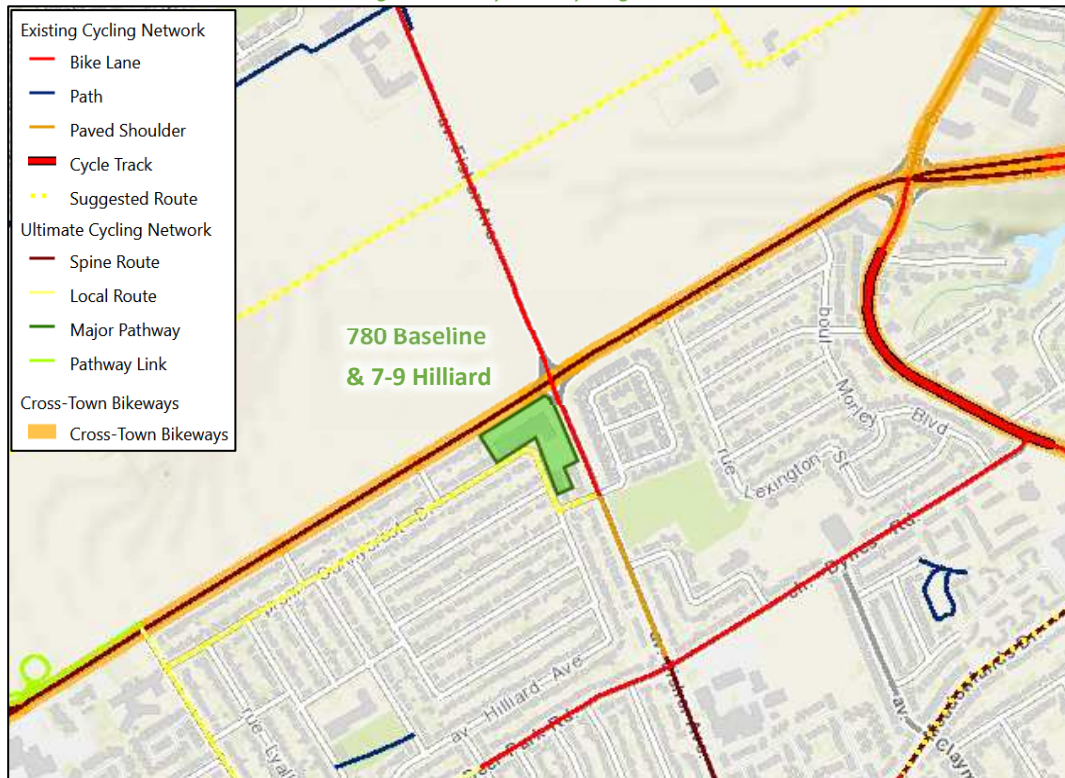

Source: <http://maps.ottawa.ca/geoOttawa/> Accessed: May 24, 2023

Pedestrian and cyclist volumes included in study area intersection counts, presented in Section 2.2.7, have been compiled and are illustrated in Figure 6 and Figure 7 respectively.

Figure 6: Existing Pedestrian Volumes


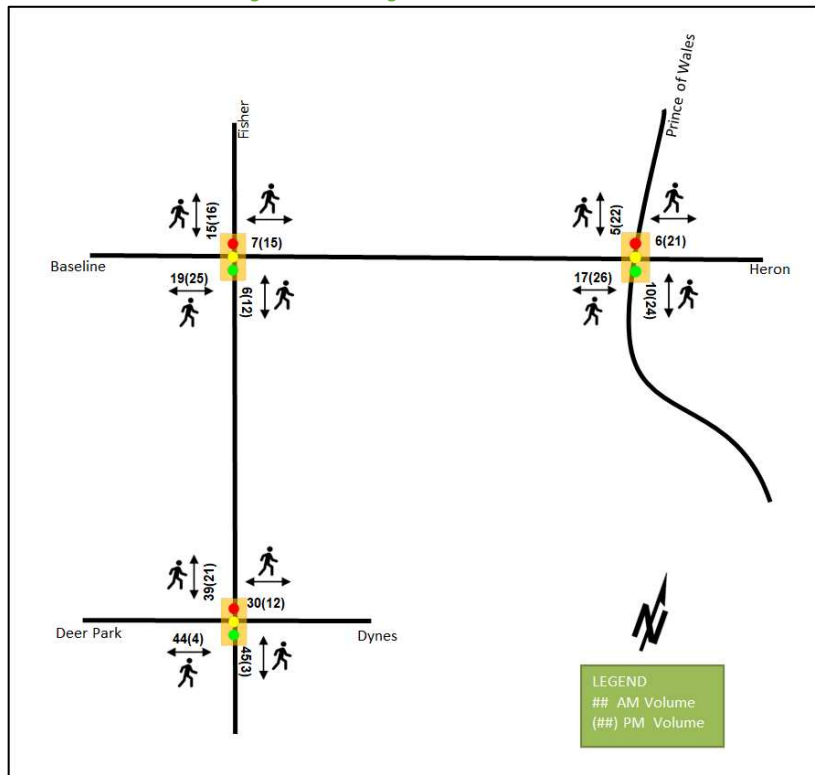


Figure 7: Existing Cyclist Volumes

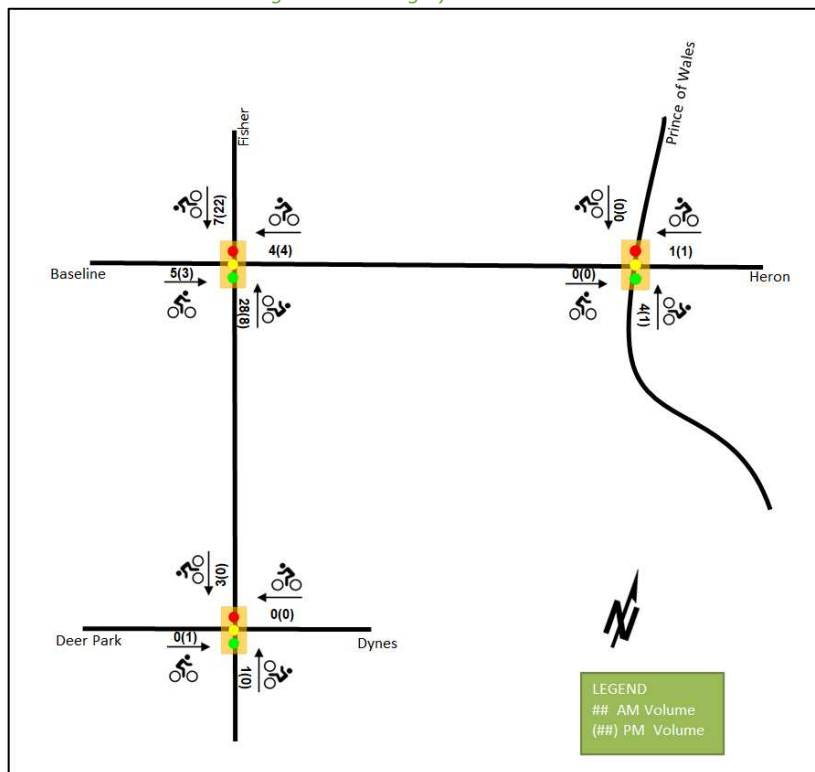

2.2.5 Existing Transit

Figure 8 illustrates the transit system map in the study area and Figure 9 illustrates nearby transit stops. All transit information is from May 11, 2022 and is included for general information purposes and context to the surrounding area.

Within the study area, routes #86 and #89 travel along Fisher Avenue and route #88 travels along Baseline Road and Heron Road. Primary stops are located at Marson Street at Baseline Road and Fisher Avenue at Baseline Road intersections. The frequency of these routes within proximity of the proposed site based on May 11, 2022 service levels are:


- Route # 86 – 15-minute service in the peak period/direction, 30-minute service all day
- Route # 88 – 10-12-minute service in the peak period/direction, 15-minute service all day
- Route # 89 – 15-minute service in the peak period/direction, 30-minute service all day

Figure 8: Existing Study Area Transit Service



Source: <http://www.octranspo.com/> Accessed: May 11, 2022

Figure 9: Existing Study Area Transit Stops

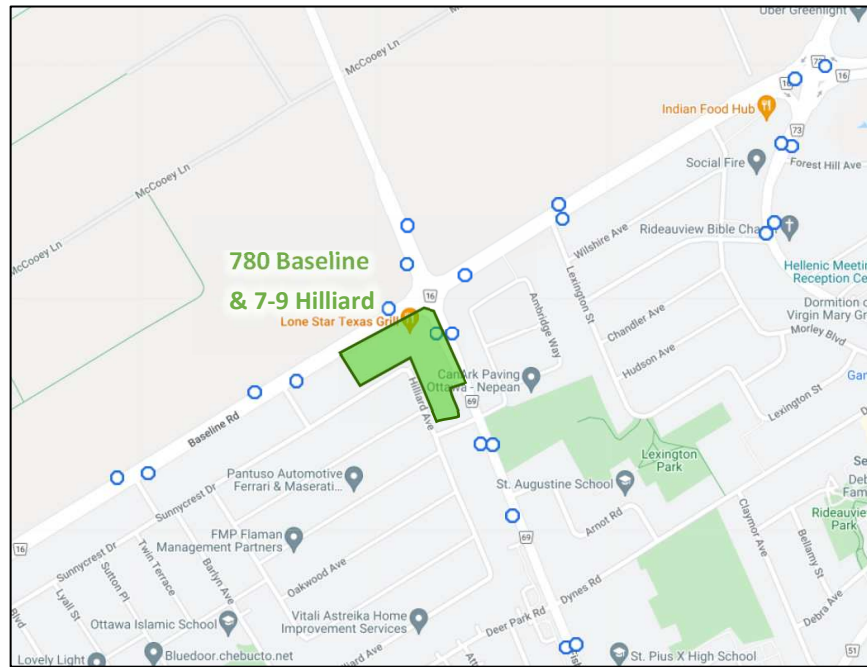

Source: <http://www.octranspo.com/> Accessed: May 11, 2022

2.2.6 Existing Area Traffic Management Measures

The primary traffic calming measure within the study area is on-road messaging stating the speed limit on Sunnycrest Drive.

2.2.7 Existing Peak Hour Travel Demand

Existing turning movement counts were acquired from the City of Ottawa for the existing Study Area intersection. Table 1 summarizes the intersection count dates.

Table 1: Intersection Count Date

| Intersection | Count Date |
|---|----------------------------|
| Fisher Avenue at Baseline Road | Wednesday, August 03, 2016 |
| Prince of Wales Drive at Baseline Road/Heron Road | Wednesday, March 04, 2020 |
| Fisher Avenue at Deer Park Road/Dynes Road | Wednesday, March 09, 2016 |

Figure 10 illustrates the existing traffic counts, balanced along the Baseline Road and Fisher Avenue corridors, and Table 2 summarizes the existing intersection operations. At the time of the Prince of Wales Drive at Baseline Road/Heron Road turning movement count, the Hog’s Back Bridge was closed, and it is noted that the count includes detour volumes from this closure. The level of service for signalized intersections is based on the volume to capacity ratio (v/c) calculation for individual lane movements and HCM 2000 v/c calculations for the overall intersection. Detailed turning movement count data is included in Appendix B and the Synchro worksheets are provided in Appendix C.

Figure 10: Existing Traffic Counts

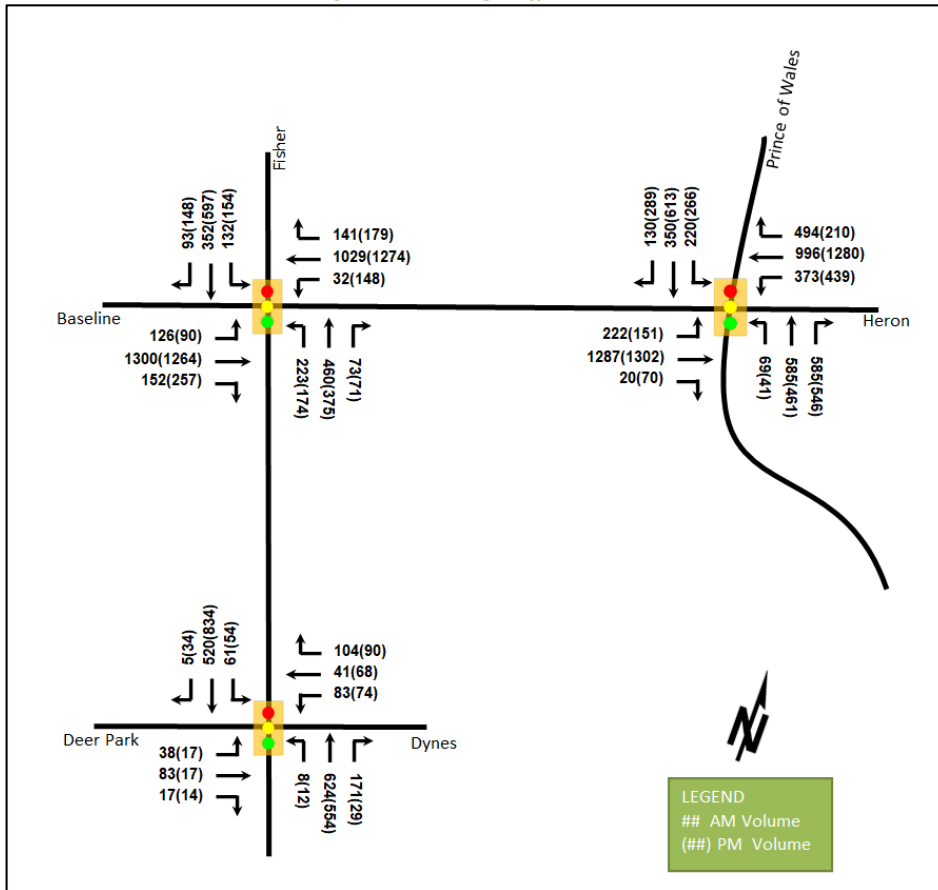


Table 2: Existing Intersection Operations

| Intersection | Lane | AM Peak Hour | | | | PM Peak Hour | | | |
|--|----------|--------------|-------------|-----------|-----------------------|--------------|-------------|-----------|-----------------------|
| | | LOS | V/C | Delay (s) | Q (95 th) | LOS | V/C | Delay (s) | Q (95 th) |
| Fisher Avenue at Baseline Road Signalized | EBL | B | 0.70 | 73.0 | 55.3 | B | 0.64 | 74.7 | 43.2 |
| | EBT | E | 0.96 | 50.4 | #272.2 | F | 1.16 | 117.8 | #266.1 |
| | EBR | A | 0.23 | 3.8 | 12.2 | A | 0.47 | 17.2 | 51.0 |
| | WBL | A | 0.42 | 82.5 | m5.3 | D | 0.90 | 101.1 | #82.6 |
| | WBT | E | 0.99 | 34.5 | m99.9 | F | 1.10 | 96.5 | #268.1 |
| | WBR | A | 0.24 | 9.9 | m12.9 | A | 0.31 | 9.1 | 25.0 |
| | NBL | D | 0.86 | 78.6 | #100.0 | D | 0.85 | 86.3 | #86.3 |
| | NBT | C | 0.73 | 53.6 | 81.1 | B | 0.63 | 53.3 | 70.8 |
| | NBR | A | 0.18 | 0.9 | 0.0 | A | 0.21 | 2.5 | 2.6 |
| | SBL | C | 0.76 | 79.3 | #62.8 | C | 0.79 | 79.9 | #72.4 |
| | SBT | C | 0.76 | 62.4 | 66.7 | F | 1.05 | 99.8 | #138.3 |
| | SBR | A | 0.25 | 1.4 | 0.0 | A | 0.43 | 14.1 | 25.1 |
| Overall | E | 0.95 | 46.1 | - | F | 1.04 | 86.4 | - | |

| Intersection | Lane | AM Peak Hour | | | | PM Peak Hour | | | |
|---|----------------|--------------|--------------|--------------|-----------------------|--------------|--------------|--------------|-----------------------|
| | | LOS | V/C | Delay (s) | Q (95 th) | LOS | V/C | Delay (s) | Q (95 th) |
| Prince of Wales Drive at Baseline Road/Heron Road Signalized | EBL | F | 1.28 | 198.6 | m#92.4 | F | 1.63 | 361.0 | #107.8 |
| | EBT/R | F | 1.16 | 106.7 | m#178.5 | F | 1.20 | 139.0 | #206.3 |
| | WBL | D | 0.82 | 66.1 | 70.2 | F | 1.24 | 174.3 | #114.8 |
| | WBT | F | 1.87 | 426.7 | #268.6 | F | 1.59 | 305.7 | #319.7 |
| | WBR | D | 0.87 | 25.5 | #90.8 | A | 0.42 | 7.1 | 19.8 |
| | NBL | A | 0.53 | 69.3 | 34.4 | A | 0.32 | 62.4 | 24.0 |
| | NBT | D | 0.82 | 56.2 | 105.8 | B | 0.62 | 47.5 | 81.0 |
| | NBR | F | 1.05 | 71.4 | #177.9 | F | 1.10 | 95.6 | #196.2 |
| | SBL | F | 1.06 | 129.1 | #120.1 | F | 1.13 | 144.4 | #145.1 |
| | SBT/R | A | 0.53 | 37.8 | 78.7 | E | 0.96 | 61.8 | #172.4 |
| Overall | F | 1.30 | 144.8 | - | F | 1.34 | 156.2 | - | |
| Fisher Avenue at Deer Park Road/Dynes Road Signalized | EB | A | 0.44 | 26.4 | 31.2 | A | 0.18 | 23.0 | 14.2 |
| | WB | B | 0.69 | 30.3 | 46.5 | C | 0.80 | 48.3 | 62.2 |
| | NBL/T | B | 0.70 | 18.7 | #148.5 | A | 0.57 | 12.9 | 105.0 |
| | NBR | A | 0.23 | 2.5 | 9.1 | A | 0.03 | 1.6 | 2.4 |
| | SBL | A | 0.44 | 11.6 | 46.4 | A | 0.55 | 11.3 | 77.7 |
| | Overall | B | 0.69 | 16.8 | - | B | 0.62 | 16.7 | - |

Notes: Saturation flow rate of 1800 veh/h/lane
Queue is measured in metres
Peak Hour Factor = 0.90

V/C = volume-to-capacity ratio
m = metered queue
= volume for the 95th %ile cycle exceeds capacity

Generally, the study area intersections experience capacity issues and significant delays along Baseline Road during both AM and PM peak hours.

At the intersection of Fisher Avenue at Baseline Road, the eastbound through, westbound through, and southbound through movements are over theoretical capacity and may be subject to high delays and extended queues during PM peak hour. Extended queues may also be exhibited on the eastbound through, northbound left-turn, and southbound left-turn movements during the AM peak hour, and on the westbound left-turn, northbound left-turn, and southbound left-turn movements during both peak hours. High delays may be experienced on the westbound left-turn movement during the AM and PM peak hours and on the northbound left-turn movement during PM peak hour. The overall intersection operates over theoretical capacity with high delays during the PM peak hour.

The intersection of the Prince of Wales Drive at Baseline Road/Heron Road may exhibit extended queues on the westbound right-turn movement during AM peak hour and on the southbound shared through/right-turn movement during PM peak hour. The eastbound and southbound left-turn, eastbound shared through right-turn, westbound through, and northbound right-turn movements are over theoretical capacity and may be subject to high delays and extended queues during both peak hours as with the westbound left-turn during PM peak hour. The overall intersection operates over theoretical capacity and may be subject to high delays during both peak hours.

At the intersection of Fisher Avenue at Deer Park Road/Dynes Road intersection, extended queues may be exhibited on the northbound left-turn/through movements during AM peak hour.

2.2.8 Collision Analysis

Collision data have been acquired from the City of Ottawa open data website (data.ottawa.ca) for five years prior to the commencement of this TIA for the surrounding study area road network. Table 3 summarizes the collision

types and conditions in the study area, Figure 11 illustrates the intersections and segments analyzed, and Table 4 summarizes the total collisions for each of these locations. Collision data are included in Appendix D.

Table 3: Study Area Collision Summary, 2015-2019

| Total Collisions | | Number | % |
|------------------------|----------------------|------------|-------------|
| | | 133 | 100% |
| Classification | Fatality | 1 | 1% |
| | Non-Fatal Injury | 24 | 18% |
| | Property Damage Only | 108 | 82% |
| Initial Impact Type | Angle | 8 | 6% |
| | Rear end | 87 | 65% |
| | Sideswipe | 17 | 13% |
| | Turning Movement | 8 | 6% |
| | SMV Unattended | 1 | 1% |
| | SMV Other | 8 | 6% |
| | Other | 4 | 3% |
| Road Surface Condition | Dry | 95 | 71% |
| | Wet | 19 | 14% |
| | Loose Snow | 8 | 6% |
| | Slush | 3 | 2% |
| | Packed Snow | 5 | 4% |
| | Ice | 3 | 2% |
| Pedestrian Involved | | 4 | 3% |
| Cyclists Involved | | 1 | 1% |

Figure 11: Study Area Collision Records – Representation of 2015-2019

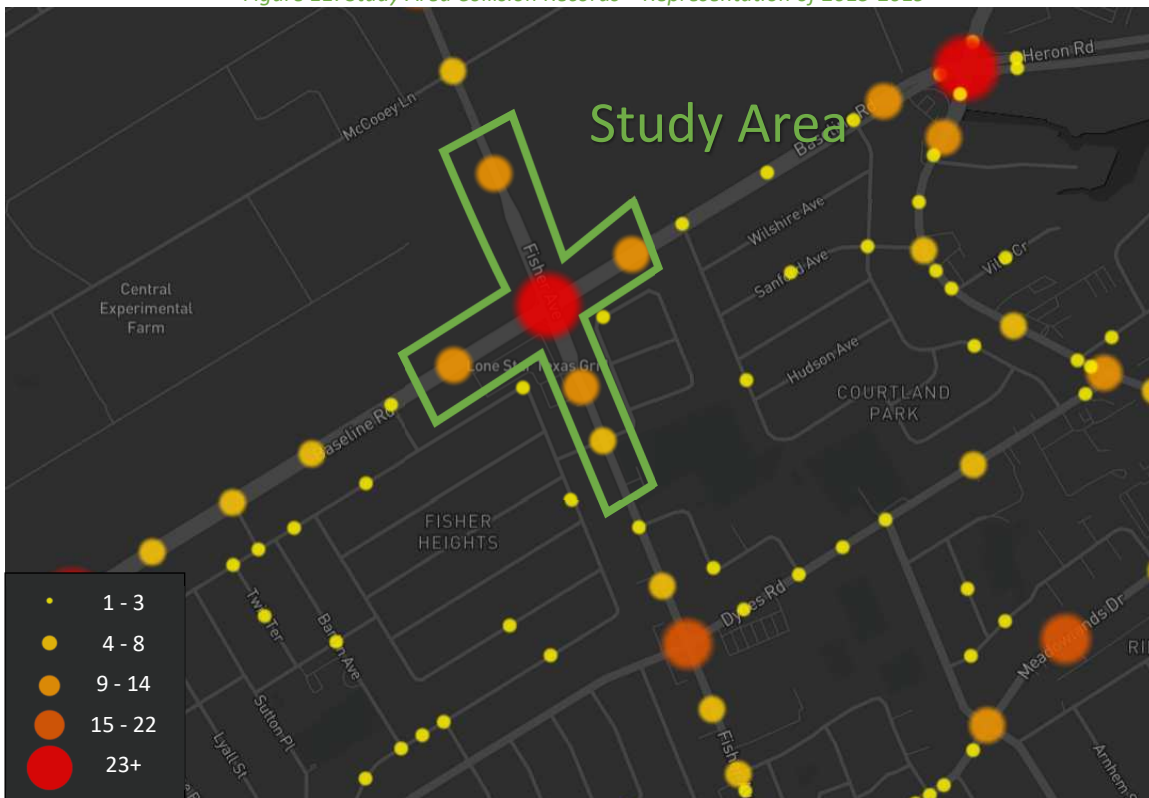


Table 4: Summary of Collision Locations, 2015-2019

| | Number | % |
|--|------------|-------------|
| Intersections / Segments | 133 | 100% |
| Fisher Ave @ Baseline Rd | 81 | 61% |
| Fisher Ave @ Malibu Ter | 7 | 5% |
| Baseline Rd btwn Marson St & Fisher Ave | 12 | 9% |
| Baseline Rd btwn Fisher Ave & Lexington St | 10 | 8% |
| Fisher Ave btwn McCooley Lane & Baseline Rd | 13 | 10% |
| Fisher Ave btwn Baseline Rd & Malibu Ter | 10 | 8% |

Within the study area, the intersection of Fisher Avenue at Baseline Road and segments of Baseline Road between Marson Street and Fisher Avenue, and Fisher Avenue between McCooley Lane and Baseline Road are noted to have experienced higher collisions than other locations. Table 5, Table 6, and Table 7 summarize the collision types and conditions for each of these locations respectively.

Table 5: Fisher Avenue at Baseline Road Collision Summary

| | | Number | % |
|-------------------------------|-----------------------------|-----------|-------------|
| Total Collisions | | 81 | 100% |
| Classification | Fatality | 1 | 1% |
| | Non-Fatal Injury | 9 | 11% |
| | Property Damage Only | 71 | 88% |
| Initial Impact Type | Angle | 2 | 2% |
| | Rear end | 59 | 73% |
| | Sideswipe | 11 | 14% |
| | Turning Movement | 2 | 2% |
| | SMV Unattended | 1 | 1% |
| | SMV Other | 5 | 6% |
| | Other | 1 | 1% |
| Road Surface Condition | Dry | 60 | 74% |
| | Wet | 7 | 9% |
| | Loose Snow | 7 | 9% |
| | Slush | 2 | 2% |
| | Packed Snow | 2 | 2% |
| | Ice | 3 | 4% |
| Pedestrian Involved | | 3 | 4% |
| Cyclists Involved | | 1 | 1% |

The Fisher Avenue at Baseline Road intersection had a total of 81 collisions during the 2015-2019 time period, including one angle collision involving a fatality. The fatality occurred during the morning at 7:46 am in dry driving conditions in November 2018, where a pedestrian was killed as a result of a two-vehicle collision. Seventy-one collisions had property damage only and the remaining nine having non-fatal injuries. The collision types are most represented by rear end with 59, followed by 11 sideswipe collisions, five SMV other collisions, two collisions each for angle and turning movement, and with the remaining collisions as SMV unattended and other. Rear end collisions are typical of congested areas and the sideswipe collisions may be influenced by the channelized right-turn runout lanes and merging movements required around the intersection. No further patterns are noted. Weather conditions do not affect collisions at this location. The City has developed a protected intersection design as part of the Baseline Road Rapid Transit Corridor project to improve active mode safety. No further examination is required as part of this study.

Table 6: Baseline Road between Marson Street and Fisher Avenue Collision Summary

| | | Number | % |
|-------------------------------|-----------------------------|-----------|-------------|
| Total Collisions | | 12 | 100% |
| Classification | Fatality | 0 | 0% |
| | Non-Fatal Injury | 4 | 33% |
| | Property Damage Only | 8 | 67% |
| Initial Impact Type | Rear end | 10 | 83% |
| | Sideswipe | 2 | 17% |
| Road Surface Condition | Dry | 7 | 58% |
| | Wet | 4 | 33% |
| | Packed Snow | 1 | 8% |
| Pedestrian Involved | | 0 | 0% |
| Cyclists Involved | | 0 | 0% |

The segment of Baseline Road between Marson Street and Fisher Avenue had a total of 12 collisions during the 2015-2019 time period, with eight involving property damage only and the remaining four having non-fatal injuries. The collision types are most represented by rear end with ten collisions, followed by two sideswipe collisions. Rear end collisions are typical of congested conditions and may also be influenced by private driveways accessing Baseline Road. Weather conditions are not considered to affect collisions at this location. No further examination is required as part of this study.

Table 7: Fisher Avenue between McCooey Lane and Baseline Road Collision Summary

| | | Number | % |
|-------------------------------|-----------------------------|-----------|-------------|
| Total Collisions | | 13 | 100% |
| Classification | Fatality | 0 | 0% |
| | Non-Fatal Injury | 3 | 23% |
| | Property Damage Only | 10 | 77% |
| Initial Impact Type | Rear end | 7 | 54% |
| | Sideswipe | 2 | 15% |
| | Turning Movement | 2 | 15% |
| | SMV Other | 2 | 15% |
| Road Surface Condition | Dry | 8 | 62% |
| | Wet | 3 | 23% |
| | Slush | 1 | 8% |
| | Packed Snow | 1 | 8% |
| Pedestrian Involved | | 0 | 0% |
| Cyclists Involved | | 0 | 0% |

The segment of Fisher Avenue between McCooey Lane and Baseline Road had a total of 13 collisions during the 2015-2019 time period, with ten involving property damage only and the remaining three having non-fatal injuries. The collision types are most represented by rear end with the remaining collisions split between sideswipe, turning movement, and SMV other. Rear end collisions are typical of congested areas and possible collisions could be related to the northbound merging and bus stop. Weather conditions are not considered to affect collisions at this location. No further examination is required as part of this study.

2.3 Planned Conditions

2.3.1 Changes to the Area Transportation Network

The Transportation Master Plan's (TMP) Rapid Transit and Transit Priority Network (RTTP) identifies Bus Rapid Transit (BRT) along Baseline Road and Heron Road, and isolated transit priority measures along Fisher Avenue

within the Affordable Network diagram. Isolated transit priority measures are additionally noted in the Network Concept diagram on Prince of Wales Drive south of Baseline Road.

The timing of the Baseline Road Rapid Transit Corridor project is subject to the timing of funding sources. The project includes median BRT lanes and segregated cycling facilities on Baseline Road through the study area. Changes along the site frontage include a new eastbound cycletrack along the south side of Baseline Road and crossrides to the adjacent intersection quadrants, but notably no tie-ins for cycling facilities along Fisher Avenue.

The Baseline Road Rapid Transit Corridor project is assumed to be build-out prior to 2034 and will be analyzed in the future horizons. The future geometry is based upon the preliminary detailed design from the Baseline Road Rapid Transit Corridor project for the site frontage and the Baseline Road at Fisher Avenue intersection provided by the City and illustrated in Figure 12, and the 1111 Prince of Wales Drive TIA (Novatech, 2020) for the intersection Baseline Road/Heron Road at Price and Price of Wales Drive intersection, illustrated in Figure 13.

Figure 12: Baseline Road Rapid Transit Corridor


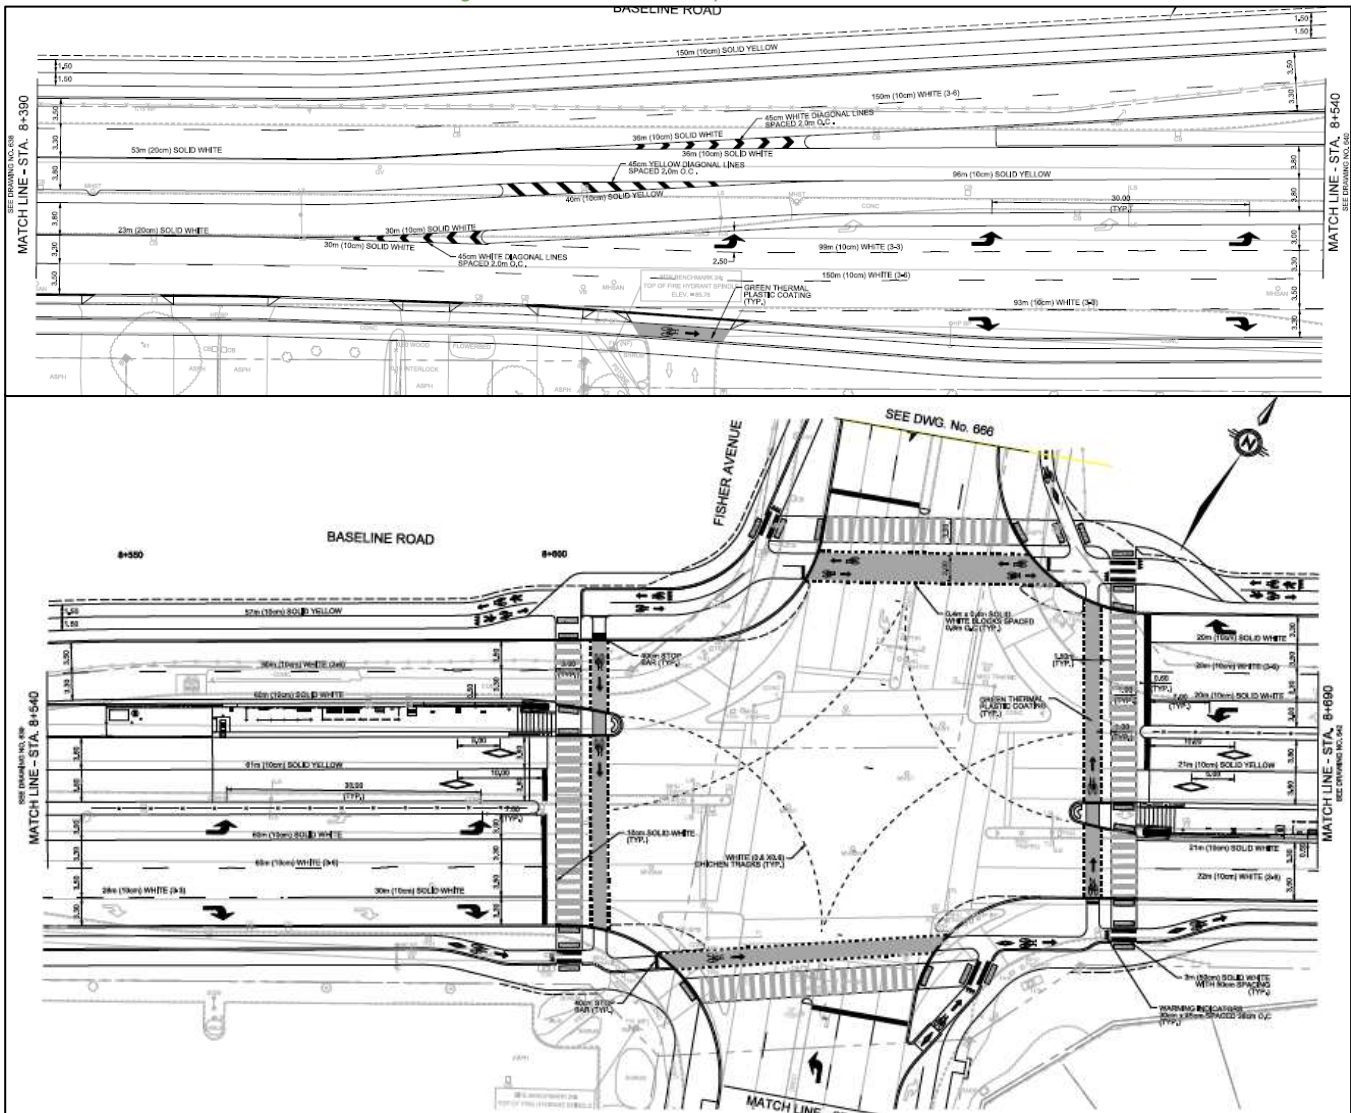


Figure 13: Prince of Wales Drive at Baseline Road/Heron Road

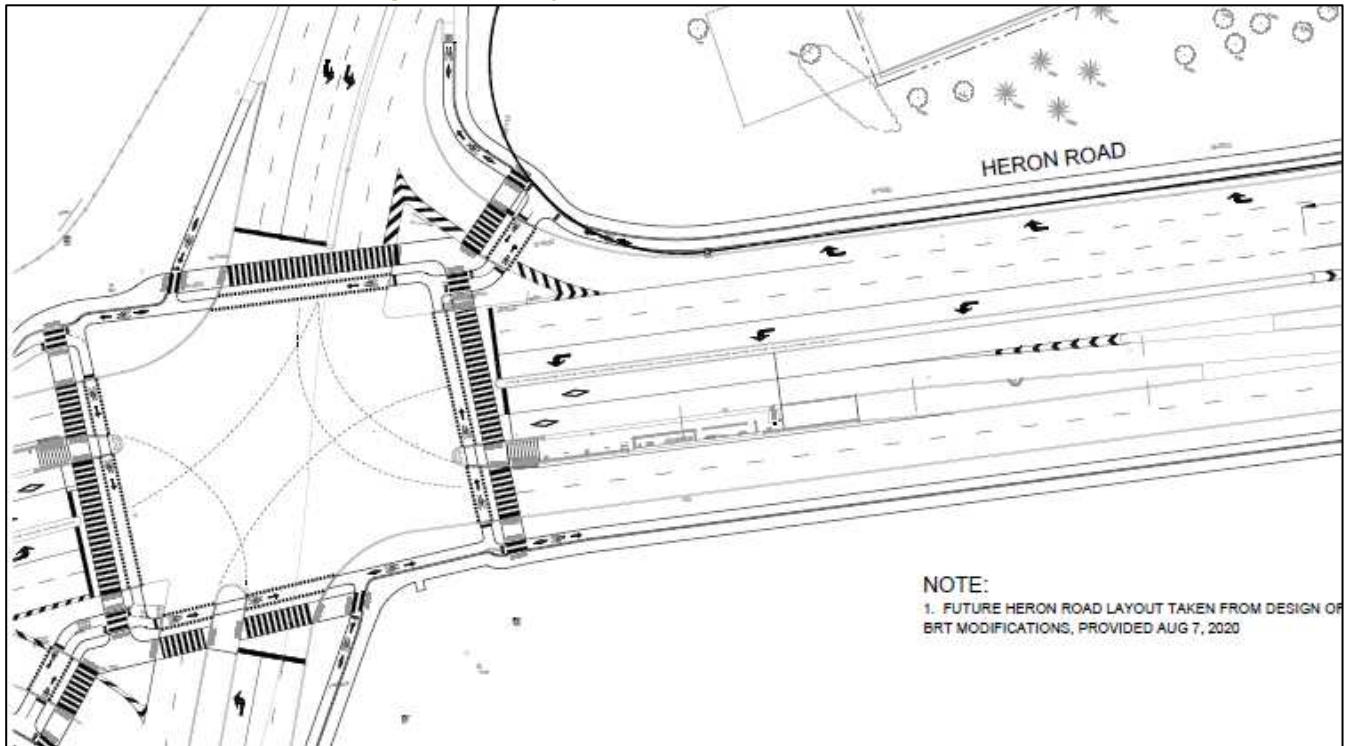

2.3.2 Other Study Area Developments

1111 Prince of Wales Drive

The proposed development includes a site plan for additional parking spaces for the office building. The reconfiguration is expected to provide a total of 319 parking spaces. No new trips are expected to / from the site, and the site trips will be reassigned due to the new driveway. (Novatech, 2020)

3 Study Area and Time Periods

3.1 Study Area

The study area will include the intersections of Fisher Avenue at Baseline Road, Prince of Wales Drive at Baseline Road/Heron Road, Fisher at Deer Park Road/Dynes Road, and the newly proposed site accesses onto Baseline Road and Fisher Avenue.

The boundary roads will be Baseline Road, Fisher Avenue, Sunnycrest Drive, and Hilliard Avenue. TRANS screenlines SL20 and SL27 are located to the east along the Rideau River/Canal and will not be assessed in this study.

3.2 Time Periods

As the proposed development is mixed-use development with residential units and commercial units, the AM and PM peak hours will be examined.

3.3 Horizon Years

The anticipated build-out year is 2034 for the entire site and this single horizon will be reviewed in support of the OPA/ZBA.

4 Exemption Review

Table 8 summarizes the exemptions for this TIA.

Table 8: Exemption Review

| Module | Element | Explanation | Exempt/Required |
|---|-------------------------------|--|--|
| Design Review Component | | | |
| 4.1 Development Design | 4.1.2 Circulation and Access | Only required for site plans | Required at Site Plan Application |
| | 4.1.3 New Street Networks | Only required for plans of subdivision | Exempt |
| 4.2 Parking | 4.2.1 Parking Supply | Only required for site plans | Required at Site Plan Application |
| | 4.2.2 Spillover Parking | Only required for site plans where parking supply is 15% below unconstrained demand | Exempt. May be required at Site Plan Application |
| Network Impact Component | | | |
| 4.5 Transportation Demand Management | All Elements | Not required for site plans expected to have fewer than 60 employees and/or students on location at any given time | Required |
| 4.6 Neighbourhood Traffic Management | 4.6.1 Adjacent Neighbourhoods | Only required when the development relies on local or collector streets for access and total volumes exceed ATM capacity thresholds | Exempt |
| 4.8 Network Concept | | Only required when proposed development generates more than 200 person-trips during the peak hour in excess of equivalent volume permitted by established zoning | Exempt |

5 Development-Generated Travel Demand

5.1 Mode Shares

Examining the mode shares recommended in the TRANS Trip Generation Manual (2020) for the subject district, derived from the most recent National Capital Region Origin-Destination survey (OD Survey), the existing average district mode shares by land use for Merivale have been summarized in Table 9.

Table 9: TRANS Trip Generation Manual Recommended Mode Shares – Merivale

| Travel Mode | Multi-Unit (High-Rise) | | Commercial Generator | |
|-----------------------|------------------------|-------------|----------------------|-------------|
| | AM | PM | AM | PM |
| Auto Driver | 41% | 41% | 71% | 61% |
| Auto Passenger | 6% | 11% | 19% | 16% |
| Transit | 42% | 33% | 1% | 8% |
| Cycling | 2% | 2% | 0% | 1% |
| Walking | 9% | 13% | 9% | 14% |
| Total | 100% | 100% | 100% | 100% |

As a result of the planned cycling and Baseline Road Rapid Transit Corridor project, along which a station at Fisher Avenue will be provided, the site transit and cycling mode shares are expected to surpass the values recommended for the Merivale area. Table 10 summarizes the proposed mode share targets for the subject development.

Table 10: Proposed Development Mode Shares

| Travel Mode | Multi-Unit (High-Rise) | | Commercial Generator | |
|----------------|------------------------|-------------|----------------------|-------------|
| | AM | PM | AM | PM |
| Auto Driver | 29% | 29% | 61% | 51% |
| Auto Passenger | 6% | 11% | 19% | 16% |
| Transit | 52% | 43% | 11% | 18% |
| Cycling | 4% | 4% | 0% | 1% |
| Walking | 9% | 13% | 9% | 14% |
| Total | 100% | 100% | 100% | 100% |

5.2 Trip Generation

This TIA has been prepared using the vehicle and person trip rates for the residential dwellings using the TRANS Trip Generation Manual (2020) and the vehicle trip rates and derived person trip rates for commercial component from the ITE Trip Generation Manual 11th Edition (2017) using the City-prescribed conversion factor of 1.28. Table 11 summarizes the person trip rates for the proposed residential land use for each peak period and the person trip rates for the non-residential land use by peak hour.

Table 11: Trip Generation Person Trip Rates

| Land Use | Land Use Code | Peak | Peak Period | | Peak Hour | |
|-----------------------------------|-------------------|------|-------------------|-------------------|-------------------|-------------------|
| | | | Vehicle Trip Rate | Person Trip Rates | Vehicle Trip Rate | Person Trip Rates |
| Multi-Unit (High-Rise) | 221 & 222 (TRANS) | AM | - | 0.80 | - | - |
| | | PM | - | 0.90 | - | - |
| Strip Retail Plaza (<40k sq. ft.) | 822 (ITE) | AM | - | - | 2.36 | 3.02 |
| | | PM | - | - | 6.59 | 8.36 |

Using the above person trip rates, the total person trip generation has been estimated. Table 12 summarizes the total person trip generation for the residential land use and for the non-residential land use.

Table 12: Total Person Trip Generation

| Land Use | Units | AM Peak Period | | | PM Peak Period | | |
|------------------------|-------|----------------|-----|-------|----------------|-----|-------|
| | | In | Out | Total | In | Out | Total |
| Multi-Unit (High-Rise) | 1,089 | 270 | 601 | 871 | 568 | 412 | 980 |

| Land Use | GFA (sq. ft.) | AM Peak Hour | | | PM Peak Hour | | |
|-----------------------------------|---------------|--------------|-----|-------|--------------|-----|-------|
| | | In | Out | Total | In | Out | Total |
| Strip Retail Plaza (<40k sq. ft.) | 30,650 | 56 | 37 | 93 | 130 | 130 | 260 |

Internal capture rates from the ITE Trip Generation Handbook 3rd Edition have been assigned to the development’s retail component for mixed-use developments. The rates summarized in Table 13 represent the percentage of trips to/from the retail use based on the residential component.

Table 13: Internal Capture Rates

| Land Use | AM | | PM | |
|----------------------------|-----|-----|-----|-----|
| | In | Out | In | Out |
| Residential to/from Retail | 17% | 14% | 10% | 26% |

Pass-by reductions applied to the retail trip generation at a rate of 40% have been included using the recommended value presented in the ITE Trip Generation Manual 11th Edition (2021) for the most similar land use with a recommended rate, “Retail (40k – 150k sq. ft.)”.

Using the above mode share targets for a BRT area, the internal capture and pass-by rates, and the person trip rates, the person trips by mode have been projected. Trip generation by peak hour has been forecasted using the prescribed peak period conversion factors presented in the TRANS Trip Generation Manual (2020) for the residential component. Table 14 summarizes the total trip generation.

Table 14: Trip Generation by Mode

| Travel Mode | | AM Peak Hour | | | | PM Peak Hour | | | |
|---------------------------|------------------|--------------|------------|------------|------------|--------------|------------|------------|------------|
| | | Mode Share | In | Out | Total | Mode Share | In | Out | Total |
| Multi-Unit (High-Rise) | Auto Driver | 29% | 37 | 84 | 121 | 29% | 73 | 52 | 125 |
| | Auto Passenger | 6% | 8 | 17 | 25 | 11% | 27 | 20 | 47 |
| | Transit | 52% | 77 | 172 | 249 | 43% | 115 | 83 | 198 |
| | Cycling | 4% | 6 | 14 | 20 | 4% | 11 | 8 | 19 |
| | Walking | 8% | 14 | 31 | 45 | 13% | 38 | 28 | 66 |
| | Total | 100% | 142 | 318 | 460 | 100% | 264 | 191 | 455 |
| Retail (<40k sq. ft.) | Auto Driver | 61% | 9 | 6 | 15 | 51% | 10 | 4 | 14 |
| | Auto Passenger | 19% | 10 | 6 | 16 | 16% | 20 | 18 | 38 |
| | Transit | 11% | 6 | 4 | 10 | 18% | 22 | 20 | 42 |
| | Cycling | 0% | 0 | 0 | 0 | 1% | 1 | 1 | 2 |
| | Walking | 9% | 5 | 3 | 8 | 14% | 17 | 15 | 32 |
| | Pass-by | 40% | -22 | -15 | -37 | 40% | -52 | -52 | -104 |
| | Internal Capture | varies | -6 | -3 | -9 | varies | -8 | -20 | -28 |
| | Total | 100% | 30 | 19 | 49 | 100% | 70 | 58 | 128 |
| Total | Auto Driver | - | 46 | 90 | 136 | - | 83 | 56 | 139 |
| | Auto Passenger | - | 18 | 23 | 41 | - | 47 | 38 | 85 |
| | Transit | - | 83 | 176 | 259 | - | 137 | 103 | 240 |
| | Cycling | - | 6 | 14 | 20 | - | 12 | 9 | 21 |
| | Walking | - | 19 | 34 | 53 | - | 55 | 43 | 98 |
| | Total | - | 172 | 337 | 509 | - | 334 | 249 | 583 |

As shown above, a total of 136 AM and 139 PM new peak hour two-way vehicle trips are projected as a result of the proposed development.

5.3 Trip Distribution

To understand the travel patterns of the subject development, the OD Survey has been reviewed to determine the travel, and these patterns were applied based on the build-out of Merivale. Table 15 below summarizes the distributions.

Table 15: OD Survey Distribution – Merivale

| To/From | % of Trips |
|--------------|-------------|
| North | 30% |
| South | 25% |
| East | 20% |
| West | 25% |
| Total | 100% |

5.4 Trip Assignment

Using the distribution outlined above, turning movement splits, and access to major transportation infrastructure, the trips generated by the site have been assigned to the study area road network. Table 16 summarizes the proportional assignment to the study area roadways, and Figure 14 and Figure 15 illustrate the new site generated volumes and pass-by volumes, respectively.

Table 16: Trip Assignment

| To/From | Inbound Via | Outbound Via |
|--------------|--|--|
| North | 20% Fisher Ave (N) 10% Prince of Wales Dr (N) | 20% Fisher Ave (N) 10% Prince of Wales Dr (N) |
| South | 10% Fisher Ave (S) 15% Baseline Rd (W) | 25% Fisher Ave (S) |
| East | 20% Heron Rd (E) | 20% Heron Rd (E) |
| West | 20% Baseline Rd (W) 5% Fisher Ave (N) | 20% Baseline Rd (W) 5% Fisher Ave (N) |
| Total | 100% | 100% |

Figure 14: New Site Generation Auto Volumes


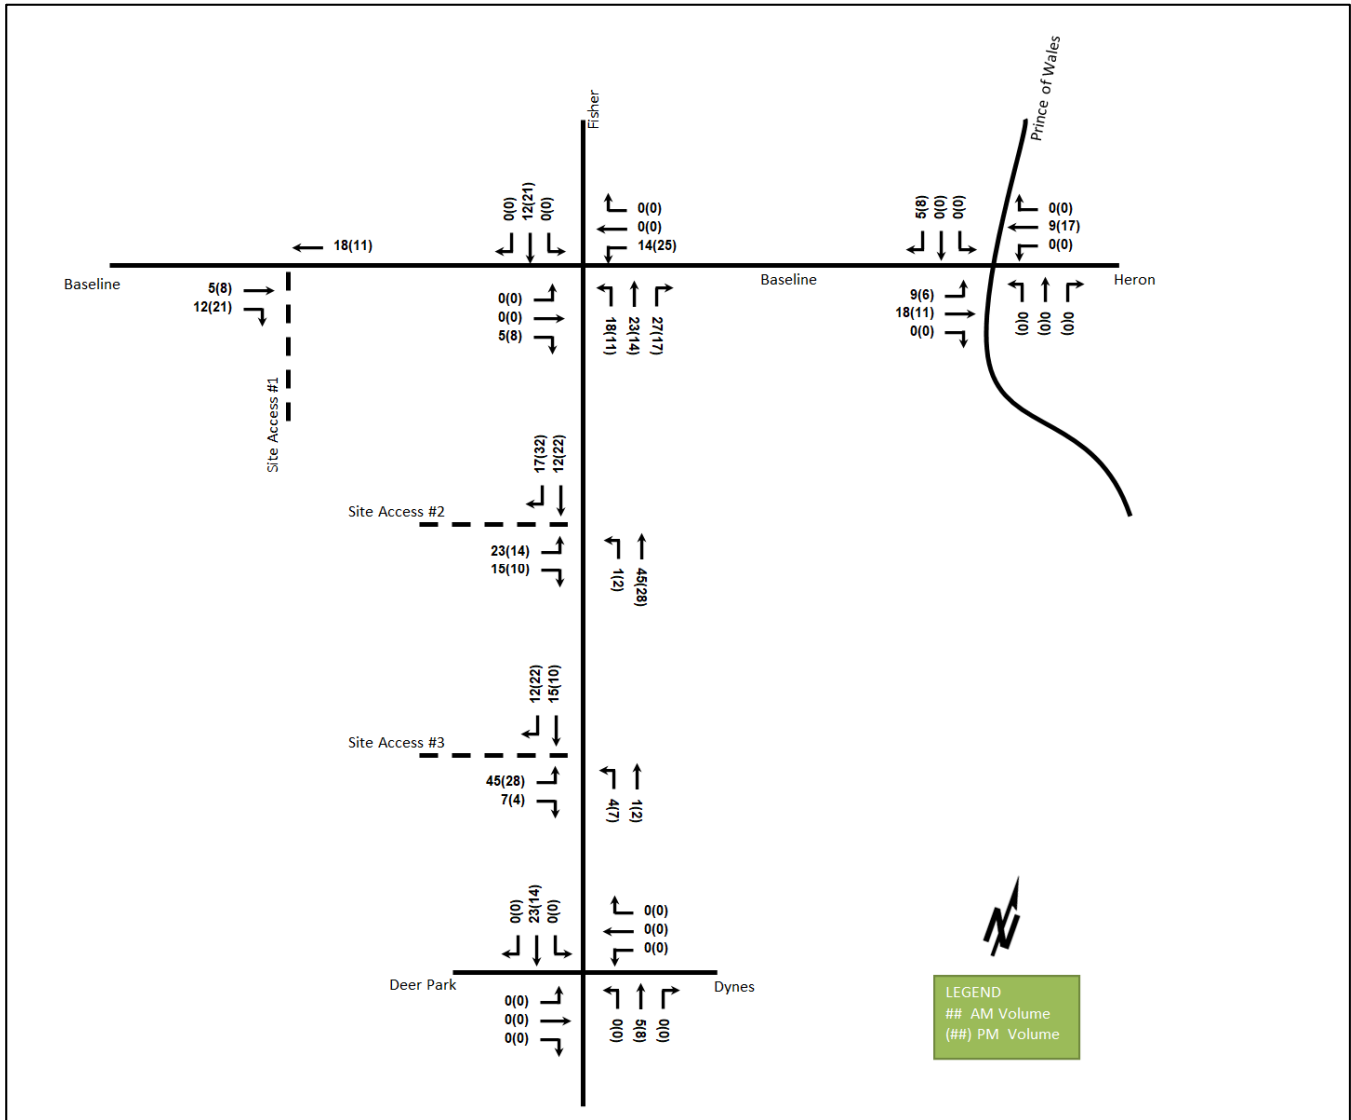


Figure 15: Pass-By Auto Volumes

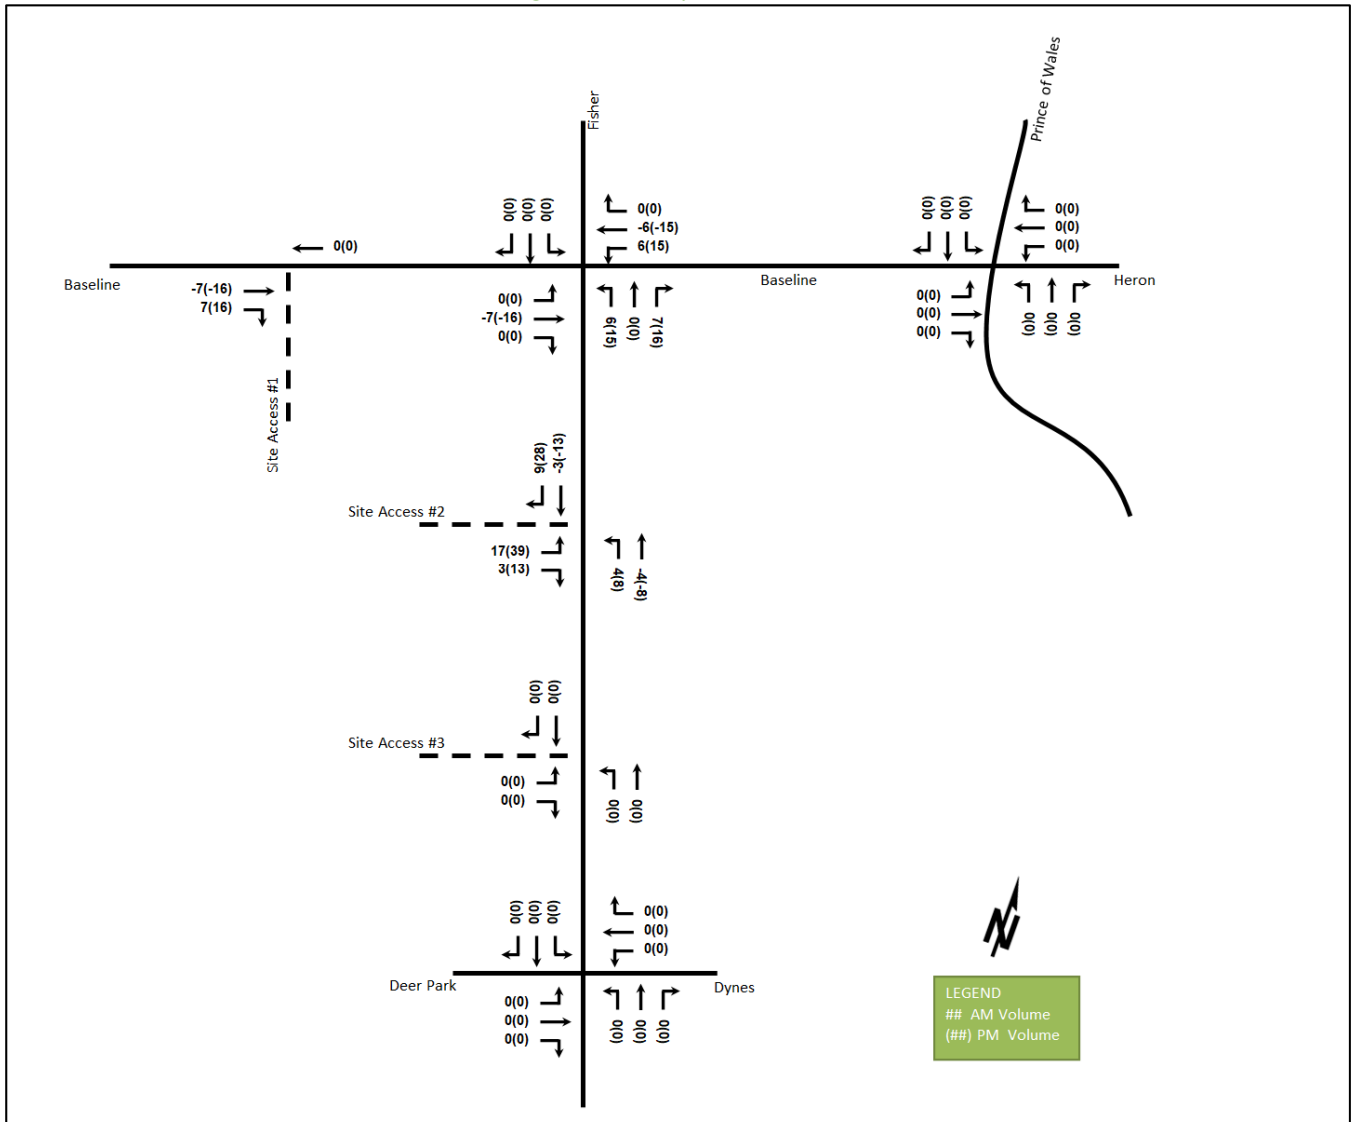

6 Background Network Travel Demands

6.1 Transportation Network Plans

The transportation network plans were discussed in Section 2.3. The Baseline Road Rapid Transit Corridor project is the only confirmed project within the study and will be incorporated into the road network analysis. The future geometry is based upon the preliminary detailed design from the Baseline Road Rapid Transit Corridor project for the Baseline Road at Fisher Avenue intersection provided by the City, and the 1111 Prince of Wales Drive TIA (Novatech, 2020) for the intersection of Prince of Wales Drive at Baseline Road/Heron Road. No other improvements impacting the transportation network elements or traffic were noted within the study area.

6.2 Background Growth

A review of the background projections from the City’s TRANS Regional Model for the 2011 and 2031 horizons was completed to determine the background growth for each of the study area roadways. The background TRANS model growth rates are summarized in Table 17 and the TRANS model plots are provided in Appendix E.

Table 17: TRANS Regional Model Projections – Study Area Growth Rates

| Street | TRANS Rate | |
|-----------------------|------------|------------|
| | Eastbound | Westbound |
| Baseline Road | -0.28% | 0.07% |
| Heron Road | -0.05% | 0.41% |
| | Northbound | Southbound |
| Prince of Wales Drive | 0.77% | 0.72% |
| Fisher Avenue | 0.61% | 0.12% |

The growth rates derived from the 2011 and 2031 TRANS model horizons are projected to be positive in the westbound direction along Baseline Road and Heron Road, and in the northbound and southbound directions along Prince of Wales Drive and Fisher Avenue. Annual growth rates rounded to the nearest 0.25% will be applied to the mainline volumes of the appropriate study area roads in the AM peak hour and reversed in the PM peak hour. Table 18 summarizes the growth rates applied.

Table 18: Study Area Growth Rates Applied

| Street | AM Peak Hour | | PM Peak Hour | |
|-----------------------|--------------|------------|--------------|------------|
| | Eastbound | Westbound | Eastbound | Westbound |
| Baseline Road | - | - | - | - |
| Heron Road | - | 0.50% | 0.50% | - |
| | Northbound | Southbound | Northbound | Southbound |
| Prince of Wales Drive | 0.75% | 0.75% | 0.75% | 0.75% |
| Fisher Avenue | 0.50% | 0.25% | 0.25% | 0.50% |

6.3 Other Developments

The background developments explicitly considered in the background conditions include 1111 Prince of Wales Drive and these volumes have been provided in Appendix F.

6.4 Trip Reductions from Existing Site Land Uses

To account for the removal of the existing commercial strip and associated reductions in the network traffic for the auto trips, an approximation of the existing land uses was derived from the ITE Trip Generation Manual 11th Edition (2017) using the City-prescribed conversion factor of 1.28. Table 19 summarizes the trip generation land use and floor area, and the resultant estimated existing site generated trips by mode have been provided in Appendix G.

Table 19: Trip Generation Person Trip Rates by Peak Hour

| Land Use | Land Use Code | GFA (sq. ft.) |
|-----------------------------------|---------------|---------------|
| Strip Retail Plaza (<40k sq. ft.) | 822 (ITE) | 34,950 |

Pass-by reductions applied to the retail trip generation at a rate of 40% have been included using the recommended value presented in the ITE Trip Generation Manual 11th Edition (2021) for the most similar land use with a recommended rate, “Retail (40k – 150k sq. ft.)”.

The existing site is estimated to produce 25 AM two-way primary auto trips in the AM peak hour and 60 two-way primary auto trips in the PM peak hour based on the existing land uses and the recommended area mode shares. Figure 16 illustrates the total vehicle volume reductions from the existing site land uses and Table 20 compares the estimated existing primary auto trips and forecasted site-generated primary auto trips.

Figure 16: Existing Retail Auto Volume Reductions

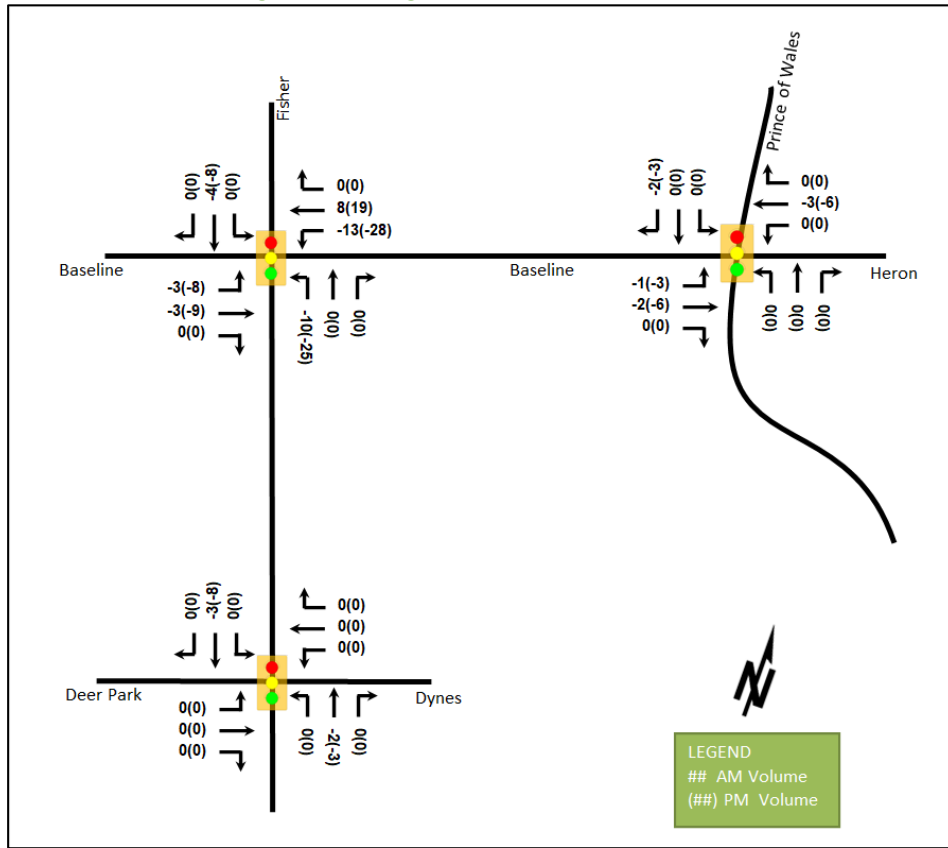


Table 20: Estimated Existing Auto Trip Volumes vs Forecasted Auto Trip Volumes

| Scenario | AM Peak Hour | | | | PM Peak Hour | | | |
|-------------------|--------------|------------|------------|-------------|--------------|------------|------------|------------|
| | Mode Share | In | Out | Total | Mode Share | In | Out | Total |
| Existing | Varies | 15 | 10 | 25 | Varies | 30 | 30 | 60 |
| Proposed | Varies | 46 | 90 | 136 | Varies | 83 | 56 | 139 |
| Difference | - | +31 | +80 | +111 | - | +53 | +26 | +79 |

7 Demand Rationalization

7.1 2034 Future Background Operations

Figure 17 illustrates the 2034 background volumes and Table 21 summarizes the 2034 background intersection operations which include signal timing adjustments for the new intersection approach configurations including the BRT corridor. The Prince of Wales Drive at Baseline Road/Heron Road intersection counts have been factored to remove the detour volumes. The level of service for signalized intersections is based on v/c calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection. The synchro worksheets for the 2034 future background horizon are provided in Appendix H.

Figure 17: 2034 Future Background Volumes

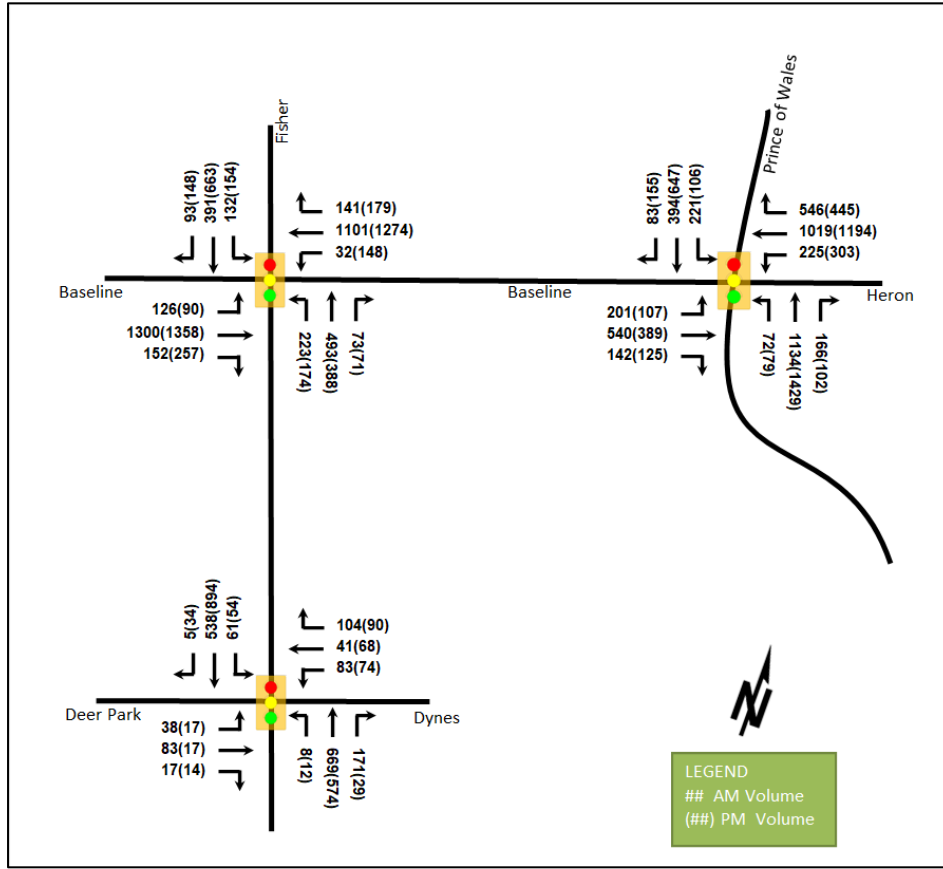


Table 21: 2034 Future Background Intersection Operations

| Intersection | Lane | AM Peak Hour | | | | PM Peak Hour | | | |
|--|----------|--------------|-------------|-----------|-----------------------|--------------|-------------|-------------|-----------------------|
| | | LOS | V/C | Delay (s) | Q (95 th) | LOS | V/C | Delay (s) | Q (95 th) |
| Fisher Avenue at Baseline Road Signalized | EBL | C | 0.71 | 78.0 | #73.4 | E | 0.92 | 131.2 | #56.4 |
| | EBT | D | 0.89 | 43.9 | #242.4 | F | 1.14 | 110.7 | #255.3 |
| | EBR | A | 0.24 | 26.9 | 45.5 | A | 0.50 | 36.3 | 77.1 |
| | WBL | A | 0.42 | 59.0 | m10.6 | F | 1.10 | 128.7 | m#46.8 |
| | WBT | E | 0.97 | 88.0 | m#169.6 | E | 0.99 | 62.6 | m123.1 |
| | WBR | A | 0.29 | 65.4 | m40.9 | A | 0.32 | 42.2 | m33.9 |
| | NBL | E | 0.95 | 102.1 | #105.9 | F | 1.09 | 151.1 | #96.8 |
| | NBT/R | C | 0.72 | 50.5 | 85.6 | A | 0.52 | 42.7 | 69.6 |
| | SBL | C | 0.73 | 78.9 | #55.0 | F | 1.02 | 136.1 | #84.7 |
| | SBT/R | C | 0.73 | 53.9 | 74.5 | E | 0.96 | 68.8 | #146.3 |
| Overall | E | 0.92 | 62.7 | - | - | F | 1.07 | 81.7 | - |

| Intersection | Lane | AM Peak Hour | | | | PM Peak Hour | | | |
|---|----------------|--------------|--------------|--------------|-----------------------|--------------|--------------|--------------|-----------------------|
| | | LOS | V/C | Delay (s) | Q (95 th) | LOS | V/C | Delay (s) | Q (95 th) |
| Prince of Wales Drive at Baseline Road/Heron Road <i>Signalized</i> | EBL | F | 1.20 | 156.5 | m#82.4 | F | 1.18 | 126.9 | m#28.5 |
| | EBT/R | D | 0.81 | 69.9 | m111.3 | D | 0.87 | 63.8 | m67.1 |
| | WBL | E | 0.95 | 101.6 | #107.1 | E | 0.98 | 100.0 | #135.5 |
| | WBT | F | 1.02 | 78.7 | #186.8 | F | 1.13 | 110.9 | #228.2 |
| | WBR | F | 1.24 | 165.2 | #240.9 | E | 0.99 | 83.4 | #180.7 |
| | NBL | A | 0.53 | 70.1 | 32.9 | A | 0.53 | 70.1 | 36.2 |
| | NBT/R | F | 1.18 | 129.8 | #252.3 | F | 1.21 | 138.8 | #294.4 |
| | SBL | F | 1.26 | 204.0 | #62.3 | D | 0.85 | 110.7 | #31.1 |
| | SBT/R | A | 0.45 | 37.3 | 71.3 | C | 0.75 | 44.1 | 119.8 |
| Overall | F | 1.38 | 107.3 | - | F | 1.49 | 100.6 | - | |
| Fisher Avenue at Deer Park Road/Dynes Road <i>Signalized</i> | EB | A | 0.40 | 25.9 | 29.4 | A | 0.17 | 23.6 | 13.1 |
| | WB | B | 0.63 | 27.5 | 42.2 | C | 0.76 | 45.9 | 54.7 |
| | NBL/T | B | 0.67 | 16.7 | 117.4 | A | 0.52 | 11.3 | 93.7 |
| | NBR | A | 0.20 | 2.3 | 8.2 | A | 0.03 | 1.3 | 2.1 |
| | SB | A | 0.38 | 10.5 | 39.0 | A | 0.51 | 10.1 | 72.1 |
| | Overall | B | 0.64 | 15.3 | - | A | 0.57 | 15.1 | - |

Saturation flow rate of 1800 veh/h/lane
 Notes: Queue is measured in metres
 Peak Hour Factor = 1.00

m = metered queue
 # = volume for the 95th %ile cycle exceeds capacity

The planned geometric changes at the Baseline Road intersections focus on the development and facilitation of transit service along the corridor and will not directly mitigate auto operational constraints.

At the intersection of Fisher Avenue and Baseline Road, the future geometry and background growth are forecasted to change operations. During the AM peak hour, the eastbound left turn movement is anticipated to exhibit extended queues and the northbound left turn movement may be subject to high delays at this horizon. During the PM peak hour, the eastbound left movement may be subject to high delays and extended queues, the westbound left movement is forecasted to be over theoretical capacity with high delays and extended queues, the northbound left movement is forecasted to be over theoretical capacity and the southbound left movement is forecasted to be over theoretical capacity with high delays.

At the intersection of Prince of Wales Drive and Baseline Road/Heron Road, the geometric changes, background growth, and the reversion to the condition without the detour volumes are anticipated to be associated with operations that are different and improved from the existing horizon. Under these conditions, during the AM peak hour the eastbound left, westbound through, westbound right, northbound through/right and southbound left movements are anticipated to be over capacity with high delays and extended queues, the westbound left movement is anticipated to be subject to high delays and extended queues, and the overall intersection is forecasted to be over theoretical capacity with high delays. During the PM peak hour, the eastbound left, westbound through, and northbound through/right movements are anticipated to be over theoretical capacity with high delays and extended queues, the westbound left, westbound right, and southbound left movements are anticipated to be subject to high delays and extended queues, and the overall intersection is forecasted to be over theoretical capacity with high delays.

The Fisher Avenue and Deer Park Road/Dynes Road intersection is anticipated to continue to operate well.

7.2 2034 Future Total Operations

Figure 18 illustrates the 2034 total volumes and Table 22 summarizes the 2034 total intersection operations including signal timing adjustments as in the background conditions. The level of service for signalized

intersections is based on v/c calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection. The synchro worksheets for the 2034 total horizon are provided in Appendix J.

Figure 18: 2034 Future Total Volumes

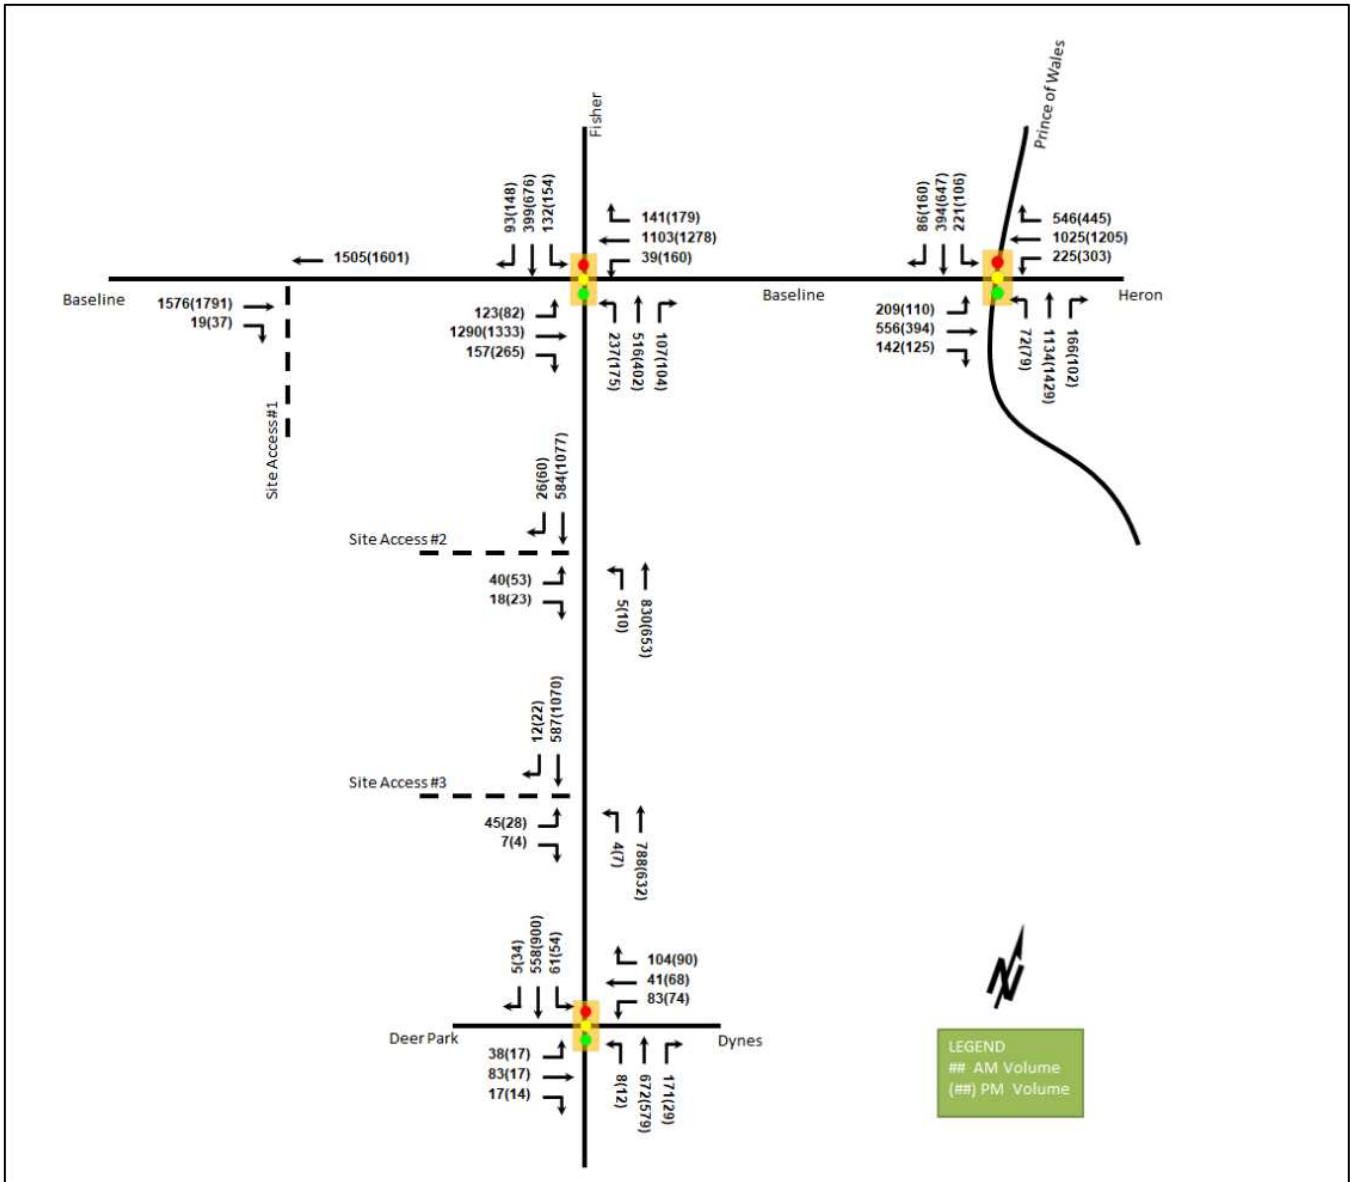


Table 22: 2034 Future Total Intersection Operations

| Intersection | Lane | AM Peak Hour | | | | PM Peak Hour | | | |
|---|----------|--------------|--------------|-----------|-----------------------|--------------|-------------|--------------|-----------------------|
| | | LOS | V/C | Delay (s) | Q (95 th) | LOS | V/C | Delay (s) | Q (95 th) |
| Fisher Avenue at Baseline Road Signalized | EBL | C | 0.72 | 80.4 | #71.3 | D | 0.84 | 114.6 | #50.5 |
| | EBT | E | 0.95 | 52.3 | #239.6 | F | 1.12 | 102.9 | #248.3 |
| | EBR | A | 0.33 | 30.8 | 49.4 | B | 0.64 | 42.9 | 87.1 |
| | WBL | A | 0.48 | 60.8 | m12.9 | F | 1.19 | 156.1 | m#52.7 |
| | WBT | E | 0.98 | 88.5 | m#168.6 | E | 1.00 | 62.9 | m123.0 |
| | WBR | A | 0.29 | 65.6 | m41.2 | A | 0.33 | 42.1 | m33.4 |
| | NBL | F | 1.01 | 116.0 | #114.5 | F | 1.14 | 165.1 | #97.8 |
| | NBT/R | C | 0.79 | 53.0 | 95.5 | A | 0.59 | 44.2 | 77.5 |
| | SBL | C | 0.73 | 78.9 | #55.0 | F | 1.02 | 136.1 | #84.7 |
| | SBT/R | C | 0.73 | 53.5 | 76.1 | E | 0.97 | 71.6 | #151.3 |
| Overall | E | 0.96 | 66.6 | - | - | F | 1.08 | 81.1 | - |
| Prince of Wales Drive at Baseline Road/Heron Road Signalized | EBL | F | 1.24 | 170.3 | m#81.6 | F | 1.21 | 140.7 | m#32.2 |
| | EBT/R | D | 0.84 | 72.1 | m108.7 | D | 0.89 | 63.1 | m69.1 |
| | WBL | E | 0.95 | 101.6 | #107.1 | E | 0.98 | 100.0 | #135.5 |
| | WBT | F | 1.03 | 80.2 | #188.5 | F | 1.14 | 114.7 | #231.3 |
| | WBR | F | 1.24 | 166.3 | #241.3 | E | 0.99 | 85.2 | #181.3 |
| | NBL | A | 0.53 | 70.1 | 32.9 | A | 0.53 | 70.1 | 36.2 |
| | NBT/R | F | 1.18 | 129.8 | #252.3 | F | 1.21 | 138.8 | #294.4 |
| | SBL | F | 1.26 | 204.0 | #62.3 | D | 0.85 | 110.7 | #31.1 |
| | SBT/R | A | 0.45 | 37.3 | 71.9 | C | 0.76 | 44.3 | 121.1 |
| Overall | F | 1.22 | 108.6 | - | - | F | 1.19 | 101.9 | - |
| Fisher Avenue at Deer Park Road/Dynes Road Signalized | EB | A | 0.40 | 25.7 | 29.0 | A | 0.17 | 23.4 | 13.2 |
| | WB | B | 0.65 | 28.3 | 42.2 | C | 0.78 | 47.5 | 55.5 |
| | NBL/T | B | 0.67 | 17.1 | 121.3 | A | 0.53 | 11.7 | 94.7 |
| | NBR | A | 0.21 | 2.4 | 8.4 | A | 0.03 | 1.3 | 2.1 |
| | SB | A | 0.40 | 10.8 | 41.6 | A | 0.52 | 10.4 | 72.7 |
| Overall | B | 0.65 | 15.6 | - | - | A | 0.58 | 15.5 | - |

Notes: Saturation flow rate of 1800 veh/h/lane
 Queue is measured in metres
 Peak Hour Factor = 1.00

m = metered queue
 # = volume for the 95th %ile cycle exceeds capacity

The study area intersections at the 2034 future total horizon will operate similarly to the 2034 background conditions except for the eastbound left-turn and northbound left-turn movements at Fisher Avenue and Baseline Road intersection during AM peak hour.

At Fisher Avenue and Baseline Road intersection during the AM peak hour, the eastbound left-turn movement may be subject to high delays with an increase of 2.4 seconds above the background conditions, and the northbound left-turn movement will be over theoretical capacity with an increase of v/c of 0.06 above the background conditions. A network reduction of approximately two northbound left-turn vehicles or the shifting of one second of split from the east-west phases to the northbound left phase would reduce the v/c of all movements at the intersection to 1.00 or below.

7.3 2034 Future Total Operations – Sensitivity Without Baseline Rapid Transit

The City requested a sensitivity analysis of the site buildout without the Baseline Rapid Transit corridor having been implemented. As no reduction in area traffic has been assumed within this report as a result of this implementation, the resultant change will be limited to the transit mode share target for site traffic aside from the employment of the existing intersection geometry. The existing recommended district mode shares by land use for Merivale, which is summarized in Table 9, have been used, resulting in a 12% increase in auto modes for

residential and a 10% increase in auto modes for commercial above the targets with the BRT improvements. Table 23 summarizes the total trip generation without Baseline Rapid Transit.

Table 23: Trip Generation by Mode – Without Baseline Rapid Transit

| Travel Mode | | AM Peak Hour | | | PM Peak Hour | | | | |
|---------------------------|------------------|--------------|------------|------------|--------------|-------------|------------|------------|------------|
| | | Mode Share | In | Out | Total | Mode Share | In | Out | Total |
| Multi-Unit (High-Rise) | Auto Driver | 41% | 53 | 118 | 171 | 41% | 103 | 74 | 177 |
| | Auto Passenger | 6% | 8 | 17 | 25 | 11% | 27 | 20 | 47 |
| | Transit | 42% | 62 | 139 | 201 | 33% | 88 | 64 | 152 |
| | Cycling | 2% | 3 | 7 | 10 | 2% | 5 | 4 | 9 |
| | Walking | 8% | 13 | 28 | 41 | 13% | 38 | 28 | 66 |
| | Total | 100% | 139 | 309 | 448 | 100% | 261 | 190 | 451 |
| Retail (<40k sq. ft.) | Auto Driver | 71% | 14 | 9 | 23 | 61% | 22 | 15 | 37 |
| | Auto Passenger | 19% | 10 | 6 | 16 | 16% | 20 | 18 | 38 |
| | Transit | 1% | 1 | 0 | 1 | 8% | 10 | 9 | 19 |
| | Cycling | 0% | 0 | 0 | 0 | 1% | 1 | 1 | 2 |
| | Walking | 9% | 5 | 3 | 8 | 14% | 17 | 15 | 32 |
| | Pass-by | 40% | -22 | -15 | -37 | 40% | -52 | -52 | -104 |
| | Internal Capture | varies | -6 | -3 | -9 | varies | -8 | -20 | -28 |
| | Total | 100% | 30 | 18 | 48 | 100% | 70 | 58 | 128 |
| Total | Auto Driver | - | 67 | 127 | 194 | - | 125 | 89 | 214 |
| | Auto Passenger | - | 18 | 23 | 41 | - | 47 | 38 | 85 |
| | Transit | - | 63 | 139 | 202 | - | 98 | 73 | 171 |
| | Cycling | - | 3 | 7 | 10 | - | 6 | 5 | 11 |
| | Walking | - | 18 | 31 | 49 | - | 55 | 43 | 98 |
| | Total | - | 169 | 327 | 496 | - | 331 | 248 | 579 |

As shown above, a total of 194 AM and 214 PM new peak hour two-way vehicle trips are projected as a result of the proposed development. Table 24 summarizes the auto trip generation comparison between the scenarios without Baseline Rapid Transit and with Baseline Rapid Transit.

Table 24: Proposed Site Generation Vehicle Trip Volumes Without BRT vs Proposed Site Generation Vehicle Trip Volumes With BRT

| Scenario | AM Peak Hour | | | PM Peak Hour | | |
|-------------------|--------------|------------|------------|--------------|------------|------------|
| | In | Out | Total | In | Out | Total |
| With BRT | 46 | 90 | 136 | 83 | 56 | 139 |
| Without BRT | 67 | 127 | 194 | 125 | 89 | 214 |
| Difference | +21 | +37 | +58 | +42 | +33 | +75 |

Figure 19 illustrates the 2034 total volumes at Fisher Avenue at Baseline Road intersection without the Baseline Rapid Transit Corridor project having been implemented and Table 25 summarizes the 2034 future total operations at Fisher Avenue at Baseline Road intersection under this scenario. The level of service for signalized intersections is based on v/c calculations for individual lane movements and HCM 2000 v/c calculations for the overall intersection. The synchro worksheets for the 2034 future total horizon at Fisher Avenue at Baseline Road without Baseline Rapid Transit are provided in Appendix K.

Figure 19: 2034 Future Total Volumes – Fisher Avenue at Baseline Road Without Baseline Rapid Transit

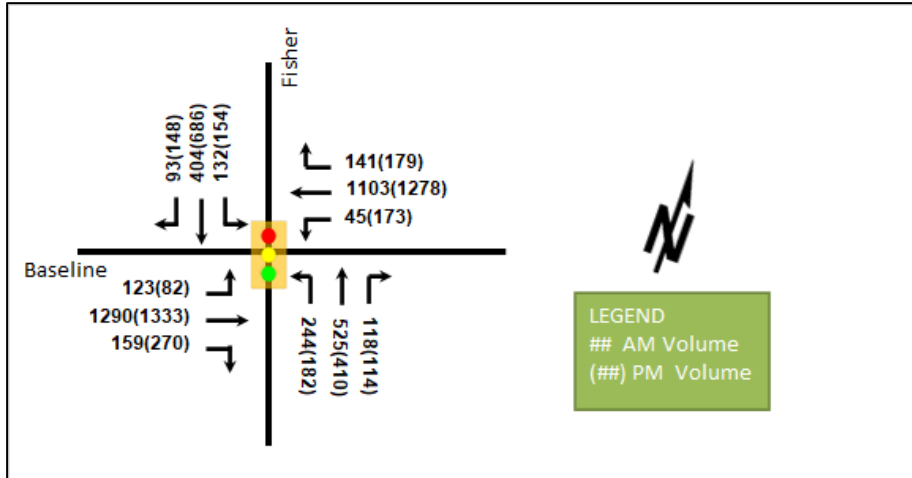


Table 25: 2034 Future Total Intersection Operations– Fisher Avenue at Baseline Road Without Baseline Rapid Transit

| Intersection | Lane | AM Peak Hour | | | | PM Peak Hour | | | |
|--|----------------|--------------|-------------|-------------|-----------------------|--------------|-------------|-------------|-----------------------|
| | | LOS | V/C | Delay (s) | Q (95 th) | LOS | V/C | Delay (s) | Q (95 th) |
| Fisher Avenue at Baseline Road Signalized | EBL | B | 0.66 | 71.1 | 49.2 | A | 0.57 | 71.4 | 36.4 |
| | EBT | D | 0.90 | 45.5 | #228.7 | F | 1.10 | 97.5 | #246.2 |
| | EBR | A | 0.22 | 3.3 | 10.0 | A | 0.44 | 16.0 | 46.5 |
| | WBL | A | 0.51 | 81.0 | m7.5 | E | 0.94 | 108.2 | #87.9 |
| | WBT | E | 0.93 | 30.5 | m104.9 | E | 0.98 | 59.6 | #228.8 |
| | WBR | A | 0.21 | 8.6 | m11.7 | A | 0.27 | 7.4 | 20.1 |
| | NBL | D | 0.85 | 77.5 | #97.3 | D | 0.82 | 83.1 | #79.4 |
| | NBT | C | 0.72 | 52.8 | 83.5 | A | 0.60 | 51.8 | 69.6 |
| | NBR | A | 0.26 | 2.0 | 2.0 | A | 0.29 | 7.7 | 12.6 |
| | SBL | C | 0.71 | 76.5 | 53.7 | C | 0.75 | 77.2 | 60.8 |
| | SBT | C | 0.78 | 63.1 | 68.9 | F | 1.07 | 104.1 | #145.3 |
| | SBR | A | 0.22 | 1.2 | 0.0 | A | 0.40 | 14.1 | 23.3 |
| | Overall | D | 0.89 | 43.2 | - | F | 1.03 | 71.7 | - |

Notes: Saturation flow rate of 1800 veh/h/lane
 Queue is measured in metres
 Peak Hour Factor = 1.00

m = metered queue
 # = volume for the 95th %ile cycle exceeds capacity

Without Baseline BRT, Fisher Avenue at Baseline Road at the 2034 future total horizon operate similarly to the existing conditions. The EA road improvements will reduce the intersection capacity through the addition of the BRT lanes and the geometric requirements for this facility will be a trade off on auto modes. Similarly, protected pedestrian and cycling movements that have been incorporated into the design will also reduce intersection operations. While the site will continue to be served by higher order roadways with auto lane capacity, the higher order transit on Baseline Road will serve a greater area than this site alone. Existing commuters, area residents and the site will be able to increase the adoption of transit and contribute to the success of this investment. As noted above, the sensitivity analysis is provided through the older paradigm and will continue to operate with a higher auto level of service. The City will have to acknowledge that the post BRT implementation will be a forceful shift of modes and beyond the developments responsibility to mitigate. Ultimately, the sensitivity illustrates that the area will continue to operate in a consistent manner, with Sections 7.1 and 7.2 illustrating the operational issues that may arise through slow adoption of transit.

7.4 Demand Rationalization Conclusions

7.4.1 Network Rationalization

At the intersections of Fisher Avenue at Baseline Road and Prince of Wales Drive at Baseline Road/Heron Road, the future BRT geometry and background growth are anticipated to be the primary driver of impacts to the forecasted operations.

With respect to rationalization of background traffic, after coming online and serving existing demands, it is anticipated that residual trip capacity will be available in the Baseline Road corridor in the form of transit and cycling trips. For the BRT corridor to maintain intersection operations commensurate with the existing conditions, shifts from auto trips to transit trips of 3% of the volumes, for the conditions inclusive of all known future area developments, would be required at the intersection of Fisher Avenue and Baseline Road in the PM peak hour. The intersection of Prince of Wales Drive at Baseline Road/Heron Road is forecast to operate better in the future conditions with the BRT implementation than in the existing conditions, partly due to the removal of detour volumes, and partly through the addition of a southbound left-turn lane as part of the modifications, though the elimination of the westbound left-turn lane, an eastbound through lane, and a northbound right-turn lane is planned.

7.4.2 Development Rationalization

The proposed mode shares for the development are appropriate to target, supported by the planned corridor improvements including BRT. These targets should be supported through TDM measures, and the sensitivity analysis indicated that the timing of the improvements was not associated with increased impacts to network operations. Therefore, no further rationalization for site traffic is required.

8 Transportation Demand Management

8.1 Context for TDM

The mode shares used within the TIA represent a shift from auto modes to transit and cycling modes. As the future Baseline Road Rapid Transit Corridor project will enhance the cycling connectivity and transit access of the development and result in residual trip capacity for these modes, the increases in these mode shares is likely to be achieved. Supportive TDM measures should be included aimed at ensuring this outcome and encouraging further shifts towards transit.

The subject site is not within a design priority area. Total bedrooms within the development are subject to the unit breakdown. No age restrictions are noted.

8.2 Need and Opportunity

The subject site has been assumed to rely on auto travel and transit with an increase in transit and cycling ridership with the immediate proximity to the future BRT corridor, and those assumptions have been carried through the analysis. Risks associated with failing to meet mode share targets may be increased volumes on the existing overcapacity movements at the intersections of Fisher Avenue at Baseline Road and Prince of Wales Drive at Baseline Road/Heron Road. The presence of further operational issues will, however, encourage transit uptake.

8.3 TDM Program

The “suite of post occupancy TDM measures” has been summarized in the TDM checklist for the residential land uses. The checklist is provided in Appendix I. The key TDM measures recommended to be considered in future site plan applications include:

- Display local area maps with walking and cycling routes, and transit route information and schedules at major entrances
- Provide real-time arrival information display at entrances
- Provide a multimodal travel option information package to new residents
- Contract with providers to install on-site bikeshare (or other micro-mobility, e.g., scootershare)
- Contract with providers to install on-site carshare spaces
- Inclusion of a 1-year Presto card for the initial purchase of condo purchase and/or rental of apartment
- Unbundle parking cost from purchase or rental costs

9 Transit

In Section 5.1 the trip generation by mode was estimated, including an estimate of the number of transit trips that will be generated by the proposed development. Table 26 summarizes the transit trip generation.

Table 26: Trip Generation by Transit Mode

| Travel Mode | Mode Share | AM Peak Hour | | | PM Peak Hour | | |
|-------------|------------|--------------|-----|-------|--------------|-----|-------|
| | | In | Out | Total | In | Out | Total |
| Transit | Varies | 83 | 176 | 259 | 137 | 103 | 240 |

The proposed development is anticipated to generate 259 AM and 240 PM peak hour two-way transit trips. These transit trips are new trips associated with the residential land use and provided for the purposes of transit service and schedule planning for residential origins and destinations. Transit trips from the existing commercial development are not considered or discounted within this section.

From the trip distribution found in section 5.3, these values can be further broken down. Table 27 summarizes forecasted site-generated transit ridership trips by direction and the equivalent bus loads. It is assumed that trips to the north and south may be taken by connecting to the LRT Trillium Line east of the site via the bus routes.

Table 27: Forecasted Site-Generated Transit Ridership

| Direction | AM Peak Hour | | PM Peak Hour | | Service Type | Equivalent Service Increase |
|-----------|--------------|-----|--------------|-----|-------------------|------------------------------|
| | In | Out | In | Out | | |
| North | 25 | 53 | 41 | 31 | Bus, BRT (future) | A standard bus load |
| South | 21 | 44 | 34 | 26 | | A standard bus load |
| East | 16 | 35 | 28 | 20 | | Two-thirds standard bus load |
| West | 21 | 44 | 34 | 26 | | A standard bus load |

9.1 Transit Priority

Examining the study area intersection operations, negligible impacts on delay are anticipated on transit movements at the study area intersections as a result of the development site traffic. No additional transit priority measures are required for Baseline Road beyond those being implemented through the EA. Presently, no transit turning movements exist between Baseline Road and the isolated transit priority corridor on Fisher Avenue.

No reduction in transit MMLOS is noted on any approach at the intersection of Fisher Avenue at Baseline Road between this sensitivity analysis and the existing conditions.

10 Network Intersection Design

10.1 Network Intersection Control

No change to the existing signalized control is recommended for the network intersections.

10.2 Network Intersection Design

10.2.1 2034 Future Total Network Intersection Operations

The operations are noted in Section 7.2 and no further rationalization is required.

10.2.2 Network Intersection MMLOS

Table 28 summarizes the MMLOS analysis for the network intersections within the study area. The existing and future conditions for both intersections will be the same and are considered in one row. The intersection analysis of Fisher Avenue at Baseline Road and Prince of Wales Drive at Baseline Road/Heron Road are based on the policy area within 600 metres of a rapid transit station, and Fisher Avenue at Deer Park Road/Dynes Road is based on the policy area of within 300 metres of a school. The MMLOS worksheets has been provided in Appendix L.

Table 28: Study Area Intersection MMLOS Analysis

| Intersection | Horizon | Pedestrian LOS | | Bicycle LOS | | Transit LOS | | Truck LOS | | Auto LOS | |
|---|------------------|----------------|--------|-------------|--------|-------------|--------|-----------|--------|----------|--------|
| | | PLOS | Target | BLOS | Target | TLOS | Target | TrLOS | Target | ALOS | Target |
| Fisher Ave at Baseline Rd | Existing | F | A | F | A | F | A | A | D | F | E |
| | Future | F | A | A | A | F | A | A | D | F | E |
| Prince of Wales Dr at Baseline Rd/ Heron Rd | Existing | F | A | F | A | F | A | A | D | F | E |
| | Future | F | A | A | A | F | A | A | D | F | E |
| Fisher Ave at Deer Park Rd/ Dynes Rd | Existing /Future | E | A | A | B | C | D | - | - | B | E |

The pedestrian LOS will not be met at the intersections throughout the study area. As is typical for arterial roads, the crossing distances do not permit the targets to be met. To meet pedestrian LOS targets, the maximum crossing distance on all pedestrian crossings would need to be reduced to two lane-widths.

The bicycle LOS will not be met at the existing intersections of Fisher Avenue at Baseline Road and Prince of Wales Drive at Baseline Road/Heron Road, but it will be met once the planned modifications are completed.

The transit LOS will not be met at the intersections throughout the study area except for Fisher Avenue at Deer Park Road/Dynes Road intersection. To meet transit LOS, the delay would need to be reduced to zero seconds on all transit movements. The future Baseline Road Rapid Transit Corridor is anticipated to improve the eastbound and westbound operations, but the northbound and southbound movements will not meet the transit LOS.

The auto LOS will not be met throughout the study area except for Fisher Avenue at Deer Park Road/Dynes Road intersection.

The MMLOS scores for the future conditions are highlighted for the City’s review given their planned improvements for these intersections, and meeting these targets are not considered the responsibility of the developer.

10.2.3 Recommended Design Elements

No study area intersection design elements are proposed as part of this study, either for the buildout scenario with BRT or for the sensitivity analysis scenario.

11 Summary of Improvements Indicated and Modifications Options

The following summarizes the analysis and results presented in this TIA report:

Proposed Site and Screening

- The proposed site includes three mixed-use buildings with a total of 1,089 dwelling units and 30,650 sq. ft of commercial space
- The first phase of development is to include the construction of the southern building in the location of an existing parking lot, and the remaining phases are to involve the demolition of the strip retail plaza
- The development proposes the use of an existing right-in-only access on Baseline Road, an existing full-movements access, and a newly proposed outbound access on Fisher Avenue
- A total of 999 residential, 105 visitor, 45 commercial vehicle parking spaces, and 1089 residential and 32 commercial bicycle parking spaces are proposed
- The development is proposed to be completed across multiple phases in 2034
- The trip generation, location, and safety triggers were met for the TIA Screening
- This report accompanies a zoning by-law amendment

Existing Conditions

- Baseline Road, Heron Road, Fisher Avenue, Prince of Wales Drive are arterial roads in the study area, and Deer Park Road and Dynes Road are collector roads
- Sidewalks are provided along the south side of Baseline Road and of Deer Park Road west of Millbrook Crescent, on the east side of Prince of Wales Drive, on the west side of Fisher Avenue north of Baseline Road, on both sides of Fisher Avenue south of Baseline Road, Dynes Road, and Deer Park Road east of Millbrook Crescent
- A paved shoulder is present on both sides of Fisher Avenue except through the intersection with Baseline Avenue where bike lanes are present and on Fisher Avenue of the road between Malibu Terrace and the auxiliary northbound right turn lane taper at Baseline Road where a cycletrack is present
- Cycletracks are also present at the Fisher Avenue at Deer Park Road/Dynes Road intersection, and bike lanes are present along Dynes Road and Dear Park Road east of Millbrook Crescent
- Fisher Avenue, Prince of Wales Drive, Baseline Road, and Heron Road are spine routes, and Baseline Road, Heron Road and Prince of Wales Drive are cross-town bikeways
- Malibu Terrace west of Fisher Avenue, Hilliard Avenue north of Malibu Terrace, Sunnycrest Drive, Deer Park Road, Dynes Road, and McCooey Lane are local routes
- The high volumes roadways have produced a high number of collisions at the study area intersections, primarily at the Fisher Avenue at Baseline Road intersection
- The Fisher Avenue at Baseline Road intersection had an angle collision involving a fatality where a pedestrian was killed as a result of a two-vehicle collision
- The City has developed a protected intersection design as part of the Baseline Road Rapid Transit Corridor project to improve active mode safety
- No further examination of collisions at the Fisher Avenue at Baseline Road intersection is required as part of this study
- Existing volumes were noted to include detour volumes from the closure of the Hog's Back Bridge

Development Generated Travel Demand

- The proposed development is forecasted produce 509 two-way person trips during the AM peak hour and 583 two-way person trips during the PM peak hour
- The proposed development is forecasted produce 136 two-way vehicle trips during the AM peak hour and 139 two-way vehicle trips during the PM peak hour based upon an increase in transit and cycling from the typical district mode shares given the proximity of the Baseline BRT improvements
- Of the forecasted trips, 30% are anticipated to travel north, 25% to the south and the west, and 20% to the east

Background Conditions

- In addition to accounting for changes in volumes from the background developments, the annual background growth derived from the two TRANS model horizons was rounded to the nearest 0.25% and applied in the AM peak hour and reversed in the PM peak hour
- Changes from the Baseline Road Rapid Transit Corridor project are included in future horizons and volumes at the intersection of Prince of Wales Drive and Baseline Road/Heron Road have been factored to remove the detour volumes
- The existing site comprises a 34,950 sq. ft of commercial building and is estimated to produce 25 AM two-way auto trips in the AM peak hour and 60 two-way auto trips in the PM peak hour based on the existing land uses and the recommended area mode shares
- The planned geometric changes at the Baseline Road intersections are not anticipated to directly mitigate operational issues, which are anticipated to persist at the 2034 future background horizon
- Operational improvements are noted at the intersection of Prince of Wales Drive and Baseline Road/Heron Road where the detour volumes are not included

Demand Rationalization

- After construction, trip capacity will be available via the Baseline BRT corridor for the transit and cycling modes
- To maintain operations at a similar performance to the existing conditions, a reduction in auto traffic of 3% is required at the intersection of Fisher Avenue at Baseline Road via a shift in auto traffic to transit, and the intersection of Prince of Wales Drive at Baseline Road/Heron Road is anticipated to operate better than the existing conditions in the future conditions
- Adjusted mode shares have been used for the site's trip generation accounting for the availability of higher order transit at build-out
- The selected mode shares are considered appropriate and should be supported through TDM measures, and the timing of improvements is not associated with increased network impacts

TDM

- A TDM program should be employed to utilize the added trip capacity from the BRT corridor improvements
- Supportive TDM measures to be included within the proposed development should include:
 - Display local area maps with walking and cycling routes, and transit route information and schedules at major entrances
 - Provide a multimodal travel option information package to new residents
 - Contract with providers to install on-site bikeshare (or other micro-mobility, e.g., scootershare)

- Contract with providers to install on-site carshare spaces
- Inclusion of a 1-year Presto card for the initial purchase of condo purchase and/or rental of apartment
- Unbundle parking cost from purchase or rental costs

Transit

- The forecasted transit trips will include 259 two-way trips during the AM peak and 240 two-way trips during the PM peak, and these transit trips are new trips associated with the residential land use and provided for the purposes of transit service and schedule planning for residential origins and destinations
- It is assumed that trips to the north and south may be taken by connecting to the LRT Trillium Line east of the site via the bus routes
- Peak hour transit ridership resulting from the site equate to half standard bus load northerly and southerly of the site, and two thirds of a bus load easterly and westerly of the site
- Negligible impacts are anticipated on transit movement delays at the study area intersections from the subject development and no additional transit priority measures are required for Baseline Road beyond those being implemented through the EA
- Presently, no transit turning movements exist between Baseline Road and the isolated transit priority corridor on Fisher Avenue

Network Intersection Design

- No change in transit MMLOS is noted on any approach at the intersection of Fisher Avenue at Baseline Road between the scenario without Baseline BRT from the existing conditions, and no intersection design elements would be required to support the development in this scenario
- The pedestrian, transit, and auto LOS will not be met at the intersections of Fisher Avenue at Baseline Road and Prince of Wales Drive at Baseline Road/Heron Road in the existing or future conditions
- The bicycle LOS at the future intersections of Fisher Avenue at Baseline Road and Prince of Wales Drive at Baseline Road/Heron Road will be met but are not met in the existing conditions, and the pedestrian LOS will not be met at the intersection of Fisher Avenue at Deer Park Road/Dynes Road
- The MMLOS scores for the future conditions are highlighted for the City's review given their planned improvements for these intersections, and meeting these targets are not considered the responsibility of the developer

12 Conclusion

It is recommended that, from a transportation perspective, the proposed development applications proceed.

Prepared By:

Reviewed By:



Yu-Chu Chen, EIT
Transportation Engineering-Intern



Andrew Harte, P.Eng.
Senior Transportation Engineer

Appendix A

TIA Screening Form and PM Certification Form

City of Ottawa 2017 TIA Guidelines
Step 1 - Screening Form

Date: 25-Feb-22
Project Number: 2021-083
Project Reference: 780 Baseline Road

| 1.1 Description of Proposed Development | |
|---|--|
| Municipal Address | 780 Baseline Road |
| Description of Location | Ward 9. 1.36 ha parcel area on south side of Baseline Rd and West side of Fisher Ave |
| Land Use Classification | General Mixed Use (GM) |
| Development Size | 900 residential units and approximately 25,000 sq.ft commercial space |
| Accesses | One on Baseline Road, Two on Fisher Avenue |
| Phase of Development | Two |
| Buildout Year | 2027 |
| TIA Requirement | Full TIA Required |

| 1.2 Trip Generation Trigger | |
|-----------------------------|-------------------------|
| Land Use Type | Townhomes or apartments |
| Development Size | 900 Units |
| Trip Generation Trigger | Yes |

| 1.3 Location Triggers | | |
|--|-----|---|
| Does the development propose a new driveway to a boundary street that is designated as part of the City's Transit Priority, Rapid Transit or Spine Bicycle Networks? | Yes | Transit Priority, Rapid Transt, and Spine |
| Is the development in a Design Priority Area (DPA) or Transit-oriented Development (TOD) zone? | No | |
| Location Trigger | Yes | |

| 1.4. Safety Triggers | |
|---|-----|
| Are posted speed limits on a boundary street 80 km/hr or greater? | No |
| Are there any horizontal/vertical curvatures on a boundary street limits sight lines at a proposed driveway? | No |
| Is the proposed driveway within the area of influence of an adjacent traffic signal or roundabout (i.e. within 300 m of intersection in rural conditions, or within 150 m of intersection in urban/ suburban conditions)? | Yes |
| Is the proposed driveway within auxiliary lanes of an intersection? | No |
| Does the proposed driveway make use of an existing median break that serves an existing site? | No |
| Is there is a documented history of traffic operations or safety concerns on the boundary streets within 500 m of the development? | Yes |
| Does the development include a drive-thru facility? | No |
| Safety Trigger | Yes |



TIA Plan Reports

On 14 June 2017, the Council of the City of Ottawa adopted new Transportation Impact Assessment (TIA) Guidelines. In adopting the guidelines, Council established a requirement for those preparing and delivering transportation impact assessments and reports to sign a letter of certification.

Individuals submitting TIA reports will be responsible for all aspects of development-related transportation assessment and reporting, and undertaking such work, in accordance and compliance with the City of Ottawa's Official Plan, the Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines.

By submitting the attached TIA report (and any associated documents) and signing this document, the individual acknowledges that s/he meets the four criteria listed below.

CERTIFICATION

1. I have reviewed and have a sound understanding of the objectives, needs and requirements of the City of Ottawa's Official Plan, Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines;
2. I have a sound knowledge of industry standard practice with respect to the preparation of transportation impact assessment reports, including multi modal level of service review;
3. I have substantial experience (more than 5 years) in undertaking and delivering transportation impact studies (analysis, reporting and geometric design) with strong background knowledge in transportation planning, engineering or traffic operations; and
4. I am either a licensed¹ or registered² professional in good standing, whose field of expertise [check appropriate field(s)] is either transportation engineering or transportation planning .

1,2 License of registration body that oversees the profession is required to have a code of conduct and ethics guidelines that will ensure appropriate conduct and representation for transportation planning and/or transportation engineering works.


City Of Ottawa
Infrastructure Services and Community
Sustainability
Planning and Growth Management
110 Laurier Avenue West, 4th fl.
Ottawa, ON K1P 1J1
Tel. : 613-580-2424
Fax: 613-560-6006

Ville d'Ottawa
Services d'infrastructure et Viabilité des
collectivités
Urbanisme et Gestion de la croissance
110, avenue Laurier Ouest
Ottawa (Ontario) K1P 1J1
Tél. : 613-580-2424
Télécopieur: 613-560-6006

Dated at Ottawa this 20 day of September, 2018.
(City)

Name: Andrew Harte
(Please Print)

Professional Title: Professional Engineer



Signature of Individual certifier that s/he meets the above four criteria

| |
|--|
| Office Contact Information (Please Print) |
| Address: 6 Plaza Court |
| City / Postal Code: Ottawa / K2H 7W1 |
| Telephone / Extension: (613) 697-3797 |
| E-Mail Address: Andrew.Harte@CGHTransportation.com |



Appendix B

Turning Movement Counts



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE


Survey Date: Wednesday, August 03, 2016

WO No: 36121

Start Time: 07:00

Device: Miovision

Full Study Diagram

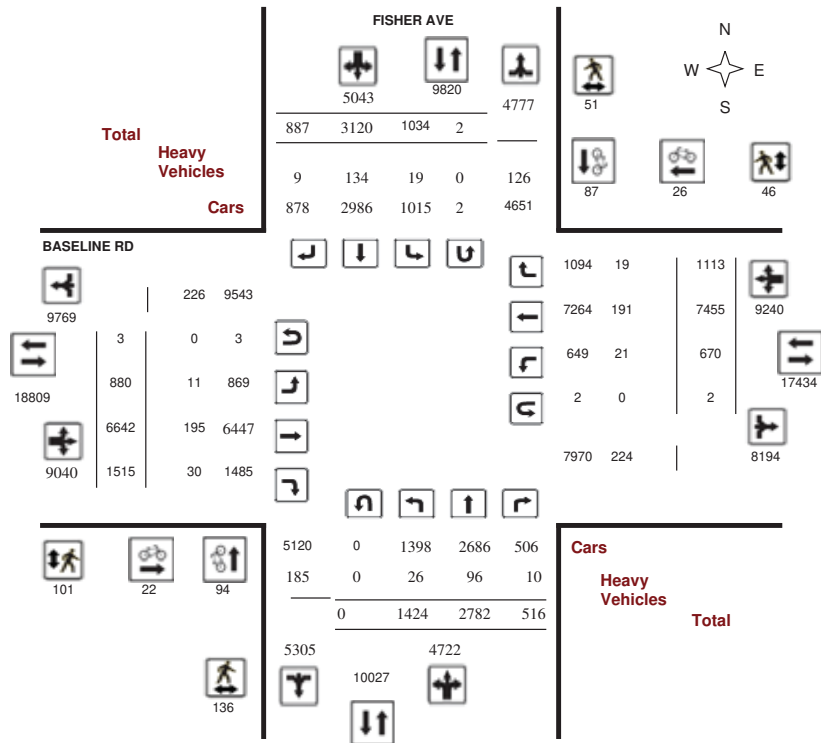

Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE


Survey Date: Wednesday, August 03, 2016

WO No: 36121

Start Time: 07:00

Device: Miovision

Full Study Peak Hour Diagram

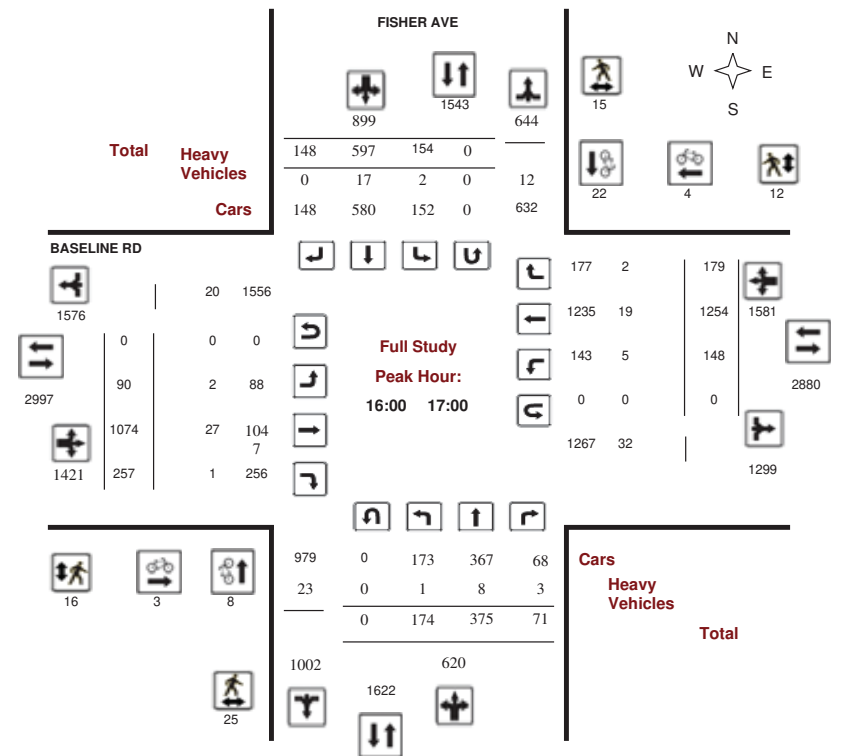




Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016
Start Time: 07:00

WO No: 36121
Device: Miovision

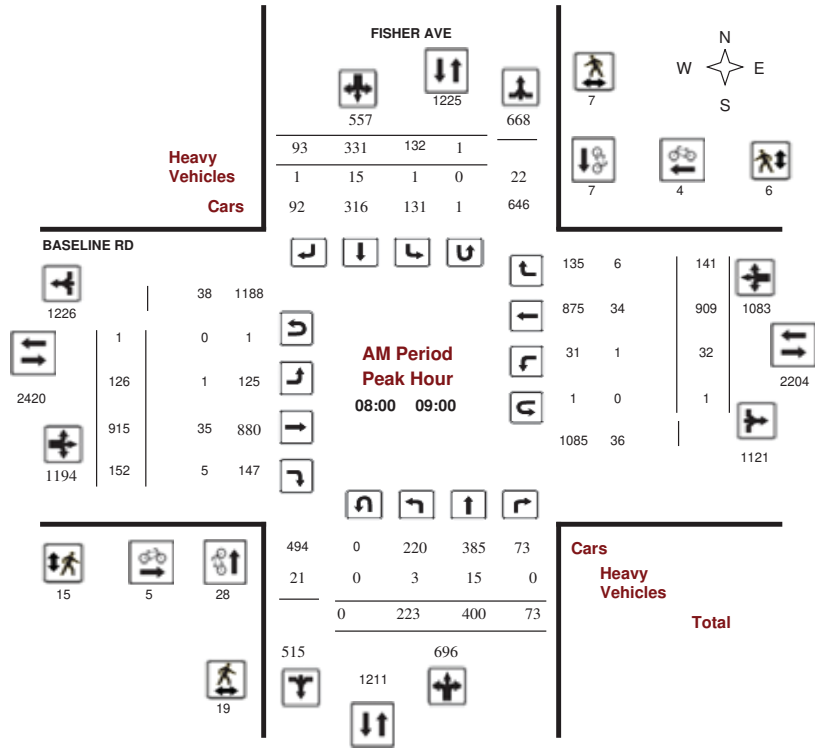


Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016
Start Time: 07:00

WO No: 36121
Device: Miovision

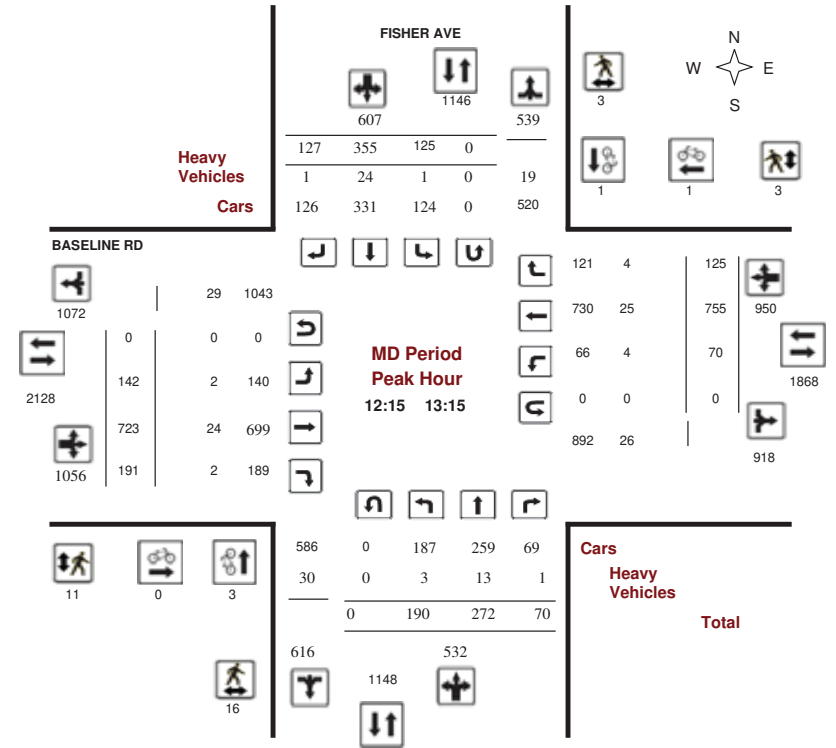




Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016
Start Time: 07:00

WO No: 36121
Device: Miovision

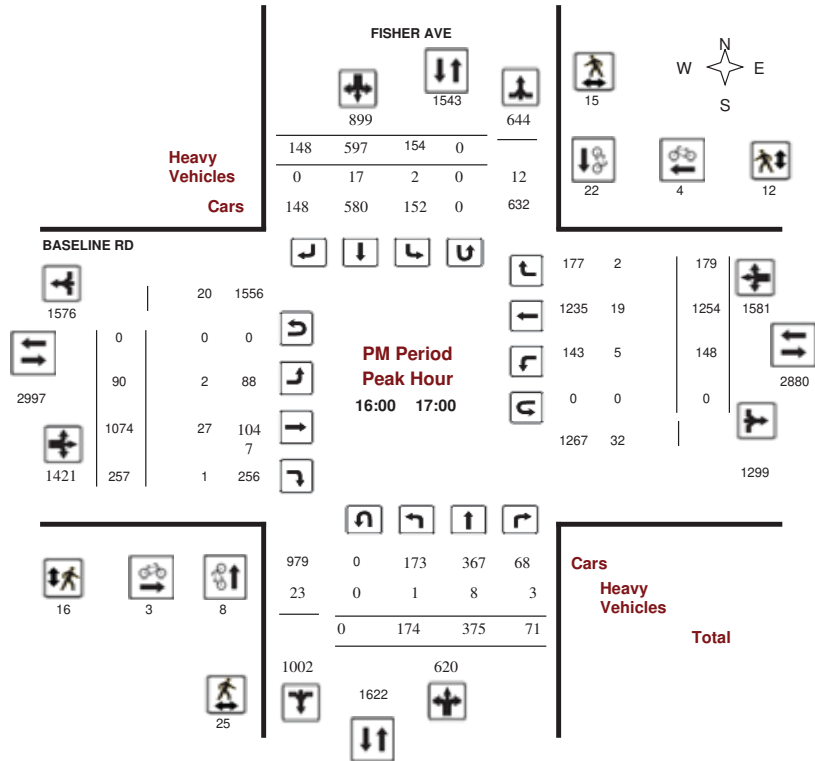

Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016
Start Time: 07:00

WO No: 36121
Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Wednesday, August 03, 2016

Total Observed U-Turns
Northbound: 0 Southbound: 2
Eastbound: 3 Westbound: 2

ADT Factor
.90

| Period | FISHER AVE | | | | BASELINE RD | | | | WB TOT | STR TOT | Grand Total | | | | | | | | |
|-------------|------------|------|------------|--------|-------------|------|-----------|--------|---------|---------|-------------|------|--------|--------|---------|-------------|-------|-------|-------|
| | Northbound | | Southbound | | Eastbound | | Westbound | | | | | | | | | | | | |
| | LT | ST | RT | NB TOT | LT | ST | RT | SB TOT | STR TOT | LT | ST | RT | EB TOT | WB TOT | STR TOT | Grand Total | | | |
| 07:00 08:00 | 174 | 406 | 68 | 648 | 121 | 309 | 57 | 487 | 1135 | 104 | 835 | 106 | 1045 | 36 | 702 | 105 | 843 | 1888 | 3023 |
| 08:00 09:00 | 223 | 400 | 73 | 696 | 132 | 331 | 93 | 556 | 1252 | 126 | 915 | 152 | 1193 | 32 | 909 | 141 | 1082 | 2275 | 3527 |
| 09:00 10:00 | 172 | 343 | 55 | 570 | 121 | 269 | 96 | 486 | 1056 | 70 | 670 | 151 | 891 | 58 | 685 | 120 | 863 | 1754 | 2810 |
| 11:30 12:30 | 172 | 276 | 59 | 507 | 121 | 365 | 135 | 621 | 1128 | 128 | 658 | 187 | 973 | 71 | 802 | 123 | 996 | 1969 | 3097 |
| 12:30 13:30 | 168 | 283 | 68 | 519 | 108 | 337 | 124 | 569 | 1088 | 139 | 707 | 211 | 1057 | 71 | 718 | 125 | 914 | 1971 | 3059 |
| 15:00 16:00 | 153 | 345 | 52 | 550 | 128 | 442 | 120 | 690 | 1240 | 115 | 848 | 212 | 1175 | 113 | 1179 | 173 | 1465 | 2640 | 3880 |
| 16:00 17:00 | 174 | 375 | 71 | 620 | 154 | 597 | 148 | 899 | 1519 | 90 | 1074 | 257 | 1421 | 148 | 1254 | 179 | 1581 | 3002 | 4521 |
| 17:00 18:00 | 188 | 354 | 70 | 612 | 149 | 470 | 114 | 733 | 1345 | 108 | 935 | 239 | 1282 | 141 | 1206 | 147 | 1494 | 2776 | 4121 |
| Sub Total | 1424 | 2782 | 516 | 4722 | 1034 | 3120 | 887 | 5041 | 9763 | 880 | 6642 | 1515 | 9037 | 670 | 7455 | 1113 | 9238 | 18275 | 28038 |
| U Turns | 0 | | | 0 | 2 | | | 2 | 2 | 3 | | | 3 | 2 | | | 2 | 5 | 7 |
| Total | 1424 | 2782 | 516 | 4722 | 1036 | 3120 | 887 | 5043 | 9765 | 883 | 6642 | 1515 | 9040 | 672 | 7455 | 1113 | 9240 | 18280 | 28045 |
| EQ 12Hr | 1979 | 3867 | 717 | 6563 | 1440 | 4337 | 1233 | 7010 | 13573 | 1227 | 9232 | 2106 | 12565 | 934 | 10362 | 1547 | 12843 | 25408 | 38981 |
| AVG 12Hr | 1781 | 3480 | 645 | 5906 | 1296 | 3903 | 1110 | 6309 | 12215 | 1104 | 8309 | 1895 | 11308 | 841 | 9326 | 1392 | 11559 | 22867 | 35082 |
| AVG 24Hr | 2333 | 4559 | 845 | 7737 | 1698 | 5113 | 1454 | 8265 | 16002 | 1446 | 10885 | 2482 | 14813 | 1102 | 12217 | 1824 | 15143 | 29956 | 45958 |

Note: These values are calculated by multiplying the totals by the appropriate expansion factor. **1.39**

Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the ADT factor. **.90**

Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. **1.31**

Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016

WO No: 36121

Start Time: 07:00

Device: Miovision

Full Study 15 Minute Increments

Table with columns for Time Period, Northbound (LT, ST, RT, N TOT, STR TOT), Southbound (LT, ST, RT, S TOT, STR TOT), Eastbound (LT, ST, RT, E TOT, STR TOT), Westbound (LT, ST, RT, W TOT, STR TOT), and Grand Total. Rows represent 15-minute intervals from 07:00 to 18:00.

Note: U-Turns are included in Totals.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016

WO No: 36121

Start Time: 07:00

Device: Miovision

Full Study Cyclist Volume

Table with columns for Time Period, FISHER AVE (Northbound, Southbound, Street Total), BASELINE RD (Eastbound, Westbound, Street Total), and Grand Total. Rows represent 15-minute intervals from 07:00 to 18:00.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016

WO No: 36121

Start Time: 07:00

Device: Miovision

Full Study Pedestrian Volume

| Time Period | FISHER AVE | | Total | BASELINE RD | | Total | Grand Total |
|-------------|----------------------------------|----------------------------------|-------|----------------------------------|----------------------------------|-------|-------------|
| | NB Approach (E or W Crossing) | SB Approach (E or W Crossing) | | EB Approach (N or S Crossing) | WB Approach (N or S Crossing) | | |
| 07:00 07:15 | 6 | 3 | 9 | 5 | 3 | 8 | 17 |
| 07:15 07:30 | 2 | 2 | 4 | 3 | 3 | 6 | 10 |
| 07:30 07:45 | 5 | 1 | 6 | 3 | 3 | 6 | 12 |
| 07:45 08:00 | 4 | 2 | 6 | 4 | 2 | 6 | 12 |
| 08:00 08:15 | 3 | 1 | 4 | 4 | 1 | 5 | 9 |
| 08:15 08:30 | 5 | 3 | 8 | 3 | 3 | 6 | 14 |
| 08:30 08:45 | 3 | 2 | 5 | 4 | 1 | 5 | 10 |
| 08:45 09:00 | 8 | 1 | 9 | 4 | 1 | 5 | 14 |
| 09:00 09:15 | 0 | 1 | 1 | 2 | 1 | 3 | 4 |
| 09:15 09:30 | 3 | 1 | 4 | 3 | 2 | 5 | 9 |
| 09:30 09:45 | 0 | 1 | 1 | 1 | 1 | 2 | 3 |
| 09:45 10:00 | 1 | 0 | 1 | 1 | 1 | 2 | 3 |
| 11:30 11:45 | 1 | 1 | 2 | 1 | 1 | 2 | 4 |
| 11:45 12:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:00 12:15 | 1 | 0 | 1 | 1 | 1 | 2 | 3 |
| 12:15 12:30 | 4 | 0 | 4 | 2 | 1 | 3 | 7 |
| 12:30 12:45 | 5 | 0 | 5 | 3 | 0 | 3 | 8 |
| 12:45 13:00 | 2 | 2 | 4 | 3 | 2 | 5 | 9 |
| 13:00 13:15 | 5 | 1 | 6 | 3 | 0 | 3 | 9 |
| 13:15 13:30 | 3 | 1 | 4 | 2 | 0 | 2 | 6 |
| 15:00 15:15 | 5 | 0 | 5 | 8 | 0 | 8 | 13 |
| 15:15 15:30 | 0 | 3 | 3 | 2 | 1 | 3 | 6 |
| 15:30 15:45 | 3 | 3 | 6 | 1 | 1 | 2 | 8 |
| 15:45 16:00 | 15 | 0 | 15 | 4 | 1 | 5 | 20 |
| 16:00 16:15 | 6 | 10 | 16 | 6 | 4 | 10 | 26 |
| 16:15 16:30 | 7 | 1 | 8 | 1 | 0 | 1 | 9 |
| 16:30 16:45 | 9 | 3 | 12 | 3 | 4 | 7 | 19 |
| 16:45 17:00 | 3 | 1 | 4 | 6 | 4 | 10 | 14 |
| 17:00 17:15 | 8 | 2 | 10 | 5 | 1 | 6 | 16 |
| 17:15 17:30 | 10 | 2 | 12 | 4 | 0 | 4 | 16 |
| 17:30 17:45 | 5 | 2 | 7 | 6 | 2 | 8 | 15 |
| 17:45 18:00 | 4 | 1 | 5 | 3 | 1 | 4 | 9 |
| Total | 136 | 51 | 187 | 101 | 46 | 147 | 334 |



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016

WO No: 36121

Start Time: 07:00

Device: Miovision

Full Study Heavy Vehicles

| Time Period | FISHER AVE | | | | | | | | | | BASELINE RD | | | | | | | | | | Grand Total |
|-------------|------------|----|----|-------|---------|------------|----|-----|-------|---------|-------------|----|-----|-------|---------|-----------|-----|-----|-------|---------|-------------|
| | Northbound | | | | | Southbound | | | | | Eastbound | | | | | Westbound | | | | | |
| | LT | ST | RT | N TOT | STR TOT | LT | ST | RT | S TOT | STR TOT | LT | ST | RT | E TOT | STR TOT | LT | ST | RT | W TOT | STR TOT | |
| 07:00 07:15 | 3 | 7 | 0 | 10 | 1 | 1 | 0 | 2 | 12 | 0 | 4 | 0 | 4 | 0 | 6 | 0 | 6 | 10 | 22 | | |
| 07:15 07:30 | 1 | 1 | 0 | 2 | 0 | 5 | 0 | 5 | 7 | 0 | 7 | 1 | 8 | 0 | 8 | 1 | 9 | 17 | 24 | | |
| 07:30 07:45 | 0 | 6 | 0 | 6 | 0 | 2 | 0 | 2 | 8 | 0 | 5 | 0 | 5 | 0 | 5 | 0 | 5 | 10 | 18 | | |
| 07:45 08:00 | 1 | 4 | 0 | 5 | 0 | 3 | 1 | 4 | 9 | 1 | 10 | 1 | 12 | 0 | 4 | 2 | 6 | 18 | 27 | | |
| 08:00 08:15 | 0 | 2 | 0 | 2 | 0 | 4 | 0 | 4 | 6 | 0 | 8 | 0 | 8 | 0 | 8 | 2 | 10 | 18 | 24 | | |
| 08:15 08:30 | 2 | 6 | 0 | 8 | 1 | 4 | 0 | 5 | 13 | 1 | 6 | 4 | 11 | 0 | 7 | 1 | 8 | 19 | 32 | | |
| 08:30 08:45 | 0 | 3 | 0 | 3 | 0 | 2 | 0 | 2 | 5 | 0 | 11 | 1 | 12 | 1 | 9 | 2 | 12 | 24 | 29 | | |
| 08:45 09:00 | 1 | 4 | 0 | 5 | 0 | 5 | 1 | 6 | 11 | 0 | 10 | 0 | 10 | 0 | 10 | 1 | 11 | 21 | 32 | | |
| 09:00 09:15 | 3 | 2 | 0 | 5 | 0 | 4 | 0 | 4 | 9 | 0 | 6 | 2 | 8 | 0 | 13 | 0 | 13 | 21 | 30 | | |
| 09:15 09:30 | 1 | 3 | 1 | 5 | 0 | 6 | 0 | 6 | 11 | 1 | 6 | 2 | 9 | 1 | 6 | 0 | 7 | 16 | 27 | | |
| 09:30 09:45 | 0 | 3 | 0 | 3 | 3 | 2 | 1 | 6 | 9 | 1 | 5 | 1 | 7 | 0 | 9 | 0 | 9 | 16 | 25 | | |
| 09:45 10:00 | 1 | 2 | 0 | 3 | 1 | 3 | 0 | 4 | 7 | 0 | 3 | 2 | 5 | 2 | 6 | 0 | 8 | 13 | 20 | | |
| 11:30 11:45 | 1 | 3 | 2 | 6 | 2 | 2 | 1 | 5 | 11 | 0 | 8 | 2 | 10 | 0 | 5 | 1 | 6 | 16 | 27 | | |
| 11:45 12:00 | 2 | 3 | 1 | 6 | 0 | 2 | 0 | 2 | 8 | 0 | 3 | 2 | 5 | 1 | 6 | 1 | 8 | 13 | 21 | | |
| 12:00 12:15 | 3 | 2 | 0 | 5 | 0 | 4 | 1 | 5 | 10 | 1 | 7 | 1 | 9 | 0 | 8 | 0 | 8 | 17 | 27 | | |
| 12:15 12:30 | 0 | 3 | 1 | 4 | 0 | 7 | 1 | 8 | 12 | 1 | 6 | 1 | 8 | 2 | 8 | 1 | 11 | 19 | 31 | | |
| 12:30 12:45 | 0 | 3 | 0 | 3 | 0 | 8 | 0 | 8 | 11 | 1 | 4 | 0 | 5 | 0 | 7 | 2 | 9 | 14 | 25 | | |
| 12:45 13:00 | 2 | 4 | 0 | 6 | 1 | 5 | 0 | 6 | 12 | 0 | 5 | 1 | 6 | 2 | 4 | 1 | 7 | 13 | 25 | | |
| 13:00 13:15 | 1 | 3 | 0 | 4 | 0 | 4 | 0 | 4 | 8 | 0 | 9 | 0 | 9 | 0 | 6 | 0 | 6 | 15 | 23 | | |
| 13:15 13:30 | 0 | 3 | 0 | 3 | 1 | 3 | 1 | 5 | 8 | 1 | 7 | 2 | 10 | 1 | 8 | 1 | 10 | 20 | 28 | | |
| 15:00 15:15 | 1 | 3 | 0 | 4 | 1 | 6 | 0 | 7 | 11 | 0 | 5 | 0 | 5 | 1 | 6 | 0 | 7 | 12 | 23 | | |
| 15:15 15:30 | 0 | 2 | 0 | 2 | 1 | 4 | 1 | 6 | 8 | 0 | 5 | 2 | 7 | 0 | 4 | 0 | 4 | 11 | 19 | | |
| 15:30 15:45 | 0 | 6 | 0 | 6 | 1 | 4 | 0 | 5 | 11 | 1 | 6 | 1 | 8 | 1 | 6 | 0 | 7 | 15 | 26 | | |
| 15:45 16:00 | 2 | 2 | 0 | 4 | 0 | 3 | 0 | 3 | 7 | 0 | 5 | 1 | 6 | 1 | 3 | 1 | 5 | 11 | 18 | | |
| 16:00 16:15 | 0 | 1 | 1 | 2 | 1 | 4 | 0 | 5 | 7 | 1 | 8 | 0 | 9 | 1 | 6 | 1 | 8 | 17 | 24 | | |
| 16:15 16:30 | 0 | 2 | 1 | 3 | 0 | 4 | 0 | 4 | 7 | 0 | 6 | 0 | 6 | 1 | 4 | 0 | 5 | 11 | 18 | | |
| 16:30 16:45 | 0 | 2 | 0 | 2 | 0 | 4 | 0 | 4 | 6 | 1 | 11 | 1 | 13 | 1 | 5 | 0 | 6 | 19 | 25 | | |
| 16:45 17:00 | 1 | 3 | 1 | 5 | 1 | 5 | 0 | 6 | 11 | 0 | 2 | 0 | 2 | 2 | 4 | 1 | 7 | 9 | 20 | | |
| 17:00 17:15 | 0 | 1 | 0 | 1 | 2 | 5 | 0 | 7 | 8 | 0 | 4 | 0 | 4 | 1 | 4 | 0 | 5 | 9 | 17 | | |
| 17:15 17:30 | 0 | 3 | 0 | 3 | 1 | 7 | 0 | 8 | 11 | 0 | 3 | 0 | 3 | 2 | 2 | 0 | 4 | 7 | 18 | | |
| 17:30 17:45 | 0 | 3 | 1 | 4 | 0 | 5 | 1 | 6 | 10 | 0 | 6 | 0 | 6 | 0 | 3 | 0 | 3 | 9 | 19 | | |
| 17:45 18:00 | 0 | 1 | 1 | 2 | 1 | 7 | 0 | 8 | 10 | 0 | 4 | 2 | 6 | 0 | 1 | 0 | 1 | 7 | 17 | | |
| Total: None | 26 | 96 | 10 | 132 | 19 | 134 | 9 | 162 | 294 | 11 | 195 | 30 | 236 | 21 | 191 | 19 | 231 | 467 | 761 | | |



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD @ FISHER AVE

Survey Date: Wednesday, August 03, 2016

WO No: 36121

Start Time: 07:00

Device: Miovision

Full Study 15 Minute U-Turn Total

| Time Period | | FISHER AVE | | BASELINE RD | | Total |
|-------------|-------|-------------------------|-------------------------|------------------------|------------------------|-------|
| | | Northbound U-Turn Total | Southbound U-Turn Total | Eastbound U-Turn Total | Westbound U-Turn Total | |
| 07:00 | 07:15 | 0 | 0 | 0 | 0 | 0 |
| 07:15 | 07:30 | 0 | 0 | 0 | 0 | 0 |
| 07:30 | 07:45 | 0 | 0 | 0 | 0 | 0 |
| 07:45 | 08:00 | 0 | 0 | 0 | 0 | 0 |
| 08:00 | 08:15 | 0 | 1 | 1 | 0 | 2 |
| 08:15 | 08:30 | 0 | 0 | 0 | 0 | 0 |
| 08:30 | 08:45 | 0 | 0 | 0 | 0 | 0 |
| 08:45 | 09:00 | 0 | 0 | 0 | 1 | 1 |
| 09:00 | 09:15 | 0 | 0 | 0 | 0 | 0 |
| 09:15 | 09:30 | 0 | 0 | 0 | 0 | 0 |
| 09:30 | 09:45 | 0 | 0 | 0 | 0 | 0 |
| 09:45 | 10:00 | 0 | 0 | 0 | 0 | 0 |
| 11:30 | 11:45 | 0 | 0 | 1 | 1 | 2 |
| 11:45 | 12:00 | 0 | 0 | 0 | 0 | 0 |
| 12:00 | 12:15 | 0 | 0 | 1 | 0 | 1 |
| 12:15 | 12:30 | 0 | 0 | 0 | 0 | 0 |
| 12:30 | 12:45 | 0 | 0 | 0 | 0 | 0 |
| 12:45 | 13:00 | 0 | 0 | 0 | 0 | 0 |
| 13:00 | 13:15 | 0 | 0 | 0 | 0 | 0 |
| 13:15 | 13:30 | 0 | 0 | 0 | 0 | 0 |
| 15:00 | 15:15 | 0 | 0 | 0 | 0 | 0 |
| 15:15 | 15:30 | 0 | 0 | 0 | 0 | 0 |
| 15:30 | 15:45 | 0 | 0 | 0 | 0 | 0 |
| 15:45 | 16:00 | 0 | 0 | 0 | 0 | 0 |
| 16:00 | 16:15 | 0 | 0 | 0 | 0 | 0 |
| 16:15 | 16:30 | 0 | 0 | 0 | 0 | 0 |
| 16:30 | 16:45 | 0 | 0 | 0 | 0 | 0 |
| 16:45 | 17:00 | 0 | 0 | 0 | 0 | 0 |
| 17:00 | 17:15 | 0 | 0 | 0 | 0 | 0 |
| 17:15 | 17:30 | 0 | 0 | 0 | 0 | 0 |
| 17:30 | 17:45 | 0 | 0 | 0 | 0 | 0 |
| 17:45 | 18:00 | 0 | 1 | 0 | 0 | 1 |
| Total | | 0 | 2 | 3 | 2 | 7 |



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR


Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study Diagram

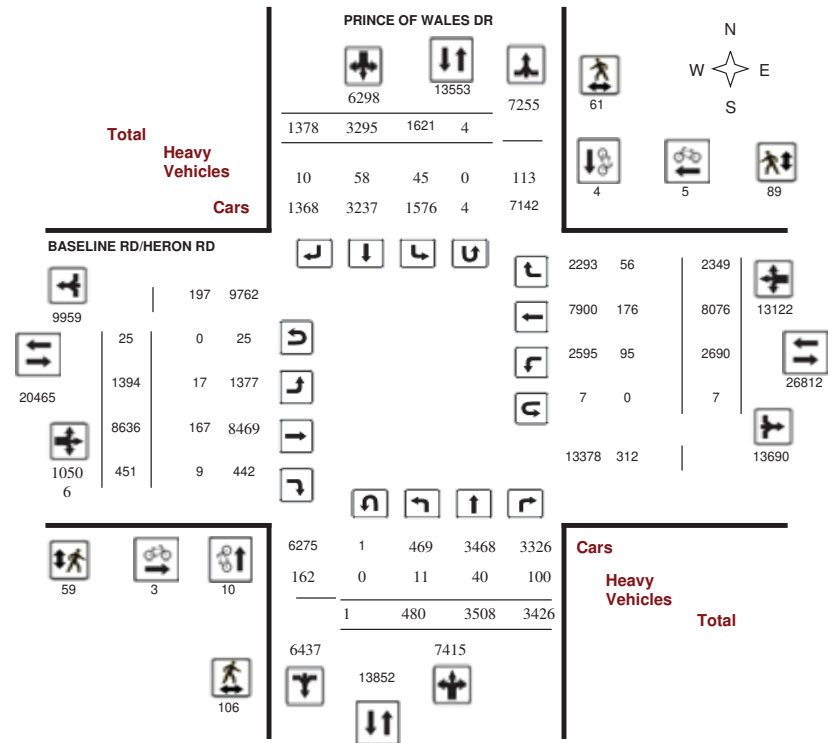

5478543 - MAR 4, 2020 - 8HR REIMPORT



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR


Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study Peak Hour Diagram

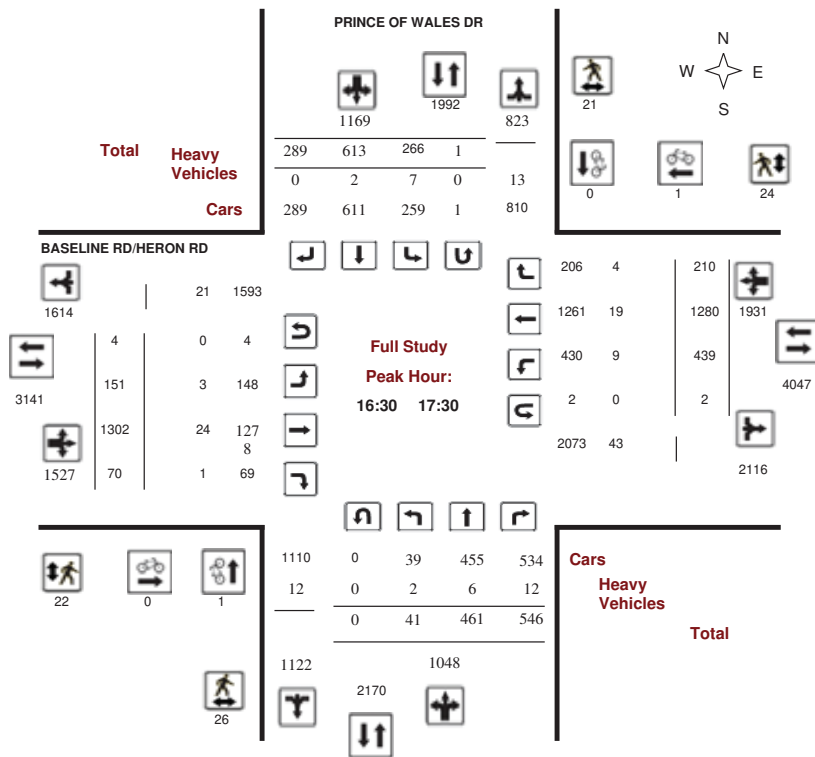

5478543 - MAR 4, 2020 - 8HR REIMPORT



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

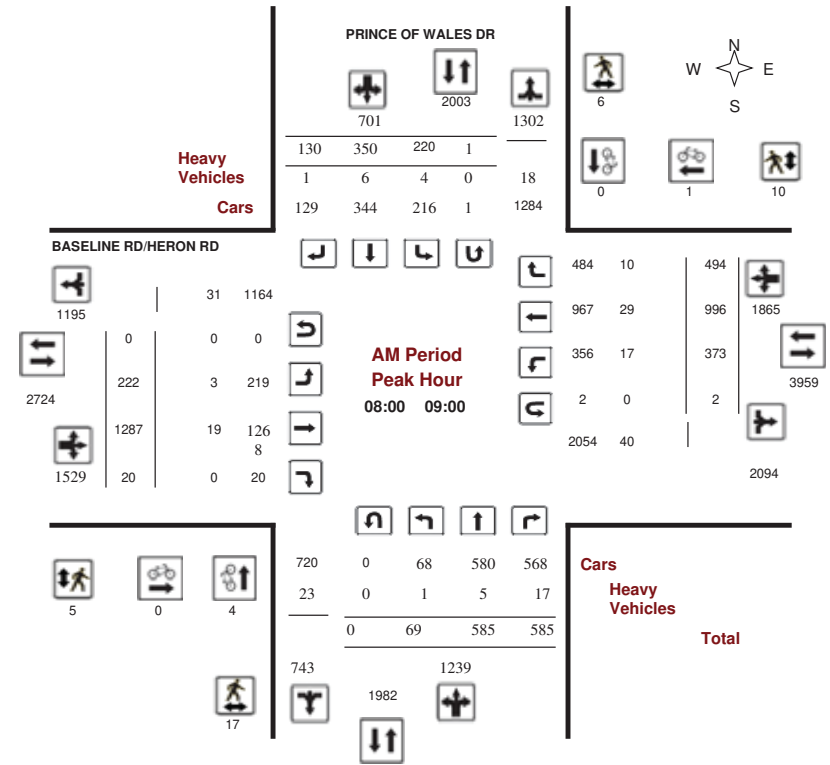

Comments 5478543 - MAR 4, 2020 - 8HR REIMPORT




Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020
Start Time: 07:00

WO No: 39636
Device: Miovision

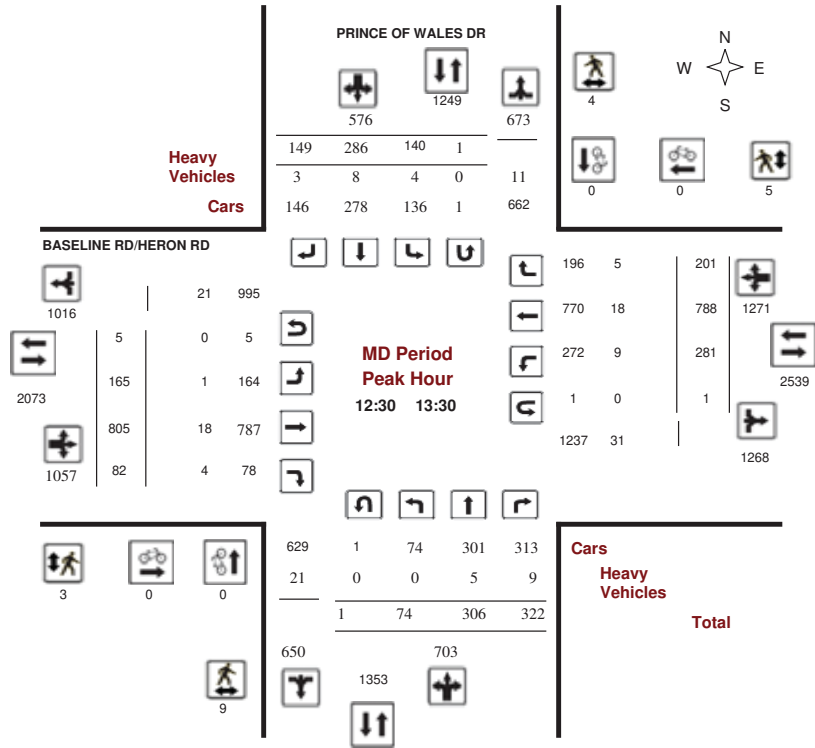

Comments 5478543 - MAR 4, 2020 - 8HR REIMPORT




Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020
Start Time: 07:00

WO No: 39636
Device: Miovision

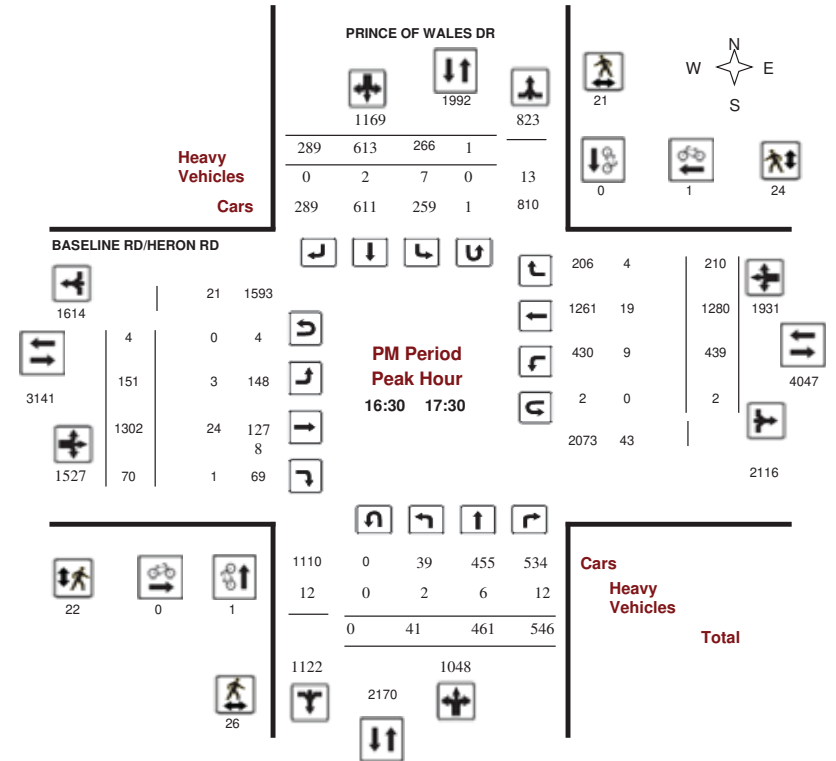

Comments 5478543 - MAR 4, 2020 - 8HR REIMPORT



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study Summary (8 HR Standard)

Survey Date: Wednesday, March 04, 2020

Total Observed U-Turns

AADT Factor

Northbound: 1 Southbound: 4
Eastbound: 25 Westbound: 7
1.00

| Period | PRINCE OF WALES DR | | | | | | | | BASELINE RD/HERON RD | | | | | | | | WB TOT | STR TOT | Grand Total |
|---|--------------------|------|------|--------|------------|------|------|--------|----------------------|------|-------|--------|-----------|------|-------|--------|--------|---------|-------------|
| | Northbound | | | | Southbound | | | | Eastbound | | | | Westbound | | | | | | |
| | LT | ST | RT | NB TOT | LT | ST | RT | SB TOT | LT | ST | RT | EB TOT | LT | ST | RT | WB TOT | | | |
| 07:00-08:00 | 53 | 669 | 421 | 1143 | 179 | 315 | 73 | 567 | 1710 | 205 | 1201 | 40 | 1446 | 274 | 809 | 433 | 1516 | 2962 | 4672 |
| 08:00-09:00 | 69 | 585 | 585 | 1239 | 220 | 350 | 130 | 700 | 1939 | 222 | 1287 | 20 | 1529 | 373 | 996 | 494 | 1863 | 3392 | 5331 |
| 09:00-10:00 | 68 | 436 | 359 | 863 | 155 | 282 | 103 | 540 | 1403 | 186 | 977 | 55 | 1218 | 264 | 826 | 269 | 1359 | 2577 | 3980 |
| 11:30-12:30 | 70 | 272 | 290 | 632 | 163 | 302 | 153 | 618 | 1250 | 130 | 695 | 44 | 869 | 272 | 848 | 198 | 1318 | 2187 | 3437 |
| 12:30-13:30 | 74 | 306 | 322 | 702 | 140 | 286 | 149 | 575 | 1277 | 165 | 805 | 82 | 1052 | 281 | 788 | 201 | 1270 | 2322 | 3599 |
| 15:00-16:00 | 57 | 387 | 414 | 858 | 234 | 572 | 218 | 1024 | 1882 | 161 | 1101 | 73 | 1335 | 368 | 1213 | 325 | 1906 | 3241 | 5123 |
| 16:00-17:00 | 41 | 430 | 528 | 999 | 287 | 607 | 292 | 1186 | 2185 | 160 | 1265 | 70 | 1495 | 426 | 1278 | 208 | 1912 | 3407 | 5592 |
| 17:00-18:00 | 48 | 423 | 507 | 978 | 243 | 581 | 260 | 1084 | 2062 | 165 | 1305 | 67 | 1537 | 432 | 1318 | 221 | 1971 | 3508 | 5570 |
| Sub Total | 480 | 3508 | 3426 | 7414 | 1621 | 3295 | 1378 | 6234 | 13708 | 1394 | 8636 | 451 | 10481 | 2690 | 8076 | 2349 | 13115 | 23596 | 37304 |
| U Turns | | | | 1 | | | | 4 | 5 | | | | 25 | | | | 7 | 32 | 37 |
| Total | 480 | 3508 | 3426 | 7415 | 1621 | 3295 | 1378 | 6238 | 13713 | 1394 | 8636 | 451 | 10506 | 2690 | 8076 | 2349 | 13122 | 23628 | 37341 |
| EQ 12hr | 667 | 4876 | 4762 | 10307 | 2253 | 4580 | 1915 | 8754 | 19061 | 1938 | 12004 | 627 | 14603 | 3739 | 11226 | 3265 | 18240 | 32843 | 51904 |
| Note: These values are calculated by multiplying the totals by the appropriate expansion factor. | | | | | | | | | | | | | | | | | | | 1.39 |
| AVG 12hr | 629 | 4595 | 4488 | 9714 | 2124 | 4316 | 1805 | 8250 | 19061 | 1826 | 11313 | 591 | 13763 | 3524 | 10580 | 3077 | 17190 | 32843 | 51904 |
| Note: These volumes are calculated by multiplying the Equivalent 12 hr. totals by the AADT factor. | | | | | | | | | | | | | | | | | | | 1 |
| AVG 24hr | 824 | 6020 | 5879 | 12725 | 2782 | 5655 | 2365 | 10808 | 23533 | 2392 | 14820 | 774 | 18029 | 4616 | 13859 | 4031 | 22519 | 40548 | 64081 |
| Note: These volumes are calculated by multiplying the Average Daily 12 hr. totals by 12 to 24 expansion factor. | | | | | | | | | | | | | | | | | | | 1.31 |
| Note: U-Turns provided for approach totals. Refer to 'U-Turn' Report for specific breakdown. | | | | | | | | | | | | | | | | | | | |



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study 15 Minute Increments

| Time Period | PRINCE OF WALES DR | | | | | | | | | | BASELINE RD/HERON RD | | | | | | | | | | W TOT | STR TOT | Grand Total |
|-------------|--------------------|------|------|-------|---------|------------|------|------|-------|---------|----------------------|-----|-------|-------|---------|-----------|-------|-----|--------|--|-------|---------|-------------|
| | Northbound | | | | | Southbound | | | | | Eastbound | | | | | Westbound | | | | | | | |
| | LT | ST | RT | N TOT | STR TOT | LT | ST | RT | S TOT | STR TOT | LT | ST | RT | E TOT | STR TOT | LT | ST | RT | W TOT | | | | |
| 07:00-07:15 | 13 | 142 | 88 | 243 | 37 | 62 | 12 | 111 | 6 | 47 | 265 | 5 | 317 | 60 | 184 | 88 | 332 | 6 | 1003 | | | | |
| 07:15-07:30 | 7 | 169 | 91 | 267 | 41 | 74 | 14 | 129 | 7 | 67 | 333 | 12 | 412 | 61 | 198 | 111 | 370 | 7 | 1178 | | | | |
| 07:30-07:45 | 18 | 171 | 109 | 298 | 54 | 80 | 27 | 161 | 12 | 44 | 339 | 7 | 391 | 75 | 209 | 110 | 394 | 12 | 1244 | | | | |
| 07:45-08:00 | 15 | 187 | 133 | 335 | 47 | 99 | 20 | 166 | 12 | 47 | 264 | 16 | 327 | 78 | 218 | 124 | 420 | 12 | 1248 | | | | |
| 08:00-08:15 | 16 | 140 | 134 | 290 | 53 | 73 | 34 | 160 | 5 | 58 | 297 | 4 | 359 | 112 | 253 | 144 | 511 | 5 | 1320 | | | | |
| 08:15-08:30 | 16 | 143 | 124 | 283 | 59 | 81 | 25 | 165 | 11 | 55 | 332 | 5 | 392 | 79 | 228 | 137 | 444 | 11 | 1284 | | | | |
| 08:30-08:45 | 22 | 151 | 152 | 325 | 56 | 78 | 46 | 180 | 10 | 45 | 323 | 3 | 371 | 106 | 257 | 119 | 482 | 10 | 1358 | | | | |
| 08:45-09:00 | 15 | 151 | 175 | 341 | 52 | 118 | 25 | 196 | 8 | 64 | 335 | 8 | 407 | 76 | 258 | 94 | 428 | 8 | 1372 | | | | |
| 09:00-09:15 | 19 | 126 | 116 | 261 | 39 | 77 | 23 | 139 | 9 | 65 | 340 | 10 | 416 | 76 | 236 | 80 | 392 | 9 | 1208 | | | | |
| 09:15-09:30 | 13 | 109 | 98 | 220 | 29 | 68 | 22 | 119 | 13 | 40 | 231 | 13 | 286 | 74 | 216 | 77 | 367 | 13 | 992 | | | | |
| 09:30-09:45 | 15 | 96 | 79 | 190 | 42 | 71 | 25 | 138 | 13 | 51 | 223 | 12 | 286 | 52 | 160 | 51 | 263 | 13 | 877 | | | | |
| 09:45-10:00 | 21 | 105 | 66 | 192 | 45 | 66 | 33 | 144 | 7 | 30 | 183 | 20 | 233 | 62 | 214 | 61 | 337 | 7 | 906 | | | | |
| 11:30-11:45 | 16 | 62 | 70 | 148 | 35 | 72 | 31 | 138 | 10 | 34 | 144 | 13 | 194 | 62 | 223 | 49 | 335 | 10 | 815 | | | | |
| 11:45-12:00 | 15 | 71 | 58 | 144 | 39 | 76 | 45 | 160 | 7 | 28 | 210 | 12 | 251 | 80 | 220 | 48 | 348 | 7 | 903 | | | | |
| 12:00-12:15 | 22 | 70 | 78 | 170 | 37 | 71 | 51 | 160 | 6 | 25 | 186 | 10 | 222 | 79 | 209 | 44 | 332 | 6 | 884 | | | | |
| 12:15-12:30 | 17 | 69 | 84 | 170 | 52 | 83 | 26 | 161 | 8 | 43 | 155 | 9 | 209 | 51 | 196 | 57 | 304 | 8 | 844 | | | | |
| 12:30-12:45 | 13 | 83 | 87 | 183 | 40 | 77 | 44 | 161 | 6 | 45 | 210 | 25 | 282 | 53 | 209 | 55 | 317 | 6 | 943 | | | | |
| 12:45-13:00 | 20 | 56 | 76 | 152 | 34 | 74 | 33 | 142 | 8 | 32 | 223 | 19 | 275 | 68 | 190 | 56 | 314 | 8 | 883 | | | | |
| 13:00-13:15 | 18 | 75 | 76 | 169 | 34 | 54 | 35 | 123 | 8 | 52 | 192 | 25 | 269 | 83 | 194 | 40 | 318 | 8 | 879 | | | | |
| 13:15-13:30 | 23 | 92 | 83 | 199 | 32 | 81 | 37 | 150 | 7 | 36 | 180 | 13 | 231 | 77 | 195 | 50 | 322 | 7 | 902 | | | | |
| 15:00-15:15 | 18 | 70 | 90 | 178 | 46 | 115 | 64 | 225 | 4 | 34 | 234 | 22 | 290 | 74 | 356 | 81 | 511 | 4 | 1204 | | | | |
| 15:15-15:30 | 17 | 106 | 105 | 228 | 65 | 141 | 59 | 265 | 10 | 49 | 243 | 19 | 311 | 94 | 298 | 84 | 476 | 10 | 1280 | | | | |
| 15:30-15:45 | 14 | 109 | 99 | 222 | 60 | 172 | 47 | 279 | 13 | 32 | 274 | 19 | 326 | 82 | 255 | 86 | 423 | 13 | 1250 | | | | |
| 15:45-16:00 | 8 | 102 | 120 | 230 | 63 | 144 | 48 | 255 | 6 | 46 | 350 | 13 | 410 | 118 | 304 | 74 | 496 | 6 | 1391 | | | | |
| 16:00-16:15 | 8 | 101 | 133 | 242 | 76 | 163 | 47 | 286 | 13 | 58 | 278 | 20 | 356 | 118 | 307 | 55 | 481 | 13 | 1365 | | | | |
| 16:15-16:30 | 8 | 89 | 123 | 220 | 75 | 134 | 88 | 297 | 6 | 29 | 352 | 17 | 398 | 100 | 342 | 45 | 487 | 6 | 1402 | | | | |
| 16:30-16:45 | 17 | 122 | 146 | 285 | 55 | 147 | 90 | 292 | 11 | 38 | 334 | 19 | 392 | 108 | 344 | 64 | 517 | 11 | 1486 | | | | |
| 16:45-17:00 | 8 | 118 | 126 | 252 | 81 | 163 | 67 | 311 | 11 | 35 | 301 | 14 | 352 | 100 | 285 | 44 | 430 | 11 | 1345 | | | | |
| 17:00-17:15 | 11 | 104 | 147 | 262 | 61 | 136 | 71 | 268 | 4 | 41 | 344 | 16 | 401 | 111 | 320 | 40 | 471 | 4 | 1402 | | | | |
| 17:15-17:30 | 5 | 117 | 127 | 249 | 69 | 167 | 61 | 298 | 3 | 37 | 323 | 21 | 382 | 120 | 331 | 62 | 513 | 3 | 1442 | | | | |
| 17:30-17:45 | 13 | 110 | 124 | 247 | 62 | 156 | 59 | 277 | 9 | 43 | 333 | 15 | 393 | 86 | 313 | 67 | 466 | 9 | 1383 | | | | |
| 17:45-18:00 | 19 | 92 | 109 | 220 | 51 | 122 | 69 | 242 | 1 | 44 | 305 | 15 | 365 | 115 | 354 | 52 | 521 | 1 | 1348 | | | | |
| Total | 480 | 3508 | 3426 | 7415 | 1621 | 3295 | 1378 | 6298 | 264 | 1394 | 8636 | 451 | 10506 | 2690 | 8076 | 2349 | 13122 | 264 | 37,341 | | | | |

Note: U-Turns are included in Totals.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study Cyclist Volume

Table with columns: Time Period, Northbound, Southbound, Street Total, Eastbound, Westbound, Street Total, Grand Total. Rows show cyclist counts for various time intervals from 07:00 to 17:45.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study Pedestrian Volume

Table with columns: Time Period, NB Approach, SB Approach, Total, EB Approach, WB Approach, Total, Grand Total. Rows show pedestrian counts for various time intervals from 07:00 to 17:45.

5478543 - MAR 4, 2020 - 8HR REIMPORT



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study Heavy Vehicles

| Time Period | PRINCE OF WALES DR | | | | | | | | | | BASELINE RD/HERON RD | | | | | | | | | | Grand Total |
|-------------|--------------------|----|----|-------|-------|------------|----|----|-------|---------|----------------------|-----|----|-------|----|-----------|----|-------|---------|-----|-------------|
| | Northbound | | | | | Southbound | | | | | Eastbound | | | | | Westbound | | | | | |
| | LT | ST | RT | N TOT | S TOT | LT | ST | RT | S TOT | STR TOT | LT | ST | RT | E TOT | LT | ST | RT | W TOT | STR TOT | | |
| 07:00 | 07:15 | 0 | 1 | 3 | 4 | 1 | 1 | 0 | 2 | 6 | 0 | 0 | 1 | 1 | 2 | 3 | 2 | 7 | 8 | 14 | |
| 07:15 | 07:30 | 0 | 2 | 4 | 6 | 0 | 0 | 1 | 1 | 7 | 0 | 6 | 0 | 6 | 4 | 3 | 3 | 10 | 16 | 23 | |
| 07:30 | 07:45 | 0 | 2 | 2 | 4 | 2 | 5 | 1 | 8 | 12 | 2 | 1 | 0 | 3 | 5 | 7 | 3 | 15 | 18 | 30 | |
| 07:45 | 08:00 | 0 | 2 | 6 | 8 | 2 | 2 | 0 | 4 | 12 | 1 | 5 | 0 | 6 | 6 | 7 | 3 | 16 | 22 | 34 | |
| 08:00 | 08:15 | 0 | 0 | 4 | 4 | 1 | 0 | 0 | 1 | 5 | 0 | 3 | 0 | 3 | 4 | 13 | 2 | 19 | 22 | 27 | |
| 08:15 | 08:30 | 0 | 2 | 4 | 6 | 1 | 3 | 1 | 5 | 11 | 0 | 4 | 0 | 4 | 7 | 6 | 4 | 17 | 21 | 32 | |
| 08:30 | 08:45 | 1 | 2 | 5 | 8 | 1 | 1 | 0 | 2 | 10 | 3 | 5 | 0 | 8 | 2 | 5 | 2 | 9 | 17 | 27 | |
| 08:45 | 09:00 | 0 | 1 | 4 | 5 | 1 | 2 | 0 | 3 | 8 | 0 | 7 | 0 | 7 | 4 | 5 | 2 | 11 | 18 | 26 | |
| 09:00 | 09:15 | 1 | 2 | 5 | 8 | 0 | 1 | 0 | 1 | 9 | 1 | 7 | 0 | 8 | 2 | 10 | 2 | 14 | 22 | 31 | |
| 09:15 | 09:30 | 1 | 3 | 5 | 9 | 1 | 2 | 1 | 4 | 13 | 1 | 5 | 0 | 6 | 4 | 4 | 1 | 9 | 15 | 28 | |
| 09:30 | 09:45 | 1 | 1 | 3 | 5 | 0 | 7 | 1 | 8 | 13 | 1 | 5 | 1 | 7 | 3 | 3 | 2 | 8 | 15 | 28 | |
| 09:45 | 10:00 | 0 | 0 | 1 | 1 | 2 | 4 | 0 | 6 | 7 | 0 | 9 | 1 | 10 | 0 | 5 | 0 | 5 | 15 | 22 | |
| 11:30 | 11:45 | 0 | 0 | 5 | 5 | 2 | 3 | 0 | 5 | 10 | 1 | 4 | 0 | 5 | 3 | 2 | 2 | 7 | 12 | 22 | |
| 11:45 | 12:00 | 0 | 2 | 3 | 5 | 0 | 1 | 1 | 2 | 7 | 0 | 4 | 0 | 4 | 3 | 7 | 4 | 14 | 18 | 25 | |
| 12:00 | 12:15 | 0 | 1 | 3 | 4 | 2 | 0 | 0 | 2 | 6 | 1 | 3 | 0 | 4 | 6 | 6 | 2 | 14 | 18 | 24 | |
| 12:15 | 12:30 | 2 | 0 | 2 | 4 | 2 | 1 | 1 | 4 | 8 | 1 | 3 | 0 | 4 | 1 | 2 | 4 | 7 | 11 | 19 | |
| 12:30 | 12:45 | 0 | 1 | 1 | 2 | 0 | 2 | 2 | 4 | 6 | 0 | 4 | 0 | 4 | 3 | 3 | 2 | 8 | 12 | 18 | |
| 12:45 | 13:00 | 0 | 1 | 2 | 3 | 2 | 2 | 1 | 5 | 8 | 0 | 5 | 2 | 7 | 1 | 3 | 1 | 5 | 12 | 20 | |
| 13:00 | 13:15 | 0 | 1 | 4 | 5 | 0 | 3 | 0 | 3 | 8 | 1 | 5 | 1 | 7 | 3 | 8 | 1 | 12 | 19 | 27 | |
| 13:15 | 13:30 | 0 | 2 | 2 | 4 | 2 | 1 | 0 | 3 | 7 | 0 | 4 | 1 | 5 | 2 | 4 | 1 | 7 | 12 | 19 | |
| 15:00 | 15:15 | 2 | 0 | 2 | 4 | 0 | 0 | 0 | 0 | 4 | 0 | 6 | 0 | 6 | 2 | 3 | 0 | 5 | 11 | 15 | |
| 15:15 | 15:30 | 0 | 1 | 2 | 3 | 5 | 2 | 0 | 7 | 10 | 0 | 6 | 0 | 6 | 3 | 6 | 1 | 10 | 16 | 26 | |
| 15:30 | 15:45 | 0 | 1 | 5 | 6 | 2 | 5 | 0 | 7 | 13 | 1 | 6 | 1 | 8 | 1 | 15 | 2 | 18 | 26 | 39 | |
| 15:45 | 16:00 | 0 | 0 | 2 | 2 | 2 | 2 | 0 | 4 | 6 | 0 | 9 | 0 | 9 | 5 | 7 | 3 | 15 | 24 | 30 | |
| 16:00 | 16:15 | 0 | 4 | 5 | 9 | 1 | 3 | 0 | 4 | 13 | 0 | 11 | 0 | 11 | 1 | 6 | 0 | 7 | 18 | 31 | |
| 16:15 | 16:30 | 0 | 2 | 1 | 3 | 3 | 0 | 0 | 3 | 6 | 0 | 7 | 0 | 7 | 2 | 5 | 0 | 7 | 14 | 20 | |
| 16:30 | 16:45 | 1 | 4 | 6 | 11 | 0 | 0 | 0 | 0 | 11 | 1 | 11 | 1 | 13 | 2 | 4 | 3 | 9 | 22 | 33 | |
| 16:45 | 17:00 | 0 | 2 | 4 | 6 | 4 | 1 | 0 | 5 | 11 | 1 | 5 | 0 | 6 | 1 | 5 | 1 | 7 | 13 | 24 | |
| 17:00 | 17:15 | 0 | 0 | 2 | 2 | 2 | 0 | 0 | 2 | 4 | 1 | 6 | 0 | 7 | 4 | 5 | 0 | 9 | 16 | 20 | |
| 17:15 | 17:30 | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 2 | 3 | 0 | 2 | 0 | 2 | 2 | 5 | 0 | 7 | 9 | 12 | |
| 17:30 | 17:45 | 1 | 0 | 2 | 3 | 3 | 3 | 0 | 6 | 9 | 0 | 5 | 0 | 5 | 4 | 4 | 2 | 10 | 15 | 24 | |
| 17:45 | 18:00 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 4 | 0 | 4 | 3 | 5 | 1 | 9 | 13 | 14 | |
| Total: | None | 11 | 40 | 100 | 151 | 45 | 58 | 10 | 113 | 264 | 17 | 167 | 9 | 193 | 95 | 176 | 56 | 327 | 520 | 784 | |



Transportation Services - Traffic Services

Turning Movement Count - Study Results

BASELINE RD/HERON RD @ PRINCE OF WALES DR

Survey Date: Wednesday, March 04, 2020

WO No: 39636

Start Time: 07:00

Device: Miovision

Full Study 15 Minute U-Turn Total

| Time Period | PRINCE OF WALES DR | | | | | BASELINE RD/HERON RD | | | | | Total |
|-------------|-------------------------|-------------------------|------------------------|------------------------|-------|-------------------------|-------------------------|------------------------|------------------------|-------|-------|
| | Northbound U-Turn Total | Southbound U-Turn Total | Eastbound U-Turn Total | Westbound U-Turn Total | Total | Northbound U-Turn Total | Southbound U-Turn Total | Eastbound U-Turn Total | Westbound U-Turn Total | Total | |
| 07:00 | 07:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 07:15 | 07:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 07:30 | 07:45 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 07:45 | 08:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 08:00 | 08:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 2 | 2 |
| 08:15 | 08:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 08:30 | 08:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 08:45 | 09:00 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 09:00 | 09:15 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 09:15 | 09:30 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 2 | 2 |
| 09:30 | 09:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 09:45 | 10:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 11:30 | 11:45 | 0 | 0 | 3 | 1 | 0 | 0 | 0 | 0 | 4 | 4 |
| 11:45 | 12:00 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 12:00 | 12:15 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 2 | 2 |
| 12:15 | 12:30 | 0 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 2 | 2 |
| 12:30 | 12:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 12:45 | 13:00 | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | 2 | 2 |
| 13:00 | 13:15 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| 13:15 | 13:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 13:30 | 13:45 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 13:45 | 14:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15:00 | 15:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15:15 | 15:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15:30 | 15:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 15:45 | 16:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:00 | 16:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:15 | 16:30 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:30 | 16:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 16:45 | 17:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:00 | 17:15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:15 | 17:30 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| 17:30 | 17:45 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 17:45 | 18:00 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Total | Total | 1 | 4 | 25 | 7 | 37 | | | | | |



Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


FISHER AVE @ DEER PARK RD/DYNES RD

Survey Date: Wednesday, March 09, 2016

Start Time: 07:00

WO No: 35788

Device: Miovision

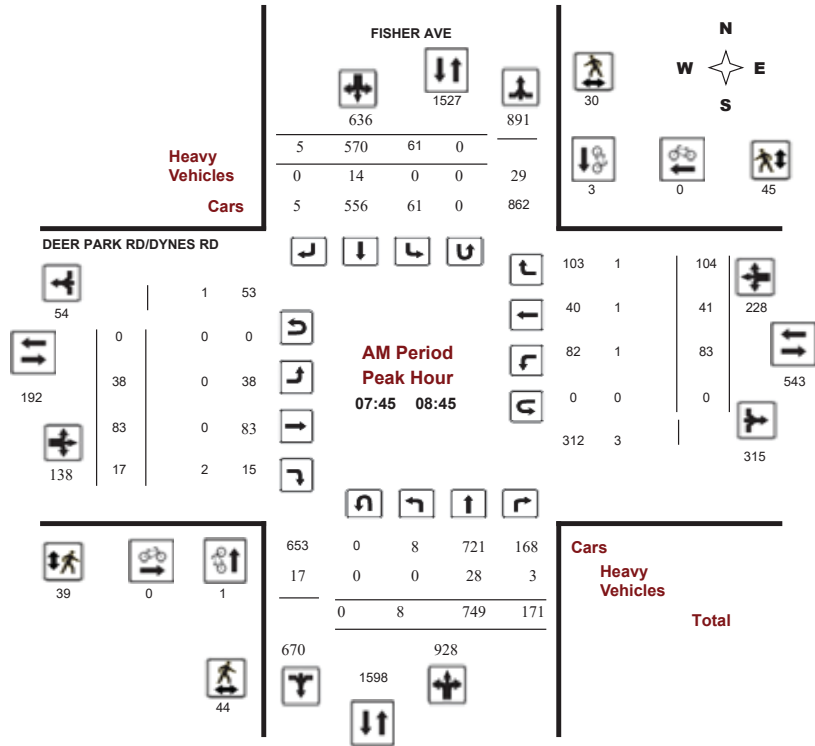

Transportation Services - Traffic Services

Turning Movement Count - Peak Hour Diagram


FISHER AVE @ DEER PARK RD/DYNES RD

Survey Date: Wednesday, March 09, 2016

Start Time: 07:00

WO No: 35788

Device: Miovision

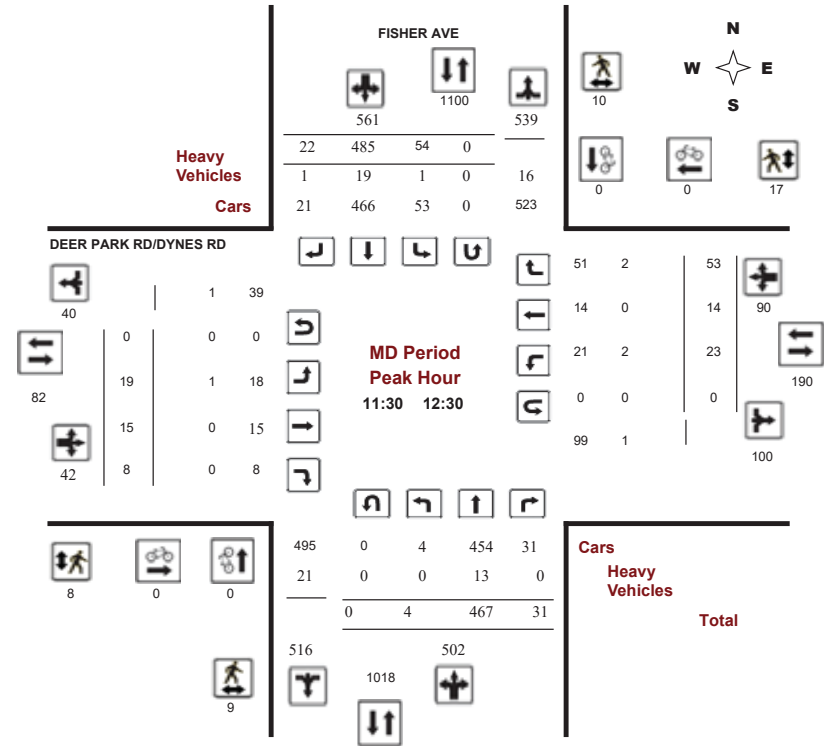



Transportation Services - Traffic Services

Turning Movement Count - Study Results

FISHER AVE @ DEER PARK RD/DYNES RD

Survey Date: Wednesday, March 09, 2016

WO No: 35788

Start Time: 07:00

Device: Miovision

Full Study 15 Minute Increments

Table with columns for Time Period, Northbound, Southbound, Eastbound, Westbound, and Grand Total. Rows show 15-minute intervals from 07:00 to 18:00.

Note: U-Turns are included in Totals.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

FISHER AVE @ DEER PARK RD/DYNES RD

Survey Date: Wednesday, March 09, 2016

WO No: 35788

Start Time: 07:00

Device: Miovision

Full Study Cyclist Volume

Table with columns for Time Period, FISHER AVE (Northbound, Southbound, Street Total), DEER PARK RD/DYNES RD (Eastbound, Westbound, Street Total), and Grand Total. Rows show 15-minute intervals from 07:00 to 18:00.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

FISHER AVE @ DEER PARK RD/DYNES RD

Survey Date: Wednesday, March 09, 2016

WO No: 35788

Start Time: 07:00

Device: Miovision

Full Study Pedestrian Volume

FISHER AVE DEER PARK RD/DYNES RD

Table with columns: Time Period, NB Approach (E or W Crossing), SB Approach (E or W Crossing), Total, EB Approach (N or S Crossing), WB Approach (N or S Crossing), Total, Grand Total. Rows show pedestrian counts for various time intervals from 07:00 to 17:45.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

FISHER AVE @ DEER PARK RD/DYNES RD

Survey Date: Wednesday, March 09, 2016

WO No: 35788

Start Time: 07:00

Device: Miovision

Full Study Heavy Vehicles

FISHER AVE DEER PARK RD/DYNES RD

Table with columns: Time Period, Northbound (LT, ST, RT, N TOT), Southbound (LT, ST, RT, S TOT), Eastbound (LT, ST, RT, E TOT), Westbound (LT, ST, RT, W TOT), STR TOT, Grand Total. Rows show heavy vehicle counts for various time intervals from 07:00 to 17:45.



Transportation Services - Traffic Services

Turning Movement Count - Study Results

FISHER AVE @ DEER PARK RD/DYNES RD

Survey Date: Wednesday, March 09, 2016

WO No: 35788

Start Time: 07:00

Device: Miovision

Full Study 15 Minute U-Turn Total

FISHER AVE DEER PARK RD/DYNES RD

| Time Period | Northbound U-Turn Total | Southbound U-Turn Total | Eastbound U-Turn Total | Westbound U-Turn Total | Total |
|-------------|-------------------------|-------------------------|------------------------|------------------------|-------|
| 07:00 07:15 | 0 | 0 | 0 | 0 | 0 |
| 07:15 07:30 | 0 | 0 | 0 | 0 | 0 |
| 07:30 07:45 | 0 | 0 | 0 | 0 | 0 |
| 07:45 08:00 | 0 | 0 | 0 | 0 | 0 |
| 08:00 08:15 | 0 | 0 | 0 | 0 | 0 |
| 08:15 08:30 | 0 | 0 | 0 | 0 | 0 |
| 08:30 08:45 | 0 | 0 | 0 | 0 | 0 |
| 08:45 09:00 | 0 | 0 | 0 | 0 | 0 |
| 09:00 09:15 | 0 | 0 | 0 | 0 | 0 |
| 09:15 09:30 | 0 | 0 | 0 | 0 | 0 |
| 09:30 09:45 | 0 | 0 | 0 | 0 | 0 |
| 09:45 10:00 | 0 | 0 | 0 | 0 | 0 |
| 11:30 11:45 | 0 | 0 | 0 | 0 | 0 |
| 11:45 12:00 | 0 | 0 | 0 | 0 | 0 |
| 12:00 12:15 | 0 | 0 | 0 | 0 | 0 |
| 12:15 12:30 | 0 | 0 | 0 | 0 | 0 |
| 12:30 12:45 | 0 | 0 | 0 | 0 | 0 |
| 12:45 13:00 | 0 | 0 | 0 | 0 | 0 |
| 13:00 13:15 | 0 | 0 | 0 | 0 | 0 |
| 13:15 13:30 | 0 | 0 | 0 | 0 | 0 |
| 15:00 15:15 | 0 | 0 | 0 | 0 | 0 |
| 15:15 15:30 | 0 | 0 | 0 | 0 | 0 |
| 15:30 15:45 | 0 | 0 | 0 | 0 | 0 |
| 15:45 16:00 | 0 | 0 | 0 | 0 | 0 |
| 16:00 16:15 | 0 | 0 | 0 | 0 | 0 |
| 16:15 16:30 | 0 | 0 | 0 | 0 | 0 |
| 16:30 16:45 | 0 | 0 | 0 | 0 | 0 |
| 16:45 17:00 | 0 | 0 | 0 | 0 | 0 |
| 17:00 17:15 | 0 | 0 | 0 | 0 | 0 |
| 17:15 17:30 | 0 | 0 | 0 | 0 | 0 |
| 17:30 17:45 | 0 | 0 | 0 | 0 | 0 |
| 17:45 18:00 | 0 | 0 | 0 | 0 | 0 |
| Total | 0 | 0 | 0 | 0 | 0 |

Appendix C

Synchro Intersection Worksheets – Existing Conditions

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

Existing
AM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|-------|--------|-------|--------|-------|-------|-------|-------|-------|
| Lane Configurations | ↔ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ |
| Traffic Volume (vph) | 126 | 1300 | 152 | 32 | 1029 | 141 | 223 | 460 | 73 | 132 | 352 | 93 |
| Future Volume (vph) | 126 | 1300 | 152 | 32 | 1029 | 141 | 223 | 460 | 73 | 132 | 352 | 93 |
| Satd. Flow (prot) | 1658 | 3252 | 1469 | 1642 | 3252 | 1455 | 1658 | 3252 | 1483 | 1658 | 3221 | 1483 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1654 | 3252 | 1401 | 1635 | 3252 | 1416 | 1634 | 3252 | 1414 | 1650 | 3221 | 1418 |
| Satd. Flow (RTOR) | | | 180 | | | 232 | | | 181 | | | 231 |
| Lane Group Flow (vph) | 140 | 1444 | 169 | 36 | 1143 | 157 | 248 | 511 | 81 | 147 | 391 | 103 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | | 8 |
| Permitted Phases | | | 2 | | | 6 | | | 4 | | | 8 |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | 4 | 3 | 8 | 8 |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 |
| Minimum Split (s) | 11.3 | 29.1 | 29.1 | 11.3 | 29.1 | 29.1 | 10.9 | 30.3 | 30.3 | 10.9 | 30.3 | 30.3 |
| Total Split (s) | 26.0 | 56.0 | 56.0 | 13.0 | 43.0 | 43.0 | 30.7 | 38.0 | 38.0 | 23.0 | 30.3 | 30.3 |
| Total Split (%) | 20.0% | 43.1% | 43.1% | 10.0% | 33.1% | 33.1% | 23.6% | 29.2% | 29.2% | 17.7% | 23.3% | 23.3% |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 |
| All-Red Time (s) | 2.6 | 2.4 | 2.4 | 2.6 | 2.4 | 2.4 | 2.6 | 3.0 | 3.0 | 2.6 | 3.0 | 3.0 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 6.3 | 6.1 | 6.1 | 6.3 | 6.1 | 6.1 | 5.9 | 6.3 | 6.3 | 5.9 | 6.3 | 6.3 |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag |
| Lead-Lag Optimize? | Yes | Yes | Yes | None | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | None | None | None | None |
| Act Effct Green (s) | 15.7 | 60.2 | 60.2 | 6.8 | 46.4 | 46.4 | 22.7 | 28.1 | 28.1 | 15.2 | 20.7 | 20.7 |
| Actuated g/C Ratio | 0.12 | 0.46 | 0.46 | 0.05 | 0.36 | 0.36 | 0.17 | 0.22 | 0.22 | 0.12 | 0.16 | 0.16 |
| v/c Ratio | 0.70 | 0.96 | 0.23 | 0.42 | 0.99 | 0.24 | 0.86 | 0.73 | 0.18 | 0.76 | 0.76 | 0.25 |
| Control Delay | 73.0 | 50.4 | 3.8 | 82.5 | 34.5 | 9.9 | 78.6 | 53.6 | 0.9 | 79.3 | 62.4 | 1.4 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Delay | 73.0 | 50.4 | 3.8 | 82.5 | 34.5 | 9.9 | 78.6 | 53.6 | 0.9 | 79.3 | 62.4 | 1.4 |
| LOS | E | D | A | F | C | A | E | D | A | E | E | A |
| Approach Delay | | 47.7 | | | 32.9 | | | 55.9 | | | 56.5 | |
| Approach LOS | | D | | | C | | | E | | | E | |
| Queue Length 50th (m) | 34.8 | ~224.0 | 0.0 | 7.4 | ~170.1 | 25.5 | 61.1 | 64.1 | 0.0 | 36.5 | 51.0 | 0.0 |
| Queue Length 95th (m) | 55.3 | #272.2 | 12.2 | m5.3 | m99.9 | m12.9 | #100.0 | 81.1 | 0.0 | #62.8 | 66.7 | 0.0 |
| Internal Link Dist (m) | | 145.0 | | | 161.5 | | | 86.9 | | | 77.9 | |
| Turn Bay Length (m) | 124.5 | | 58.5 | 134.0 | | 91.5 | | | 85.0 | 65.0 | | 60.0 |
| Base Capacity (vph) | 251 | 1507 | 745 | 88 | 1159 | 654 | 316 | 792 | 481 | 218 | 594 | 450 |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Reduced v/c Ratio | 0.56 | 0.96 | 0.23 | 0.41 | 0.99 | 0.24 | 0.78 | 0.65 | 0.17 | 0.67 | 0.66 | 0.23 |

Intersection Summary


| |
|--|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 119 (92%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 135 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

Existing
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.99 | Intersection LOS: D |
| Intersection Signal Delay: 46.1 | ICU Level of Service E |
| Intersection Capacity Utilization 89.7% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 1: Fisher Ave & Baseline Rd

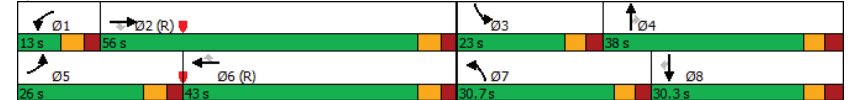

Lanes, Volumes, Timings
 2: Prince of Wales Dr & Baseline Rd/Heron Rd Existing
 AM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|--------|---------|-----|-------|--------|-------|-------|-------|--------|--------|-------|-----|
| Lane Configurations | | | | | | | | | | | | |
| Traffic Volume (vph) | 222 | 1287 | 20 | 373 | 996 | 494 | 69 | 585 | 585 | 220 | 350 | 130 |
| Future Volume (vph) | 222 | 1287 | 20 | 373 | 996 | 494 | 69 | 585 | 585 | 220 | 350 | 130 |
| Satd. Flow (prot) | 1658 | 4752 | 0 | 3124 | 3283 | 1483 | 1658 | 3316 | 1469 | 1658 | 3164 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1654 | 4752 | 0 | 3104 | 3283 | 1449 | 1653 | 3316 | 1428 | 1649 | 3164 | 0 |
| Satd. Flow (RTOR) | | 2 | | | | | 452 | | | 364 | | 38 |
| Lane Group Flow (vph) | 247 | 1452 | 0 | 414 | 1107 | 549 | 77 | 650 | 650 | 244 | 533 | 0 |
| Turn Type | Prot | NA | | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | |
| Protected Phases | 5 | 2 | | 1 | 6 | 6 | 7 | 4 | 4 | 3 | 8 | |
| Permitted Phases | | | | | | 6 | | | 4 | | | |
| Detector Phase | 5 | 2 | | 1 | 6 | 6 | 7 | 4 | 4 | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | | 5.0 | 10.0 | 10.0 | 5.0 | 12.0 | 12.0 | 5.0 | 12.0 | |
| Minimum Split (s) | 11.8 | 29.5 | | 11.8 | 29.8 | 29.8 | 10.9 | 37.8 | 37.8 | 10.9 | 37.8 | |
| Total Split (s) | 22.0 | 38.0 | | 30.0 | 30.0 | 30.0 | 24.0 | 38.0 | 38.0 | 24.0 | 38.0 | |
| Total Split (%) | 16.9% | 29.2% | | 23.1% | 23.1% | 23.1% | 18.5% | 29.2% | 29.2% | 18.5% | 29.2% | |
| Yellow Time (s) | 3.7 | 3.0 | | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | |
| All-Red Time (s) | 3.1 | 2.8 | | 3.1 | 2.8 | 2.8 | 2.2 | 3.1 | 3.1 | 2.2 | 3.1 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.8 | 5.8 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | 6.8 | 5.9 | 6.8 | |
| Lead/Lag | Lag | | | Lag | Lag | Lag | Lead | Lag | Lag | Lead | Lag | |
| Lead-Lag Optimize? | Yes | | | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | |
| Recall Mode | None | C-Max | | None | C-Max | C-Max | None | Min | Min | None | Min | |
| Act Effct Green (s) | 15.2 | 34.3 | | 21.1 | 23.5 | 23.5 | 11.4 | 31.2 | 31.2 | 18.1 | 40.5 | |
| Actuated g/C Ratio | 0.12 | 0.26 | | 0.16 | 0.18 | 0.18 | 0.09 | 0.24 | 0.24 | 0.14 | 0.31 | |
| v/c Ratio | 1.28 | 1.16 | | 0.82 | 1.87 | 0.87 | 0.53 | 0.82 | 1.05 | 1.06 | 0.53 | |
| Control Delay | 198.6 | 106.7 | | 66.1 | 426.7 | 25.5 | 69.3 | 56.2 | 71.4 | 129.1 | 37.8 | |
| Queue Delay | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Total Delay | 198.6 | 106.7 | | 66.1 | 426.7 | 25.5 | 69.3 | 56.2 | 71.4 | 129.1 | 37.8 | |
| LOS | F | F | | E | F | C | E | E | E | F | D | |
| Approach Delay | 120.0 | | | 248.1 | | | 64.1 | | | 66.5 | | |
| Approach LOS | F | | | F | | | E | | | E | | |
| Queue Length 50th (m) | -78.6 | -160.4 | | 52.8 | -226.9 | 24.0 | 19.2 | 83.3 | -105.5 | -68.4 | 56.6 | |
| Queue Length 95th (m) | m#92.4 | m#178.5 | | 70.2 | #268.6 | #90.8 | 34.4 | 105.8 | #177.9 | #120.1 | 78.7 | |
| Internal Link Dist (m) | 188.2 | | | 220.4 | | | 142.9 | | | 135.6 | | |
| Turn Bay Length (m) | 125.0 | | | 115.0 | | | 184.0 | | | 66.0 | | |
| Base Capacity (vph) | 193 | 1254 | | 557 | 593 | 632 | 230 | 795 | 619 | 230 | 1011 | |
| Starvation Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Reduced v/c Ratio | 1.28 | 1.16 | | 0.74 | 1.87 | 0.87 | 0.33 | 0.82 | 1.05 | 1.06 | 0.53 | |

Intersection Summary
 Cycle Length: 130
 Actuated Cycle Length: 130
 Offset: 42 (32%), Referenced to phase 2:EBT and 6:WBT, Start of Green
 Natural Cycle: 150
 Control Type: Actuated-Coordinated

Lanes, Volumes, Timings
 2: Prince of Wales Dr & Baseline Rd/Heron Rd Existing
 AM Peak Hour


| Lane Group | Ø13 | Ø14 |
|------------------------|------|------|
| Lane Configurations | | |
| Traffic Volume (vph) | | |
| Future Volume (vph) | | |
| Satd. Flow (prot) | | |
| Fit Permitted | | |
| Satd. Flow (perm) | | |
| Satd. Flow (RTOR) | | |
| Lane Group Flow (vph) | | |
| Turn Type | | |
| Protected Phases | 13 | 14 |
| Permitted Phases | | |
| Detector Phase | | |
| Switch Phase | | |
| Minimum Initial (s) | 1.0 | 1.0 |
| Minimum Split (s) | 3.0 | 3.0 |
| Total Split (s) | 8.0 | 8.0 |
| Total Split (%) | 6% | 6% |
| Yellow Time (s) | 2.0 | 2.0 |
| All-Red Time (s) | 0.0 | 0.0 |
| Lost Time Adjust (s) | | |
| Total Lost Time (s) | | |
| Lead/Lag | Lead | Lead |
| Lead-Lag Optimize? | Yes | Yes |
| Recall Mode | Max | Max |
| Act Effct Green (s) | | |
| Actuated g/C Ratio | | |
| v/c Ratio | | |
| Control Delay | | |
| Queue Delay | | |
| Total Delay | | |
| LOS | | |
| Approach Delay | | |
| Approach LOS | | |
| Queue Length 50th (m) | | |
| Queue Length 95th (m) | | |
| Internal Link Dist (m) | | |
| Turn Bay Length (m) | | |
| Base Capacity (vph) | | |
| Starvation Cap Reductn | | |
| Spillback Cap Reductn | | |
| Storage Cap Reductn | | |
| Reduced v/c Ratio | | |

Intersection Summary

Lanes, Volumes, Timings
2: Prince of Wales Dr & Baseline Rd/Heron Rd

Existing
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.87 | Intersection LOS: F |
| Intersection Signal Delay: 144.8 | ICU Level of Service F |
| Intersection Capacity Utilization 96.1% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

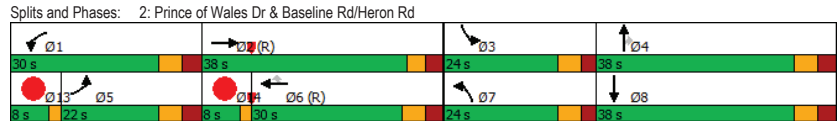

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

Existing
AM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|-------|-----|-------|-------|-----|--------|-------|-------|-------|-------|-----|
| Lane Configurations | | ↔ | | | ↔ | | | ↔ | ↔ | | ↔ | ↔ |
| Traffic Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 624 | 171 | 61 | 520 | 5 |
| Future Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 624 | 171 | 61 | 520 | 5 |
| Satd. Flow (prot) | 0 | 1660 | 0 | 0 | 1577 | 0 | 0 | 1710 | 1483 | 0 | 3292 | 0 |
| Fit Permitted | | 0.830 | | | 0.834 | | | 0.991 | | | 0.762 | |
| Satd. Flow (perm) | 0 | 1390 | 0 | 0 | 1323 | 0 | 0 | 1696 | 1289 | 0 | 2521 | 0 |
| Satd. Flow (RTOR) | | 9 | | | 56 | | | 190 | | | 2 | |
| Lane Group Flow (vph) | 0 | 153 | 0 | 0 | 254 | 0 | 0 | 702 | 190 | 0 | 652 | 0 |
| Turn Type | Perm | NA | | Perm | NA | | Perm | NA | Perm | Perm | NA | |
| Protected Phases | | 4 | | | 8 | | | 2 | | 6 | | 6 |
| Permitted Phases | 4 | | | 8 | | | 2 | | 2 | 6 | | |
| Detector Phase | 4 | 4 | | 8 | 8 | | 2 | 2 | 2 | 6 | 6 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 10.0 | 10.0 | | 10.0 | 10.0 | | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | |
| Minimum Split (s) | 31.1 | 31.1 | | 31.1 | 31.1 | | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | |
| Total Split (s) | 33.0 | 33.0 | | 33.0 | 33.0 | | 47.0 | 47.0 | 47.0 | 47.0 | 47.0 | |
| Total Split (%) | 41.3% | 41.3% | | 41.3% | 41.3% | | 58.8% | 58.8% | 58.8% | 58.8% | 58.8% | |
| Yellow Time (s) | 3.0 | 3.0 | | 3.0 | 3.0 | | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | |
| All-Red Time (s) | 4.1 | 4.1 | | 4.1 | 4.1 | | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | |
| Lost Time Adjust (s) | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Lost Time (s) | | 7.1 | | | 7.1 | | | 6.2 | 6.2 | | 6.2 | |
| Lead/Lag | | | | | | | | | | | | |
| Lead-Lag Optimize? | | | | | | | | | | | | |
| Recall Mode | None | None | | None | None | | C-Max | C-Max | C-Max | C-Max | C-Max | |
| Act Effct Green (s) | | 19.6 | | | 19.6 | | 47.1 | 47.1 | 47.1 | 47.1 | 47.1 | |
| Actuated g/C Ratio | | 0.24 | | | 0.24 | | 0.59 | 0.59 | 0.59 | 0.59 | 0.59 | |
| v/c Ratio | | 0.44 | | | 0.69 | | 0.70 | 0.23 | 0.44 | 0.44 | 0.44 | |
| Control Delay | | 26.4 | | | 30.3 | | 18.7 | 2.5 | 11.6 | 11.6 | 11.6 | |
| Queue Delay | | 0.0 | | | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Total Delay | | 26.4 | | | 30.3 | | 18.7 | 2.5 | 11.6 | 11.6 | 11.6 | |
| LOS | | C | | | C | | B | A | B | B | B | |
| Approach Delay | | 26.4 | | | 30.3 | | 15.2 | | 11.6 | 11.6 | 11.6 | |
| Approach LOS | | C | | | C | | B | | B | B | B | |
| Queue Length 50th (m) | | 17.0 | | | 25.0 | | 79.2 | 0.0 | 30.4 | 30.4 | 30.4 | |
| Queue Length 95th (m) | | 31.2 | | | 46.5 | | #148.5 | 9.1 | 46.4 | 46.4 | 46.4 | |
| Internal Link Dist (m) | | 152.1 | | | 156.9 | | 172.3 | | 30.0 | 30.0 | 30.0 | |
| Turn Bay Length (m) | | | | | | | | | | | | |
| Base Capacity (vph) | | 456 | | | 466 | | 997 | 836 | 1483 | 1483 | 1483 | |
| Starvation Cap Reductn | | 0 | | | 0 | | 0 | 0 | 0 | 0 | 0 | |
| Spillback Cap Reductn | | 0 | | | 0 | | 0 | 0 | 0 | 0 | 0 | |
| Storage Cap Reductn | | 0 | | | 0 | | 0 | 0 | 0 | 0 | 0 | |
| Reduced v/c Ratio | | 0.34 | | | 0.55 | | 0.70 | 0.23 | 0.44 | 0.44 | 0.44 | |

| Intersection Summary | | | | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|--|--|--|--|
| Cycle Length: 80 | | | | | | | | | | | | |
| Actuated Cycle Length: 80 | | | | | | | | | | | | |
| Offset: 78 (98%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green | | | | | | | | | | | | |
| Natural Cycle: 70 | | | | | | | | | | | | |
| Control Type: Actuated-Coordinated | | | | | | | | | | | | |

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

Existing
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.70 | Intersection LOS: B |
| Intersection Signal Delay: 16.8 | ICU Level of Service E |
| Intersection Capacity Utilization 90.4% | |
| Analysis Period (min) 15 | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |

Splits and Phases: 6: Deer Park Rd/Dynes Rd & Fisher Ave



Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

Existing
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|-------|--------|-------|-------|-------|-------|-------|--------|-------|
| Lane Configurations | ↖ | ↗ | ↘ | ↖ | ↗ | ↘ | ↖ | ↗ | ↘ | ↖ | ↗ | ↘ |
| Traffic Volume (vph) | 90 | 1264 | 257 | 148 | 1274 | 179 | 174 | 375 | 71 | 154 | 597 | 148 |
| Future Volume (vph) | 90 | 1264 | 257 | 148 | 1274 | 179 | 174 | 375 | 71 | 154 | 597 | 148 |
| Satd. Flow (prot) | 1658 | 3283 | 1483 | 1642 | 3316 | 1483 | 1658 | 3316 | 1455 | 1658 | 3283 | 1483 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1652 | 3283 | 1401 | 1632 | 3316 | 1425 | 1641 | 3316 | 1396 | 1640 | 3283 | 1390 |
| Satd. Flow (RTOR) | | | 148 | | | 153 | | | 128 | | | 142 |
| Lane Group Flow (vph) | 100 | 1404 | 286 | 164 | 1416 | 199 | 193 | 417 | 79 | 171 | 663 | 164 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | 2 | | | 6 | | | 4 | | | 8 |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | 4 | 3 | 8 | 8 |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 |
| Minimum Split (s) | 11.3 | 29.2 | 29.2 | 11.3 | 29.2 | 29.2 | 10.9 | 30.3 | 30.3 | 10.9 | 30.3 | 30.3 |
| Total Split (s) | 21.0 | 54.0 | 54.0 | 21.0 | 54.0 | 54.0 | 24.7 | 30.3 | 30.3 | 24.7 | 30.3 | 30.3 |
| Total Split (%) | 16.2% | 41.5% | 41.5% | 16.2% | 41.5% | 41.5% | 19.0% | 23.3% | 23.3% | 19.0% | 23.3% | 23.3% |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 |
| All-Red Time (s) | 2.6 | 2.4 | 2.4 | 2.6 | 2.4 | 2.4 | 2.6 | 3.0 | 3.0 | 2.6 | 3.0 | 3.0 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 6.3 | 6.1 | 6.1 | 6.3 | 6.1 | 6.1 | 5.9 | 6.3 | 6.3 | 5.9 | 6.3 | 6.3 |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag |
| Lead-Lag Optimize? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | None | None | None | None |
| Act Effct Green (s) | 12.3 | 48.1 | 48.1 | 14.5 | 50.3 | 50.3 | 17.8 | 25.8 | 25.8 | 17.0 | 25.0 | 25.0 |
| Actuated g/C Ratio | 0.09 | 0.37 | 0.37 | 0.11 | 0.39 | 0.39 | 0.14 | 0.20 | 0.20 | 0.13 | 0.19 | 0.19 |
| v/c Ratio | 0.64 | 1.16 | 0.47 | 0.90 | 1.10 | 0.31 | 0.85 | 0.63 | 0.21 | 0.79 | 1.05 | 0.43 |
| Control Delay | 74.7 | 117.8 | 17.2 | 101.1 | 96.5 | 9.1 | 86.3 | 53.3 | 2.5 | 79.9 | 99.8 | 14.1 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Delay | 74.7 | 117.8 | 17.2 | 101.1 | 96.5 | 9.1 | 86.3 | 53.3 | 2.5 | 79.9 | 99.8 | 14.1 |
| LOS | E | F | B | F | F | A | F | D | A | E | F | B |
| Approach Delay | | 99.3 | | | 87.2 | | | 56.7 | | | 82.3 | |
| Approach LOS | | F | | | F | | | E | | | F | |
| Queue Length 50th (m) | 24.9 | ~223.8 | 25.5 | 42.0 | ~219.7 | 7.5 | 48.5 | 53.0 | 0.0 | 42.3 | ~100.8 | 4.7 |
| Queue Length 95th (m) | 43.2 | #266.1 | 51.0 | #82.6 | #268.1 | 25.0 | #86.3 | 70.8 | 2.6 | #72.4 | #138.3 | 25.1 |
| Internal Link Dist (m) | | 142.5 | | | 157.3 | | | 109.7 | | | 89.2 | |
| Turn Bay Length (m) | 124.5 | | 58.5 | 134.0 | | 91.5 | | | 85.0 | 65.0 | | 60.0 |
| Base Capacity (vph) | 187 | 1214 | 611 | 185 | 1282 | 645 | 239 | 659 | 380 | 239 | 632 | 382 |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Reduced v/c Ratio | 0.53 | 1.16 | 0.47 | 0.89 | 1.10 | 0.31 | 0.81 | 0.63 | 0.21 | 0.72 | 1.05 | 0.43 |

Intersection Summary


| |
|--|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 123 (95%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 135 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

Existing
PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.16 | Intersection LOS: F |
| Intersection Signal Delay: 86.4 | ICU Level of Service F |
| Intersection Capacity Utilization 94.7% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |

Splits and Phases: 1: Fisher Ave & Baseline Rd

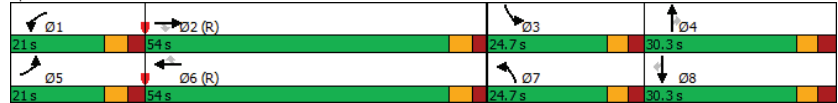

Lanes, Volumes, Timings
2: Prince of Wales Dr & Baseline Rd/Heron Rd

Existing
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|--------|--------|-----|--------|--------|-------|-------|-------|--------|--------|--------|-----|
| Lane Configurations | ↔ | ↔↔ | ↔ | ↔↔ | ↔↔ | ↔ | ↔ | ↔↔ | ↔ | ↔ | ↔↔ | ↔ |
| Traffic Volume (vph) | 151 | 1302 | 70 | 439 | 1280 | 210 | 41 | 461 | 546 | 266 | 613 | 289 |
| Future Volume (vph) | 151 | 1302 | 70 | 439 | 1280 | 210 | 41 | 461 | 546 | 266 | 613 | 289 |
| Satd. Flow (prot) | 1658 | 4713 | 0 | 3216 | 3316 | 1483 | 1610 | 3316 | 1483 | 1642 | 3117 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1650 | 4713 | 0 | 3187 | 3316 | 1412 | 1599 | 3316 | 1420 | 1617 | 3117 | 0 |
| Satd. Flow (RTOR) | | 6 | | | | 233 | | | 261 | | 63 | |
| Lane Group Flow (vph) | 168 | 1525 | 0 | 488 | 1422 | 233 | 46 | 512 | 607 | 296 | 1002 | 0 |
| Turn Type | Prot | NA | | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | | | | 6 | | | 4 | | | |
| Detector Phase | 5 | 2 | | 1 | 6 | 6 | 7 | 4 | 4 | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | | 5.0 | 10.0 | 10.0 | 12.0 | 12.0 | 12.0 | 5.0 | 10.0 | |
| Minimum Split (s) | 11.8 | 29.5 | | 11.8 | 29.5 | 29.5 | 17.9 | 37.8 | 37.8 | 10.9 | 37.8 | |
| Total Split (s) | 15.0 | 42.0 | | 23.0 | 42.0 | 42.0 | 17.9 | 38.0 | 38.0 | 27.0 | 49.0 | |
| Total Split (%) | 11.4% | 31.8% | | 17.4% | 31.8% | 31.8% | 13.6% | 28.8% | 28.8% | 20.5% | 37.1% | |
| Yellow Time (s) | 3.7 | 3.7 | | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | |
| All-Red Time (s) | 3.1 | 2.8 | | 3.1 | 2.8 | 2.8 | 2.2 | 3.1 | 3.1 | 2.2 | 3.1 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.8 | 6.5 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | 6.8 | 5.9 | 6.8 | |
| Lead/Lag | Lag | | | | | | Lead | Lag | Lag | Lead | Lag | |
| Lead-Lag Optimize? | Yes | | | | | | Yes | Yes | Yes | Yes | Yes | |
| Recall Mode | None | C-Max | | None | C-Max | C-Max | Min | Min | Min | None | None | |
| Act Effct Green (s) | 8.2 | 35.5 | | 16.2 | 35.5 | 35.5 | 12.0 | 33.1 | 33.1 | 21.1 | 42.2 | |
| Actuated g/C Ratio | 0.06 | 0.27 | | 0.12 | 0.27 | 0.27 | 0.09 | 0.25 | 0.25 | 0.16 | 0.32 | |
| v/c Ratio | 1.63 | 1.20 | | 1.24 | 1.59 | 0.42 | 0.32 | 0.62 | 1.10 | 1.13 | 0.96 | |
| Control Delay | 361.0 | 139.0 | | 174.3 | 305.7 | 7.1 | 62.4 | 47.5 | 95.6 | 144.4 | 61.8 | |
| Queue Delay | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Total Delay | 361.0 | 139.0 | | 174.3 | 305.7 | 7.1 | 62.4 | 47.5 | 95.6 | 144.4 | 61.8 | |
| LOS | F | F | | F | F | A | E | D | F | F | E | |
| Approach Delay | | 161.0 | | | 243.3 | | | 73.2 | | | 80.6 | |
| Approach LOS | | F | | | F | | | E | | | F | |
| Queue Length 50th (m) | -62.9 | -176.1 | | -80.8 | -277.4 | 0.0 | 11.4 | 62.4 | -124.9 | -89.0 | 128.1 | |
| Queue Length 95th (m) | #107.8 | #206.3 | | #114.8 | #319.7 | 19.8 | 24.0 | 81.0 | #196.2 | #145.1 | #172.4 | |
| Internal Link Dist (m) | | 190.6 | | | 284.9 | | | 145.3 | | | 127.9 | |
| Turn Bay Length (m) | 125.0 | | | 115.0 | | 243.0 | 117.0 | | 40.0 | 66.0 | | |
| Base Capacity (vph) | 103 | 1272 | | 394 | 892 | 550 | 146 | 832 | 551 | 262 | 1040 | |
| Starvation Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Reduced v/c Ratio | 1.63 | 1.20 | | 1.24 | 1.59 | 0.42 | 0.32 | 0.62 | 1.10 | 1.13 | 0.96 | |

Intersection Summary

| |
|---|
| Cycle Length: 131.9 |
| Actuated Cycle Length: 131.9 |
| Offset: 84 (64%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 145 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings
 2: Prince of Wales Dr & Baseline Rd/Heron Rd


Existing
 PM Peak Hour

| | |
|------------------------|------|
| Lane Group | Ø13 |
| Lane Configurations | |
| Traffic Volume (vph) | |
| Future Volume (vph) | |
| Satd. Flow (prot) | |
| Fit Permitted | |
| Satd. Flow (perm) | |
| Satd. Flow (RTOR) | |
| Lane Group Flow (vph) | |
| Turn Type | |
| Protected Phases | 13 |
| Permitted Phases | |
| Detector Phase | |
| Switch Phase | |
| Minimum Initial (s) | 4.0 |
| Minimum Split (s) | 6.0 |
| Total Split (s) | 8.0 |
| Total Split (%) | 6% |
| Yellow Time (s) | 2.0 |
| All-Red Time (s) | 0.0 |
| Lost Time Adjust (s) | |
| Total Lost Time (s) | |
| Lead/Lag | Lead |
| Lead-Lag Optimize? | Yes |
| Recall Mode | Max |
| Act Effct Green (s) | |
| Actuated g/C Ratio | |
| v/c Ratio | |
| Control Delay | |
| Queue Delay | |
| Total Delay | |
| LOS | |
| Approach Delay | |
| Approach LOS | |
| Queue Length 50th (m) | |
| Queue Length 95th (m) | |
| Internal Link Dist (m) | |
| Turn Bay Length (m) | |
| Base Capacity (vph) | |
| Starvation Cap Reductn | |
| Spillback Cap Reductn | |
| Storage Cap Reductn | |
| Reduced v/c Ratio | |
| Intersection Summary | |

Lanes, Volumes, Timings
 2: Prince of Wales Dr & Baseline Rd/Heron Rd

Existing
 PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.63 | |
| Intersection Signal Delay: 156.2 | Intersection LOS: F |
| Intersection Capacity Utilization 106.2% | ICU Level of Service G |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. Queue shown is maximum after two cycles. | |

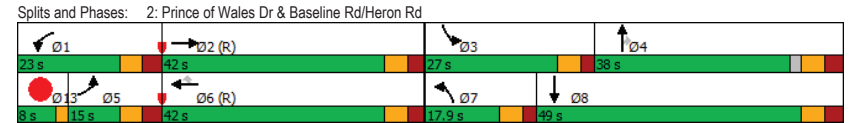

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

Existing
PM Peak Hour


| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|-------|-----|-------|-------|-----|-------|-------|-------|------|-------|-----|
| Lane Configurations | | ↔ | | | ↔ | | | ↔ | ↔ | | ↔ | |
| Traffic Volume (vph) | 17 | 17 | 14 | 74 | 68 | 90 | 12 | 554 | 29 | 54 | 834 | 34 |
| Future Volume (vph) | 17 | 17 | 14 | 74 | 68 | 90 | 12 | 554 | 29 | 54 | 834 | 34 |
| Satd. Flow (prot) | 0 | 1638 | 0 | 0 | 1612 | 0 | 0 | 1743 | 1483 | 0 | 3247 | 0 |
| Fit Permitted | | 0.818 | | | 0.873 | | | 0.973 | | | 0.872 | |
| Satd. Flow (perm) | 0 | 1359 | 0 | 0 | 1428 | 0 | 0 | 1698 | 1441 | 0 | 2840 | 0 |
| Satd. Flow (RTOR) | | 16 | | | 33 | | | 47 | | | 7 | |
| Lane Group Flow (vph) | 0 | 54 | 0 | 0 | 258 | 0 | 0 | 629 | 32 | 0 | 1025 | 0 |
| Turn Type | Perm | NA | | Perm | NA | | Perm | NA | Perm | Perm | NA | |
| Protected Phases | | 4 | | | 8 | | | 2 | | | 6 | |
| Permitted Phases | 4 | | | 8 | | | 2 | | 2 | | 6 | |
| Detector Phase | 4 | 4 | | 8 | 8 | | 2 | 2 | 2 | | 6 | 6 |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 10.0 | 10.0 | | 10.0 | 10.0 | | 10.0 | 10.0 | 10.0 | | 10.0 | |
| Minimum Split (s) | 31.1 | 31.1 | | 31.1 | 31.1 | | 27.2 | 27.2 | 27.2 | | 27.2 | |
| Total Split (s) | 33.0 | 33.0 | | 33.0 | 33.0 | | 62.0 | 62.0 | 62.0 | | 62.0 | |
| Total Split (%) | 34.7% | 34.7% | | 34.7% | 34.7% | | 65.3% | 65.3% | 65.3% | | 65.3% | |
| Yellow Time (s) | 3.0 | 3.0 | | 3.0 | 3.0 | | 3.3 | 3.3 | 3.3 | | 3.3 | |
| All-Red Time (s) | 4.1 | 4.1 | | 4.1 | 4.1 | | 2.9 | 2.9 | 2.9 | | 2.9 | |
| Lost Time Adjust (s) | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Lost Time (s) | | 7.1 | | | 7.1 | | | 6.2 | 6.2 | | 6.2 | |
| Lead/Lag | | | | | | | | | | | | |
| Lead-Lag Optimize? | | | | | | | | | | | | |
| Recall Mode | None | None | | None | None | | C-Max | C-Max | C-Max | | C-Max | |
| Act Effct Green (s) | | 19.9 | | | 19.9 | | | 61.8 | 61.8 | | 61.8 | |
| Actuated g/C Ratio | | 0.21 | | | 0.21 | | | 0.65 | 0.65 | | 0.65 | |
| v/c Ratio | | 0.18 | | | 0.80 | | | 0.57 | 0.03 | | 0.55 | |
| Control Delay | | 23.0 | | | 48.3 | | | 12.9 | 1.6 | | 11.3 | |
| Queue Delay | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Delay | | 23.0 | | | 48.3 | | | 12.9 | 1.6 | | 11.3 | |
| LOS | | C | | | D | | | B | A | | B | |
| Approach Delay | | 23.0 | | | 48.3 | | | 12.3 | | | 11.3 | |
| Approach LOS | | C | | | D | | | B | | | B | |
| Queue Length 50th (m) | | 5.7 | | | 39.2 | | | 58.6 | 0.0 | | 49.2 | |
| Queue Length 95th (m) | | 14.2 | | | 62.2 | | | 105.0 | 2.4 | | 77.7 | |
| Internal Link Dist (m) | | 145.0 | | | 146.3 | | | 187.2 | | | 22.4 | |
| Turn Bay Length (m) | | | | | | | | | | | | |
| Base Capacity (vph) | | 382 | | | 413 | | | 1105 | 954 | | 1851 | |
| Starvation Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Spillback Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Storage Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Reduced v/c Ratio | | 0.14 | | | 0.62 | | | 0.57 | 0.03 | | 0.55 | |

| Intersection Summary | | | | | | | | | | | | |
|---|--|--|--|--|--|--|--|--|--|--|--|--|
| Cycle Length: 95 | | | | | | | | | | | | |
| Actuated Cycle Length: 95 | | | | | | | | | | | | |
| Offset: 10 (11%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green | | | | | | | | | | | | |
| Natural Cycle: 70 | | | | | | | | | | | | |
| Control Type: Actuated-Coordinated | | | | | | | | | | | | |

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

Existing
PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.80 | Intersection LOS: B |
| Intersection Signal Delay: 16.7 | ICU Level of Service F |
| Intersection Capacity Utilization 93.6% | |
| Analysis Period (min) 15 | |



Appendix D

Collision Data

Appendix E

TRANS Model Plots

| Accident Date | Accident Year | Accident Time | Location | Environment Condition | Light | Traffic Control | Traffic Control Condition | Classification Of Accident | Initial Impact Type | Road Surface Condition |
|---------------|---------------|---------------|--|-----------------------|---------------|---------------------|---------------------------|----------------------------|-----------------------------|------------------------|
| 3/6/2015 | 2015 | 14:51 | BASELINE RD btwn MARSON ST & FISHER AVE | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 3/27/2015 | 2015 | 8:20 | BASELINE RD btwn MARSON ST & FISHER AVE | 03 - Snow | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 12/2/2015 | 2015 | 18:23 | BASELINE RD btwn MARSON ST & FISHER AVE | 01 - Clear | 07 - Dark | 10 - No control | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 8/8/2017 | 2017 | 17:09 | BASELINE RD btwn MARSON ST & FISHER AVE | 01 - Clear | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 9/12/2017 | 2017 | 10:35 | BASELINE RD btwn MARSON ST & FISHER AVE | 01 - Clear | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 1/4/2017 | 2017 | 15:21 | BASELINE RD btwn MARSON ST & FISHER AVE | 03 - Snow | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 05 - Packed snow |
| 1/24/2018 | 2018 | 18:06 | BASELINE RD btwn MARSON ST & FISHER AVE (_32A4U) | 01 - Clear | 07 - Dark | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 6/19/2018 | 2018 | 6:40 | BASELINE RD btwn MARSON ST & FISHER AVE (_32A4U) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 04 - Sideswipe | 01 - Dry |
| 9/21/2018 | 2018 | 8:36 | BASELINE RD btwn MARSON ST & FISHER AVE (_32A4U) | 02 - Rain | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 02 - Wet |
| 1/10/2019 | 2019 | 13:42 | BASELINE RD btwn MARSON ST & FISHER AVE (_32A4U) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 1/10/2019 | 2019 | 13:04 | BASELINE RD btwn MARSON ST & FISHER AVE (_32A4U) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 04 - Sideswipe | 01 - Dry |
| 12/5/2019 | 2019 | 17:00 | BASELINE RD btwn MARSON ST & FISHER AVE (_32A4U) | 01 - Clear | 07 - Dark | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 7/14/2015 | 2015 | 16:33 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 10/13/2015 | 2015 | 9:30 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD | 02 - Rain | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 10/27/2015 | 2015 | 10:43 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 04 - Sideswipe | 01 - Dry |
| 10/17/2016 | 2016 | 16:36 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD | 01 - Clear | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 3/23/2016 | 2016 | 17:56 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD | 01 - Clear | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 6/4/2016 | 2016 | 11:05 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 10/27/2017 | 2017 | 10:19 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 05 - Turning movement | 01 - Dry |
| 2/12/2018 | 2018 | 16:44 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD (_32A4S) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 05 - Turning movement | 05 - Packed snow |
| 5/4/2018 | 2018 | 21:32 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD (_32A4S) | 06 - Strong wind | 07 - Dark | 10 - No control | | 03 - P.D. only | 07 - SMV other | 01 - Dry |
| 5/25/2018 | 2018 | 17:53 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD (_32A4S) | 02 - Rain | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 12/6/2018 | 2018 | 8:54 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD (_32A4S) | 01 - Clear | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 07 - SMV other | 02 - Wet |
| 1/25/2019 | 2019 | 15:30 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD (_32A4S) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 04 - Sideswipe | 04 - Slush |
| 9/17/2019 | 2019 | 9:29 | FISHER AVE btwn MCCOOEY LANE & BASELINE RD (_32A4S) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 1/2/2015 | 2015 | 20:32 | FISHER AVE btwn BASELINE RD & MALIBU TER | 01 - Clear | 07 - Dark | 10 - No control | | 03 - P.D. only | 02 - Angle | 01 - Dry |
| 5/29/2015 | 2015 | 7:50 | FISHER AVE btwn BASELINE RD & MALIBU TER | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 99 - Other | 01 - Dry |
| 9/28/2015 | 2015 | 5:30 | FISHER AVE btwn BASELINE RD & MALIBU TER | 02 - Rain | 07 - Dark | 10 - No control | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 12/17/2015 | 2015 | 16:15 | FISHER AVE btwn BASELINE RD & MALIBU TER | 02 - Rain | 05 - Dusk | 10 - No control | | 03 - P.D. only | 05 - Turning movement | 02 - Wet |
| 9/30/2015 | 2015 | 16:28 | FISHER AVE btwn BASELINE RD & MALIBU TER | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 8/26/2016 | 2016 | 18:16 | FISHER AVE btwn BASELINE RD & MALIBU TER | 01 - Clear | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 10/22/2016 | 2016 | 8:27 | FISHER AVE btwn BASELINE RD & MALIBU TER | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 05 - Turning movement | 01 - Dry |
| 12/7/2017 | 2017 | 17:30 | FISHER AVE btwn BASELINE RD & MALIBU TER | 01 - Clear | 07 - Dark | 10 - No control | | 03 - P.D. only | 02 - Angle | 01 - Dry |
| 4/30/2018 | 2018 | 17:22 | FISHER AVE btwn BASELINE RD & MALIBU TER (_32A4X) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 99 - Other | 01 - Dry |
| 8/17/2019 | 2019 | 13:19 | FISHER AVE btwn BASELINE RD & MALIBU TER (_32A4X) | 02 - Rain | 01 - Daylight | 10 - No control | | 02 - Non-fatal injury | 02 - Angle | 02 - Wet |
| 3/6/2015 | 2015 | 12:44 | BASELINE RD btwn FISHER AVE & LEXINGTON ST | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 4/22/2015 | 2015 | 9:30 | BASELINE RD btwn FISHER AVE & LEXINGTON ST | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 04 - Sideswipe | 01 - Dry |
| 5/11/2016 | 2016 | 17:43 | BASELINE RD btwn FISHER AVE & LEXINGTON ST | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 11/8/2016 | 2016 | 17:55 | BASELINE RD btwn FISHER AVE & LEXINGTON ST | 01 - Clear | 07 - Dark | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 6/5/2017 | 2017 | 8:40 | BASELINE RD btwn FISHER AVE & LEXINGTON ST | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 9/15/2018 | 2018 | 13:06 | BASELINE RD btwn FISHER AVE & LEXINGTON ST (_32A4R) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 10/30/2018 | 2018 | 17:53 | BASELINE RD btwn FISHER AVE & LEXINGTON ST (_32A4R) | 01 - Clear | 05 - Dusk | 10 - No control | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 2/12/2019 | 2019 | 17:47 | BASELINE RD btwn FISHER AVE & LEXINGTON ST (_32A4R) | 03 - Snow | 05 - Dusk | 10 - No control | | 03 - P.D. only | 04 - Sideswipe | 03 - Loose snow |
| 6/25/2019 | 2019 | 15:49 | BASELINE RD btwn FISHER AVE & LEXINGTON ST (_32A4R) | 01 - Clear | 01 - Daylight | 10 - No control | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 11/10/2019 | 2019 | 20:17 | BASELINE RD btwn FISHER AVE & LEXINGTON ST (_32A4R) | 01 - Clear | 07 - Dark | 10 - No control | | 03 - P.D. only | 99 - Other | 01 - Dry |
| 2/27/2015 | 2015 | 8:39 | FISHER AVE @ MALIBU TER | 01 - Clear | 01 - Daylight | 02 - Stop sign | | 02 - Non-fatal injury | 02 - Angle | 01 - Dry |
| 2/14/2015 | 2015 | 20:39 | FISHER AVE @ MALIBU TER | 01 - Clear | 07 - Dark | 03 - P.D. only | | 05 - Turning movement | 05 - Packed snow | 01 - Dry |
| 6/3/2015 | 2015 | 8:14 | FISHER AVE @ MALIBU TER | 01 - Clear | 01 - Daylight | 02 - Stop sign | | 03 - P.D. only | 02 - Angle | 01 - Dry |
| 9/30/2017 | 2017 | 10:05 | FISHER AVE @ MALIBU TER | 01 - Clear | 01 - Daylight | 02 - Stop sign | | 03 - P.D. only | 02 - Angle | 01 - Dry |
| 2/15/2018 | 2018 | 16:01 | FISHER AVE @ MALIBU TER (0003121) | 01 - Clear | 01 - Daylight | 02 - Stop sign | | 02 - Non-fatal injury | 05 - Turning movement | 02 - Wet |
| 10/18/2018 | 2018 | 8:00 | FISHER AVE @ MALIBU TER (0003121) | 01 - Clear | 01 - Daylight | 02 - Stop sign | | 02 - Non-fatal injury | 07 - SMV other | 01 - Dry |
| 1/25/2019 | 2019 | 10:40 | FISHER AVE @ MALIBU TER (0003121) | 01 - Clear | 01 - Daylight | 02 - Stop sign | | 02 - Non-fatal injury | 03 - Rear end | 02 - Wet |
| 7/4/2015 | 2015 | 13:17 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 2/4/2015 | 2015 | 10:15 | BASELINE RD @ FISHER AVE | 03 - Snow | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 03 - Loose snow |
| 3/4/2015 | 2015 | 16:30 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 1/4/2015 | 2015 | 19:50 | BASELINE RD @ FISHER AVE | 04 - Freezing Rain | 07 - Dark | 01 - Traffic signal | | 03 - P.D. only | 99 - Other | 06 - Ice |
| 8/18/2015 | 2015 | 17:10 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 3/6/2015 | 2015 | 16:32 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 04 - Sideswipe | 01 - Dry |
| 3/15/2015 | 2015 | 7:37 | BASELINE RD @ FISHER AVE | 03 - Snow | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 07 - SMV other | 03 - Loose snow |
| 2/19/2015 | 2015 | 13:10 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 2/19/2015 | 2015 | 13:29 | BASELINE RD @ FISHER AVE | 05 - Drifting Snow | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 03 - Loose snow |
| 6/23/2015 | 2015 | 8:45 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 3/27/2015 | 2015 | 19:37 | BASELINE RD @ FISHER AVE | 03 - Snow | 07 - Dark | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 03 - Loose snow |
| 5/13/2015 | 2015 | 10:38 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 4/26/2015 | 2015 | 11:30 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 04 - Sideswipe | 01 - Dry |
| 6/26/2015 | 2015 | 14:56 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 11/12/2015 | 2015 | 16:50 | BASELINE RD @ FISHER AVE | 02 - Rain | 05 - Dusk | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 02 - Wet |
| 9/18/2015 | 2015 | 17:51 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 8/9/2015 | 2015 | 14:16 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 12/31/2015 | 2015 | 16:43 | BASELINE RD @ FISHER AVE | 03 - Snow | 05 - Dusk | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 03 - Loose snow |
| 4/1/2016 | 2016 | 16:56 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 02 - Non-fatal injury | 07 - SMV other | 01 - Dry |
| 9/20/2016 | 2016 | 17:20 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 10/15/2016 | 2016 | 12:50 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 1/5/2016 | 2016 | 9:17 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 04 - Sideswipe | 01 - Dry |
| 1/28/2016 | 2016 | 16:44 | BASELINE RD @ FISHER AVE | 01 - Clear | 05 - Dusk | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 7/16/2016 | 2016 | 20:52 | BASELINE RD @ FISHER AVE | 01 - Clear | 05 - Dusk | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 3/22/2016 | 2016 | 12:14 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 11/2/2016 | 2016 | 18:06 | BASELINE RD @ FISHER AVE | 01 - Clear | 07 - Dark | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 7/20/2016 | 2016 | 16:30 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 10/1/2016 | 2016 | 16:15 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 10/19/2016 | 2016 | 3:08 | BASELINE RD @ FISHER AVE | 01 - Clear | 07 - Dark | 01 - Traffic signal | | 03 - P.D. only | 06 - SMV unattended vehicle | 01 - Dry |
| 12/21/2016 | 2016 | 16:48 | BASELINE RD @ FISHER AVE | 01 - Clear | 05 - Dusk | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 11/26/2016 | 2016 | 21:20 | BASELINE RD @ FISHER AVE | 01 - Clear | 07 - Dark | 01 - Traffic signal | | 03 - P.D. only | 02 - Angle | 01 - Dry |
| 7/21/2017 | 2017 | 9:19 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 02 - Non-fatal injury | 04 - Sideswipe | 01 - Dry |
| 9/11/2017 | 2017 | 16:16 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 9/7/2017 | 2017 | 7:30 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 10/6/2017 | 2017 | 9:29 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 02 - Non-fatal injury | 03 - Rear end | 01 - Dry |
| 10/3/2017 | 2017 | 13:32 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 12/11/2017 | 2017 | 17:30 | BASELINE RD @ FISHER AVE | 01 - Clear | 07 - Dark | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 12/6/2017 | 2017 | 16:43 | BASELINE RD @ FISHER AVE | 01 - Clear | 05 - Dusk | 01 - Traffic signal | | 03 - P.D. only | 03 - Rear end | 01 - Dry |
| 1/5/2017 | 2017 | 10:47 | BASELINE RD @ FISHER AVE | 01 - Clear | 01 - Daylight | 01 - Traffic signal | | 02 - Non-fatal injury | 02 - Non-fatal injury | 05 - Packed snow |
| 2/15/2017 | 2017 | 10:48 | BASELINE RD @ FISHER AVE | 03 - Snow | | | | | | |

Appendix F

Background development Volumes

TRANS Regional Model

Version 2.15 - Assigned June 16, 2020

AM Peak Hour Total Traffic Volume

Network Mapping

2031 Model - Base case

N/A

User Initials: TIMW


Plot Prepared: May 31, 2021

EMME Scenario: 21711



Legend

AM Peak Hour Total Traffic Volume



Distance (m)



The TRANS model is continuously refined & maintained, and all information is provided in good faith. However, model outputs are provided "as is", and no warranty or guarantee is provided as to the accuracy, reliability or reasonableness of the results. In using this data, you agree to accept any and all risks arising from any incorrect, incomplete, or misleading information.

Recipients are required to use caution and professional judgement in using and interpreting model outputs. In particular, caution should be used when focusing on a geographically limited area (such as a single road or intersection), as the model is primarily designed to simulate regional-scale phenomena and has been calibrated at a regional level.

As general good practice, it is recommended that the user confirm the network coding within the area of interest, and compare base year forecasts against traffic count data to assess the extent to which the model may be over- or under-estimating the travel demand.

TRANS Regional Model

Version 2.15 - Assigned June 16, 2020

AM Peak Hour Total Traffic Volume

Network Mapping

2011 Model - Base case

N/A

User Initials: TIMW


Plot Prepared: May 31, 2021

EMME Scenario: 21711



Legend

AM Peak Hour Total Traffic Volume



Distance (m)



The TRANS model is continuously refined & maintained, and all information is provided in good faith. However, model outputs are provided "as is", and no warranty or guarantee is provided as to the accuracy, reliability or reasonableness of the results. In using this data, you agree to accept any and all risks arising from any incorrect, incomplete, or misleading information.

Recipients are required to use caution and professional judgement in using and interpreting model outputs. In particular, caution should be used when focusing on a geographically limited area (such as a single road or intersection), as the model is primarily designed to simulate regional-scale phenomena and has been calibrated at a regional level.

As general good practice, it is recommended that the user confirm the network coding within the area of interest, and compare base year forecasts against traffic count data to assess the extent to which the model may be over- or under-estimating the travel demand.

TRANS Regional Model

Version 2.15 - Assigned June 16, 2020

AM Peak Hour Total Traffic Volume

Network Mapping

2031 Model - Base case

N/A

User Initials: TIMW


Plot Prepared: May 31, 2021

EMME Scenario: 21711



Legend

AM Peak Hour Total Traffic Volume




Distance (m)



The TRANS model is continuously refined & maintained, and all information is provided in good faith. However, model outputs are provided "as is", and no warranty or guarantee is provided as to the accuracy, reliability or reasonableness of the results. In using this data, you agree to accept any and all risks arising from any incorrect, incomplete, or misleading information.

Recipients are required to use caution and professional judgement in using and interpreting model outputs. In particular, caution should be used when focusing on a geographically limited area (such as a single road or intersection), as the model is primarily designed to simulate regional-scale phenomena and has been calibrated at a regional level.

As general good practice, it is recommended that the user confirm the network coding within the area of interest, and compare base year forecasts against traffic count data to assess the extent to which the model may be over- or under-estimating the travel demand.

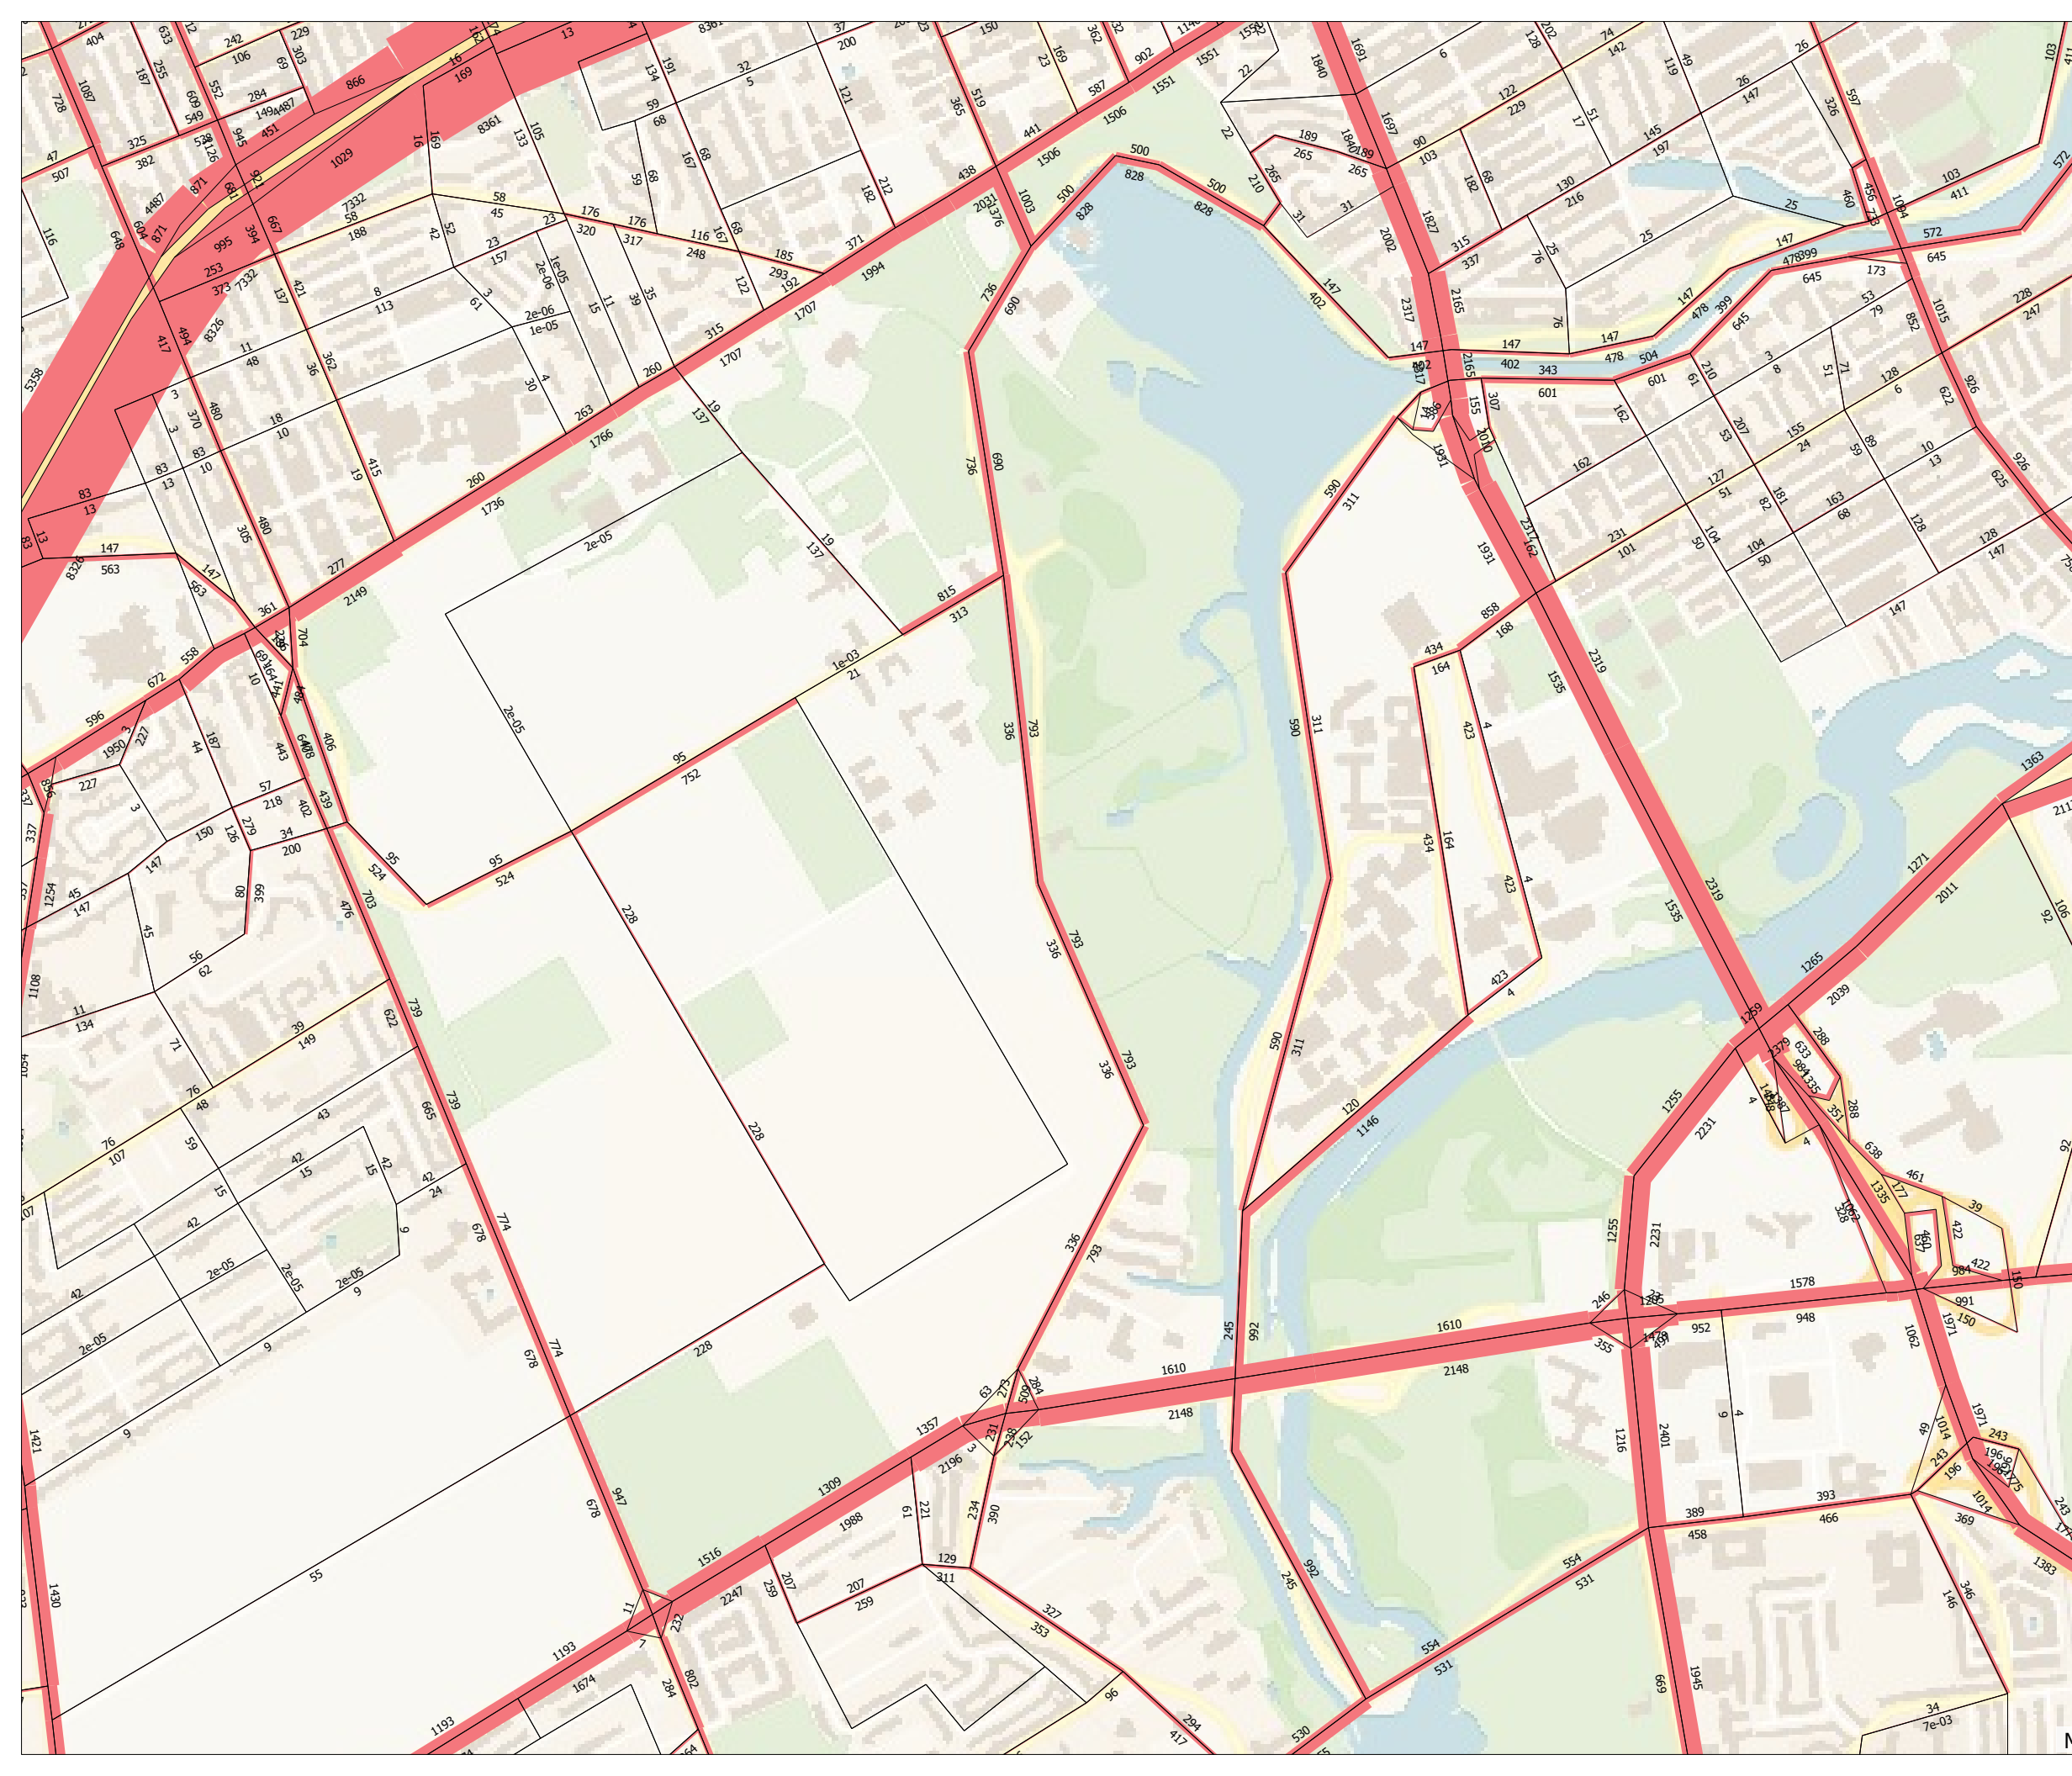

TRANS Regional Model

Version 2.15 - Assigned June 16, 2020

AM Peak Hour Total Traffic Volume

Network Mapping

2011 Model - Base case

N/A

User Initials: TIMW


Plot Prepared: May 31, 2021

EMME Scenario: 21711



Legend

AM Peak Hour Total Traffic Volume




Distance (m)



The TRANS model is continuously refined & maintained, and all information is provided in good faith. However, model outputs are provided "as is", and no warranty or guarantee is provided as to the accuracy, reliability or reasonableness of the results. In using this data, you agree to accept any and all risks arising from any incorrect, incomplete, or misleading information.

Recipients are required to use caution and professional judgement in using and interpreting model outputs. In particular, caution should be used when focusing on a geographically limited area (such as a single road or intersection), as the model is primarily designed to simulate regional-scale phenomena and has been calibrated at a regional level.


As general good practice, it is recommended that the user confirm the network coding within the area of interest, and compare base year forecasts against traffic count data to assess the extent to which the model may be over- or under-estimating the travel demand.

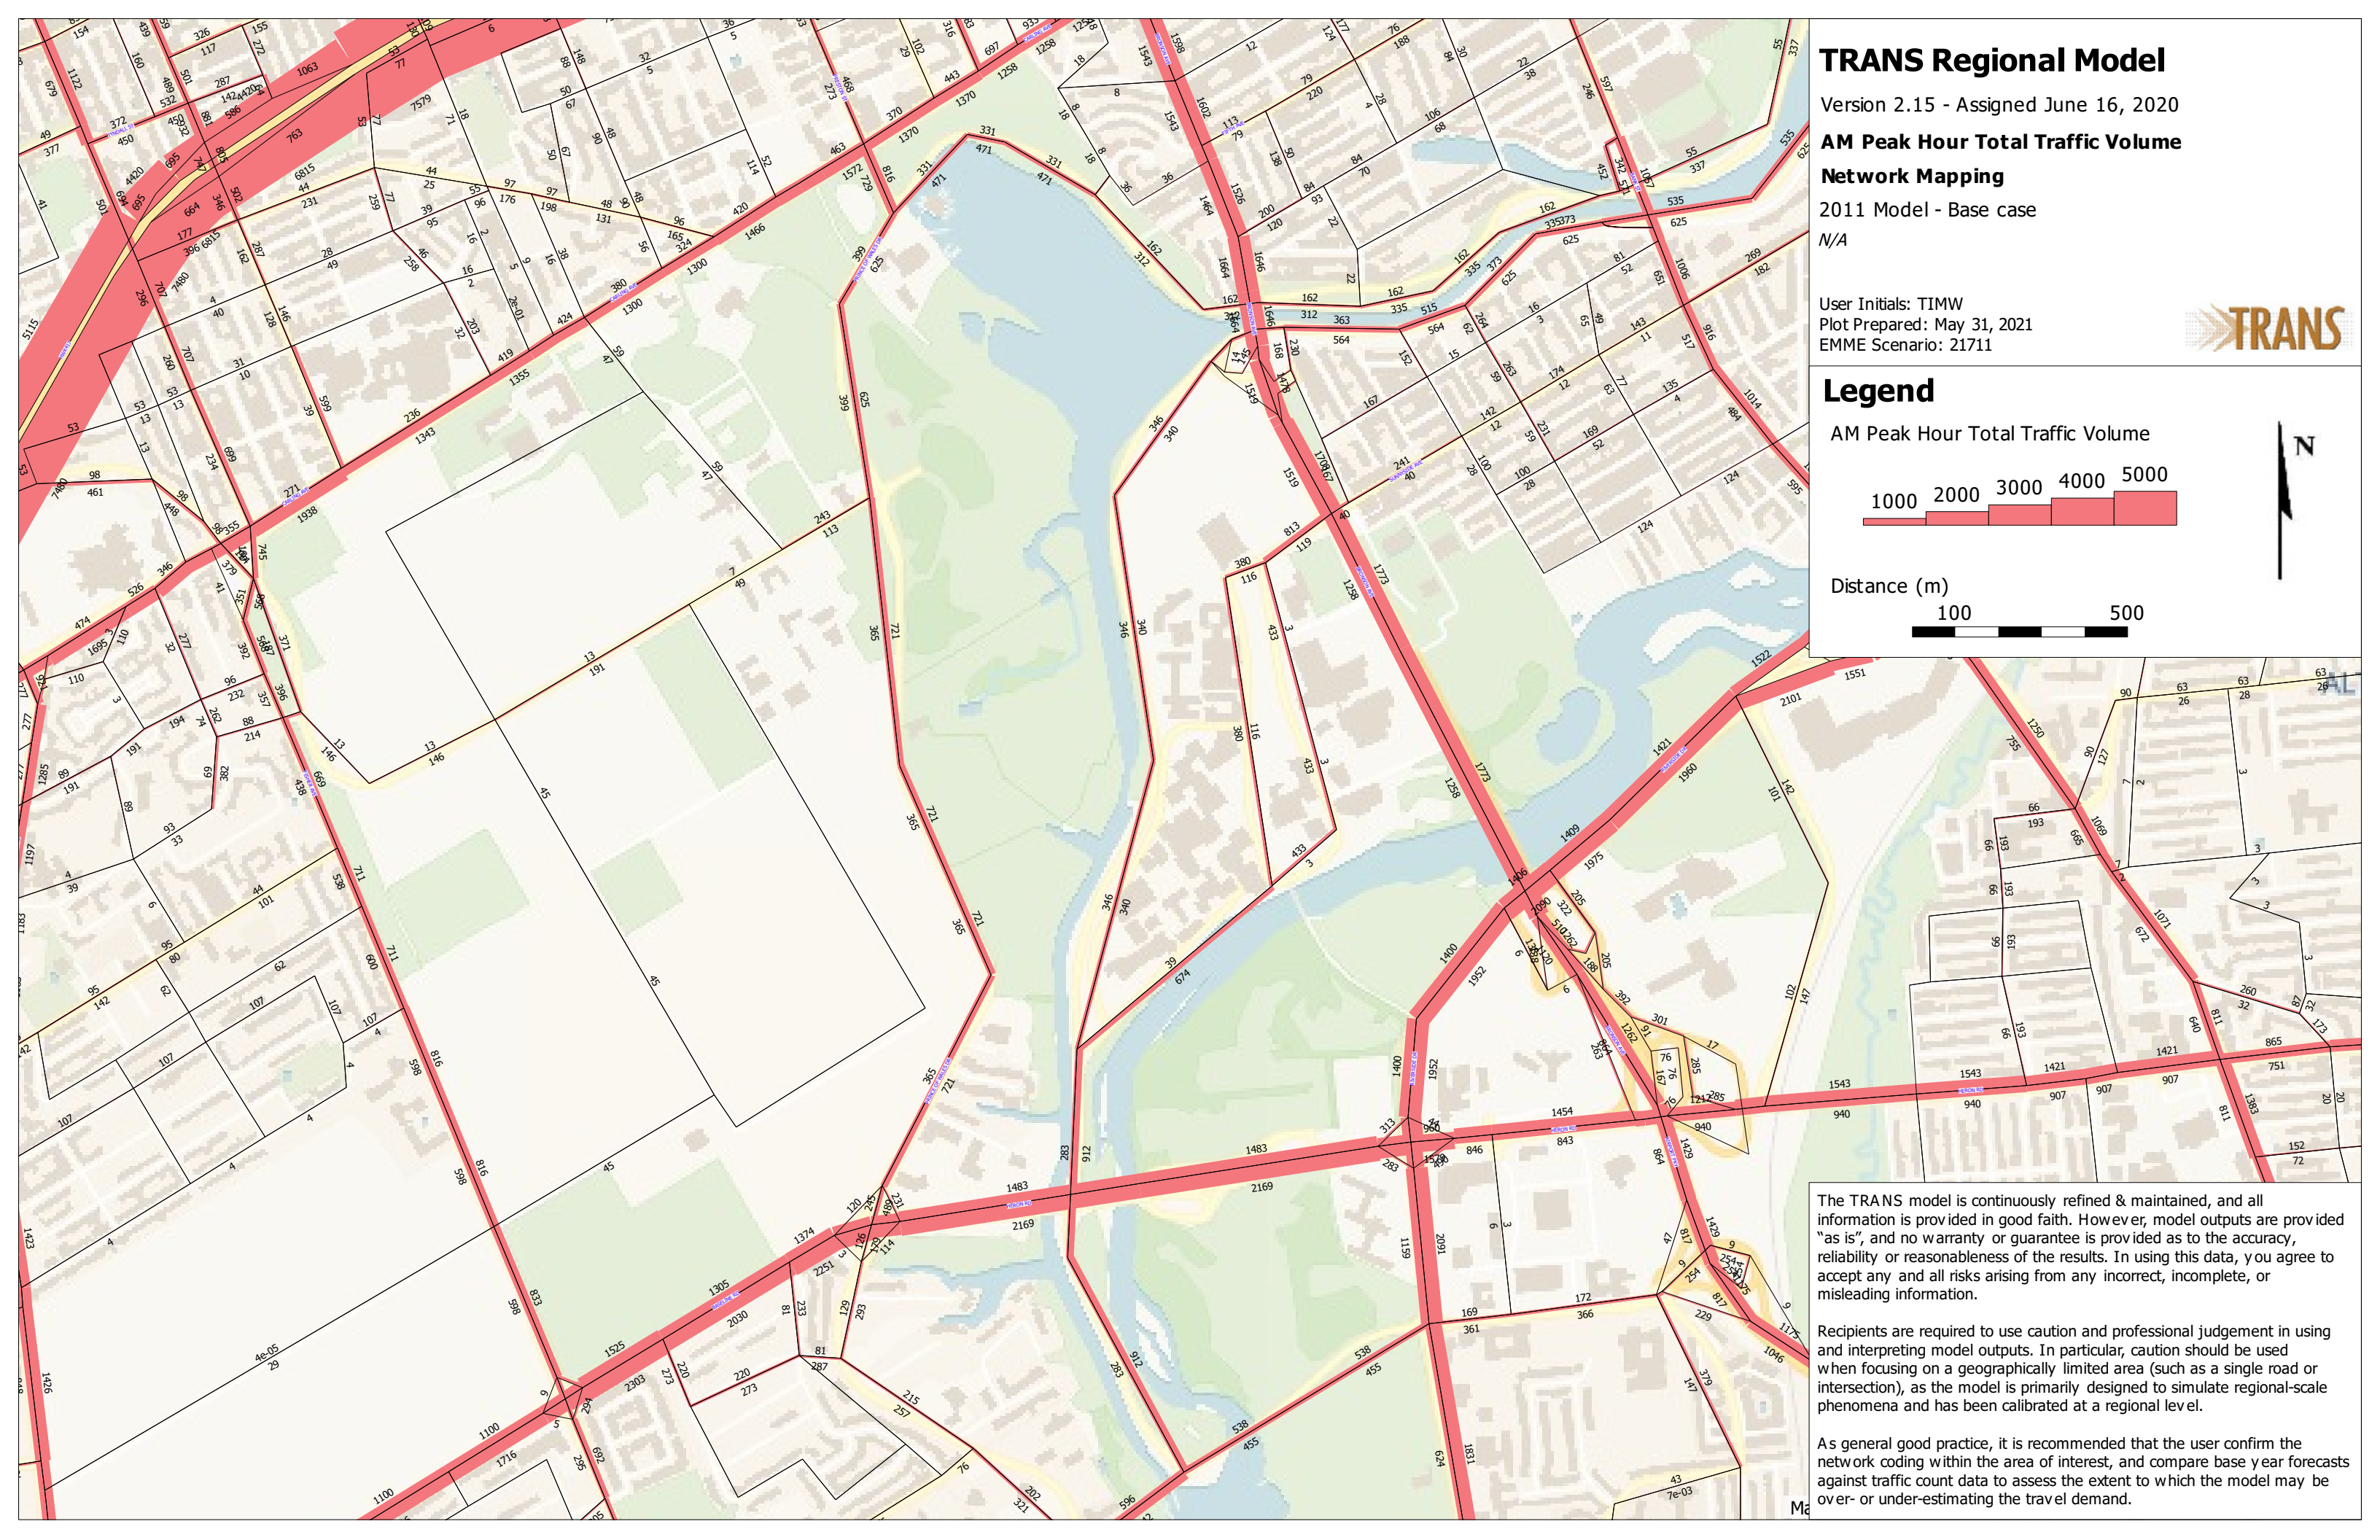

Appendix G

Existing Site Generated Trip

Figure 6: Reassigned Site Trips

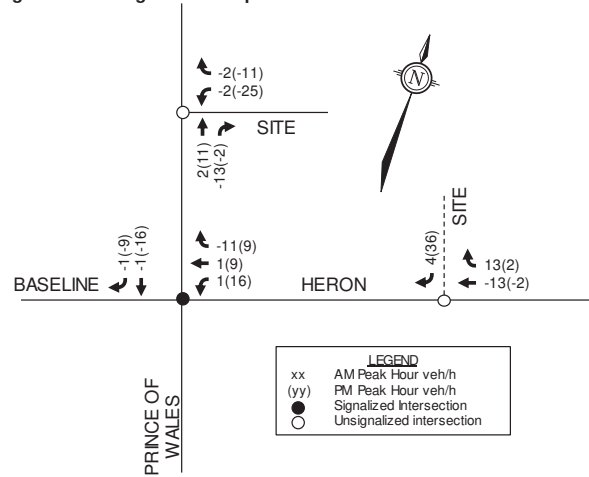

5.2 Background Traffic

5.2.1 Future Background Traffic

For the 'Inner Suburbs' area of Ottawa, Exhibit 2.10 of the 2013 TMP projects population and employment growth rates of approximately 0.3% and 1.2% per annum, respectively. To reflect the study area's development as an employment area, a 1% background growth rate has been applied to non-site traffic in this area.

This 1% background growth rate is in line with the annual historical (2000 to 2016) growth rate for this area (-2% to 2%) identified by the City of Ottawa (See **Figure 7**).

2020 and 2025 background traffic volumes for the study area are shown in **Figure 8** and **Figure 9**, respectively.

Appendix H

Synchro Intersection Worksheets – 2034 Future Background Conditions

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Background
AM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|-------|---------|-------|--------|-------|------|-------|-------|-----|
| Lane Configurations | ↔ | ↗ | ↘ | ↔ | ↗ | ↘ | ↔ | ↗ | ↘ | ↔ | ↗ | ↘ |
| Traffic Volume (vph) | 126 | 1300 | 152 | 32 | 1101 | 141 | 223 | 493 | 73 | 132 | 391 | 93 |
| Future Volume (vph) | 126 | 1300 | 152 | 32 | 1101 | 141 | 223 | 493 | 73 | 132 | 391 | 93 |
| Satd. Flow (prot) | 1658 | 3252 | 1469 | 1642 | 3252 | 1455 | 1658 | 3182 | 0 | 1658 | 3124 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1654 | 3252 | 1407 | 1634 | 3252 | 1419 | 1644 | 3182 | 0 | 1653 | 3124 | 0 |
| Satd. Flow (RTOR) | | | | | | | | | | | | |
| Lane Group Flow (vph) | 126 | 1300 | 152 | 32 | 1101 | 141 | 223 | 566 | 0 | 132 | 484 | 0 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Prot | NA | | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | 2 | | | 6 | | | | | | |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | | 5.0 | 10.0 | |
| Minimum Split (s) | 11.3 | 41.2 | 41.2 | 11.3 | 41.2 | 41.2 | 10.9 | 41.3 | | 10.9 | 41.3 | |
| Total Split (s) | 16.2 | 53.0 | 53.0 | 11.3 | 48.1 | 48.1 | 24.4 | 43.7 | | 22.0 | 41.3 | |
| Total Split (%) | 12.5% | 40.8% | 40.8% | 8.7% | 37.0% | 37.0% | 18.8% | 33.6% | | 16.9% | 31.8% | |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | | 3.3 | 3.3 | |
| All-Red Time (s) | 2.6 | 2.5 | 2.5 | 2.6 | 2.5 | 2.5 | 2.6 | 3.0 | | 2.6 | 3.0 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.3 | 6.2 | 6.2 | 6.3 | 6.2 | 6.2 | 5.9 | 6.3 | | 5.9 | 6.3 | |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | | Lead | Lag | |
| Lead-Lag Optimize? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | | None | None | |
| Act Effct Green (s) | 13.9 | 58.1 | 58.1 | 6.1 | 45.3 | 45.3 | 18.5 | 31.9 | | 14.2 | 27.6 | |
| Actuated g/C Ratio | 0.11 | 0.45 | 0.45 | 0.05 | 0.35 | 0.35 | 0.14 | 0.25 | | 0.11 | 0.21 | |
| v/c Ratio | 0.71 | 0.89 | 0.24 | 0.42 | 0.97 | 0.29 | 0.95 | 0.72 | | 0.73 | 0.73 | |
| Control Delay | 78.0 | 43.9 | 26.9 | 59.0 | 88.0 | 65.4 | 102.1 | 50.5 | | 78.9 | 53.9 | |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Delay | 78.0 | 43.9 | 26.9 | 59.0 | 88.0 | 65.4 | 102.1 | 50.5 | | 78.9 | 53.9 | |
| LOS | E | D | C | E | F | E | F | D | | E | D | |
| Approach Delay | | 45.0 | | | 84.8 | | | 65.1 | | | 59.3 | |
| Approach LOS | | D | | | F | | | E | | | E | |
| Queue Length 50th (m) | 30.6 | 170.6 | 25.5 | 8.6 | ~161.2 | 37.6 | 57.4 | 73.1 | | 32.8 | 62.6 | |
| Queue Length 95th (m) | #73.4 | #242.4 | 45.5 | m10.6 | m#169.6 | m40.9 | #105.9 | 85.6 | | #55.0 | 74.5 | |
| Internal Link Dist (m) | | 271.5 | | | 796.1 | | | 86.9 | | | 158.3 | |
| Turn Bay Length (m) | 124.5 | | 100.0 | 134.0 | | 91.5 | | | | 65.0 | | |
| Base Capacity (vph) | 177 | 1453 | 628 | 77 | 1132 | 494 | 235 | 915 | | 205 | 841 | |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Reduced v/c Ratio | 0.71 | 0.89 | 0.24 | 0.42 | 0.97 | 0.29 | 0.95 | 0.62 | | 0.64 | 0.58 | |

Intersection Summary


| |
|---|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 135 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Background
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.97 | Intersection LOS: E |
| Intersection Signal Delay: 62.7 | ICU Level of Service F |
| Intersection Capacity Utilization 96.2% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 1: Fisher Ave & Baseline Rd



Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Background
AM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|-------|-----|-------|-------|-----|-------|-------|-------|-------|-------|-----|
| Lane Configurations | | ↔ | | | ↔ | | | ↕ | ↕ | | ↕ | ↕ |
| Traffic Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 669 | 171 | 61 | 538 | 5 |
| Future Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 669 | 171 | 61 | 538 | 5 |
| Satd. Flow (prot) | 0 | 1660 | 0 | 0 | 1577 | 0 | 0 | 1710 | 1483 | 0 | 3293 | 0 |
| Fit Permitted | | 0.849 | | | 0.843 | | | 0.993 | | | 0.799 | |
| Satd. Flow (perm) | 0 | 1421 | 0 | 0 | 1336 | 0 | 0 | 1699 | 1289 | 0 | 2644 | 0 |
| Satd. Flow (RTOR) | | 9 | | | 56 | | | 171 | | | 1 | |
| Lane Group Flow (vph) | 0 | 138 | 0 | 0 | 228 | 0 | 0 | 677 | 171 | 0 | 604 | 0 |
| Turn Type | Perm | NA | | Perm | NA | | Perm | NA | Perm | Perm | NA | |
| Protected Phases | | 4 | | | 8 | | | 2 | | 2 | 6 | |
| Permitted Phases | 4 | | | 8 | | | 2 | | 2 | 6 | | |
| Detector Phase | 4 | 4 | | 8 | 8 | | 2 | 2 | 2 | 6 | 6 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 10.0 | 10.0 | | 10.0 | 10.0 | | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | |
| Minimum Split (s) | 31.1 | 31.1 | | 31.1 | 31.1 | | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | |
| Total Split (s) | 33.0 | 33.0 | | 33.0 | 33.0 | | 47.0 | 47.0 | 47.0 | 47.0 | 47.0 | |
| Total Split (%) | 41.3% | 41.3% | | 41.3% | 41.3% | | 58.8% | 58.8% | 58.8% | 58.8% | 58.8% | |
| Yellow Time (s) | 3.0 | 3.0 | | 3.0 | 3.0 | | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | |
| All-Red Time (s) | 4.1 | 4.1 | | 4.1 | 4.1 | | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | |
| Lost Time Adjust (s) | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Lost Time (s) | | 7.1 | | | 7.1 | | | 6.2 | 6.2 | | 6.2 | |
| Lead/Lag | | | | | | | | | | | | |
| Lead-Lag Optimize? | | | | | | | | | | | | |
| Recall Mode | None | None | | None | None | | C-Max | C-Max | C-Max | C-Max | C-Max | |
| Act Effct Green (s) | | 19.0 | | | 19.0 | | 47.7 | 47.7 | 47.7 | 47.7 | 47.7 | |
| Actuated g/C Ratio | | 0.24 | | | 0.24 | | 0.60 | 0.60 | 0.60 | 0.60 | 0.60 | |
| v/c Ratio | | 0.40 | | | 0.63 | | 0.67 | 0.20 | 0.38 | 0.38 | 0.38 | |
| Control Delay | | 25.9 | | | 27.5 | | 16.7 | 2.3 | 10.5 | 10.5 | 10.5 | |
| Queue Delay | | 0.0 | | | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Total Delay | | 25.9 | | | 27.5 | | 16.7 | 2.3 | 10.5 | 10.5 | 10.5 | |
| LOS | | C | | | C | | B | A | B | B | B | |
| Approach Delay | | 25.9 | | | 27.5 | | 13.8 | | 10.5 | 10.5 | 10.5 | |
| Approach LOS | | C | | | C | | B | | B | B | B | |
| Queue Length 50th (m) | | 15.0 | | | 21.1 | | 74.5 | 0.0 | 27.1 | 27.1 | 27.1 | |
| Queue Length 95th (m) | | 29.4 | | | 42.2 | | 117.4 | 8.2 | 39.0 | 39.0 | 39.0 | |
| Internal Link Dist (m) | | 152.1 | | | 156.9 | | 172.3 | | 30.0 | 30.0 | 30.0 | |
| Turn Bay Length (m) | | | | | | | | | | | | |
| Base Capacity (vph) | | 466 | | | 470 | | 1013 | 837 | 1577 | 1577 | 1577 | |
| Starvation Cap Reductn | | 0 | | | 0 | | 0 | 0 | 0 | 0 | 0 | |
| Spillback Cap Reductn | | 0 | | | 0 | | 0 | 0 | 0 | 0 | 0 | |
| Storage Cap Reductn | | 0 | | | 0 | | 0 | 0 | 0 | 0 | 0 | |
| Reduced v/c Ratio | | 0.30 | | | 0.49 | | 0.67 | 0.20 | 0.38 | 0.38 | 0.38 | |


| Intersection Summary | |
|------------------------|--|
| Cycle Length: | 80 |
| Actuated Cycle Length: | 80 |
| Offset: | 78 (98%), Referenced to phase 2:NBT and 6:SBTL, Start of Green |
| Natural Cycle: | 70 |
| Control Type: | Actuated-Coordinated |

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Background
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.67 | Intersection LOS: B |
| Intersection Signal Delay: 15.3 | ICU Level of Service F |
| Intersection Capacity Utilization 93.4% | |
| Analysis Period (min) 15 | |

Splits and Phases: 6: Deer Park Rd/Dynes Rd & Fisher Ave



Lanes, Volumes, Timings

2034 Future Background

8: Prince of Wales Dr & Baseline Rd/Heron Rd

AM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|--------|--------|-----|--------|--------|--------|-------|--------|-----|-------|-------|-----|
| Lane Configurations | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ |
| Traffic Volume (vph) | 201 | 540 | 142 | 225 | 1019 | 546 | 72 | 1134 | 166 | 221 | 394 | 83 |
| Future Volume (vph) | 201 | 540 | 142 | 225 | 1019 | 546 | 72 | 1134 | 166 | 221 | 394 | 83 |
| Satd. Flow (prot) | 1658 | 3186 | 0 | 1610 | 3283 | 1483 | 1658 | 3237 | 0 | 3216 | 3219 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1654 | 3186 | 0 | 1592 | 3283 | 1450 | 1652 | 3237 | 0 | 3205 | 3219 | 0 |
| Satd. Flow (RTOR) | | | | | | | | | | | | |
| Lane Group Flow (vph) | 201 | 682 | 0 | 225 | 1019 | 546 | 72 | 1300 | 0 | 221 | 477 | 0 |
| Turn Type | Prot | NA | | Prot | NA | Perm | Prot | NA | | Prot | NA | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | | | | 6 | | | | | | |
| Detector Phase | 5 | 2 | | 1 | 6 | 6 | 7 | 4 | | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | | 5.0 | 10.0 | 10.0 | 5.0 | 12.0 | | 5.0 | 12.0 | |
| Minimum Split (s) | 11.8 | 29.5 | | 11.8 | 29.8 | 29.8 | 10.9 | 37.8 | | 10.9 | 37.8 | |
| Total Split (s) | 20.0 | 40.0 | | 26.0 | 46.0 | 46.0 | 20.4 | 51.0 | | 13.0 | 43.6 | |
| Total Split (%) | 15.4% | 30.8% | | 20.0% | 35.4% | 35.4% | 15.7% | 39.2% | | 10.0% | 33.5% | |
| Yellow Time (s) | 3.7 | 3.0 | | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | | 3.7 | 3.7 | |
| All-Red Time (s) | 3.1 | 2.8 | | 3.1 | 2.8 | 2.8 | 2.2 | 3.1 | | 2.2 | 3.1 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.8 | 5.8 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | | 5.9 | 6.8 | |
| Lead/Lag | | | | | | | Lead | Lag | | Lead | Lag | |
| Lead-Lag Optimize? | | | | | | | Yes | Yes | | Yes | Yes | |
| Recall Mode | None | C-Max | | None | C-Max | C-Max | None | Min | | None | Min | |
| Act Effct Green (s) | 13.2 | 34.2 | | 19.2 | 39.5 | 39.5 | 10.8 | 44.2 | | 7.1 | 43.0 | |
| Actuated g/C Ratio | 0.10 | 0.26 | | 0.15 | 0.30 | 0.30 | 0.08 | 0.34 | | 0.05 | 0.33 | |
| v/c Ratio | 1.20 | 0.81 | | 0.95 | 1.02 | 1.24 | 0.53 | 1.18 | | 1.26 | 0.45 | |
| Control Delay | 156.5 | 69.9 | | 101.6 | 78.7 | 165.2 | 70.1 | 129.8 | | 204.0 | 37.3 | |
| Queue Delay | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Delay | 156.5 | 69.9 | | 101.6 | 78.7 | 165.2 | 70.1 | 129.8 | | 204.0 | 37.3 | |
| LOS | F | E | | F | E | F | E | F | | F | D | |
| Approach Delay | | 89.7 | | | 108.0 | | | 126.7 | | | 90.1 | |
| Approach LOS | | F | | | F | | | F | | | F | |
| Queue Length 50th (m) | -64.3 | 98.6 | | 57.9 | -145.7 | -173.4 | 18.0 | -210.0 | | -36.5 | 52.1 | |
| Queue Length 95th (m) | m#82.4 | m111.3 | | #107.1 | #186.8 | #240.9 | 32.9 | #252.3 | | #62.3 | 71.3 | |
| Internal Link Dist (m) | | 796.1 | | | 320.4 | | | 142.9 | | | 135.6 | |
| Turn Bay Length (m) | 125.0 | | | 118.0 | | 184.0 | 117.0 | | | 74.0 | | |
| Base Capacity (vph) | 168 | 838 | | 237 | 997 | 440 | 184 | 1100 | | 175 | 1064 | |
| Starvation Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Reduced v/c Ratio | 1.20 | 0.81 | | 0.95 | 1.02 | 1.24 | 0.39 | 1.18 | | 1.26 | 0.45 | |

Intersection Summary

Cycle Length: 130

Actuated Cycle Length: 130

Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green

Natural Cycle: 145

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings


2034 Future Background

8: Prince of Wales Dr & Baseline Rd/Heron Rd

AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.26 | Intersection LOS: F |
| Intersection Signal Delay: 107.3 | ICU Level of Service G |
| Intersection Capacity Utilization 108.6% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 8: Prince of Wales Dr & Baseline Rd/Heron Rd



Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Background
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|--------|--------|-------|-------|-------|------|-------|--------|-----|
| Lane Configurations | ↔ | ↕↕ | ↕↕ | ↔ | ↕↕ | ↕↕ | ↔ | ↕↕ | ↕↕ | ↔ | ↕↕ | ↕↕ |
| Traffic Volume (vph) | 90 | 1358 | 257 | 148 | 1274 | 179 | 174 | 388 | 71 | 154 | 663 | 148 |
| Future Volume (vph) | 90 | 1358 | 257 | 148 | 1274 | 179 | 174 | 388 | 71 | 154 | 663 | 148 |
| Satd. Flow (prot) | 1658 | 3283 | 1483 | 1642 | 3316 | 1483 | 1658 | 3214 | 0 | 1658 | 3173 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1652 | 3283 | 1410 | 1633 | 3316 | 1431 | 1648 | 3214 | 0 | 1646 | 3173 | 0 |
| Satd. Flow (RTOR) | | | | | | | | | | | | |
| Lane Group Flow (vph) | 90 | 1358 | 257 | 148 | 1274 | 179 | 174 | 459 | 0 | 154 | 811 | 0 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Prot | NA | | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | 2 | | | 6 | | | | | | |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | | 5.0 | 10.0 | |
| Minimum Split (s) | 11.3 | 33.2 | 33.2 | 11.3 | 33.2 | 33.2 | 10.9 | 41.5 | | 10.9 | 41.5 | |
| Total Split (s) | 14.0 | 53.5 | 53.5 | 17.0 | 56.5 | 56.5 | 18.0 | 41.7 | | 17.8 | 41.5 | |
| Total Split (%) | 10.8% | 41.2% | 41.2% | 13.1% | 43.5% | 43.5% | 13.8% | 32.1% | | 13.7% | 31.9% | |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | | 3.3 | 3.3 | |
| All-Red Time (s) | 2.6 | 2.5 | 2.5 | 2.6 | 2.5 | 2.5 | 2.6 | 3.0 | | 2.6 | 3.0 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.3 | 6.2 | 6.2 | 6.3 | 6.2 | 6.2 | 5.9 | 6.3 | | 5.9 | 6.3 | |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lag | Lag | | Lead | Lead | |
| Lead-Lag Optimize? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | | None | None | |
| Act Effct Green (s) | 7.7 | 47.3 | 47.3 | 10.7 | 50.3 | 50.3 | 12.5 | 35.4 | | 11.9 | 34.8 | |
| Actuated g/C Ratio | 0.06 | 0.36 | 0.36 | 0.08 | 0.39 | 0.39 | 0.10 | 0.27 | | 0.09 | 0.27 | |
| v/c Ratio | 0.92 | 1.14 | 0.50 | 1.10 | 0.99 | 0.32 | 1.09 | 0.52 | | 1.02 | 0.96 | |
| Control Delay | 131.2 | 110.7 | 36.3 | 128.7 | 62.6 | 42.2 | 151.1 | 42.7 | | 136.1 | 68.8 | |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Delay | 131.2 | 110.7 | 36.3 | 128.7 | 62.6 | 42.2 | 151.1 | 42.7 | | 136.1 | 68.8 | |
| LOS | F | F | D | F | E | D | F | D | | F | E | |
| Approach Delay | | 100.6 | | | 66.4 | | | 72.5 | | | 79.6 | |
| Approach LOS | | F | | | E | | | E | | | E | |
| Queue Length 50th (m) | 23.4 | ~213.1 | 50.9 | ~43.6 | 130.7 | 33.5 | ~51.5 | 52.6 | | ~40.8 | 107.5 | |
| Queue Length 95th (m) | #56.4 | #255.3 | 77.1 | m#46.8 | m123.1 | m33.9 | #96.8 | 69.6 | | #84.7 | #146.3 | |
| Internal Link Dist (m) | | 192.5 | | | 794.8 | | | 85.7 | | | 126.1 | |
| Turn Bay Length (m) | 124.5 | | 100.0 | 134.0 | | 91.5 | 127.0 | | | 65.0 | | |
| Base Capacity (vph) | 98 | 1194 | 513 | 135 | 1283 | 553 | 160 | 875 | | 151 | 859 | |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Reduced v/c Ratio | 0.92 | 1.14 | 0.50 | 1.10 | 0.99 | 0.32 | 1.09 | 0.52 | | 1.02 | 0.94 | |

Intersection Summary


| |
|---|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 150 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Background
PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.14 | Intersection LOS: F |
| Intersection Signal Delay: 81.7 | ICU Level of Service G |
| Intersection Capacity Utilization 105.5% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 1: Fisher Ave & Baseline Rd



Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Background
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|-------|-----|-------|-------|-----|-------|-------|-------|-------|-------|-----|
| Lane Configurations | | ↔ | | | ↔ | | | ↔ | ↔ | | ↔ | |
| Traffic Volume (vph) | 17 | 17 | 14 | 74 | 68 | 90 | 12 | 574 | 29 | 54 | 894 | 34 |
| Future Volume (vph) | 17 | 17 | 14 | 74 | 68 | 90 | 12 | 574 | 29 | 54 | 894 | 34 |
| Satd. Flow (prot) | 0 | 1640 | 0 | 0 | 1611 | 0 | 0 | 1743 | 1483 | 0 | 3251 | 0 |
| Fit Permitted | | 0.830 | | | 0.875 | | | 0.976 | | | 0.885 | |
| Satd. Flow (perm) | 0 | 1381 | 0 | 0 | 1431 | 0 | 0 | 1703 | 1441 | 0 | 2885 | 0 |
| Satd. Flow (RTOR) | | 14 | | | 33 | | | 47 | | | 6 | |
| Lane Group Flow (vph) | 0 | 48 | 0 | 0 | 232 | 0 | 0 | 586 | 29 | 0 | 982 | 0 |
| Turn Type | Perm | NA | | Perm | NA | | Perm | NA | Perm | Perm | NA | |
| Protected Phases | | 4 | | | 8 | | | 2 | | 2 | 6 | |
| Permitted Phases | 4 | | | 8 | | | 2 | | 2 | 6 | | |
| Detector Phase | 4 | 4 | | 8 | 8 | | 2 | 2 | 2 | 6 | 6 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 10.0 | 10.0 | | 10.0 | 10.0 | | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | |
| Minimum Split (s) | 31.1 | 31.1 | | 31.1 | 31.1 | | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | |
| Total Split (s) | 33.0 | 33.0 | | 33.0 | 33.0 | | 62.0 | 62.0 | 62.0 | 62.0 | 62.0 | |
| Total Split (%) | 34.7% | 34.7% | | 34.7% | 34.7% | | 65.3% | 65.3% | 65.3% | 65.3% | 65.3% | |
| Yellow Time (s) | 3.0 | 3.0 | | 3.0 | 3.0 | | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | |
| All-Red Time (s) | 4.1 | 4.1 | | 4.1 | 4.1 | | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | |
| Lost Time Adjust (s) | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Lost Time (s) | | 7.1 | | | 7.1 | | | 6.2 | 6.2 | | 6.2 | |
| Lead/Lag | | | | | | | | | | | | |
| Lead-Lag Optimize? | | | | | | | | | | | | |
| Recall Mode | None | None | | None | None | | C-Max | C-Max | C-Max | C-Max | C-Max | |
| Act Effct Green (s) | | 18.6 | | | 18.6 | | | 63.1 | 63.1 | | 63.1 | |
| Actuated g/C Ratio | | 0.20 | | | 0.20 | | | 0.66 | 0.66 | | 0.66 | |
| v/c Ratio | | 0.17 | | | 0.76 | | | 0.52 | 0.03 | | 0.51 | |
| Control Delay | | 23.6 | | | 45.9 | | | 11.3 | 1.3 | | 10.1 | |
| Queue Delay | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Delay | | 23.6 | | | 45.9 | | | 11.3 | 1.3 | | 10.1 | |
| LOS | | C | | | D | | | B | A | | B | |
| Approach Delay | | 23.6 | | | 45.9 | | | 10.9 | | | 10.1 | |
| Approach LOS | | C | | | D | | | B | | | B | |
| Queue Length 50th (m) | | 5.2 | | | 34.7 | | | 49.3 | 0.0 | | 42.9 | |
| Queue Length 95th (m) | | 13.1 | | | 54.7 | | | 93.7 | 2.1 | | 72.1 | |
| Internal Link Dist (m) | | 145.0 | | | 146.3 | | | 187.2 | | | 22.4 | |
| Turn Bay Length (m) | | | | | | | | | | | | |
| Base Capacity (vph) | | 386 | | | 414 | | | 1131 | 973 | | 1919 | |
| Starvation Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Spillback Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Storage Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Reduced v/c Ratio | | 0.12 | | | 0.56 | | | 0.52 | 0.03 | | 0.51 | |


| Intersection Summary | |
|------------------------|---|
| Cycle Length: | 95 |
| Actuated Cycle Length: | 95 |
| Offset: | 10 (11%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green |
| Natural Cycle: | 65 |
| Control Type: | Actuated-Coordinated |

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Background
PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.76 | Intersection LOS: B |
| Intersection Signal Delay: 15.1 | ICU Level of Service F |
| Intersection Capacity Utilization 96.5% | |
| Analysis Period (min) 15 | |

Splits and Phases: 6: Deer Park Rd/Dynes Rd & Fisher Ave



Lanes, Volumes, Timings

2034 Future Background

8: Prince of Wales Dr & Baseline Rd/Heron Rd

PM Peak Hour

| | ↖ | → | ↘ | ↙ | ← | ↖ | ↙ | ↘ | ↙ | ↘ | ↙ | ↘ |
|------------------------|--------|-------|-----|--------|--------|--------|-------|--------|-----|-------|-------|-----|
| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
| Lane Configurations | ↖ | ↕ | ↘ | ↖ | ↕ | ↘ | ↖ | ↕ | ↘ | ↖ | ↕ | ↘ |
| Traffic Volume (vph) | 107 | 389 | 125 | 303 | 1194 | 445 | 79 | 1429 | 102 | 106 | 647 | 155 |
| Future Volume (vph) | 107 | 389 | 125 | 303 | 1194 | 445 | 79 | 1429 | 102 | 106 | 647 | 155 |
| Satd. Flow (prot) | 1658 | 3153 | 0 | 1658 | 3316 | 1483 | 1610 | 3273 | 0 | 3185 | 3195 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1647 | 3153 | 0 | 1622 | 3316 | 1413 | 1596 | 3273 | 0 | 3166 | 3195 | 0 |
| Satd. Flow (RTOR) | | | | | | | | | | | | |
| Lane Group Flow (vph) | 107 | 514 | 0 | 303 | 1194 | 445 | 79 | 1531 | 0 | 106 | 802 | 0 |
| Turn Type | Prot | NA | | Prot | NA | Perm | Prot | NA | | Prot | NA | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | | | | 6 | | | | | | |
| Detector Phase | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | | 5.0 | 10.0 | 10.0 | 12.0 | 12.0 | | 5.0 | 10.0 | |
| Minimum Split (s) | 11.8 | 29.5 | | 11.8 | 29.5 | 29.5 | 17.9 | 37.8 | | 10.9 | 37.8 | |
| Total Split (s) | 14.0 | 31.0 | | 31.0 | 48.0 | 48.0 | 18.0 | 57.0 | | 11.0 | 50.0 | |
| Total Split (%) | 10.8% | 23.8% | | 23.8% | 36.9% | 36.9% | 13.8% | 43.8% | | 8.5% | 38.5% | |
| Yellow Time (s) | 3.7 | 3.7 | | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | | 3.7 | 3.7 | |
| All-Red Time (s) | 3.1 | 2.8 | | 3.1 | 2.8 | 2.8 | 2.2 | 3.1 | | 2.2 | 3.1 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.8 | 6.5 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | | 5.9 | 6.8 | |
| Lead/Lag | | | | | | | Lead | Lag | | Lead | Lag | |
| Lead-Lag Optimize? | | | | | | | Yes | Yes | | Yes | Yes | |
| Recall Mode | None | C-Max | | None | C-Max | C-Max | Min | Min | | None | None | |
| Act Effct Green (s) | 7.2 | 24.5 | | 24.2 | 41.5 | 41.5 | 12.0 | 50.2 | | 5.1 | 43.3 | |
| Actuated g/C Ratio | 0.06 | 0.19 | | 0.19 | 0.32 | 0.32 | 0.09 | 0.39 | | 0.04 | 0.33 | |
| v/c Ratio | 1.18 | 0.87 | | 0.98 | 1.13 | 0.99 | 0.53 | 1.21 | | 0.85 | 0.75 | |
| Control Delay | 126.9 | 63.8 | | 100.0 | 110.9 | 83.4 | 70.1 | 138.8 | | 110.7 | 44.1 | |
| Queue Delay | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Delay | 126.9 | 63.8 | | 100.0 | 110.9 | 83.4 | 70.1 | 138.8 | | 110.7 | 44.1 | |
| LOS | F | E | | F | F | F | E | F | | F | D | |
| Approach Delay | | 74.6 | | | 102.9 | | | 135.5 | | | 51.9 | |
| Approach LOS | | E | | | F | | | F | | | D | |
| Queue Length 50th (m) | ~32.7 | 74.0 | | 78.1 | ~186.2 | 113.2 | 19.6 | ~251.8 | | 14.1 | 96.0 | |
| Queue Length 95th (m) | m#28.5 | m#7.1 | | #135.5 | #228.2 | #180.7 | 36.2 | #294.4 | | #31.1 | 119.8 | |
| Internal Link Dist (m) | | 794.8 | | | 323.7 | | | 145.3 | | | 127.9 | |
| Turn Bay Length (m) | 125.0 | | | 118.0 | | 184.0 | 117.0 | | | 74.0 | | |
| Base Capacity (vph) | 91 | 594 | | 308 | 1058 | 451 | 149 | 1263 | | 124 | 1063 | |
| Starvation Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Reduced v/c Ratio | 1.18 | 0.87 | | 0.98 | 1.13 | 0.99 | 0.53 | 1.21 | | 0.85 | 0.75 | |

Intersection Summary

| |
|---|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 150 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings


2034 Future Background

8: Prince of Wales Dr & Baseline Rd/Heron Rd

PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.21 | Intersection LOS: F |
| Intersection Signal Delay: 100.6 | ICU Level of Service H |
| Intersection Capacity Utilization 112.2% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 8: Prince of Wales Dr & Baseline Rd/Heron Rd



Appendix I

TDM Checklist

TDM Measures Checklist:
Non-Residential Developments (office, institutional, retail or industrial)

| Legend | |
|--------|--|
| BASIC | The measure is generally feasible and effective, and in most cases would benefit the development and its users |
| BETTER | The measure could maximize support for users of sustainable modes, and optimize development performance |
| ★ | The measure is one of the most dependably effective tools to encourage the use of sustainable modes |

| TDM measures: <i>Non-residential developments</i> | | Check if proposed & add descriptions |
|---|---|--------------------------------------|
| 1. TDM PROGRAM MANAGEMENT | | |
| 1.1 Program coordinator | | |
| BASIC | ★ 1.1.1 Designate an internal coordinator, or contract with an external coordinator | <input type="checkbox"/> |
| 1.2 Travel surveys | | |
| BETTER | 1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress | <input type="checkbox"/> |
| 2. WALKING AND CYCLING | | |
| 2.1 Information on walking/cycling routes & destinations | | |
| BASIC | 2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances | <input checked="" type="checkbox"/> |
| 2.2 Bicycle skills training | | |
| <i>Commuter travel</i> | | |
| BETTER | ★ 2.2.1 Offer on-site cycling courses for commuters, or subsidize off-site courses | <input type="checkbox"/> |
| 2.3 Valet bike parking | | |
| <i>Visitor travel</i> | | |
| BETTER | 2.3.1 Offer secure valet bike parking during public events when demand exceeds fixed supply (e.g. for festivals, concerts, games) | <input type="checkbox"/> |

| TDM measures: <i>Non-residential developments</i> | | Check if proposed & add descriptions |
|---|---|--------------------------------------|
| 3. TRANSIT | | |
| 3.1 Transit information | | |
| BASIC | 3.1.1 Display relevant transit schedules and route maps at entrances | <input checked="" type="checkbox"/> |
| BASIC | 3.1.2 Provide online links to OC Transpo and STO information | <input type="checkbox"/> |
| BETTER | 3.1.3 Provide real-time arrival information display at entrances | <input type="checkbox"/> |
| 3.2 Transit fare incentives | | |
| <i>Commuter travel</i> | | |
| BETTER | 3.2.1 Offer preloaded PRESTO cards to encourage commuters to use transit | <input type="checkbox"/> |
| BETTER | ★ 3.2.2 Subsidize or reimburse monthly transit pass purchases by employees | <input type="checkbox"/> |
| <i>Visitor travel</i> | | |
| BETTER | 3.2.3 Arrange inclusion of same-day transit fare in price of tickets (e.g. for festivals, concerts, games) | <input type="checkbox"/> |
| 3.3 Enhanced public transit service | | |
| <i>Commuter travel</i> | | |
| BETTER | 3.3.1 Contract with OC Transpo to provide enhanced transit services (e.g. for shift changes, weekends) | <input type="checkbox"/> |
| <i>Visitor travel</i> | | |
| BETTER | 3.3.2 Contract with OC Transpo to provide enhanced transit services (e.g. for festivals, concerts, games) | <input type="checkbox"/> |
| 3.4 Private transit service | | |
| <i>Commuter travel</i> | | |
| BETTER | 3.4.1 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for shift changes, weekends) | <input type="checkbox"/> |
| <i>Visitor travel</i> | | |
| BETTER | 3.4.2 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for festivals, concerts, games) | <input type="checkbox"/> |

| TDM measures: <i>Non-residential developments</i> | | Check if proposed & add descriptions |
|---|---|--------------------------------------|
| 4. RIDESHARING | | |
| 4.1 Ridematching service | | |
| <i>Commuter travel</i> | | |
| BASIC ★ | 4.1.1 Provide a dedicated ridematching portal at OttawaRideMatch.com | <input type="checkbox"/> |
| 4.2 Carpool parking price incentives | | |
| <i>Commuter travel</i> | | |
| BETTER | 4.2.1 Provide discounts on parking costs for registered carpools | <input type="checkbox"/> |
| 4.3 Vanpool service | | |
| <i>Commuter travel</i> | | |
| BETTER | 4.3.1 Provide a vanpooling service for long-distance commuters | <input type="checkbox"/> |
| 5. CARSHARING & BIKESHARING | | |
| 5.1 Bikeshare stations & memberships | | |
| BETTER | 5.1.1 Contract with provider to install on-site bikeshare station for use by commuters and visitors | <input type="checkbox"/> |
| <i>Commuter travel</i> | | |
| BETTER | 5.1.2 Provide employees with bikeshare memberships for local business travel | <input type="checkbox"/> |
| 5.2 Carshare vehicles & memberships | | |
| <i>Commuter travel</i> | | |
| BETTER | 5.2.1 Contract with provider to install on-site carshare vehicles and promote their use by tenants | <input type="checkbox"/> |
| BETTER | 5.2.2 Provide employees with carshare memberships for local business travel | <input type="checkbox"/> |
| 6. PARKING | | |
| 6.1 Priced parking | | |
| <i>Commuter travel</i> | | |
| BASIC ★ | 6.1.1 Charge for long-term parking (daily, weekly, monthly) | <input checked="" type="checkbox"/> |
| BASIC | 6.1.2 Unbundle parking cost from lease rates at multi-tenant sites | <input checked="" type="checkbox"/> |
| <i>Visitor travel</i> | | |
| BETTER | 6.1.3 Charge for short-term parking (hourly) | <input type="checkbox"/> |

| TDM measures: <i>Non-residential developments</i> | | Check if proposed & add descriptions |
|---|---|--------------------------------------|
| 7. TDM MARKETING & COMMUNICATIONS | | |
| 7.1 Multimodal travel information | | |
| <i>Commuter travel</i> | | |
| BASIC ★ | 7.1.1 Provide a multimodal travel option information package to new/relocating employees and students | <input checked="" type="checkbox"/> |
| <i>Visitor travel</i> | | |
| BETTER ★ | 7.1.2 Include multimodal travel option information in invitations or advertising that attract visitors or customers (e.g. for festivals, concerts, games) | <input type="checkbox"/> |
| 7.2 Personalized trip planning | | |
| <i>Commuter travel</i> | | |
| BETTER ★ | 7.2.1 Offer personalized trip planning to new/relocating employees | <input type="checkbox"/> |
| 7.3 Promotions | | |
| <i>Commuter travel</i> | | |
| BETTER | 7.3.1 Deliver promotions and incentives to maintain awareness, build understanding, and encourage trial of sustainable modes | <input type="checkbox"/> |
| 8. OTHER INCENTIVES & AMENITIES | | |
| 8.1 Emergency ride home | | |
| <i>Commuter travel</i> | | |
| BETTER ★ | 8.1.1 Provide emergency ride home service to non-driving commuters | <input type="checkbox"/> |
| 8.2 Alternative work arrangements | | |
| <i>Commuter travel</i> | | |
| BASIC ★ | 8.2.1 Encourage flexible work hours | <input type="checkbox"/> |
| BETTER | 8.2.2 Encourage compressed workweeks | <input type="checkbox"/> |
| BETTER ★ | 8.2.3 Encourage telework | <input type="checkbox"/> |
| 8.3 Local business travel options | | |
| <i>Commuter travel</i> | | |
| BASIC ★ | 8.3.1 Provide local business travel options that minimize the need for employees to bring a personal car to work | <input type="checkbox"/> |
| 8.4 Commuter incentives | | |
| <i>Commuter travel</i> | | |
| BETTER | 8.4.1 Offer employees a taxable, mode-neutral commuting allowance | <input type="checkbox"/> |
| 8.5 On-site amenities | | |
| <i>Commuter travel</i> | | |
| BETTER | 8.5.1 Provide on-site amenities/services to minimize mid-day or mid-commute errands | <input type="checkbox"/> |

TDM Measures Checklist:
Residential Developments (multi-family, condominium or subdivision)

| Legend | |
|---------------|--|
| BASIC | The measure is generally feasible and effective, and in most cases would benefit the development and its users |
| BETTER | The measure could maximize support for users of sustainable modes, and optimize development performance |
| ★ | The measure is one of the most dependably effective tools to encourage the use of sustainable modes |

| TDM measures: Residential developments | | Check if proposed & add descriptions |
|---|---|--------------------------------------|
| 1. TDM PROGRAM MANAGEMENT | | |
| 1.1 Program coordinator | | |
| BASIC ★ | 1.1.1 Designate an internal coordinator, or contract with an external coordinator | <input type="checkbox"/> |
| 1.2 Travel surveys | | |
| BETTER | 1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress | <input type="checkbox"/> |
| 2. WALKING AND CYCLING | | |
| 2.1 Information on walking/cycling routes & destinations | | |
| BASIC | 2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances (<i>multi-family, condominium</i>) | <input checked="" type="checkbox"/> |
| 2.2 Bicycle skills training | | |
| BETTER | 2.2.1 Offer on-site cycling courses for residents, or subsidize off-site courses | <input type="checkbox"/> |

| TDM measures: Residential developments | | Check if proposed & add descriptions |
|---|--|---|
| 3. TRANSIT | | |
| 3.1 Transit information | | |
| BASIC | 3.1.1 Display relevant transit schedules and route maps at entrances (<i>multi-family, condominium</i>) | <input checked="" type="checkbox"/> |
| BETTER | 3.1.2 Provide real-time arrival information display at entrances (<i>multi-family, condominium</i>) | <input checked="" type="checkbox"/> |
| 3.2 Transit fare incentives | | |
| BASIC ★ | 3.2.1 Offer PRESTO cards preloaded with one monthly transit pass on residence purchase/move-in, to encourage residents to use transit | <input type="checkbox"/> |
| BETTER | 3.2.2 Offer at least one year of free monthly transit passes on residence purchase/move-in | <input checked="" type="checkbox"/> For each residential unit |
| 3.3 Enhanced public transit service | | |
| BETTER ★ | 3.3.1 Contract with OC Transpo to provide early transit services until regular services are warranted by occupancy levels (<i>subdivision</i>) | <input type="checkbox"/> |
| 3.4 Private transit service | | |
| BETTER | 3.4.1 Provide shuttle service for seniors homes or lifestyle communities (e.g. scheduled mall or supermarket runs) | <input type="checkbox"/> |
| 4. CARSHARING & BIKESHARING | | |
| 4.1 Bikeshare stations & memberships | | |
| BETTER | 4.1.1 Contract with provider to install on-site bikeshare station (<i>multi-family</i>) | <input checked="" type="checkbox"/> |
| BETTER | 4.1.2 Provide residents with bikeshare memberships, either free or subsidized (<i>multi-family</i>) | <input type="checkbox"/> |
| 4.2 Carshare vehicles & memberships | | |
| BETTER | 4.2.1 Contract with provider to install on-site carshare vehicles and promote their use by residents | <input checked="" type="checkbox"/> |
| BETTER | 4.2.2 Provide residents with carshare memberships, either free or subsidized | <input type="checkbox"/> |
| 5. PARKING | | |
| 5.1 Priced parking | | |
| BASIC ★ | 5.1.1 Unbundle parking cost from purchase price (<i>condominium</i>) | <input checked="" type="checkbox"/> |
| BASIC ★ | 5.1.2 Unbundle parking cost from monthly rent (<i>multi-family</i>) | <input checked="" type="checkbox"/> |

| TDM measures: <i>Residential developments</i> | | Check if proposed & add descriptions |
|---|---|--------------------------------------|
| 6. TDM MARKETING & COMMUNICATIONS | | |
| 6.1 Multimodal travel information | | |
| BASIC ★ | 6.1.1 Provide a multimodal travel option information package to new residents | <input checked="" type="checkbox"/> |
| 6.2 Personalized trip planning | | |
| BETTER ★ | 6.2.1 Offer personalized trip planning to new residents | <input type="checkbox"/> |

Appendix J

Synchro Intersection Worksheets – 2034 Future Total Conditions

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total
AM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|-------|---------|-------|--------|-------|------|-------|-------|-----|
| Lane Configurations | ↔ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ |
| Traffic Volume (vph) | 123 | 1290 | 157 | 39 | 1103 | 141 | 237 | 516 | 107 | 132 | 399 | 93 |
| Future Volume (vph) | 123 | 1290 | 157 | 39 | 1103 | 141 | 237 | 516 | 107 | 132 | 399 | 93 |
| Satd. Flow (prot) | 1658 | 3252 | 1469 | 1642 | 3252 | 1455 | 1658 | 3154 | 0 | 1658 | 3091 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1653 | 3252 | 1132 | 1582 | 3252 | 1409 | 1593 | 3154 | 0 | 1652 | 3091 | 0 |
| Satd. Flow (RTOR) | | | | | | | | | | | | |
| Lane Group Flow (vph) | 123 | 1290 | 157 | 39 | 1103 | 141 | 237 | 623 | 0 | 132 | 492 | 0 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Prot | NA | | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | 2 | | | 6 | | | | | | |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | | 5.0 | 10.0 | |
| Minimum Split (s) | 11.3 | 41.2 | 41.2 | 11.3 | 41.2 | 41.2 | 10.9 | 41.3 | | 10.9 | 41.3 | |
| Total Split (s) | 16.2 | 53.0 | 53.0 | 11.3 | 48.1 | 48.1 | 24.4 | 43.7 | | 22.0 | 41.3 | |
| Total Split (%) | 12.5% | 40.8% | 40.8% | 8.7% | 37.0% | 37.0% | 18.8% | 33.6% | | 16.9% | 31.8% | |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | | 3.3 | 3.3 | |
| All-Red Time (s) | 2.6 | 2.5 | 2.5 | 2.6 | 2.5 | 2.5 | 2.6 | 3.0 | | 2.6 | 3.0 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.3 | 6.2 | 6.2 | 6.3 | 6.2 | 6.2 | 5.9 | 6.3 | | 5.9 | 6.3 | |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | | Lead | Lag | |
| Lead-Lag Optimize? | Yes | Yes | Yes | None | Yes | Yes | Yes | Yes | | Yes | Yes | |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | | None | None | |
| Act Effct Green (s) | 13.4 | 54.5 | 54.5 | 6.4 | 45.1 | 45.1 | 18.5 | 32.6 | | 14.2 | 28.3 | |
| Actuated g/C Ratio | 0.10 | 0.42 | 0.42 | 0.05 | 0.35 | 0.35 | 0.14 | 0.25 | | 0.11 | 0.22 | |
| v/c Ratio | 0.72 | 0.95 | 0.33 | 0.48 | 0.98 | 0.29 | 1.01 | 0.79 | | 0.73 | 0.73 | |
| Control Delay | 80.4 | 52.3 | 30.8 | 60.8 | 88.5 | 65.6 | 116.0 | 53.0 | | 78.9 | 53.5 | |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Delay | 80.4 | 52.3 | 30.8 | 60.8 | 88.5 | 65.6 | 116.0 | 53.0 | | 78.9 | 53.5 | |
| LOS | F | D | C | E | F | E | F | D | | E | D | |
| Approach Delay | | 52.3 | | | 85.1 | | | 70.4 | | | 58.9 | |
| Approach LOS | | D | | | F | | | E | | | E | |
| Queue Length 50th (m) | 30.1 | ~186.8 | 28.6 | 10.3 | ~167.2 | 37.7 | ~62.0 | 80.2 | | 32.8 | 62.3 | |
| Queue Length 95th (m) | #71.3 | #239.6 | 49.4 | m12.9 | m#168.6 | m41.2 | #114.5 | 95.5 | | #55.0 | 76.1 | |
| Internal Link Dist (m) | | 271.5 | | | 796.1 | | | 86.9 | | | 158.3 | |
| Turn Bay Length (m) | 124.5 | | 100.0 | 134.0 | | 91.5 | | 65.0 | | | | |
| Base Capacity (vph) | 170 | 1363 | 474 | 81 | 1129 | 489 | 235 | 907 | | 205 | 832 | |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Reduced v/c Ratio | 0.72 | 0.95 | 0.33 | 0.48 | 0.98 | 0.29 | 1.01 | 0.69 | | 0.64 | 0.59 | |

Intersection Summary


| |
|---|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 135 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.01 | Intersection LOS: E |
| Intersection Signal Delay: 66.6 | ICU Level of Service G |
| Intersection Capacity Utilization 104.1% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 1: Fisher Ave & Baseline Rd



HCM Signalized Intersection Capacity Analysis
1: Fisher Ave & Baseline Rd

2034 Future Total
AM Peak Hour

| Movement | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|-----------------------------------|-------|--------|------|------|---------------------------|------|-------|-------|------|------|------|------|
| Lane Configurations | ↔ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ |
| Traffic Volume (vph) | 123 | 1290 | 157 | 39 | 1103 | 141 | 237 | 516 | 107 | 132 | 399 | 93 |
| Future Volume (vph) | 123 | 1290 | 157 | 39 | 1103 | 141 | 237 | 516 | 107 | 132 | 399 | 93 |
| Ideal Flow (vphpl) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |
| Total Lost time (s) | 6.3 | 6.2 | 6.2 | 6.3 | 6.2 | 6.2 | 5.9 | 6.3 | 5.9 | 6.3 | 6.3 | 6.3 |
| Lane Util. Factor | 1.00 | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | 0.95 | 1.00 | 0.95 |
| Frbp, ped/bikes | 1.00 | 1.00 | 0.77 | 1.00 | 1.00 | 0.97 | 1.00 | 0.99 | 1.00 | 0.98 | 1.00 | 0.98 |
| Ftpb, ped/bikes | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Frt | 1.00 | 1.00 | 0.85 | 1.00 | 1.00 | 0.85 | 1.00 | 0.97 | 1.00 | 0.97 | 1.00 | 0.97 |
| Fit Protected | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | 0.95 | 1.00 | 0.95 | 1.00 |
| Satd. Flow (prot) | 1658 | 3252 | 1133 | 1642 | 3252 | 1410 | 1658 | 3153 | 1658 | 3089 | 1658 | 3089 |
| Fit Permitted | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | 0.95 | 1.00 | 0.95 | 1.00 |
| Satd. Flow (perm) | 1658 | 3252 | 1133 | 1642 | 3252 | 1410 | 1658 | 3153 | 1658 | 3089 | 1658 | 3089 |
| Peak-hour factor, PHF | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Adj. Flow (vph) | 123 | 1290 | 157 | 39 | 1103 | 141 | 237 | 516 | 107 | 132 | 399 | 93 |
| RTOR Reduction (vph) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Lane Group Flow (vph) | 123 | 1290 | 157 | 39 | 1103 | 141 | 237 | 623 | 0 | 132 | 492 | 0 |
| Confl. Peds. (#/hr) | 9 | 150 | 150 | 12 | 10 | 10 | 9 | 69 | 8 | 8 | 69 | 69 |
| Confl. Bikes (#/hr) | | | | | | | | | | | | 11 |
| Heavy Vehicles (%) | 2% | 4% | 3% | 3% | 4% | 4% | 2% | 4% | 2% | 5% | 5% | 2% |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Prot | NA | Prot | NA |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | 2 | | | 6 | | | | | | |
| Actuated Green, G (s) | 13.4 | 53.2 | 53.2 | 5.3 | 45.1 | 45.1 | 18.5 | 32.6 | | 14.2 | 28.3 | |
| Effective Green, g (s) | 13.4 | 53.2 | 53.2 | 5.3 | 45.1 | 45.1 | 18.5 | 32.6 | | 14.2 | 28.3 | |
| Actuated g/C Ratio | 0.10 | 0.41 | 0.41 | 0.04 | 0.35 | 0.35 | 0.14 | 0.25 | | 0.11 | 0.22 | |
| Clearance Time (s) | 6.3 | 6.2 | 6.2 | 6.3 | 6.2 | 6.2 | 5.9 | 6.3 | | 5.9 | 6.3 | |
| Vehicle Extension (s) | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | | 3.0 | 3.0 | |
| Lane Grp Cap (vph) | 170 | 1330 | 463 | 66 | 1128 | 489 | 235 | 790 | | 181 | 672 | |
| v/s Ratio Prot | c0.07 | c0.40 | | 0.02 | 0.34 | | c0.14 | c0.20 | | 0.08 | 0.16 | |
| v/s Ratio Perm | | | 0.14 | | | 0.10 | | | | | | |
| v/c Ratio | 0.72 | 0.97 | 0.34 | 0.59 | 0.98 | 0.29 | 1.01 | 0.79 | | 0.73 | 0.73 | |
| Uniform Delay, d1 | 56.5 | 37.6 | 26.3 | 61.3 | 42.0 | 30.8 | 55.8 | 45.5 | | 56.0 | 47.3 | |
| Progression Factor | 1.00 | 1.00 | 1.00 | 0.83 | 1.88 | 1.99 | 1.00 | 1.00 | | 1.00 | 1.00 | |
| Incremental Delay, d2 | 14.1 | 18.5 | 2.0 | 6.4 | 13.7 | 0.7 | 60.9 | 5.3 | | 13.7 | 4.1 | |
| Delay (s) | 70.6 | 56.1 | 28.3 | 57.5 | 92.5 | 62.0 | 116.7 | 50.7 | | 69.7 | 51.4 | |
| Level of Service | E | E | C | E | F | E | F | D | | E | D | |
| Approach Delay (s) | | 54.4 | | | 88.1 | | | 68.9 | | | 55.3 | |
| Approach LOS | | D | | | F | | | E | | | E | |
| Intersection Summary | | | | | | | | | | | | |
| HCM 2000 Control Delay | | 67.4 | | | HCM 2000 Level of Service | | | | | | E | |
| HCM 2000 Volume to Capacity ratio | | 0.96 | | | | | | | | | | |
| Actuated Cycle Length (s) | | 130.0 | | | Sum of lost time (s) | | | | | | 24.7 | |
| Intersection Capacity Utilization | | 104.1% | | | ICU Level of Service | | | | | | G | |
| Analysis Period (min) | | 15 | | | | | | | | | | |
| c Critical Lane Group | | | | | | | | | | | | |

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Total
AM Peak Hour


| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|---|-------|-------|-----|-------|-------|-----|-------|-------|-------|-------|-------|-----|
| Lane Configurations | | ↕ | | | ↕ | | | ↕ | | | ↕ | |
| Traffic Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 672 | 171 | 61 | 558 | 5 |
| Future Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 672 | 171 | 61 | 558 | 5 |
| Satd. Flow (prot) | 0 | 1634 | 0 | 0 | 1576 | 0 | 0 | 1710 | 1483 | 0 | 3292 | 0 |
| Fit Permitted | | 0.851 | | | 0.843 | | | 0.993 | | | 0.799 | |
| Satd. Flow (perm) | 0 | 1402 | 0 | 0 | 1284 | 0 | 0 | 1699 | 1281 | 0 | 2644 | 0 |
| Satd. Flow (RTOR) | | 9 | | | 56 | | | 171 | | | 1 | |
| Lane Group Flow (vph) | 0 | 138 | 0 | 0 | 228 | 0 | 0 | 680 | 171 | 0 | 624 | 0 |
| Turn Type | Perm | NA | | Perm | NA | | Perm | NA | Perm | Perm | NA | |
| Protected Phases | | 4 | | | 8 | | | 2 | | 2 | 6 | |
| Permitted Phases | 4 | | | 8 | | | 2 | | 2 | 6 | | |
| Detector Phase | 4 | 4 | | 8 | 8 | | 2 | 2 | 2 | 6 | 6 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 10.0 | 10.0 | | 10.0 | 10.0 | | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | |
| Minimum Split (s) | 31.1 | 31.1 | | 31.1 | 31.1 | | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | |
| Total Split (s) | 33.0 | 33.0 | | 33.0 | 33.0 | | 47.0 | 47.0 | 47.0 | 47.0 | 47.0 | |
| Total Split (%) | 41.3% | 41.3% | | 41.3% | 41.3% | | 58.8% | 58.8% | 58.8% | 58.8% | 58.8% | |
| Yellow Time (s) | 3.0 | 3.0 | | 3.0 | 3.0 | | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | |
| All-Red Time (s) | 4.1 | 4.1 | | 4.1 | 4.1 | | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | |
| Lost Time Adjust (s) | | 0.0 | | | 0.0 | | | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | | 7.1 | | | 7.1 | | | 6.2 | | 6.2 | 6.2 | |
| Lead/Lag | | | | | | | | | | | | |
| Lead-Lag Optimize? | | | | | | | | | | | | |
| Recall Mode | None | None | | None | None | | C-Max | C-Max | C-Max | C-Max | C-Max | |
| Act Effct Green (s) | | 19.2 | | | 19.2 | | | 47.5 | 47.5 | | 47.5 | |
| Actuated g/C Ratio | | 0.24 | | | 0.24 | | | 0.59 | 0.59 | | 0.59 | |
| v/c Ratio | | 0.40 | | | 0.65 | | | 0.67 | 0.21 | | 0.40 | |
| Control Delay | | 25.7 | | | 28.3 | | | 17.1 | 2.4 | | 10.8 | |
| Queue Delay | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Delay | | 25.7 | | | 28.3 | | | 17.1 | 2.4 | | 10.8 | |
| LOS | | C | | | C | | | B | A | | B | |
| Approach Delay | | 25.7 | | | 28.3 | | | 14.2 | | | 10.8 | |
| Approach LOS | | C | | | C | | | B | | | B | |
| Queue Length 50th (m) | | 15.0 | | | 21.2 | | | 75.0 | 0.0 | | 28.4 | |
| Queue Length 95th (m) | | 29.0 | | | 42.2 | | | 121.3 | 8.4 | | 41.6 | |
| Internal Link Dist (m) | | 152.1 | | | 156.9 | | | 172.3 | | | 30.0 | |
| Turn Bay Length (m) | | | | | | | | | | | | |
| Base Capacity (vph) | | 459 | | | 453 | | | 1008 | 830 | | 1570 | |
| Starvation Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Spillback Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Storage Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Reduced v/c Ratio | | 0.30 | | | 0.50 | | | 0.67 | 0.21 | | 0.40 | |
| Intersection Summary | | | | | | | | | | | | |
| Cycle Length: 80 | | | | | | | | | | | | |
| Actuated Cycle Length: 80 | | | | | | | | | | | | |
| Offset: 78 (98%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green | | | | | | | | | | | | |
| Natural Cycle: 70 | | | | | | | | | | | | |
| Control Type: Actuated-Coordinated | | | | | | | | | | | | |

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Total
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.67 | Intersection LOS: B |
| Intersection Signal Delay: 15.6 | ICU Level of Service F |
| Intersection Capacity Utilization 94.2% | |
| Analysis Period (min) 15 | |

Splits and Phases: 6: Deer Park Rd/Dynes Rd & Fisher Ave



HCM Signalized Intersection Capacity Analysis
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Total
AM Peak Hour

| Movement | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|-----------------------------------|------|------|------|-------|------|------|------|---------------------------|------|------|------|------|
| Lane Configurations | | ↔ | | | ↔ | | | ↔ | ↔ | | ↔ | |
| Traffic Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 672 | 171 | 61 | 558 | 5 |
| Future Volume (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 672 | 171 | 61 | 558 | 5 |
| Ideal Flow (vphpl) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |
| Total Lost time (s) | | 7.1 | | | 7.1 | | | 6.2 | 6.2 | | 6.2 | |
| Lane Util. Factor | | 1.00 | | | 1.00 | | | 1.00 | 1.00 | | 0.95 | |
| Frbp, ped/bikes | | 0.98 | | | 0.98 | | | 1.00 | 0.86 | | 1.00 | |
| Fipb, ped/bikes | | 0.99 | | | 0.95 | | | 1.00 | 1.00 | | 1.00 | |
| Frt | | 0.98 | | | 0.94 | | | 1.00 | 0.85 | | 1.00 | |
| Flt Protected | | 0.99 | | | 0.98 | | | 1.00 | 1.00 | | 1.00 | |
| Satd. Flow (prot) | | 1626 | | | 1498 | | | 1710 | 1281 | | 3284 | |
| Flt Permitted | | 0.85 | | | 0.84 | | | 0.99 | 1.00 | | 0.80 | |
| Satd. Flow (perm) | | 1403 | | | 1286 | | | 1698 | 1281 | | 2635 | |
| Peak-hour factor, PHF | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Adj. Flow (vph) | 38 | 83 | 17 | 83 | 41 | 104 | 8 | 672 | 171 | 61 | 558 | 5 |
| RTOR Reduction (vph) | 0 | 7 | 0 | 0 | 43 | 0 | 0 | 0 | 69 | 0 | 0 | 0 |
| Lane Group Flow (vph) | 0 | 131 | 0 | 0 | 185 | 0 | 0 | 680 | 102 | 0 | 624 | 0 |
| Confl. Peds. (#/hr) | 32 | | 171 | 171 | | 32 | 43 | | 47 | 47 | | 43 |
| Confl. Bikes (#/hr) | | | | | | | | | 2 | | | 4 |
| Heavy Vehicles (%) | 2% | 2% | 12% | 2% | 2% | 2% | 2% | 4% | 2% | 2% | 2% | 2% |
| Turn Type | Perm | NA | | Perm | NA | | Perm | NA | Perm | Perm | NA | |
| Protected Phases | | 4 | | | 8 | | | 2 | | 6 | | |
| Permitted Phases | 4 | | | 8 | | | 2 | | 2 | 6 | | |
| Actuated Green, G (s) | | 19.2 | | | 19.2 | | | 47.5 | 47.5 | | 47.5 | |
| Effective Green, g (s) | | 19.2 | | | 19.2 | | | 47.5 | 47.5 | | 47.5 | |
| Actuated g/C Ratio | | 0.24 | | | 0.24 | | | 0.59 | 0.59 | | 0.59 | |
| Clearance Time (s) | | 7.1 | | | 7.1 | | | 6.2 | 6.2 | | 6.2 | |
| Vehicle Extension (s) | | 3.0 | | | 3.0 | | | 3.0 | 3.0 | | 3.0 | |
| Lane Grp Cap (vph) | | 336 | | | 308 | | | 1008 | 760 | | 1564 | |
| v/s Ratio Prot | | | | | | | | | | | | |
| v/s Ratio Perm | | 0.09 | | | 0.14 | | | 0.40 | 0.08 | | 0.24 | |
| v/c Ratio | | 0.39 | | | 0.60 | | | 0.67 | 0.13 | | 0.40 | |
| Uniform Delay, d1 | | 25.5 | | | 27.0 | | | 11.0 | 7.2 | | 8.6 | |
| Progression Factor | | 1.00 | | | 1.00 | | | 1.00 | 1.00 | | 1.00 | |
| Incremental Delay, d2 | | 0.8 | | | 3.3 | | | 3.6 | 0.4 | | 0.8 | |
| Delay (s) | | 26.2 | | | 30.3 | | | 14.6 | 7.5 | | 9.4 | |
| Level of Service | | C | | | C | | | B | A | | A | |
| Approach Delay (s) | | 26.2 | | | 30.3 | | | 13.2 | | | 9.4 | |
| Approach LOS | | C | | | C | | | B | | | A | |
| Intersection Summary | | | | | | | | | | | | |
| HCM 2000 Control Delay | | | | 15.0 | | | | HCM 2000 Level of Service | | | B | |
| HCM 2000 Volume to Capacity ratio | | | | 0.65 | | | | | | | | |
| Actuated Cycle Length (s) | | | | 80.0 | | | | Sum of lost time (s) | | | 13.3 | |
| Intersection Capacity Utilization | | | | 94.2% | | | | ICU Level of Service | | | F | |
| Analysis Period (min) | | | | 15 | | | | | | | | |
| c Critical Lane Group | | | | | | | | | | | | |

Lanes, Volumes, Timings

2034 Future Total

8: Prince of Wales Dr & Baseline Rd/Heron Rd

AM Peak Hour

| | ↖ | | → | | ↗ | | ↖ | | ← | | ↗ | | ↖ | | ↘ | | ↙ | |
|------------------------|--------|--------|-----|--------|--------|--------|-------|--------|-----|-------|-------|-----|---|--|---|--|---|--|
| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR | | | | | | |
| Lane Configurations | ↖ | ↕ | ↗ | ↖ | ↕ | ↗ | ↖ | ↕ | ↗ | ↖ | ↕ | ↗ | | | | | | |
| Traffic Volume (vph) | 209 | 556 | 142 | 225 | 1025 | 546 | 72 | 1134 | 166 | 221 | 394 | 86 | | | | | | |
| Future Volume (vph) | 209 | 556 | 142 | 225 | 1025 | 546 | 72 | 1134 | 166 | 221 | 394 | 86 | | | | | | |
| Satd. Flow (prot) | 1658 | 3156 | 0 | 1610 | 3283 | 1483 | 1658 | 3237 | 0 | 3216 | 3216 | 0 | | | | | | |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | | | | | | | |
| Satd. Flow (perm) | 1654 | 3156 | 0 | 1567 | 3283 | 1445 | 1652 | 3237 | 0 | 3205 | 3216 | 0 | | | | | | |
| Satd. Flow (RTOR) | | | | | | | | | | | | | | | | | | |
| Lane Group Flow (vph) | 209 | 698 | 0 | 225 | 1025 | 546 | 72 | 1300 | 0 | 221 | 480 | 0 | | | | | | |
| Turn Type | Prot | NA | | Prot | NA | Perm | Prot | NA | | Prot | NA | | | | | | | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | | | | | | | |
| Permitted Phases | | | | | | 6 | | | | | | | | | | | | |
| Detector Phase | 5 | 2 | | 1 | 6 | 6 | 7 | 4 | | 3 | 8 | | | | | | | |
| Switch Phase | | | | | | | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | | 5.0 | 10.0 | 10.0 | 5.0 | 12.0 | | 5.0 | 12.0 | | | | | | | |
| Minimum Split (s) | 11.8 | 29.5 | | 11.8 | 29.8 | 29.8 | 10.9 | 37.8 | | 10.9 | 37.8 | | | | | | | |
| Total Split (s) | 20.0 | 40.0 | | 26.0 | 46.0 | 46.0 | 20.4 | 51.0 | | 13.0 | 43.6 | | | | | | | |
| Total Split (%) | 15.4% | 30.8% | | 20.0% | 35.4% | 35.4% | 15.7% | 39.2% | | 10.0% | 33.5% | | | | | | | |
| Yellow Time (s) | 3.7 | 3.0 | | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | | 3.7 | 3.7 | | | | | | | |
| All-Red Time (s) | 3.1 | 2.8 | | 3.1 | 2.8 | 2.8 | 2.2 | 3.1 | | 2.2 | 3.1 | | | | | | | |
| Lost Time Adjust (s) | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | | | | | | | |
| Total Lost Time (s) | 6.8 | 5.8 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | | 5.9 | 6.8 | | | | | | | |
| Lead/Lag | | | | | | | Lead | Lag | | Lead | Lag | | | | | | | |
| Lead-Lag Optimize? | | | | | | | Yes | Yes | | Yes | Yes | | | | | | | |
| Recall Mode | None | C-Max | | None | C-Max | C-Max | None | Min | | None | Min | | | | | | | |
| Act Effct Green (s) | 13.2 | 34.2 | | 19.2 | 39.5 | 39.5 | 10.8 | 44.2 | | 7.1 | 43.0 | | | | | | | |
| Actuated g/C Ratio | 0.10 | 0.26 | | 0.15 | 0.30 | 0.30 | 0.08 | 0.34 | | 0.05 | 0.33 | | | | | | | |
| v/c Ratio | 1.24 | 0.84 | | 0.95 | 1.03 | 1.24 | 0.53 | 1.18 | | 1.26 | 0.45 | | | | | | | |
| Control Delay | 170.3 | 72.1 | | 101.6 | 80.2 | 166.3 | 70.1 | 129.8 | | 204.0 | 37.3 | | | | | | | |
| Queue Delay | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | | | | | | | |
| Total Delay | 170.3 | 72.1 | | 101.6 | 80.2 | 166.3 | 70.1 | 129.8 | | 204.0 | 37.3 | | | | | | | |
| LOS | F | E | | F | F | F | E | F | | F | D | | | | | | | |
| Approach Delay | | 94.8 | | | 109.1 | | | 126.7 | | | 89.9 | | | | | | | |
| Approach LOS | | F | | | F | | | F | | | F | | | | | | | |
| Queue Length 50th (m) | ~68.7 | 100.9 | | 57.9 | ~147.4 | ~173.8 | 18.0 | ~210.0 | | ~36.5 | 52.5 | | | | | | | |
| Queue Length 95th (m) | m#81.6 | m108.7 | | #107.1 | #188.5 | #241.3 | 32.9 | #252.3 | | #62.3 | 71.9 | | | | | | | |
| Internal Link Dist (m) | | 796.1 | | | 320.4 | | | 142.9 | | | 135.6 | | | | | | | |
| Turn Bay Length (m) | 125.0 | | | 118.0 | | 184.0 | 117.0 | | | 74.0 | | | | | | | | |
| Base Capacity (vph) | 168 | 830 | | 237 | 997 | 439 | 184 | 1100 | | 175 | 1063 | | | | | | | |
| Starvation Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | | | | | | | |
| Spillback Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | | | | | | | |
| Storage Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | | | | | | | |
| Reduced v/c Ratio | 1.24 | 0.84 | | 0.95 | 1.03 | 1.24 | 0.39 | 1.18 | | 1.26 | 0.45 | | | | | | | |

Intersection Summary

| |
|---|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 145 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings


2034 Future Total

8: Prince of Wales Dr & Baseline Rd/Heron Rd

AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.26 | Intersection LOS: F |
| Intersection Signal Delay: 108.6 | ICU Level of Service H |
| Intersection Capacity Utilization 109.3% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 8: Prince of Wales Dr & Baseline Rd/Heron Rd



HCM Signalized Intersection Capacity Analysis
8: Prince of Wales Dr & Baseline Rd/Heron Rd

2034 Future Total
AM Peak Hour

| Movement | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|------|------|-------|-------|-------|-------|-------|------|-------|------|------|
| Lane Configurations | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ |
| Traffic Volume (vph) | 209 | 556 | 142 | 225 | 1025 | 546 | 72 | 1134 | 166 | 221 | 394 | 86 |
| Future Volume (vph) | 209 | 556 | 142 | 225 | 1025 | 546 | 72 | 1134 | 166 | 221 | 394 | 86 |
| Ideal Flow (vphpl) | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 | 1800 |
| Total Lost time (s) | 6.8 | 5.8 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | | 5.9 | 6.8 | |
| Lane Util. Factor | 1.00 | 0.95 | | 1.00 | 0.95 | 1.00 | 1.00 | 0.95 | | 0.97 | 0.95 | |
| Frbp, ped/bikes | 1.00 | 0.98 | | 1.00 | 1.00 | 0.97 | 1.00 | 1.00 | | 1.00 | 1.00 | |
| Flpb, ped/bikes | 1.00 | 1.00 | | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | | 1.00 | 1.00 | |
| Frt | 1.00 | 0.97 | | 1.00 | 1.00 | 0.85 | 1.00 | 0.98 | | 1.00 | 0.97 | |
| Flt Protected | 0.95 | 1.00 | | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | | 0.95 | 1.00 | |
| Satd. Flow (prot) | 1658 | 3157 | | 1610 | 3283 | 1445 | 1658 | 3237 | | 3216 | 3216 | |
| Flt Permitted | 0.95 | 1.00 | | 0.95 | 1.00 | 1.00 | 0.95 | 1.00 | | 0.95 | 1.00 | |
| Satd. Flow (perm) | 1658 | 3157 | | 1610 | 3283 | 1445 | 1658 | 3237 | | 3216 | 3216 | |
| Peak-hour factor, PHF | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |
| Adj. Flow (vph) | 209 | 556 | 142 | 225 | 1025 | 546 | 72 | 1134 | 166 | 221 | 394 | 86 |
| RTOR Reduction (vph) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Lane Group Flow (vph) | 209 | 698 | 0 | 225 | 1025 | 546 | 72 | 1300 | 0 | 221 | 480 | 0 |
| Confl. Peds. (#/hr) | 6 | | 42 | 42 | | 6 | 5 | | 10 | 10 | | 5 |
| Confl. Bikes (#/hr) | | | 7 | | | 5 | | | 4 | | | |
| Heavy Vehicles (%) | 2% | 2% | 2% | 5% | 3% | 2% | 2% | 2% | 3% | 2% | 2% | 2% |
| Turn Type | Prot | NA | | Prot | NA | Perm | Prot | NA | | Prot | NA | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | | | 6 | | | | | | | |
| Actuated Green, G (s) | 13.2 | 33.0 | | 19.2 | 38.3 | 38.3 | 9.5 | 45.4 | | 7.1 | 43.0 | |
| Effective Green, g (s) | 13.2 | 33.0 | | 19.2 | 38.3 | 38.3 | 9.5 | 45.4 | | 7.1 | 43.0 | |
| Actuated g/C Ratio | 0.10 | 0.25 | | 0.15 | 0.29 | 0.29 | 0.07 | 0.35 | | 0.05 | 0.33 | |
| Clearance Time (s) | 6.8 | 5.8 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | | 5.9 | 6.8 | |
| Vehicle Extension (s) | 3.0 | 3.0 | | 3.0 | 3.0 | 3.0 | 3.0 | 3.0 | | 3.0 | 3.0 | |
| Lane Grp Cap (vph) | 168 | 801 | | 237 | 967 | 425 | 121 | 1130 | | 175 | 1063 | |
| v/s Ratio Prot | 0.13 | 0.22 | | c0.14 | 0.31 | | 0.04 | c0.40 | | c0.07 | 0.15 | |
| v/s Ratio Perm | | | | | c0.38 | | | | | | | |
| v/c Ratio | 1.24 | 0.87 | | 0.95 | 1.06 | 1.28 | 0.60 | 1.15 | | 1.26 | 0.45 | |
| Uniform Delay, d1 | 58.4 | 46.5 | | 54.9 | 45.9 | 45.9 | 58.4 | 42.3 | | 61.5 | 34.2 | |
| Progression Factor | 0.84 | 1.49 | | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | | 1.00 | 1.00 | |
| Incremental Delay, d2 | 129.0 | 5.7 | | 44.0 | 46.2 | 145.0 | 7.6 | 78.2 | | 155.8 | 0.3 | |
| Delay (s) | 177.8 | 74.9 | | 98.9 | 92.1 | 190.9 | 66.0 | 120.5 | | 217.3 | 34.5 | |
| Level of Service | F | E | | F | F | F | E | F | | F | C | |
| Approach Delay (s) | 98.6 | | | 122.9 | | | 117.7 | | | 92.1 | | |
| Approach LOS | F | | | F | | | F | | | F | | |

| Intersection Summary | | | |
|-----------------------------------|--------|---------------------------|------|
| HCM 2000 Control Delay | 112.3 | HCM 2000 Level of Service | F |
| HCM 2000 Volume to Capacity ratio | 1.22 | | |
| Actuated Cycle Length (s) | 130.0 | Sum of lost time (s) | 26.0 |
| Intersection Capacity Utilization | 109.3% | ICU Level of Service | H |
| Analysis Period (min) | 15 | | |
| c Critical Lane Group | | | |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|--------|--------|-------|-------|-------|-----|-------|--------|-----|
| Lane Configurations | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ | ↔ | ↕ | ↔ |
| Traffic Volume (vph) | 82 | 1333 | 265 | 160 | 1278 | 179 | 175 | 402 | 104 | 154 | 676 | 148 |
| Future Volume (vph) | 82 | 1333 | 265 | 160 | 1278 | 179 | 175 | 402 | 104 | 154 | 676 | 148 |
| Satd. Flow (prot) | 1658 | 3283 | 1483 | 1642 | 3316 | 1483 | 1658 | 3176 | 0 | 1658 | 3138 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1650 | 3283 | 1136 | 1584 | 3316 | 1416 | 1617 | 3176 | 0 | 1643 | 3138 | 0 |
| Satd. Flow (RTOR) | | | | | | | | | | | | |
| Lane Group Flow (vph) | 82 | 1333 | 265 | 160 | 1278 | 179 | 175 | 506 | 0 | 154 | 824 | 0 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | | Prot | NA | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | 2 | | | 6 | | | | | | |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | | 5.0 | 10.0 | |
| Minimum Split (s) | 11.3 | 33.2 | 33.2 | 11.3 | 33.2 | 33.2 | 10.9 | 41.5 | | 10.9 | 41.5 | |
| Total Split (s) | 14.0 | 53.5 | 53.5 | 17.0 | 56.5 | 56.5 | 18.0 | 41.7 | | 17.8 | 41.5 | |
| Total Split (%) | 10.8% | 41.2% | 41.2% | 13.1% | 43.5% | 43.5% | 13.8% | 32.1% | | 13.7% | 31.9% | |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | | 3.3 | 3.3 | |
| All-Red Time (s) | 2.6 | 2.5 | 2.5 | 2.6 | 2.5 | 2.5 | 2.6 | 3.0 | | 2.6 | 3.0 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.3 | 6.2 | 6.2 | 6.3 | 6.2 | 6.2 | 5.9 | 6.3 | | 5.9 | 6.3 | |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lag | Lag | | Lead | Lead | |
| Lead-Lag Optimize? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | | None | None | |
| Act Effct Green (s) | 7.7 | 47.3 | 47.3 | 10.7 | 50.3 | 50.3 | 12.1 | 35.4 | | 11.9 | 35.2 | |
| Actuated g/C Ratio | 0.06 | 0.36 | 0.36 | 0.08 | 0.39 | 0.39 | 0.09 | 0.27 | | 0.09 | 0.27 | |
| v/c Ratio | 0.84 | 1.12 | 0.64 | 1.19 | 1.00 | 0.33 | 1.14 | 0.59 | | 1.02 | 0.97 | |
| Control Delay | 114.6 | 102.9 | 42.9 | 156.1 | 62.9 | 42.1 | 165.1 | 44.2 | | 136.1 | 71.6 | |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Delay | 114.6 | 102.9 | 42.9 | 156.1 | 62.9 | 42.1 | 165.1 | 44.2 | | 136.1 | 71.6 | |
| LOS | F | F | D | F | E | D | F | D | | F | E | |
| Approach Delay | 94.0 | | | 69.8 | | | 75.3 | | | 81.7 | | |
| Approach LOS | F | | | E | | | E | | | F | | |
| Queue Length 50th (m) | 21.2 | ~206.1 | 56.0 | ~50.2 | 131.2 | 33.6 | ~52.1 | 59.3 | | ~40.8 | 110.2 | |
| Queue Length 95th (m) | #50.5 | #248.3 | 87.1 | m#52.7 | m123.0 | m33.4 | #97.8 | 77.5 | | #84.7 | #151.3 | |
| Internal Link Dist (m) | | 192.5 | | 794.8 | | | 85.7 | | | | 126.1 | |
| Turn Bay Length (m) | 124.5 | | 100.0 | 134.0 | | 91.5 | 127.0 | | | 65.0 | | |
| Base Capacity (vph) | 98 | 1194 | 413 | 135 | 1283 | 547 | 154 | 864 | | 151 | 849 | |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Reduced v/c Ratio | 0.84 | 1.12 | 0.64 | 1.19 | 1.00 | 0.33 | 1.14 | 0.59 | | 1.02 | 0.97 | |


| Intersection Summary | |
|------------------------|---|
| Cycle Length: | 130 |
| Actuated Cycle Length: | 130 |
| Offset: | 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: | 150 |
| Control Type: | Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total
PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 1.19 | Intersection LOS: F |
| Intersection Signal Delay: 81.1 | ICU Level of Service G |
| Intersection Capacity Utilization 107.9% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |

Splits and Phases: 1: Fisher Ave & Baseline Rd



Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Total
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|-------|-----|-------|-------|-----|-------|-------|-------|-------|-------|-----|
| Lane Configurations | | ↔ | | | ↔ | | | ↔ | ↔ | | ↔ | ↔ |
| Traffic Volume (vph) | 17 | 17 | 14 | 74 | 68 | 90 | 12 | 579 | 29 | 54 | 900 | 34 |
| Future Volume (vph) | 17 | 17 | 14 | 74 | 68 | 90 | 12 | 579 | 29 | 54 | 900 | 34 |
| Satd. Flow (prot) | 0 | 1572 | 0 | 0 | 1609 | 0 | 0 | 1743 | 1483 | 0 | 3248 | 0 |
| Fit Permitted | | 0.836 | | | 0.875 | | | 0.976 | | | 0.885 | |
| Satd. Flow (perm) | 0 | 1331 | 0 | 0 | 1367 | 0 | 0 | 1703 | 1423 | 0 | 2883 | 0 |
| Satd. Flow (RTOR) | | 14 | | | 33 | | | 47 | | | 6 | |
| Lane Group Flow (vph) | 0 | 48 | 0 | 0 | 232 | 0 | 0 | 591 | 29 | 0 | 988 | 0 |
| Turn Type | Perm | NA | | Perm | NA | | Perm | NA | Perm | Perm | NA | |
| Protected Phases | | 4 | | | 8 | | | 2 | | | 6 | |
| Permitted Phases | 4 | | | 8 | | | 2 | | 2 | 6 | | |
| Detector Phase | 4 | 4 | | 8 | 8 | | 2 | 2 | 2 | 6 | 6 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 10.0 | 10.0 | | 10.0 | 10.0 | | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | |
| Minimum Split (s) | 31.1 | 31.1 | | 31.1 | 31.1 | | 27.2 | 27.2 | 27.2 | 27.2 | 27.2 | |
| Total Split (s) | 33.0 | 33.0 | | 33.0 | 33.0 | | 62.0 | 62.0 | 62.0 | 62.0 | 62.0 | |
| Total Split (%) | 34.7% | 34.7% | | 34.7% | 34.7% | | 65.3% | 65.3% | 65.3% | 65.3% | 65.3% | |
| Yellow Time (s) | 3.0 | 3.0 | | 3.0 | 3.0 | | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | |
| All-Red Time (s) | 4.1 | 4.1 | | 4.1 | 4.1 | | 2.9 | 2.9 | 2.9 | 2.9 | 2.9 | |
| Lost Time Adjust (s) | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Lost Time (s) | | 7.1 | | | 7.1 | | | 6.2 | 6.2 | | 6.2 | |
| Lead/Lag | | | | | | | | | | | | |
| Lead-Lag Optimize? | | | | | | | | | | | | |
| Recall Mode | None | None | | None | None | | C-Max | C-Max | C-Max | C-Max | C-Max | |
| Act Effct Green (s) | | 19.0 | | | 19.0 | | | 62.7 | 62.7 | | 62.7 | |
| Actuated g/C Ratio | | 0.20 | | | 0.20 | | | 0.66 | 0.66 | | 0.66 | |
| v/c Ratio | | 0.17 | | | 0.78 | | | 0.53 | 0.03 | | 0.52 | |
| Control Delay | | 23.4 | | | 47.5 | | | 11.7 | 1.3 | | 10.4 | |
| Queue Delay | | 0.0 | | | 0.0 | | | 0.0 | 0.0 | | 0.0 | |
| Total Delay | | 23.4 | | | 47.5 | | | 11.7 | 1.3 | | 10.4 | |
| LOS | | C | | | D | | | B | A | | B | |
| Approach Delay | | 23.4 | | | 47.5 | | | 11.2 | | | 10.4 | |
| Approach LOS | | C | | | D | | | B | | | B | |
| Queue Length 50th (m) | | 5.1 | | | 34.7 | | | 51.0 | 0.0 | | 44.3 | |
| Queue Length 95th (m) | | 13.2 | | | 55.5 | | | 94.7 | 2.1 | | 72.7 | |
| Internal Link Dist (m) | | 145.0 | | | 146.3 | | | 187.2 | | | 22.4 | |
| Turn Bay Length (m) | | | | | | | | | | | | |
| Base Capacity (vph) | | 373 | | | 396 | | | 1123 | 955 | | 1904 | |
| Starvation Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Spillback Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Storage Cap Reductn | | 0 | | | 0 | | | 0 | 0 | | 0 | |
| Reduced v/c Ratio | | 0.13 | | | 0.59 | | | 0.53 | 0.03 | | 0.52 | |

Intersection Summary


| |
|---|
| Cycle Length: 95 |
| Actuated Cycle Length: 95 |
| Offset: 10 (11%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green |
| Natural Cycle: 65 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings
6: Deer Park Rd/Dynes Rd & Fisher Ave

2034 Future Total
PM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.78 | Intersection LOS: B |
| Intersection Signal Delay: 15.5 | ICU Level of Service F |
| Intersection Capacity Utilization 98.1% | |
| Analysis Period (min) 15 | |

Splits and Phases: 6: Deer Park Rd/Dynes Rd & Fisher Ave



Lanes, Volumes, Timings
8: Prince of Wales Dr & Baseline Rd/Heron Rd

2034 Future Total
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|--------|-------|-----|--------|--------|--------|-------|--------|-----|-------|-------|-----|
| Lane Configurations | ↖ | ↗ | ↘ | ↖ | ↗ | ↘ | ↖ | ↗ | ↘ | ↖ | ↗ | ↘ |
| Traffic Volume (vph) | 110 | 394 | 125 | 303 | 1205 | 445 | 79 | 1429 | 102 | 106 | 647 | 160 |
| Future Volume (vph) | 110 | 394 | 125 | 303 | 1205 | 445 | 79 | 1429 | 102 | 106 | 647 | 160 |
| Satd. Flow (prot) | 1658 | 3114 | 0 | 1658 | 3316 | 1483 | 1610 | 3273 | 0 | 3185 | 3191 | 0 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1647 | 3114 | 0 | 1584 | 3316 | 1406 | 1596 | 3273 | 0 | 3166 | 3191 | 0 |
| Satd. Flow (RTOR) | | | | | | | | | | | | |
| Lane Group Flow (vph) | 110 | 519 | 0 | 303 | 1205 | 445 | 79 | 1531 | 0 | 106 | 807 | 0 |
| Turn Type | Prot | NA | | Prot | NA | Perm | Prot | NA | | Prot | NA | |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | | | | 6 | | | | | | |
| Detector Phase | 5 | 2 | | 1 | 6 | 6 | 7 | 4 | | 3 | 8 | |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | | 5.0 | 10.0 | 10.0 | 12.0 | 12.0 | | 5.0 | 10.0 | |
| Minimum Split (s) | 11.8 | 29.5 | | 11.8 | 29.5 | 29.5 | 17.9 | 37.8 | | 10.9 | 37.8 | |
| Total Split (s) | 14.0 | 31.0 | | 31.0 | 48.0 | 48.0 | 18.0 | 57.0 | | 11.0 | 50.0 | |
| Total Split (%) | 10.8% | 23.8% | | 23.8% | 36.9% | 36.9% | 13.8% | 43.8% | | 8.5% | 38.5% | |
| Yellow Time (s) | 3.7 | 3.7 | | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | | 3.7 | 3.7 | |
| All-Red Time (s) | 3.1 | 2.8 | | 3.1 | 2.8 | 2.8 | 2.2 | 3.1 | | 2.2 | 3.1 | |
| Lost Time Adjust (s) | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Lost Time (s) | 6.8 | 6.5 | | 6.8 | 6.5 | 6.5 | 5.9 | 6.8 | | 5.9 | 6.8 | |
| Lead/Lag | | | | | | | Lead | Lag | | Lead | Lag | |
| Lead-Lag Optimize? | | | | | | | Yes | Yes | | Yes | Yes | |
| Recall Mode | None | C-Max | | None | C-Max | C-Max | Min | Min | | None | None | |
| Act Effct Green (s) | 7.2 | 24.5 | | 24.2 | 41.5 | 41.5 | 12.0 | 50.2 | | 5.1 | 43.3 | |
| Actuated g/C Ratio | 0.06 | 0.19 | | 0.19 | 0.32 | 0.32 | 0.09 | 0.39 | | 0.04 | 0.33 | |
| v/c Ratio | 1.21 | 0.89 | | 0.98 | 1.14 | 0.99 | 0.53 | 1.21 | | 0.85 | 0.76 | |
| Control Delay | 140.7 | 63.1 | | 100.0 | 114.7 | 85.2 | 70.1 | 138.8 | | 110.7 | 44.3 | |
| Queue Delay | 0.0 | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 0.0 | 0.0 | |
| Total Delay | 140.7 | 63.1 | | 100.0 | 114.7 | 85.2 | 70.1 | 138.8 | | 110.7 | 44.3 | |
| LOS | F | E | | F | F | F | E | F | | F | D | |
| Approach Delay | | 76.7 | | | 105.7 | | | 135.5 | | | 52.0 | |
| Approach LOS | | E | | | F | | | F | | | D | |
| Queue Length 50th (m) | -34.2 | 74.7 | | 78.1 | -189.2 | 113.5 | 19.6 | -251.8 | | 14.1 | 96.8 | |
| Queue Length 95th (m) | m#32.2 | m69.1 | | #135.5 | #231.3 | #181.3 | 36.2 | #294.4 | | #31.1 | 121.1 | |
| Internal Link Dist (m) | | 794.8 | | | 323.7 | | | 145.3 | | | 127.9 | |
| Turn Bay Length (m) | 125.0 | | | 118.0 | | 184.0 | 117.0 | | | 74.0 | | |
| Base Capacity (vph) | 91 | 586 | | 308 | 1058 | 448 | 149 | 1263 | | 124 | 1061 | |
| Starvation Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Spillback Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Storage Cap Reductn | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | | 0 | 0 | |
| Reduced v/c Ratio | 1.21 | 0.89 | | 0.98 | 1.14 | 0.99 | 0.53 | 1.21 | | 0.85 | 0.76 | |

Intersection Summary

| |
|---|
| Cycle Length: 130 |
| Actuated Cycle Length: 130 |
| Offset: 0 (0%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: 150 |
| Control Type: Actuated-Coordinated |

Lanes, Volumes, Timings

8: Prince of Wales Dr & Baseline Rd/Heron Rd

2034 Future Total

PM Peak Hour

Maximum v/c Ratio: 1.21

Intersection Signal Delay: 101.9 Intersection LOS: F

Intersection Capacity Utilization 112.7% ICU Level of Service H


Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: Prince of Wales Dr & Baseline Rd/Heron Rd



Appendix K

Synchro Worksheets – Fisher Avenue at Baseline Road Without Baseline Rapid Transit

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total-without BRT
AM Peak Hour


| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|-------|--------|-------|-------|-------|-------|-------|-------|-------|
| Lane Configurations | ↔ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ | ↕ |
| Traffic Volume (vph) | 123 | 1290 | 159 | 45 | 1103 | 141 | 244 | 525 | 118 | 132 | 404 | 93 |
| Future Volume (vph) | 123 | 1290 | 159 | 45 | 1103 | 141 | 244 | 525 | 118 | 132 | 404 | 93 |
| Satd. Flow (prot) | 1658 | 3252 | 1469 | 1642 | 3252 | 1455 | 1658 | 3252 | 1483 | 1658 | 3221 | 1483 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1654 | 3252 | 1401 | 1633 | 3252 | 1416 | 1635 | 3252 | 1414 | 1650 | 3221 | 1418 |
| Satd. Flow (RTOR) | | | 180 | | | 232 | | | 181 | | | 231 |
| Lane Group Flow (vph) | 123 | 1290 | 159 | 45 | 1103 | 141 | 244 | 525 | 118 | 132 | 404 | 93 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | | 8 |
| Permitted Phases | | | 2 | | | 6 | | | 4 | | | 8 |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | 4 | 3 | 8 | 8 |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 |
| Minimum Split (s) | 11.3 | 29.1 | 29.1 | 11.3 | 29.1 | 29.1 | 10.9 | 30.3 | 30.3 | 10.9 | 30.3 | 30.3 |
| Total Split (s) | 26.0 | 56.0 | 56.0 | 13.0 | 43.0 | 43.0 | 30.7 | 38.0 | 38.0 | 23.0 | 30.3 | 30.3 |
| Total Split (%) | 20.0% | 43.1% | 43.1% | 10.0% | 33.1% | 33.1% | 23.6% | 29.2% | 29.2% | 17.7% | 23.3% | 23.3% |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 |
| All-Red Time (s) | 2.6 | 2.4 | 2.4 | 2.6 | 2.4 | 2.4 | 2.6 | 3.0 | 3.0 | 2.6 | 3.0 | 3.0 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 6.3 | 6.1 | 6.1 | 6.3 | 6.1 | 6.1 | 5.9 | 6.3 | 6.3 | 5.9 | 6.3 | 6.3 |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag |
| Lead-Lag Optimize? | Yes | Yes | Yes | None | C-Max | C-Max | None | None | None | None | None | None |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | None | None | None | None |
| Act Effct Green (s) | 14.7 | 57.2 | 57.2 | 7.1 | 47.2 | 47.2 | 22.6 | 29.0 | 29.0 | 14.5 | 20.9 | 20.9 |
| Actuated g/C Ratio | 0.11 | 0.44 | 0.44 | 0.05 | 0.36 | 0.36 | 0.17 | 0.22 | 0.22 | 0.11 | 0.16 | 0.16 |
| v/c Ratio | 0.66 | 0.90 | 0.22 | 0.51 | 0.93 | 0.21 | 0.85 | 0.72 | 0.26 | 0.71 | 0.78 | 0.22 |
| Control Delay | 71.1 | 45.5 | 3.3 | 81.0 | 30.5 | 8.6 | 77.5 | 52.8 | 2.0 | 76.5 | 63.1 | 1.2 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Delay | 71.1 | 45.5 | 3.3 | 81.0 | 30.5 | 8.6 | 77.5 | 52.8 | 2.0 | 76.5 | 63.1 | 1.2 |
| LOS | E | D | A | F | C | A | E | D | A | E | E | A |
| Approach Delay | | 43.2 | | | 29.9 | | | 52.8 | | | 56.8 | |
| Approach LOS | | D | | | C | | | D | | | E | |
| Queue Length 50th (m) | 30.6 | ~185.4 | 0.0 | 8.7 | 156.0 | 17.3 | 59.9 | 64.9 | 0.0 | 32.8 | 52.6 | 0.0 |
| Queue Length 95th (m) | 49.2 | #228.7 | 10.0 | m7.5 | m104.9 | m11.7 | #97.3 | 83.5 | 2.0 | 53.7 | 68.9 | 0.0 |
| Internal Link Dist (m) | | 115.4 | | | 156.7 | | | 86.9 | | | 100.0 | |
| Turn Bay Length (m) | 124.5 | | 58.5 | 134.0 | | 91.5 | | | 85.0 | 65.0 | | 60.0 |
| Base Capacity (vph) | 251 | 1429 | 716 | 92 | 1180 | 661 | 316 | 792 | 481 | 218 | 594 | 450 |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Reduced v/c Ratio | 0.49 | 0.90 | 0.22 | 0.49 | 0.93 | 0.21 | 0.77 | 0.66 | 0.25 | 0.61 | 0.68 | 0.21 |

| Intersection Summary | |
|------------------------|--|
| Cycle Length: | 130 |
| Actuated Cycle Length: | 130 |
| Offset: | 119 (92%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: | 115 |
| Control Type: | Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total-without BRT
AM Peak Hour

| | |
|---|------------------------|
| Maximum v/c Ratio: 0.93 | Intersection LOS: D |
| Intersection Signal Delay: 43.2 | ICU Level of Service F |
| Intersection Capacity Utilization 91.6% | |
| Analysis Period (min) 15 | |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |
| m Volume for 95th percentile queue is metered by upstream signal. | |



Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total-without BRT
PM Peak Hour

| Lane Group | EBL | EBT | EBR | WBL | WBT | WBR | NBL | NBT | NBR | SBL | SBT | SBR |
|------------------------|-------|--------|-------|-------|--------|-------|-------|-------|-------|-------|--------|-------|
| Lane Configurations | ↔ | ↕ | ↕ | ↔ | ↕ | ↕ | ↔ | ↕ | ↕ | ↔ | ↕ | ↕ |
| Traffic Volume (vph) | 82 | 1333 | 270 | 173 | 1278 | 179 | 182 | 410 | 114 | 154 | 686 | 148 |
| Future Volume (vph) | 82 | 1333 | 270 | 173 | 1278 | 179 | 182 | 410 | 114 | 154 | 686 | 148 |
| Satd. Flow (prot) | 1658 | 3283 | 1483 | 1642 | 3316 | 1483 | 1658 | 3316 | 1455 | 1658 | 3283 | 1483 |
| Fit Permitted | 0.950 | | | 0.950 | | | 0.950 | | | 0.950 | | |
| Satd. Flow (perm) | 1651 | 3283 | 1401 | 1631 | 3316 | 1425 | 1641 | 3316 | 1396 | 1640 | 3283 | 1390 |
| Satd. Flow (RTOR) | | | 147 | | | | 152 | | | 128 | | |
| Lane Group Flow (vph) | 82 | 1333 | 270 | 173 | 1278 | 179 | 182 | 410 | 114 | 154 | 686 | 148 |
| Turn Type | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm | Prot | NA | Perm |
| Protected Phases | 5 | 2 | | 1 | 6 | | 7 | 4 | | 3 | 8 | |
| Permitted Phases | | | 2 | | | 6 | | | 4 | | | 8 |
| Detector Phase | 5 | 2 | 2 | 1 | 6 | 6 | 7 | 4 | 4 | 3 | 8 | 8 |
| Switch Phase | | | | | | | | | | | | |
| Minimum Initial (s) | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 | 5.0 | 10.0 | 10.0 |
| Minimum Split (s) | 11.3 | 29.2 | 29.2 | 11.3 | 29.2 | 29.2 | 10.9 | 30.3 | 30.3 | 10.9 | 30.3 | 30.3 |
| Total Split (s) | 21.0 | 54.0 | 54.0 | 21.0 | 54.0 | 54.0 | 24.7 | 30.3 | 30.3 | 24.7 | 30.3 | 30.3 |
| Total Split (%) | 16.2% | 41.5% | 41.5% | 16.2% | 41.5% | 41.5% | 19.0% | 23.3% | 23.3% | 19.0% | 23.3% | 23.3% |
| Yellow Time (s) | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 |
| All-Red Time (s) | 2.6 | 2.4 | 2.4 | 2.6 | 2.4 | 2.4 | 2.6 | 3.0 | 3.0 | 2.6 | 3.0 | 3.0 |
| Lost Time Adjust (s) | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Lost Time (s) | 6.3 | 6.1 | 6.1 | 6.3 | 6.1 | 6.1 | 5.9 | 6.3 | 6.3 | 5.9 | 6.3 | 6.3 |
| Lead/Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag | Lead | Lag | Lag |
| Lead-Lag Optimize? | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Recall Mode | None | C-Max | C-Max | None | C-Max | C-Max | None | None | None | None | None | None |
| Act Effct Green (s) | 11.4 | 47.9 | 47.9 | 14.7 | 51.2 | 51.2 | 17.3 | 26.7 | 26.7 | 16.1 | 25.5 | 25.5 |
| Actuated g/C Ratio | 0.09 | 0.37 | 0.37 | 0.11 | 0.39 | 0.39 | 0.13 | 0.21 | 0.21 | 0.12 | 0.20 | 0.20 |
| v/c Ratio | 0.57 | 1.10 | 0.44 | 0.94 | 0.98 | 0.27 | 0.82 | 0.60 | 0.29 | 0.75 | 1.07 | 0.40 |
| Control Delay | 71.4 | 97.5 | 16.0 | 108.2 | 59.6 | 7.4 | 83.1 | 51.8 | 7.7 | 77.2 | 104.1 | 14.1 |
| Queue Delay | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| Total Delay | 71.4 | 97.5 | 16.0 | 108.2 | 59.6 | 7.4 | 83.1 | 51.8 | 7.7 | 77.2 | 104.1 | 14.1 |
| LOS | E | F | B | F | E | A | F | D | A | E | F | B |
| Approach Delay | | 83.2 | | | 59.0 | | | 52.7 | | | 86.4 | |
| Approach LOS | | F | | | E | | | D | | | F | |
| Queue Length 50th (m) | 20.5 | ~203.9 | 22.2 | 44.6 | 169.0 | 4.3 | 45.4 | 51.2 | 0.0 | 38.3 | ~107.2 | 4.3 |
| Queue Length 95th (m) | 36.4 | #246.2 | 46.5 | #87.9 | #228.8 | 20.1 | #79.4 | 69.6 | 12.6 | 60.8 | #145.3 | 23.3 |
| Internal Link Dist (m) | | 142.5 | | | 143.6 | | | 85.7 | | | 78.9 | |
| Turn Bay Length (m) | 124.5 | | 58.5 | 134.0 | | 91.5 | | | 85.0 | 65.0 | | 60.0 |
| Base Capacity (vph) | 187 | 1209 | 609 | 185 | 1305 | 653 | 239 | 681 | 388 | 239 | 643 | 374 |
| Starvation Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Spillback Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Storage Cap Reductn | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Reduced v/c Ratio | 0.44 | 1.10 | 0.44 | 0.94 | 0.98 | 0.27 | 0.76 | 0.60 | 0.29 | 0.64 | 1.07 | 0.40 |


| Intersection Summary | |
|------------------------|--|
| Cycle Length: | 130 |
| Actuated Cycle Length: | 130 |
| Offset: | 123 (95%), Referenced to phase 2:EBT and 6:WBT, Start of Green |
| Natural Cycle: | 135 |
| Control Type: | Actuated-Coordinated |

Lanes, Volumes, Timings
1: Fisher Ave & Baseline Rd

2034 Future Total-without BRT
PM Peak Hour

| | |
|---|--------|
| Maximum v/c Ratio: | 1.10 |
| Intersection Signal Delay: | 71.7 |
| Intersection Capacity Utilization: | 100.2% |
| Analysis Period (min): | 15 |
| Intersection LOS: | E |
| ICU Level of Service: | G |
| ~ Volume exceeds capacity, queue is theoretically infinite. | |
| Queue shown is maximum after two cycles. | |
| # 95th percentile volume exceeds capacity, queue may be longer. | |
| Queue shown is maximum after two cycles. | |

Splits and Phases: 1: Fisher Ave & Baseline Rd



Appendix L

MMLOS Analysis

Multi-Modal Level of Service - Intersections Form

| | | | |
|------------|-------------------------|---------|-----------|
| Consultant | CGH Transportation Inc. | Project | 2021-063 |
| Scenario | Existing/Future | Date | 5/30/2023 |
| Comments | | | |

| INTERSECTIONS | | Fisher Avenue at Baseline Road (Existing) | | | | Prince of Wales Drive at Baseline Road/Heron Road (Existing) | | | | Fisher Avenue at Baseline Road (Future) | | | | Prince of Wales Drive at Baseline Road/Heron Road (Future) | | | | Fisher Avenue at Deer Park Road/Dynes Road | | | | |
|--|-----------------------------------|---|----------------------------------|----------------------------------|-----------------------------------|--|----------------------------------|----------------------------------|-----------------------------------|---|-----------------------------------|-----------------------------------|-----------------------------------|--|-----------------------------------|-----------------------------------|-----------------------------------|--|-----------------------------------|-----------------------------------|------------------------------|------------------------------|
| Crossing Side | | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | |
| Pedestrian | Lanes | 6 | 7 | 6 | 7 | 7 | 6 | 9 | 9 | 7 | 9 | 10+ | 10+ | 7 | 7 | 9 | 9 | 5 | 5 | 3 | 3 | |
| | Median | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | Median > 2.4 m | Median > 2.4 m | Median > 2.4 m | Median > 2.4 m | Median > 2.4 m | Median > 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | No Median - 2.4 m | |
| | Conflicting Left Turns | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Protected | Permissive | Permissive | Permissive | Permissive | |
| | Conflicting Right Turns | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | Permissive or yield control | |
| | Right Turns on Red (RTOR) ? | RTOR allowed | RTOR allowed | RTOR allowed | RTOR allowed | RTOR allowed | RTOR allowed | RTOR allowed | RTOR allowed | RTOR allowed | RTOR prohibited | RTOR prohibited | RTOR prohibited | RTOR prohibited | RTOR prohibited | RTOR prohibited | RTOR prohibited | RTOR allowed | RTOR allowed | RTOR allowed | RTOR allowed | |
| | Ped Signal Leading Interval? | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No | No |
| | Corner Radius | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | Conventional with Receiving Lane | No Channel | No Channel | No Channel | No Channel | |
| | Corner Radius | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m | 15-25m |
| | Crosswalk Type | Std transverse markings | Std transverse markings | Std transverse markings | Std transverse markings | Std transverse markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Std transverse markings | Std transverse markings | Std transverse markings | Std transverse markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings | Zebra stripe hi-vis markings |
| | PETSI Score | 27 | 11 | 27 | 11 | 16 | 32 | -20 | -17 | 13 | -20 | -26 | -26 | 25 | 25 | -9 | -9 | 40 | 40 | 71 | 73 | |
| Ped. Exposure to Traffic LoS | F | F | F | F | F | E | #N/A | #N/A | #N/A | F | #N/A | #N/A | #N/A | F | F | F | F | E | E | C | C | |
| Cycle Length | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 130 | 95 | 95 | 95 | 95 | |
| Effective Walk Time | 7 | 7 | 21 | 34 | 10 | 10 | 11 | 19 | 9 | 7 | 28 | 31 | 10 | 10 | 11 | 19 | 83 | 83 | 76 | 76 | | |
| Average Pedestrian Delay | 58 | 58 | 46 | 36 | 55 | 55 | 54 | 47 | 56 | 58 | 40 | 38 | 55 | 55 | 54 | 47 | 1 | 1 | 2 | 2 | | |
| Pedestrian Delay LoS | E | E | E | D | E | E | E | E | E | E | E | E | D | E | E | E | E | A | A | A | A | |
| Level of Service | F | F | F | F | F | F | E | #N/A | #N/A | F | #N/A | #N/A | #N/A | F | F | F | F | E | E | C | C | |
| Approach From | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | NORTH | SOUTH | EAST | WEST | | |
| Bicycle Lane Arrangement on Approach | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Mixed Traffic | Mixed Traffic | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Mixed Traffic | Mixed Traffic | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | Curb Bike Lane, Cycletrack or MUP | | |
| Right Turn Lane Configuration | Not Applicable | Not Applicable | > 50 m | > 50 m | Not Applicable | Not Applicable | > 50 m | > 50 m | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | |
| Right Turning Speed | Not Applicable | Not Applicable | >25 km/h | >25 km/h | Not Applicable | Not Applicable | >25 km/h | >25 km/h | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | |
| Cyclist relative to RT motorists | Not Applicable | Not Applicable | F | F | Not Applicable | Not Applicable | F | F | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | Not Applicable | |
| Separated or Mixed Traffic | Separated | Separated | Mixed Traffic | Mixed Traffic | Separated | Separated | Mixed Traffic | Mixed Traffic | Separated | Separated | Separated | Separated | Separated | Separated | Separated | Separated | Separated | Separated | Separated | Separated | Separated | |
| Left Turn Approach | ≥ 2 lanes crossed | ≥ 2 lanes crossed | One lane crossed | One lane crossed | ≥ 2 lanes crossed | ≥ 2 lanes crossed | ≥ 2 lanes crossed | ≥ 2 lanes crossed | ≥ 2 lanes crossed | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | 2-stage, LT box | | |
| Operating Speed | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | ≥ 60 km/h | | |
| Left Turning Cyclist | F | F | F | F | F | F | F | F | F | A | A | A | A | A | A | A | A | A | A | A | | |
| Level of Service | F | F | F | F | F | F | F | F | F | A | A | A | A | A | A | A | A | A | A | A | | |
| Average Signal Delay | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | > 40 sec | ≤ 20 sec | ≤ 20 sec | - | - | |
| Level of Service | F | F | F | F | - | F | F | F | F | F | F | F | F | - | F | F | F | C | C | - | - | |
| Effective Corner Radius | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | > 15 m | - | - | - | - | |
| Number of Receiving Lanes on Departure from Intersection | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | ≥ 2 | - | - | - | - | |
| Level of Service | A | A | A | A | A | A | A | A | A | A | A | A | A | A | A | A | A | - | - | - | - | |
| Volume to Capacity Ratio | | > 1.00 | | | | > 1.00 | | | | | > 1.00 | | | | > 1.00 | | | | | 0.61 - 0.70 | | |
| Level of Service | | F | | | | F | | | | | F | | | | F | | | | | B | | |

Multi-Modal Level of Service - Segments Form

| | | | |
|------------|-------------------------|---------|-----------|
| Consultant | CGH Transportation Inc. | Project | 2021-083 |
| Scenario | Existing/Future | Date | 5/30/2023 |
| Comments | | | |

| SEGMENTS | | | Section | Section | Section |
|---|---|----------|------------------------|----------------------|--------------------|
| | | | Baseline Rd (Existing) | Baseline Rd (Future) | Fisher Ave |
| Pedestrian | Sidewalk Width | - | 1.5 m | ≥ 2 m | ≥ 2 m |
| | Boulevard Width | | 0.5 - 2 m | 0.5 - 2 m | < 0.5 |
| | Avg Daily Curb Lane Traffic Volume | | > 3000 | > 3000 | > 3000 |
| | Operating Speed | | > 60 km/h | > 60 km/h | > 50 to 60 km/h |
| | On-Street Parking | | no | no | no |
| | Exposure to Traffic PLoS | | E | E | E |
| | Effective Sidewalk Width | | | | |
| Pedestrian Volume | | | | | |
| Crowding PLoS | - | - | - | | |
| Level of Service | - | - | - | | |
| Bicycle | Type of Cycling Facility | C | Mixed Traffic | Physically Separated | Curbside Bike Lane |
| | Number of Travel Lanes | | 4-5 lanes total | | ≤ 1 each direction |
| | Operating Speed | | ≥ 60 km/h | | >50 to 70 km/h |
| | # of Lanes & Operating Speed LoS | | F | - | C |
| | Bike Lane (+ Parking Lane) Width | | | | ≥1.5 to <1.8 m |
| | Bike Lane Width LoS | | - | - | B |
| | Bike Lane Blockages | | | | Rare |
| | Blockage LoS | | - | - | A |
| | Median Refuge Width (no median = < 1.8 m) | | | | < 1.8 m refuge |
| | No. of Lanes at Unsignalized Crossing | | | | ≤ 3 lanes |
| Sidestreet Operating Speed | | | ≤ 40 km/h | | |
| Unsignalized Crossing - Lowest LoS | - | A | A | | |
| Level of Service | - | A | C | | |
| Transit | Facility Type | E | Mixed Traffic | Segregated ROW | Mixed Traffic |
| | Friction or Ratio Transit:Posted Speed | | Vt/Vp ≤ 0.6 | | Vt/Vp ≤ 0.6 |
| | Level of Service | | E | A | E |
| Truck | Truck Lane Width | C | > 3.7 m | ≤ 3.5 m | ≤ 3.3 m |
| | Travel Lanes per Direction | | > 1 | > 1 | > 1 |
| | Level of Service | | A | A | C |