



1299 Richmond Road

TIA Strategy Report

DRAFT

June 2023



TIA Plan Reports

On 14 June 2017, the Council of the City of Ottawa adopted new Transportation Impact Assessment (TIA) Guidelines. In adopting the guidelines, Council established a requirement for those preparing and delivering transportation impact assessments and reports to sign a letter of certification.

Individuals submitting TIA reports will be responsible for all aspects of development-related transportation assessment and reporting, and undertaking such work, in accordance and compliance with the City of Ottawa's Official Plan, the Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines.

By submitting the attached TIA report (and any associated documents) and signing this document, the individual acknowledges that s/he meets the four criteria listed below.

CERTIFICATION

1. I have reviewed and have a sound understanding of the objectives, needs and requirements of the City of Ottawa's Official Plan, Transportation Master Plan and the Transportation Impact Assessment (2017) Guidelines;
2. I have a sound knowledge of industry standard practice with respect to the preparation of transportation impact assessment reports, including multi modal level of service review;
3. I have substantial experience (more than 5 years) in undertaking and delivering transportation impact studies (analysis, reporting and geometric design) with strong background knowledge in transportation planning, engineering or traffic operations; and
4. I am either a licensed¹ or registered² professional in good standing, whose field of expertise [check appropriate field(s)] is either transportation engineering or transportation planning .

1,2 License of registration body that oversees the profession is required to have a code of conduct and ethics guidelines that will ensure appropriate conduct and representation for transportation planning and/or transportation engineering works.

City Of Ottawa
Infrastructure Services and Community
Sustainability
Planning and Growth Management
110 Laurier Avenue West, 4th fl.
Ottawa, ON K1P 1J1
Tel. : 613-580-2424
Fax: 613-560-6006

Ville d'Ottawa
Services d'infrastructure et Viabilité des
collectivités
Urbanisme et Gestion de la croissance
110, avenue Laurier Ouest
Ottawa (Ontario) K1P 1J1
Tél. : 613-580-2424
Télécopieur: 613-560-6006

Dated at Ottawa this 13 day of June, 2023
(City)

Name: Austin Shih, M.A.Sc., P.Eng
(Please Print)

Professional Title: Senior Transportation Engineer



Signature of Individual certifier that s/he meets the above four criteria

Office Contact Information (Please Print)
Address: 1223 Michael Street North, Suite 100
City / Postal Code: Ottawa, Ontario, K1J 7T2
Telephone / Extension: 613-691-1569
E-Mail Address: austin.shih@parsons.com



1299 Richmond Road

TIA Strategy Report

prepared for:
Brigil Construction
98 Lois Street
Gatineau, QC
J8Y 3R7

prepared by:
 **PARSONS**
1223 Michael Street North
Suite 100
Ottawa, ON K1J 7T2

June 13, 2023

478250-01000

DOCUMENT CONTROL PAGE

CLIENT:	Brigil Construction
PROJECT NAME:	1299 Richmond Road
REPORT TITLE:	TIA Step 4 Strategy Report
PARSONS PROJECT NO:	478250 - 01000
APPLICATION TYPE:	Zoning By-Law Amendment (ZBLA) and Site Plan Application (SPA)
VERSION:	Draft
DIGITAL MASTER:	\\XCCAN57FS01\Data\ISO\478250\1000\DOCS\STEP4-Strategy\1299 Richmond Rd - Strategy Report v2 - JLas.docx
ORIGINATOR	Juan Lavin, P.Eng.
REVIEWER:	Austin Shih, M.A.Sc., P.Eng.
AUTHORIZATION:	
CIRCULATION LIST:	Josiane Gervais, P.Eng.
HISTORY:	<ul style="list-style-type: none"> - TIA Step 1 Screening Form – June 27, 2022 - TIA Step 2 Scoping Report – June 27, 2022 - TIA Step 3 Forecasting Report – May 29, 2023 - TIA Step 4 Strategy Report – June 13, 2023

TABLE OF CONTENTS

1.0	SCREENING FORM	1
2.0	SCOPING REPORT	1
2.1.	EXISTING AND PLANNED CONDITIONS	1
2.1.1.	PROPOSED DEVELOPMENT.....	1
2.1.2.	EXISTING CONDITIONS.....	3
2.1.3.	PLANNED CONDITIONS	8
2.2.	STUDY AREA AND TIME PERIODS.....	12
2.3.	EXEMPTION REVIEW	12
3.0	FORECASTING	13
3.1.	DEVELOPMENT GENERATED TRAVEL DEMAND.....	13
3.1.1.	TRIP GENERATION AND MODE SHARES.....	13
3.1.2.	TRIP DISTRIBUTION AND ASSIGNMENT	15
3.2.	BACKGROUND NETWORK TRAFFIC.....	16
3.2.1.	TRANSPORTATION NETWORK PLANS.....	16
3.2.2.	BACKGROUND GROWTH	16
3.2.3.	OTHER DEVELOPMENTS	16
3.3.	DEMAND RATIONALIZATION	17
4.0	STRATEGY REPORT	19
4.1.	DEVELOPMENT DESIGN.....	19
4.1.1.	DESIGN FOR SUSTAINABLE MODES.....	19
4.1.2.	CIRCULATION AND ACCESS.....	20
4.1.3.	NEW STREETS NETWORK	21
4.2.	PARKING	21
4.2.1.	PARKING SUPPLY.....	21
4.2.2.	SPILOVER PARKING.....	22
4.3.	BOUNDARY STREET DESIGN	22
4.3.1.	EXISTING AND FUTURE CONDITIONS	22
4.4.	ACCESS INTERSECTION DESIGN	23
4.4.1.	LOCATION AND DESIGN OF ACCESS	23
4.4.2.	INTERSECTION CONTROL.....	24
4.4.3.	INTERSECTION DESIGN.....	24
4.5.	TRANSPORTATION DEMAND MANAGEMENT.....	24
4.5.1.	CONTEXT FOR TDM	24
4.5.2.	NEED AND OPPORTUNITY	24
4.5.3.	TDM PROGRAM	24
4.6.	NEIGHBORHOOD TRAFFIC MANAGEMENT	25
4.6.1.	ADJACENT NEIGHBORHOODS	25
4.7.	TRANSIT	25
4.7.1.	ROUTE CAPACITY.....	25
4.7.2.	TRANSIT PRIORITY.....	25
4.8.	REVIEW OF NETWORK CONCEPT	25

4.9. INTERSECTION DESIGN..... 26

 4.9.1. INTERSECTION CONTROL..... 26

 4.9.2. INTERSECTION DESIGN..... 26

5.0 FINDINGS AND RECOMMENDATIONS 29

LIST OF FIGURES

FIGURE 1: LOCAL CONTEXT1

FIGURE 2: PROPOSED SITE PLAN.....2

FIGURE 3: ADJACENT DRIVEWAYS WITHIN 200M OF SITE ACCESS5

FIGURE 4: STUDY AREA ACTIVE TRANSPORTATION FACILITIES5

FIGURE 5: AREA TRANSIT NETWORK.....6

FIGURE 6: BUS STOP LOCATIONS.....6

FIGURE 7: EXISTING PEAK HOUR TRAFFIC VOLUMES7

FIGURE 8: EXISTING PEDESTRIAN AND CYCLISTS PEAK HOUR VOLUMES7

FIGURE 9: LRT STAGE 2 EXPANSIONS MAP.....8

FIGURE 10: CARLING AVE PROPOSED BUS LANE.....9

FIGURE 11: STAGE 2 LRT STATION CONNECTIVITY ENHANCEMENT STUDY – LINCOLN FIELDS STATION 10

FIGURE 12: ULTIMATE CYCLING NETWORK MAP 11

FIGURE 13: STUDY AREA..... 12

FIGURE 14: SITE-GENERATED TRAFFIC..... 15

FIGURE 15: FUTURE BACKGROUND 2025 TRAFFIC VOLUMES 16

FIGURE 16: FUTURE BACKGROUND 2030 TRAFFIC VOLUMES 17

FIGURE 17: LRT STATIONS ALONG RICHMOND RD..... 18

FIGURE 18: TOTAL PROJECTED 2025 TRAFFIC VOLUMES 18

FIGURE 19: TOTAL PROJECTED 2030 TRAFFIC VOLUMES 19

FIGURE 20: WALKING ROUTES TO TRANSIT FACILITIES 20

FIGURE 21: SITE ACCESS AND CIRCULATION..... 21

LIST OF TABLES

TABLE 1: EXEMPTIONS REVIEW SUMMARY..... 12

TABLE 2: PROPOSED DEVELOPMENT TRIP RATES 13

TABLE 3: RESIDENTIAL UNITS PEAK PERIOD PERSON TRIP GENERATION..... 13

TABLE 4: HIGH-RISE APARTMENTS PEAK PERIOD TRIPS MODE SHARES BREAKDOWN 13

TABLE 5: PEAK PERIOD TO PEAK HOUR CONVERSION FACTORS (2020 TRANS MANUAL) 14

TABLE 6: HIGH-RISE APARTMENTS PEAK HOUR TRIPS MODE SHARE BREAKDOWN 14

TABLE 7: FUTURE MODE SHARE TARGETS FOR RESIDENTIAL TRIPS..... 14

TABLE 8: HIGH-RISE APARTMENTS PEAK HOUR TRIPS TOD MODE SHARE BREAKDOWN 15

TABLE 9: HIGH-RISE APARTMENTS MODE SHARES BREAKDOWN 15

TABLE 10: PROPOSED VEHICLE PARKING SPACE SUPPLY..... 22

TABLE 11: BICYCLE PARKING REQUIREMENTS..... 22

TABLE 12: MMLOS – BOUNDARY STREET SEGMENT EXISTING..... 23

TABLE 13: PROJECTED NUMBER OF UNITS ABOVE EXISTING ZONING 26

TABLE 14: MMLOS – EXISTING AND FUTURE ADJACENT SIGNALIZED INTERSECTIONS 27

TABLE 15: EXISTING INTERSECTION PERFORMANCE 27

TABLE 16: 2030 BACKGROUND INTERSECTION PERFORMANCE 28

TABLE 17: 2030 FULL BUILD-OUT INTERSECTION PERFORMANCE 28

LIST OF APPENDICES

APPENDIX A: SCREENING FORM AND SITE PLAN

APPENDIX B: TRANSIT ROUTE MAPS

APPENDIX C: TRAFFIC DATA

APPENDIX D: COLLISION DATA

APPENDIX E: LINCOLN FIELDS STATION FUTURE CONNECTIVITY PLAN

APPENDIX F: TRUCK TURNING TEMPLATES

APPENDIX G: MMLOS: ROAD SEGMENTS

APPENDIX H: TDM CHECKLISTS

APPENDIX I: ABOVE ZONING PEAK PERSON TRIP CALCULATIONS

APPENDIX J: MMLOS: INTERSECTIONS

APPENDIX K: SYNCHRO ANALYSIS: EXISTING INTERSECTION PERFORMANCE

APPENDIX L: SYNCHRO ANALYSIS: BACKGROUND INTERSECTION PERFORMANCE

APPENDIX M: SYNCHRO ANALYSIS: FUTURE PROJECTED INTERSECTION PERFORMANCE

DRAFT

STRATEGY REPORT

Parsons has been retained by Brigil Construction Inc. to prepare a TIA in support of a Zoning By-Law Amendment (ZBLA) and Site Plan Application (SPA) for a two-tower residential development. This document follows the TIA process as outlined in the City Transportation Impact Assessment (TIA) Guidelines (2017). The following report represents Step 4 – Strategy Report. The Screening Form and response to comments has been provided in **Appendix A**.

1.0 SCREENING FORM

The Screening Form confirmed the need for a TIA Report based on the trip generation and location triggers. The trip generation trigger was met as the development is anticipated to generate more than 60 person trips during peak hours. The location trigger was met given the development's location in the Richmond Arterial Mainstreet Design Priority Area (DPA) as well as within 600m of Lincoln Fields Station.

2.0 SCOPING REPORT

2.1. Existing and Planned Conditions


2.1.1. Proposed Development

The proposed development will be located at the municipal address of 1299 Richmond Rd and will be replacing the existing commercial building and surface parking lot. The site is bounded by Richmond Rd to the south, Assaly Rd to the west and Starflower Ln to the north and east. The proposed development is anticipated to consist of a 28-storey and a 32-storey high residential towers and a shared 5-storey podium. The buildings will consist of a total of 590 apartment units with 748 m² (8,046 ft²) ground floor retail space. Access to a three-level underground parking garage is located along Starflower Ave on the north side of the building, with a total of 248 vehicle parking spaces. The buildout date of the development is assumed to be 2025. The site is currently zoned as Arterial Mainstreet (AM10). The local context of the site is illustrated in **Figure 1** and the concept plan is provided in the following pages as **Figure 2** (high quality plan in **Appendix A**).

Figure 1: Local Context



Figure 2: Proposed Site Plan

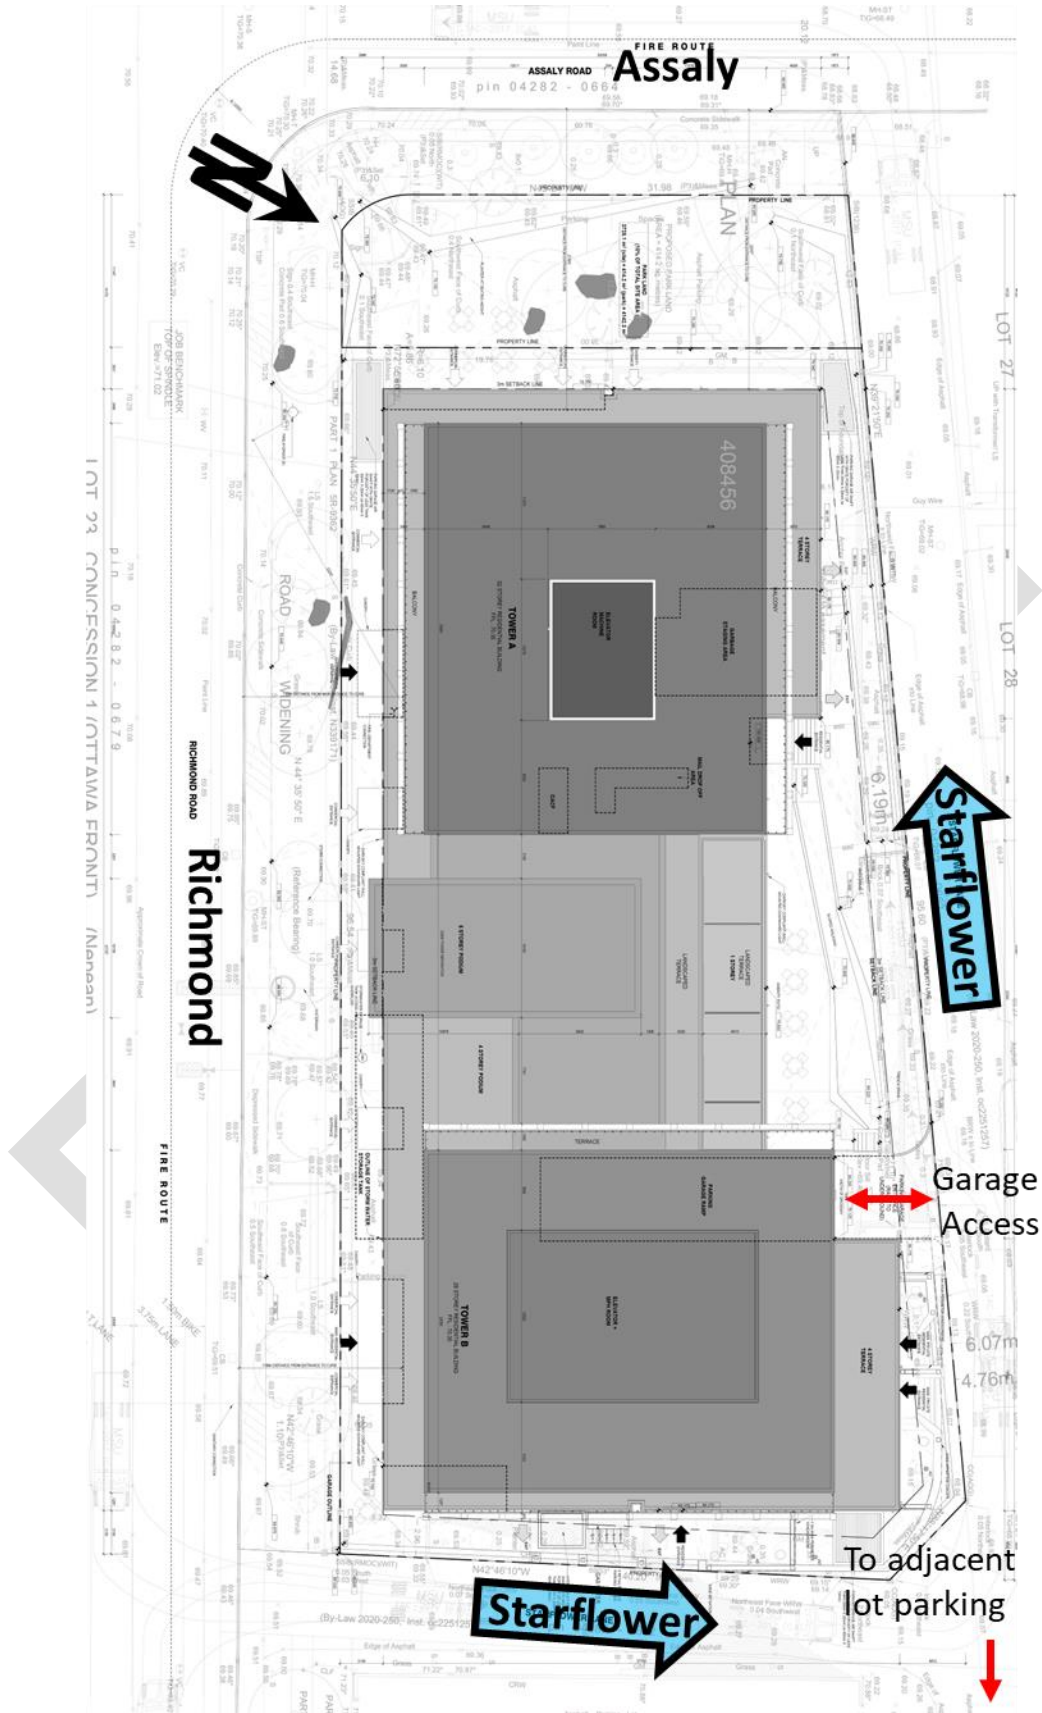

2.1.2. Existing Conditions

Area Road Network

The following roads were included in the TIA. Description for each road within the study area has been provided below.

Richmond Rd is an east-west municipal arterial road that extends from Baseline Rd in the west (where it continues west as Robertson Rd) to Island Park Dr in the east (where it continues east as Wellington St W). Within the study area, the roadway consists of a two-lane cross-section, with sidewalks on both sides of the road and on-street parking on the north side of the road at the site frontage. Bike lanes are provided on the north side of the road, with a cycle track on the south side. The posted speed limit is 50 km/h. Richmond Rd provides access to the site in existing conditions.

Assaly Rd is a short north-south municipal local road that extends from Regina St in the north to Richmond Rd in the south. The roadway consists of a two-lane cross-section with sidewalks on both sides of the road and an unposted assumed speed limit of 50km/h.

Starflower Ln is a municipal local one-way road that extends from Richmond Rd along the site frontage, turns west and continues in this direction beyond the property limits to Croydon Ave. The roadway consists of a one-lane cross-section with 6m right of way and pavement width, with a posted speed limit of 20km/h. Starflower Ln currently provides access to a variety of uses including residential homes and apartments as well as commercial retail uses.

Croydon Ave is a north-south municipal local road that extends from Regina St in the north to Carling Ave in the south. Within the study area, the roadway consists of a two-lane cross-section with sidewalks on both sides north of Richmond Rd and mostly on the west side south of thereof. The speed limit is assumed to be 50km/h.

Existing Study Area Intersections


Richmond/Assaly

The Richmond/Assaly intersection is a four-legged signalized intersection. The eastbound and westbound approaches consist of a shared through/right-turn lane and an auxiliary left-turn lane. The northbound approach consists of a shared through/left-turn lane and an auxiliary right-turn lane. The southbound approach consists of an all-movement lane. Crosswalks are provided on all legs of the intersection, with an eastbound through bike signal and crossing. The northbound right-turn on red is not permitted.




Richmond/Starflower

The Richmond/Starflower is an unsignalized three-legged intersection. The eastbound approach consists of a through lane and an auxiliary left-turn lane that extends from a downstream residential building access on Richmond Rd. The westbound approach consists of a shared through/right-turn lane. The north leg consists of a one-way northbound only lane. There is a continuous depressed sidewalk across Starflower Ln. Starflower Ln is one-way northbound at this location, thus southbound movements from Starflower Ln are not permitted.

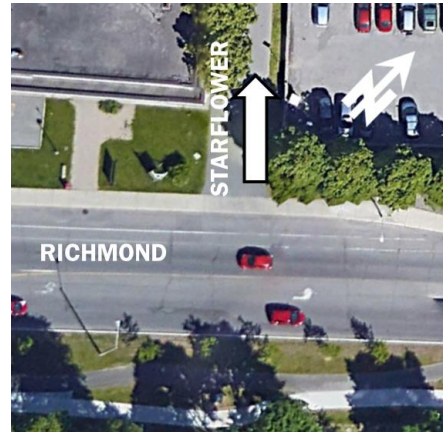

Assaly/Starflower

The Assaly/Starflower intersection is an unsignalized four-legged intersection. There are no turning movements on any approach. The westbound approach on Starflower Ln is stop controlled. There is a continuous depressed sidewalk across Starflower Ln on both sides of Assaly Rd. Starflower Ln is one-way westbound across Assaly, thus movements in the eastbound direction are prohibited.

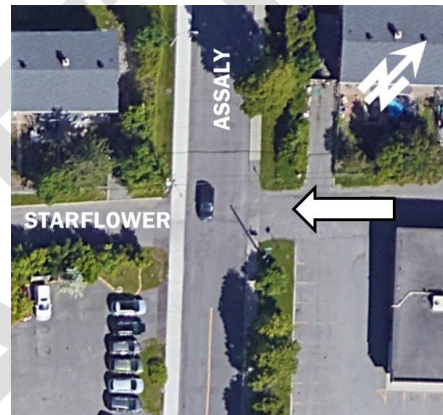

Richmond/Croydon

The Richmond/Croydon intersection is a four-legged signalized intersection. The eastbound, westbound, and northbound approaches consist of a shared through/right-turn lane and an auxiliary left-turn lane. The southbound approach consists of an all-movement lane. Crosswalks are provided on all legs of the intersection, with an eastbound through bike signal and crossing. The northbound right-turn on red is not permitted.



Existing Driveways to Adjacent Developments

There are 5 driveways providing access to residential uses along Starflower Ln as shown in **Figure 3**. Four driveways are located on the north side of Starflower Ln, all of which provide access to single family homes. The last driveway is located at the northeast corner of Starflower Ln and provides access to the surface parking lot of the existing residential building at 1285 Richmond Rd.

Figure 3: Adjacent Driveways within 200m of Site Access



Existing Area Traffic Management Measures

Existing area traffic management measures within the study area include bike signals at the intersections of Richmond/Assaly and Richmond/Croydon, as well as one-way operations with reduced speed of 20km/h along Starflower Ln.

Existing Pedestrian/Cycling Network

The active transportation network facilities for pedestrians and cyclists are illustrated in **Figure 4**. As shown, sidewalk facilities are provided throughout the study area, including both sides of Richmond Rd, Assaly Rd and Croydon Ave. Richmond Rd possesses a westbound onstreet bike lane that extends through the study area, and an eastbound cycle track are provided that transitions to an onstreet bike lane east of Starflower Ln.

Multi-use Pathways (MUP) are provided on both sides of Sir John A. Macdonald Pkwy (the Pinecrest Creek Pathway), with connections to Richmond Rd. The Pinecrest Creek Pathway provides connectivity to other major cycling facilities such as the major east-west Ottawa River Pathway which connects to the downtown and destinations west of the site. Pinecrest Creek Pathway also extends to the south, providing high quality cycling facilities to Algonquin College, the Experimental Farm Pathway and beyond. Richmond Rd is designated as a spine route and a cross-town bikeway, while Pinecrest Creek Pathway is designated as a cross-town bikeway with major pathways.

Figure 4: Study Area Active Transportation Facilities



Transit Network

The following description of OC Transpo routes within the study area reflect the current bus operations:


- **Route #11 (Parliament <-> Bayshore):** identified by OC Transpo as a “Frequent Route”, this route operates all day, 7 days a week and at an average rate of every 15 minutes during weekday peak hours. The nearest bus stop to the site is at the intersection of Richmond/Starflower.
- **Route #153 (Tunney’s Pasture <-> Lincoln Fields):** identified by OC Transpo as a “Local Route”, this route operates with a custom routing to local destinations. The nearest bus stop to the site is at the intersection of Richmond/Assaly.
- **Lincoln Fields Station** is an existing station along the transitway, located within 350m radius of the site along Carling Ave and Sir John A. Macdonald Pkwy. Lincoln Fields Station provides access to many bus routes, including #11, #50, #51, #57, #58, #61, #62, #63, #64, #66, #67, #73, #74, #75, #82, #85, #153, #154, #186, #252, #256, #257, #258, #261, #262, #263, #264, #265, #267, #268, #282, #283, #301, #303 and #305.

The transit network for the study area is illustrated in **Figure 5** and the transit route maps are provided in **Appendix B**. **Figure 6** illustrates the bus stop locations.

Figure 5: Area Transit Network



Figure 6: Bus Stop Locations

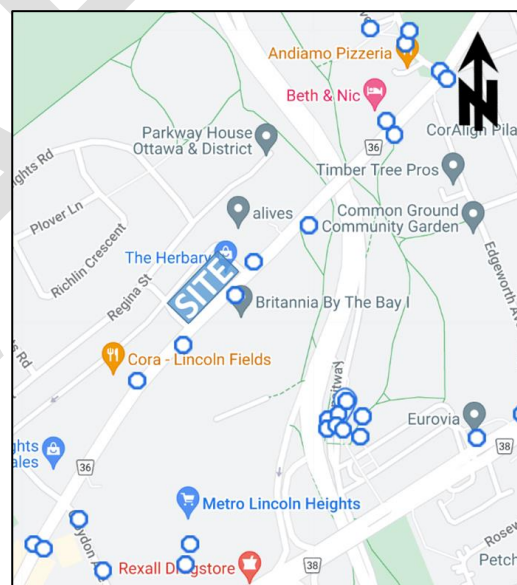

Peak Hour Travel Demands

Traffic count data was obtained from the City of Ottawa at the intersections of Assaly/Richmond and Croydon/Richmond in both 2016 and 2022. The City's 2022 counts were significantly lower compared to 2016 counts, as they were conducted when Covid-19 restrictions were still in place. However, the 2016 counts were also not expected to be fully representative of existing traffic volumes due to the various changes in the transportation network since that time, including the city's adoption of various new policies and design standards that prioritize sustainable modes of travel, the completion of Stage 1 LRT in September 2019, new road network projects, expanded policies supporting sustainable modes (such as improved TDM measures), and changes in travel behaviour triggered by Covid-19 (such as greater work-from-home opportunities).

To account for a worst-case scenario, the 2016 volumes that are expected to be overly conservative will be used as the baseline for existing volume within the study area.

Additional study area intersection volumes were captured during a June 14, 2022 count performed by Parsons for the site access and Starflower Ln intersections with Richmond Rd and Assaly Rd. Within these counts, it was noted that a small number of vehicles (up to 7) was observed violating the one-way only restriction along Starflower Ln, by turning left on the southbound approach from Assaly Rd and travelling in the opposite direction to enter the existing strip mall at 1299 Richmond Rd.

The traffic volumes at study area intersections are illustrated in **Figure 7**, with raw traffic count data provided in **Appendix C**. Existing active transportations (pedestrian and cyclist) volumes at the intersection of Richmond/Assaly has been provided in **Figure 8**.

Figure 7: Existing Peak Hour Traffic Volumes


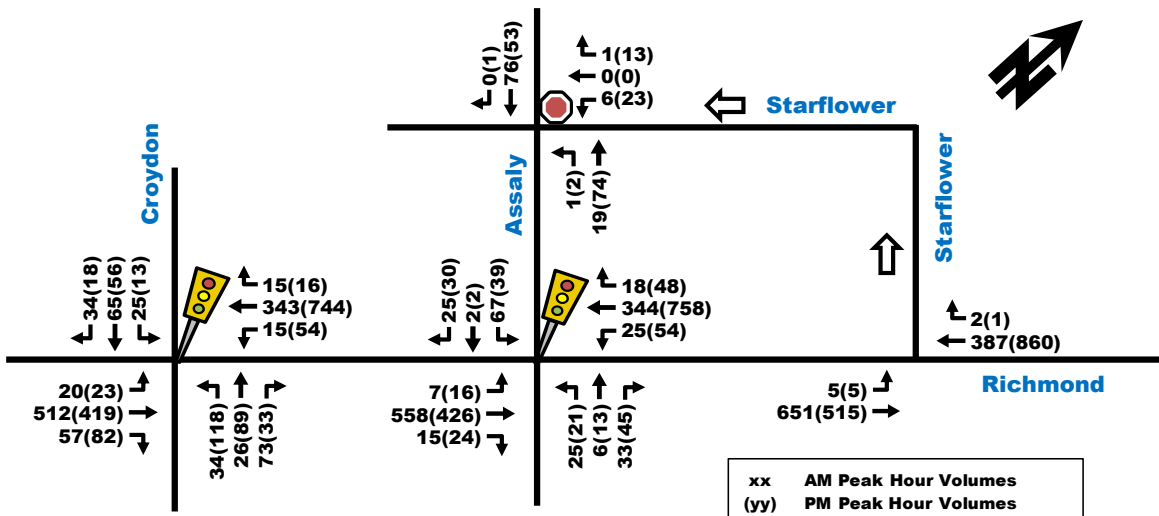


Figure 8: Existing Pedestrian and Cyclists Peak Hour Volumes

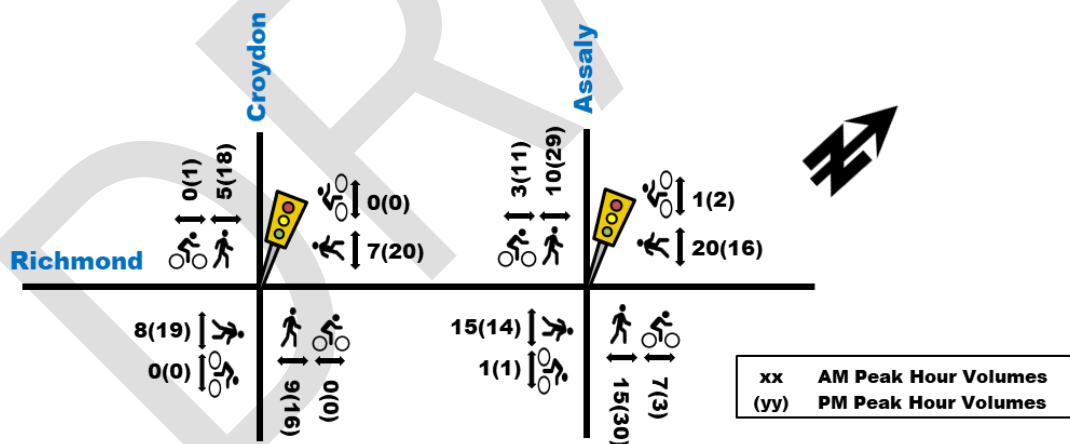

Existing Road Safety Conditions

A five-year collision history data (2017-2021, inclusive) was obtained from the City of Ottawa’s Open Ottawa webpage for all intersections and road segments within the study area. It was determined that a total of 40 collisions have occurred. Of the 40 collisions, 11 (28%) resulted from rear ends, 10 (25%) from angled collisions, 10 (25%) from single vehicle (other), 5 (13%) from turning movements, 2 (5%) from sideswipes and 2 (5%) from single vehicle (unattended). Of the collisions, 29 (73%) collisions representing the majority of collisions, resulted in property damage only, while 11 (27%) resulted in non-fatal injuries. There were no fatal injuries recorded.

Within the study area, the quantity of collisions, collisions per million entering vehicles (MEV) and/or distance of mid-block at each location has occurred at a rate of:

- Assaly/Richmond: 6, MEV 0.22
- Croydon/Richmond: 22, MEV 0.70
- Mid-block Assaly, Regina to Richmond: 1 (80m)
- Mid-block Richmond, Transitway to Assaly: 4 (270m)
- Mid-block Richmond, Assaly to Croydon: 7 (285m)
- Collisions with Pedestrians: 7 (18%)
- Collisions with Cyclists: 1 (3%)

The Croydon/Richmond intersection exhibited a total of 22 collisions, with 4 (18%) involving pedestrians and 1 (5%) involving cyclists. The collisions with vulnerable users has caused a non-fatal injury rate of 32% or 7 of the 22 collisions. The high rate of collisions with vulnerable users here may be attributed to active travellers heading to and from the Lincoln Heights Shopping Center to the community just north of Richmond Rd or linked to the intersection skew. Although space and pavement painting has been provided for cyclists and pedestrians, further measures from the Protected Intersection Design Manual (PIDG) such as leading pedestrian and cyclist intervals and no-right-on-red allowed for all movements could reduce the frequency of this type of collision.

The mid-block section on Richmond Rd between Assaly Rd and the Transitway exhibited 2 collisions with pedestrians out of 4 collisions total. Although not many collisions were recorded here, it could be possible that some pedestrians are crossing mid-block at an uncontrolled location to shorten the walking distance to/from Lincoln Fields Station to the community north of Richmond Rd. If this trend continues in future years, then the City may consider adding a PXO mid-block if warrants satisfy the need.

No other intersections or mid-block segments showed any notable or concerning trends. Collision data has been provided in **Appendix D**.


2.1.3. Planned Conditions

Future Transportation Network Changes

Stage 2 LRT

The Light Rail Transit (LRT) system in the City of Ottawa has entered Stage 2 of its implementation, which will include the extension of the LRT corridor in the west, east and south directions. The west extension will include a new LRT station at the existing Lincoln Fields bus station, located within 350m distance of the development site. The west extension to Moodie station is expected to be complete by 2025. **Figure 9** illustrates the full expansion of the LRT Stage 2 system.

Figure 9: LRT Stage 2 Expansions Map

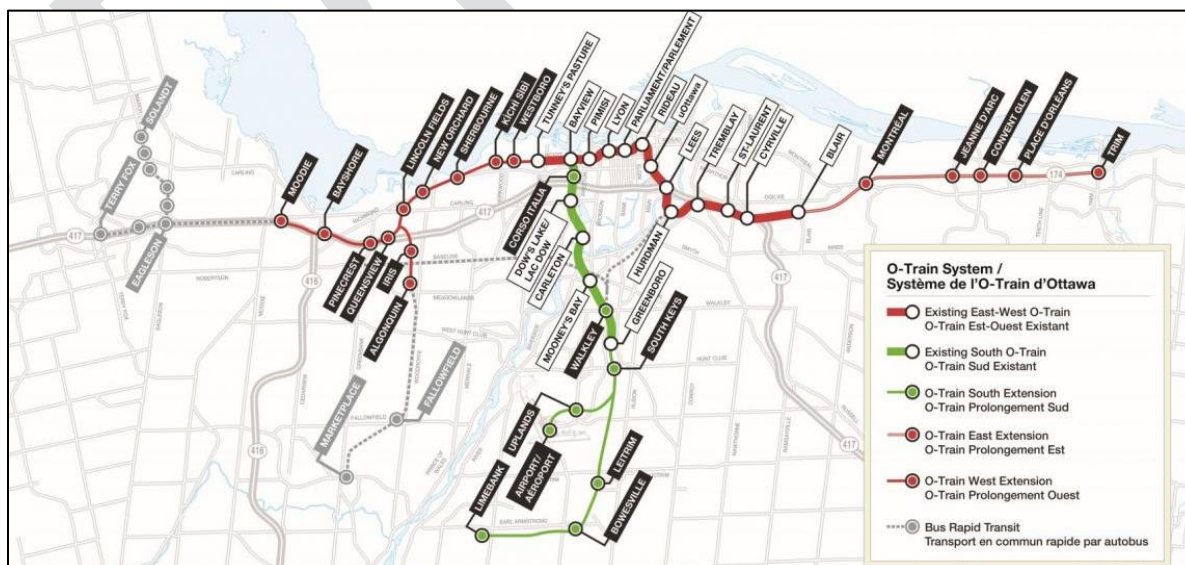


Carling Avenue Transit Priority

The City of Ottawa is undergoing a detailed design for the Carling Avenue Transit Priority corridor between Lincoln Fields Station and Bronson Ave, where a Bus Rapid Transit (BRT) is being implemented by converting a curbside lane in each direction across different sections of Carling Ave to a dedicated bus lane. **Figure 10** illustrates the proposed bus lane at the frontage of Lincoln Fields Station, as provided in the Carling Ave Transit Priority Measures Study (WSP 2017). Between Lincoln Fields Station and Sherwood Dr, some interim measures have been implemented since 2022.

In addition, the Carling Ave Transit Priority Corridor EA Study proposes new uni-directional cycle tracks along Carling Ave from Lincoln Fields to Dow's Lake Station near Preston St which are anticipated by 2028. The EA study coupled with the Lincoln Fields Secondary Plan, aim at improving cyclist connectivity and accessibility with plans to improve cyclist crossing treatments at Carling Ave intersections, including uni-directional and bi-directional crossrides.

Figure 10: Carling Ave Proposed Bus Lane

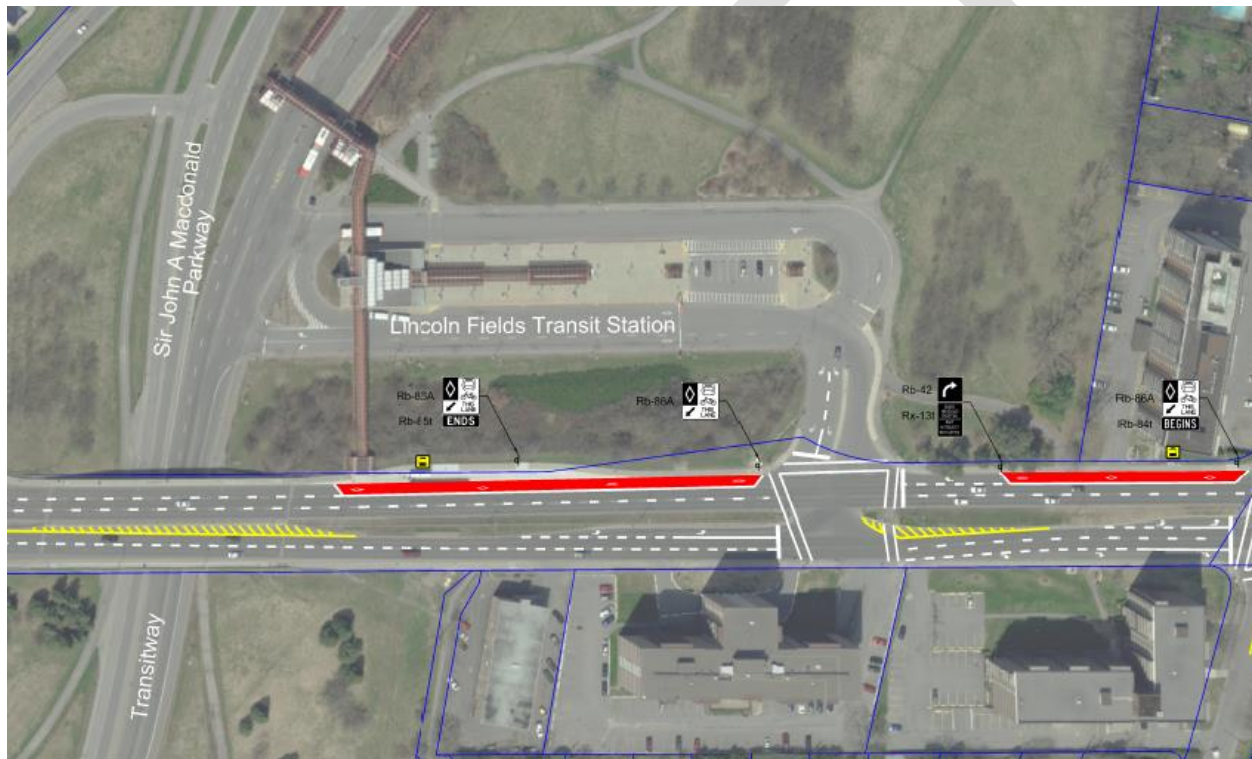

Lincoln Fields Secondary Plan

As part of the LRT Stage 2, the existing Lincoln Fields BRT station will be converted to a LRT station by 2025. The Lincoln Fields Station Secondary Plan was launched in December 2019 and paused in early 2020. Since then, the Secondary Plan has resumed in November 2021 and is currently underway, with an expected completion date in 2023¹. The study area includes an 800m radius around Lincoln Fields Station, which includes the proposed development site located within 350m. The purpose of the study is to identify opportunities to improve connectivity and walkability to the station and engage the community to identify appropriate measures for Carling Ave, Richmond Rd, and Lincoln Fields Station.

¹ <https://ottawa.ca/en/city-hall/public-engagement/projects/lincoln-fields-station-secondary-plan#section-005e87eb-f256-475a-84d9-205699df2c8c>

Provided in **Appendix E** is a preliminary plan illustrating the potential future connectivity through MUP connections and a pedestrian bridge crossing. Connectivity to Richmond Rd is anticipated to be maintained in the future.

Lastly, within the Stage 2 LRT Station Connectivity Enhancement Study², the City has proposed additions to cycling and walking facilities near Lincoln Fields Station as illustrated in **Figure 11** and described below:

- A. Replace the Woodroffe pedestrian bridge across alignment, south of station, to accommodate the LRT.
- B. Multi-use pathway along east and west side of alignment, from Richmond Road to new Woodroffe pedestrian bridge south of Carling Avenue (noted as Item A), including reconstruction of pathway to Rosewood Avenue.
- C. Station plaza with 9 passenger pick-up and drop-off spaces and bike parking for 60 bikes with space allocated to double in future when required.
- D. Cycle tracks on Carling, in front of station entrance.
- E. Signalized crossing including crossrides at Carling Avenue at station entrance, and west of station at a point mid-block between the station entrance and the ramps connecting Carling Avenue to Sir John A. Macdonald Parkway.
- F. Add lighting to NCC pathway, from the pedestrian crossing at the SJAM to Richmond Road.
- G. Provide more space in front of station plaza for pedestrians and cyclists by removing a lane of traffic in the westbound direction.

Figure 11: Stage 2 LRT Station Connectivity Enhancement Study - Lincoln Fields Station




² <https://ottawa.ca/en/city-hall/public-engagement/projects/stage-2-lrt-station-connectivity-enhancement-study>

Ultimate Cycling Network Plan

Within the cycling plan, Carling Ave is identified as a future spine route. The gaps in cycling facilities on Richmond Rd between Carling Ave and Holly Acres Rd is proposed a future spine route. Various local streets have a proposed future local route classification. The future cycling network is illustrated in **Figure 12**.

Figure 12: Ultimate Cycling Network Map

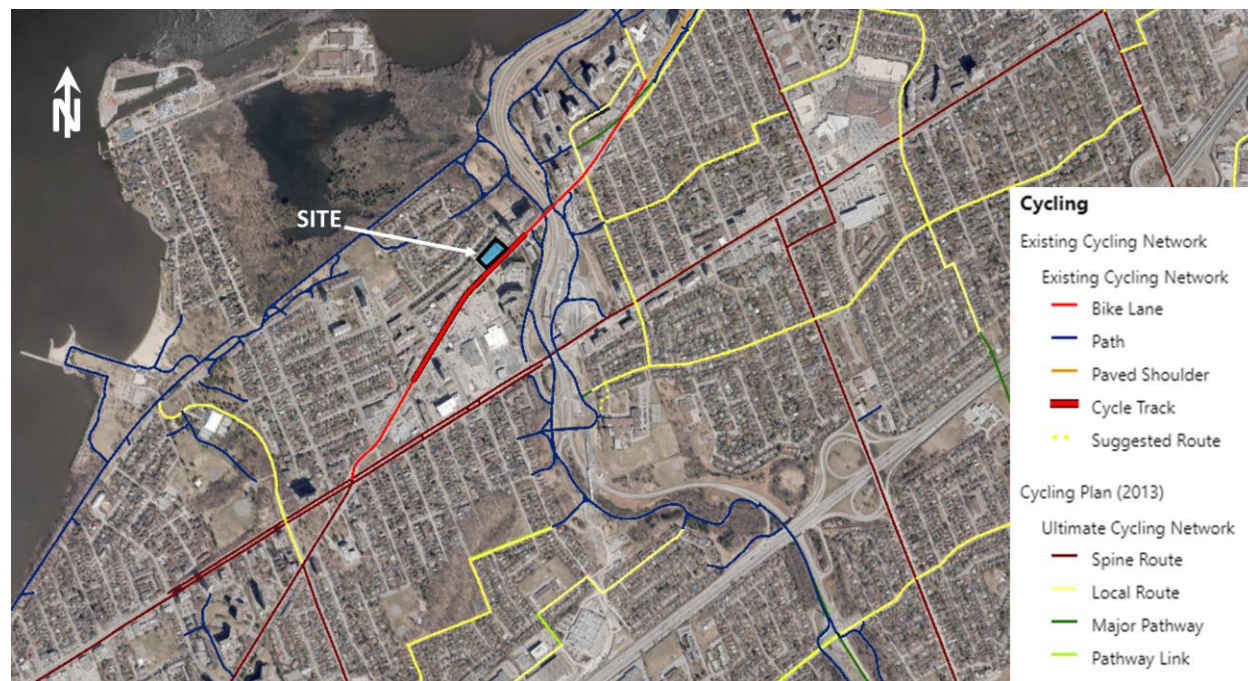

Other Area Developments

The following section outlines proposed future adjacent developments within the study area. Based on the City of Ottawa's Development Applications search tool, there are two development applications initiated in the area.

1047 Richmond Road

A Zoning By-Law Amendment (ZBLA) and Official Plan Amendment (OPA) applications have been submitted for a residential buildings' development located at 1047 Richmond Rd. The development will consist of 1,343 residential units with first floor retail, with an anticipated full buildout by 2026. Based on the TIA prepared by Parsons, the development is anticipated to generate approximately 85 vehicle trips and a total of 565 person trips during peak hours.

2475 Regina Street

A Zoning By-Law Amendment (ZBLA) application has been submitted for a residential buildings' development located at 2475 Regina St. The development will consist of 510 residential units with an anticipated full buildout by 2026. Based on the TIA prepared by EXP Services Inc., the development is anticipated to generate approximately 60 vehicle trips and a total of 215 person trips during peak hours.

365 Forest Street

A Zoning By-Law Amendment (ZBLA) application has been submitted for a residential buildings' development located at 365 Forest St. The development will consist of 391 residential units with an anticipated full buildout by 2024. Based on the TIA prepared by CGH Transportation, the development is anticipated to generate up to approximately 45 vehicle trips and a total of 265 person trips during peak hours.

2.2. Study Area and Time Periods

For the purposes of this report, the proposed development is assumed to be fully constructed by 2025. As such, horizon years 2025 and 2030 (i.e. five-years after development buildout) will be analyzed using the weekday morning and afternoon peak hour time period traffic volumes. Proposed study area intersections are listed below and illustrated in **Figure 13**.

- Assaly/Richmond
- Starflower/Richmond
- Croydon/Richmond
- Assaly/Starflower
- Starflower/Residential Building Access

Figure 13: Study Area



2.3. Exemption Review

The following modules/elements of the TIA process provided in **Table 1** are recommended to be exempt in the subsequent steps of the TIA process, based on the City’s TIA guidelines and the subject site:

Table 1: Exemptions Review Summary

Module	Element	Exemption Consideration
4.1 Development Design	4.1.3 New Street Network	Only required for plans of subdivision
4.2 Parking	4.2.2 Stillover Parking	Only required for site plans where parking supply is 15% below unconstrained demand.
4.8 Network Concept	All	To be confirmed. This section is typically only required when proposed development generates more than 200 person-trips peak hour in excess of the equivalent volumes permitted by established zoning.

3.0 FORECASTING

3.1. Development Generated Travel Demand

3.1.1. Trip Generation and mode shares

Trip Generation Rates

The proposed development will consist of 590 apartment units and approximately 748 m² (8,046 ft²) of retail space. The retail space will likely provide ancillary use for the high-density residential units and is expected to be intended for local residents, community and potentially some pass-by traffic. As such, it is not expected to be a regional attraction and is not anticipated to generate new trips.

The appropriate trip generation rates for high-rise apartment units were obtained from the 2020 TRANS Trip Generation Manual. The Manual provides person-trip rates during the peak AM and PM periods (i.e. 7am-9:30am and 3:30pm-6pm). The trip rates are summarized in **Table 2** below.

Table 2: Proposed Development Trip Rates

Land Use	ITE/TRANS Designation	Data Source	Trip Rates	
			AM Peak	PM Peak
Residential	"High-Rise Apartments"	TRANS	T = 0.8(du);	T = 0.9(du);

Note: T = Average Vehicle Trip Ends; du = Dwelling unit

Using the respective residential trip rates in **Table 2**, the total number of person trips per hour generated by the proposed residential land use of the development are calculated for the morning and afternoon peak periods, as shown in **Table 3**.

Table 3: Residential Units Peak Period Person Trip Generation

Land Use	Dwelling Units	AM Peak Period Person Trips	PM Peak Period Person Trips
High-Rise Apartments	590	472	531

The proposed development's residential land use is anticipated to generate a total of approximately 472 and 531 person trips during the morning and afternoon peak periods, respectively. The total peak period person trips in **Table 3** are then divided into different travel modes using mode share percentages obtained from the 2020 TRANS Manual for the "Bayshore/Cedarview" district. **Table 4** provides the travel mode breakdown for the proposed high-rise apartments.

Table 4: High-Rise Apartments Peak Period Trips Mode Shares Breakdown

Travel Mode	Mode Share	AM Peak Period Person Trip	Mode Share	PM Peak Period Person Trips
Auto Driver	40%	187	40%	212
Auto Passenger	12%	58	15%	79
Transit	38%	181	33%	173
Cycling	2%	7	1%	6
Walking	8%	38	11%	61
Total Person Trips	100%	472	100%	531

Standard traffic analysis is usually conducted using the morning and afternoon peak hour trips as they represent a worst-case scenario. In the 2020 TRANS Manual, Table 4 provides conversions rates from peak period to peak hours for different mode shares. The conversion rates are provided in **Table 5** below.

Table 5: Peak Period to Peak Hour Conversion Factors (2020 TRANS Manual)

Travel Mode	Peak Period to Peak Hour Conversion Factors	
	AM	PM
Auto Driver and Passenger	0.48	0.44
Transit	0.55	0.47
Bike	0.58	0.48
Walk	0.58	0.52

Using the conversion rates in **Table 5** and the peak period person trips for different travel modes in **Table 4**, the peak hour trips for different travel modes can be calculated as shown in **Table 6**.

Table 6: High-Rise Apartments Peak Hour Trips Mode Share Breakdown

Travel Mode	AM Peak Hour Trips	PM Peak Hour Trips
Auto Driver	90	93
Auto Passenger	28	35
Transit	100	81
Cycling	4	3
Walking	22	31
Total Person Trips	244	244

As shown above, the residential land use of the proposed development is anticipated to generate a total of up to 244 total person trips, 93 total vehicle trips, 100 total transit trips and 34 total active transport (walking and cycling) trips during peak hours.

The location of the Lincoln Fields LRT Station is within a 350m radius (roughly 550m walking distance). Therefore, it is reasonable to expect there would be higher transit usage from this development than the average for the TRANS district. Additionally, there are notable biking destinations accessible via high quality pathways and MUPs, including Tunney's Pasture (approximately 7kms bike ride, 20 mins), Downtown Ottawa (10kms, 30 mins), Bayshore Shopping Center (4kms, 15 mins), National Defense Headquarters (8kms, 25 mins), Algonquin College (4kms, 15mins) to name a few. An increase in cycling mode share is also forecasted.

Table 7 summarizes the the TRANS 2020 suggested residential modal shares, the City's Transit Oriented Development (TOD) mode shares and future projected residential modal shares.

Table 7: Future Mode Share Targets for Residential Trips

Travel Mode	TRANS Residential Mode Shares		City's TOD Mode Shares	Future Target Mode Share (AM & PM)	Residential Modal Share Target Rationale
	AM	PM			
Auto Driver	40%	40%	15%	25%	A reduction in driver mode share from TRANS is justifiable given the close proximity to future LRT station and high quality cycling facilities nearby. Reduced parking rate of approximately 0.3 parking spaces per unit further dissuade driving and promotes alternate modes of transportation.
Auto Passenger	12%	15%	5%	10%	
Transit	38%	33%	65%	55%	Development is located within 600m of a future LRT/existing BRT station, making it a Transit-Oriented Development (TOD).
Cycling	2%	1%	5%	8%	There are high quality cycling facilities with major city pathways nearby, making cycling an attractive option.
Walking	8%	11%	10%	2%	A lower walking mode share is expected as the site is located far from major employment nodes.

The peak hour mode share trips have been adjusted with the proposed target mode shares as shown in **Table 8**. Note that the same mode share percentages are applied to both the AM and PM peak hours.

Table 8: High-Rise Apartments Peak Hour Trips TOD Mode Share Breakdown

Travel Mode	Mode Share	AM Peak Hour Trips	PM Peak Hour Trips
Auto Driver	25%	61	61
Auto Passenger	10%	24	24
Transit	55%	134	134
Cycling	8%	20	20
Walking	2%	5	5
Total Person Trips	100%	244	244

Using the modified mode shares above, the breakdown of inbound and outbound trips for the high-rise apartments are provided in **Table 9**. The inbound and outbound percentages were obtained from the 2020 TRANS Manual.

Table 9: High-Rise Apartments Mode Shares Breakdown

Travel Mode	AM Peak (Person Trips/h)			PM Peak (Person Trips/h)		
	In (31%)	Out (69%)	Total	In (58%)	Out (42%)	Total
Auto Driver	19	42	61	35	26	61
Auto Passenger	7	17	24	14	10	24
Transit	42	92	134	78	56	134
Cycling	6	14	20	12	8	20
Walking	2	3	5	3	2	5
Total Person Trips	76	168	244	142	102	244

As shown in **Table 9**, the total number of vehicle trips anticipated to be generated by the residential land use is 61 vehicles per hour during the morning and afternoon peak hours.


3.1.2. Trip Distribution and Assignment

Based on the 2011 OD Survey (Bayshore/Cedarview district) and the location of adjacent arterial roadways and neighbourhoods, the distribution of site-generated traffic volumes was estimated as follows:

- 40% to/from the east via Richmond Rd;
- 60% to/from the west via Richmond Rd;

The anticipated ‘new’ auto trips for the proposed development from **Table 9** were then assigned to the road network as shown in **Figure 14** for the total site-generated traffic.

Figure 14: Site-Generated Traffic

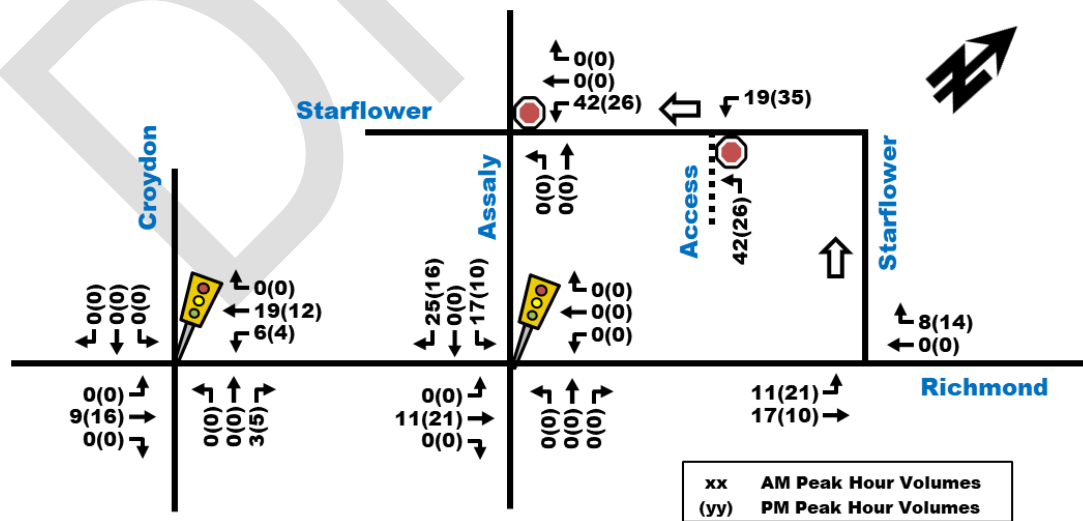

3.2. Background Network Traffic

3.2.1. Transportation network plans

Refer to Section 2.1.3: Planned Conditions.

3.2.2. Background Growth

The City of Ottawa is currently in the process of completing Stage 2 LRT which will bring a new rapid transit LRT Station within 350m of the development with connectivity as far west as Moodie and Baseline Stations, via downtown and as far east as Trim Station, which should further reduce auto usage and replace it with transit and active transportation. As mentioned in existing conditions, Section 2.1.2, the 2016 volumes which were used as existing baseline conditions are considered a worst-case scenario as the existing volumes are assumed lower due to already constructed Stage 1 LRT and effects of Covid-19 change in work culture and greater work-from-home opportunities.

However, to partially coordinate with other future adjacent developments, a conservative growth rate of 0.5% annually was applied to the through movements along Richmond Rd at applicable the study area intersections.

3.2.3. Other Developments

Refer to Section 0 - Other Area Developments for a description of the adjacent future developments. Given the anticipated full buildout years of the adjacent development, the adjacent 365 Forest St development will be added at the future background 2025 volumes, while the adjacent 2475 Regina St development will be added to the future background 2030 volumes. The total future background 2025 and 2030 traffic volumes are provided in Figure 15 and Figure 16, respectively.

Figure 15: Future Background 2025 Traffic Volumes


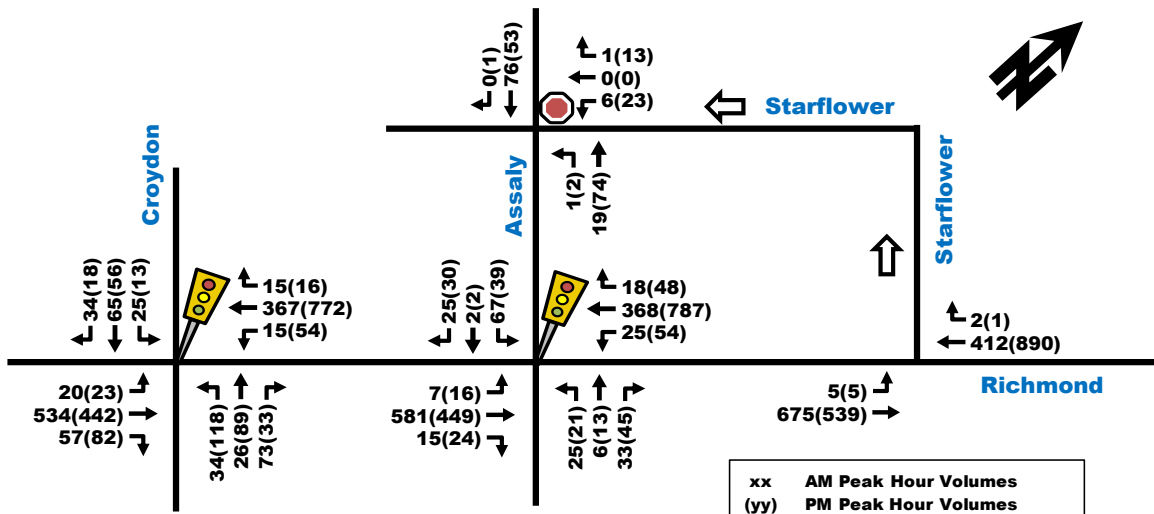


Figure 16: Future Background 2030 Traffic Volumes

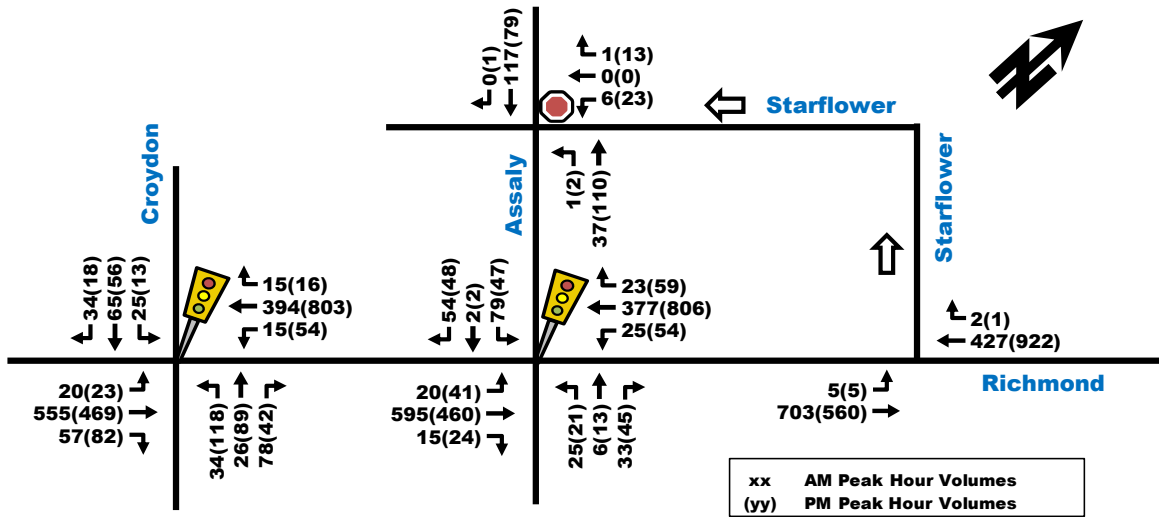

3.3. Demand Rationalization

The following section indicates factors that may be used to rationalize the future travel demands in the study area and determine if there are potential capacity limitations and how they may be addressed.

The total projected 2025 and 2030 traffic volumes can be calculated by superimposing the site-generated traffic in **Figure 14**, onto the background traffic in **Figure 15** and **Figure 16**. The total projected 2025 and 2030 traffic volumes are illustrated in **Figure 18** and **Figure 19**, respectively. The approach for this study was to proceed without applying any reductions to the study area traffic volumes, as a worst-case scenario. The impact of the proposed development’s site-generated traffic volumes on the study area intersections and roadways will be determined in the subsequent sections of the TIA report.

Nonetheless, based on plans in the broader transportation network, the effect of the following two transit-related upgrades may influence vehicle travel patterns in the road network and result in an overall reduction in background traffic volumes.

LRT Stage 2

As discussed in **Section 2.1.3.1** of this TIA, the stage 2 construction of the LRT is underway, which will involve reconstructing the existing Lincoln Fields Station (located within 350m radius) and expanding the LRT corridor in different directions. The west expansion is expected to be completed by 2025.

As shown in the **Figure 17** below, between Lincoln Fields Station and the existing Tunney’s Pasture LRT Station, two new stations, New Orchard and Sherbourne, will also be constructed along Richmond Rd, while Kichi Sibi and Westboro Stations will be constructed along the transitway slightly north of Richmond Rd.

Figure 17: LRT Stations Along Richmond Rd



These new stations are expected to result in a significantly higher transit usage from background traffic and surrounding developments along Richmond Rd, which will result in a decrease in vehicles travelling along the Richmond Rd corridor. The influence of the LRT will likely be experienced at the frontage of the proposed development as well. Once the LRT is constructed, travel patterns will begin to adjust as trips shift from vehicle trips to transit trips.

Carling Ave Transit Priority

Carling Ave is located within a 450m radius of the proposed development site, which is outside the study area limits of this TIA Report. However, the Transit Priority Study indicated that the BRT is expected to result in a 20% reduction in peak direction background traffic and up to 15% reduction in the off-peak direction along Carling Ave. Although this BRT is located outside of the study area, it is forecasted that some residual effects of a reduction in vehicle travel within the Carling Ave corridor will affect the study area intersections by reducing their volumes too.

Figure 18: Total Projected 2025 Traffic Volumes


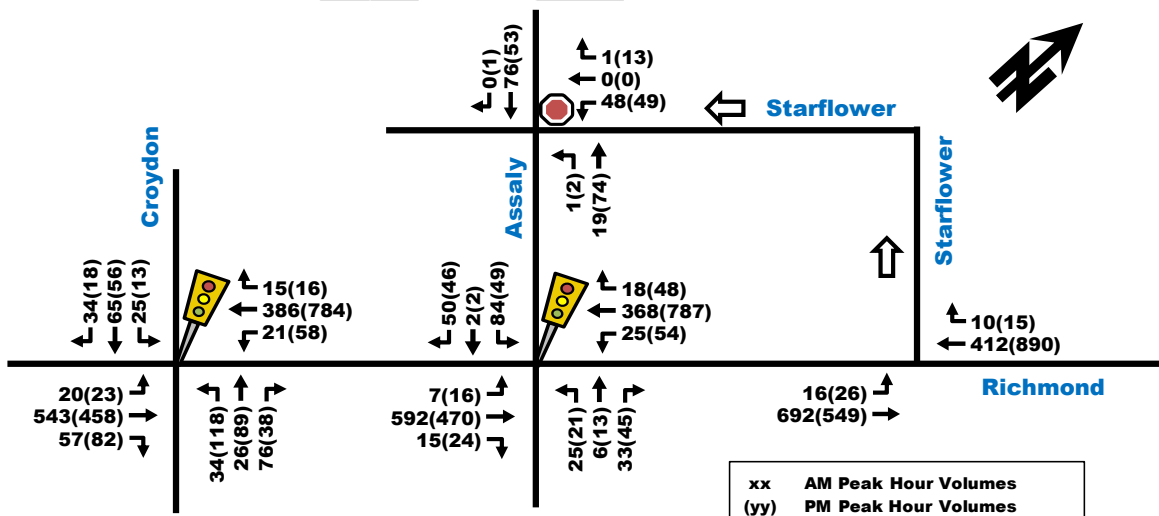


Figure 19: Total Projected 2030 Traffic Volumes

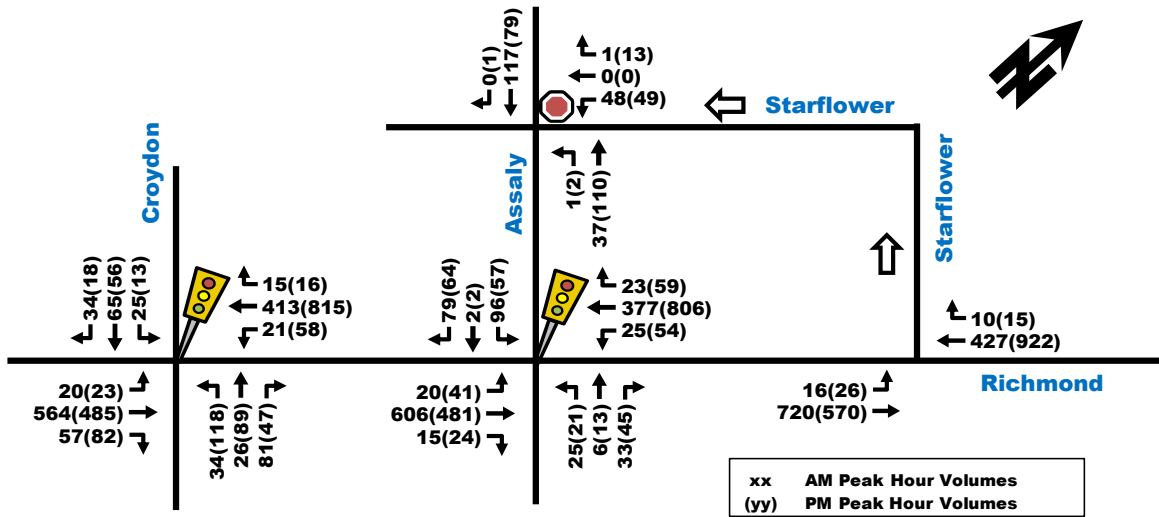

4.0 STRATEGY REPORT

4.1. Development Design

4.1.1. Design for Sustainable Modes


Location of Transit Facilities

The subject development is located within 350m radius of major transit station at Lincoln Fields. Lincoln Fields is currently under construction, being upgraded from a bus rapid transit (BRT) to a light rail transit (LRT) as part of Stage 2 Confederation Line West expansion. Lincoln Fields will also be part of a major connection point for bus routes off Carling Avenue. The LRT station is anticipated to be operational by 2025.

From the site, the most direct route to Lincoln Fields Station using municipal facilities uses the signalized intersection of Assaly/Richmond, sidewalk on the south side of Richmond Rd to the Pinecrest Pathway, as shown in Figure 20. It is acknowledged there are also informal routes used by the public that traverse adjacent properties to reduce their travel time to Lincoln Station, which do not appear to be enforced. The City could explore formalizing these connections via joint use agreements or alternate arrangements; however this is not a responsibility for the developer. That said, in the event these informal routes via private property are closed in the future, the formal connection previously described does provide adequate connectivity to the station. Appendix E illustrates the proposed pedestrian enhancements within the Lincoln Fields Station, which includes new pedestrian bridge crossings and MUP connections.

In addition to rapid transit at Lincoln Fields, there are bus stops located adjacent to the site for frequent route #11 and local route #153. Frequent route #11 provides connectivity between Bayshore Shopping Center and Downtown via Richmond / Wellington / Somerset St. Local route #153 provides connectivity to Lincoln Fields Station for those who have mobility challenges and may find it difficult to walk the 600m to Lincoln Fields Station.

Figure 20: Walking Routes to Transit Facilities

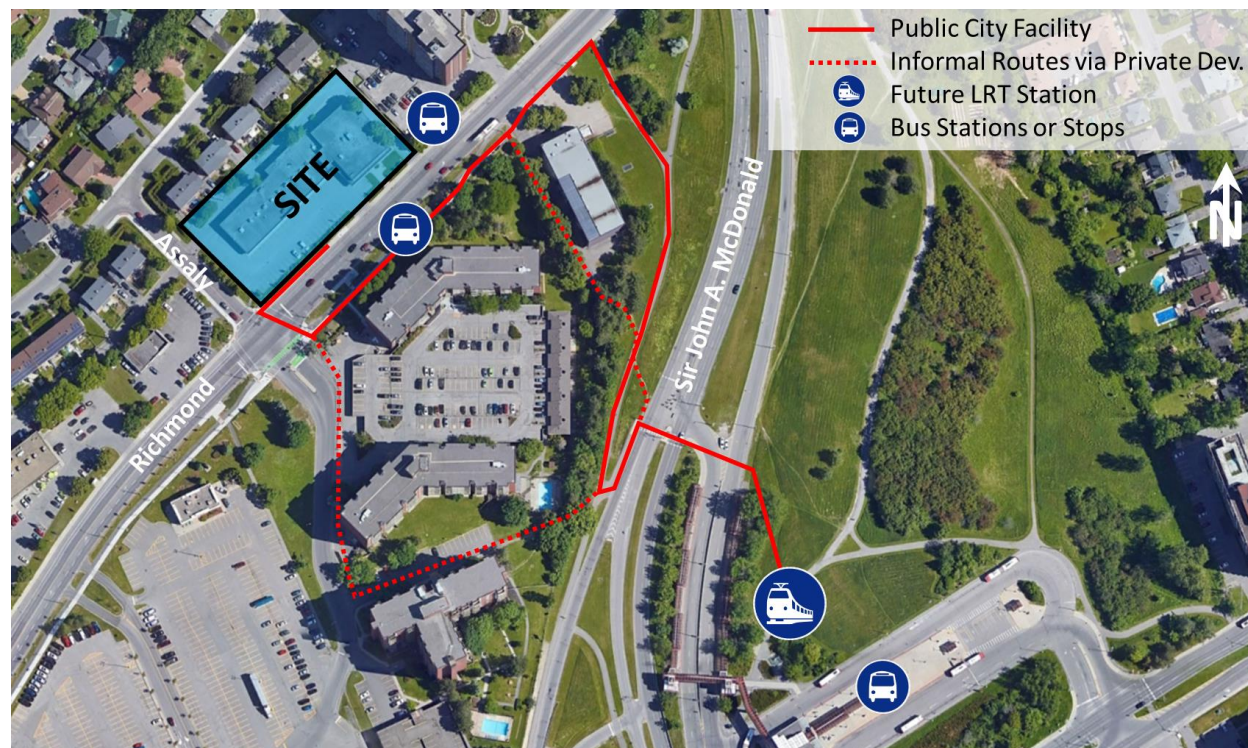

Pedestrian/Cycling Routes and Facilities

Walking facilities to transit stations have been described in the module above. Building entrances will provide direct connectivity to existing sidewalk facilities on Richmond Rd and Assaly Rd. Courtyards with outdoor patio are proposed and wide pedestrian areas.

The site currently has excellent connectivity to cycling infrastructure. On-street cycling facilities fronting the site such as partial uni-directional cycling facilities on the south side of Richmond Rd or curbside bike lanes on the north side of Richmond Rd provide direct access from the site to Pinecrest Creek Pathway. The Pinecrest Creek Pathway provides grade separated cycling and pedestrian facilities at most major crossings and connects to the major east-west Ottawa River Pathway that leads to the downtown and along the Ottawa River; as well as major destinations to the south such as Algonquin College, the Experimental Farm Pathway and beyond. The existing cycling and pedestrian infrastructures will link to future facilities such as those proposed on Carling Ave via the Carling Ave Transit Priority project.

Bicycle Parking


A combined total of 310 bicycle parking is currently proposed, where 305 bike parking spaces will be located indoors within P1, P2 and P3. Bike parking spaces will be located close to elevators which provide access to the ground floor. The remainder 5 bike parking spaces will be located outdoors for retail visitors.

4.1.2. Circulation and Access

The existing site currently provides two access points off Richmond Rd. The proposed development will see the removal of the existing access closer to Assaly Rd (to be reinstated to boulevard design as per City standards), and will rely on Starflower Ln to provide access/egress for the subject site as shown in **Figure 21**. Starflower Ln will continue to operate as a one-way road, with full movement entry via Richmond Rd and full movement exit at Assaly Rd. There will be an underground garage ramp located on the backside of the building, accessible via

Starflower Ln. All surface parking will be removed, and the site will only offer underground parking for residents and visitors.

Figure 21: Site Access and Circulation

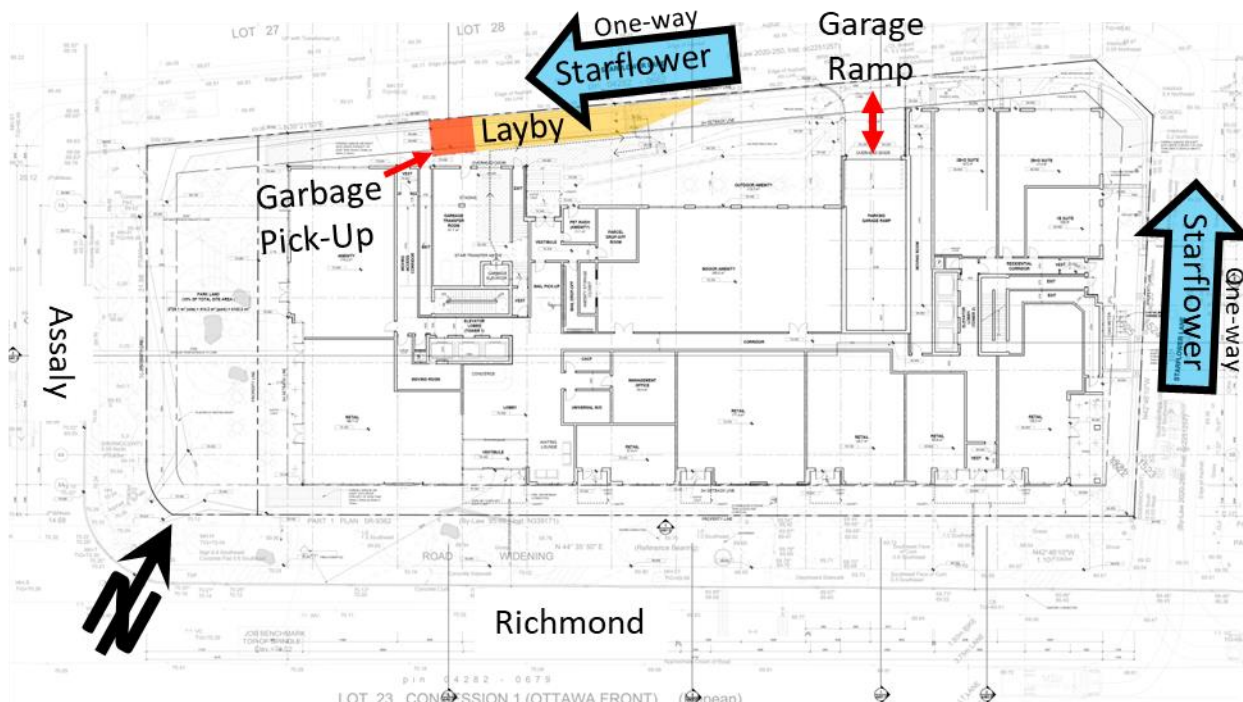

The parking garage for Towers A and B will be housed within a shared three-level structure. The parking garage will include a single 6m wide ramp access to permit two-way travel, located approximately 25m west from the internal T-intersection on Starflower Ln. The majority of internal ramp grades within the parking garage vary between 4% to 5%, with the first ramp transitioning from 7.5% to 15% when indoors, which is considered acceptable. The buildings will be set back from the laneway, providing adequate sight lines. Starflower Ln has a posted speed limit of 20km/h, which can be maintained based on the frequency of driveway accesses and proposed design of the development frontage that promotes slower driving speeds.

The site plan has been designed to ensure both MSU/HSU style trucks can be accommodated on Starflower Ln. Garbage operations for all towers will be completed within a layby parallel to Starflower Ln, where the required bins will be placed outside for pickup. Loading will also occur from the layby, which has been designed to limit encroachment onto Starflower Ln. The truck turning templates have been provided in **Appendix F**.

4.1.3. New Streets Network

Exempt. See **Table 1**.

4.2. Parking

4.2.1. Parking Supply

According to Part 4 – Parking, Queuing and Loading Provisions for the City of Ottawa By-Laws, the site is located in Area Z based on Schedule 1A and is within Rapid Transit Stations within Schedule 2A. **Table 10** summarizes the vehicle parking minimum allowed within the parking by-law and the quantities proposed.

Table 10: Proposed Vehicle Parking Space Supply

Rate per Unit/Size ¹	Land Use	Required Vehicle Spaces			Proposed Spaces		
		Residents	Res Visitor	Retail	Residents	Visitor / Retail	Total
0.0 base residential per unit; 0.1 visitor parking per unit; 0.0 spaces per 100 m ² of commercial	590 units, 748 m ² Retail	0	60	0	188	60	248
1. Within the area shown as Area Z, no off-street motor vehicle parking is required to be provided under this section, (By-law 2016-249) for residential and retail. Within Areas X, Y and Z, no more than thirty visitor parking spaces are required per building.							

Table 11 summarizes the bicycle parking requirements as per City of Ottawa Zoning By-Law-Part 4, sections 100-114.

Table 11: Bicycle Parking Requirements

Land Use		Rate per Unit/Size	Required Bicycle Spaces	Proposed Spaces
Residential	590 units	0.5 per unit	295	310
Retail	748 m ²	1 per 250 m ²	3	
Totals			298	Meets mins.

The Parking By-law requires 60 residential visitor spaces and a minimum of 0 residential occupant and retail parking spaces given its close proximity to Lincoln Fields major LRT station (Area Z within Schedule 1A in Parking By-law). The development proposes 188 residential parking spaces and 60 shared visitor and retail parking spaces meeting the minimum requirements. Within Area Z, a maximum of 1.75 combined vehicle spaces per unit is allowed, which would equate to 1,033 spaces. The development proposes a parking rate that is above the minimum requirements and below the maximum allowed parking limits.

The Parking By-law requires a minimum of 298 bike parking spaces. The proposed development proposes a total of 310 bike parking spaces, with the majority of bike parking located indoors in a well-lit secured area, within the underground parking lot. Additional 5 outdoor bike parking spaces are proposed near the retail portion of the building. The proposed development exceeds the minimum bicycle parking requirements in the Parking By-law.

4.2.2. Spillover Parking

The development meets all the Parking By-law minimums and does not exceed the maximum limits allowed. Spillover parking is not anticipated at this site.

4.3. Boundary Street Design

4.3.1. Existing and Future Conditions

The boundary streets for the development are Richmond Rd and Assaly Rd. The existing roadway geometries consist of the following features:

- *Richmond Rd:*
 - 1 vehicle travel lane in each direction;
 - 2m sidewalk on both sides of road. The north side of road does not have a boulevard separation, but the south side has greater than 2m boulevard separation;
 - More than 3,000 vehicles per day;
 - Posted speed limit is 50km/h;
 - Classified as an arterial mainstreet roadway but not identified as a trucking route; and,
 - Identified as a spine route and cross-town bike route with curbside painted cycling facilities on the north side and cycle track on the south side.
- *Assaly Rd:*

- 1 vehicle travel lane in each direction;
- 1.5m sidewalk on east side and 2m sidewalks on west side, both without boulevard separation. The future site frontage sidewalk on Assaly Rd is proposed as greater than 2m wide with no boulevard separation;
- Less than 3,000 vehicles per day;
- Assumed unposted speed limit is 50km/h;
- Not part of a cycling, transit or trucking route; and,
- Located within 300m of Regina Street Alternative School.

Multi-modal Level of Service (MMLoS) analysis for the subject road segments adjacent to the site is summarized in **Table 12** with detail analysis provided in **Appendix G**.

Table 12: MMLoS – Boundary Street Segment Existing

Road Segment	Multi-Modal Level of Service							
	Pedestrian		Bicycle		Transit		Truck	
	PLoS	Target	BLoS	Target	TLoS	Target	TkLoS	Target
Existing								
Richmond Rd – north side between Assaly & Starflower	E	A	C	A	D	D	B	E
Richmond Rd – south side between Assaly & Starflower	C	A	A	A	D	D	B	E
Assaly Rd – east side between Regina & Richmond	F	A	D	D	-	n/a	-	n/a
Assaly Rd – west side between Regina & Richmond	C	A	D	D	-	n/a	-	n/a
Future								
Assaly Rd – east side between Regina & Richmond	C	A	D	D	-	n/a	-	n/a

Pedestrian

- None of the road segments meet the target PLoS 'A' triggered by the proximity to a school and within 600m of rapid transit station. It is noteworthy that the developer is proposing wide sidewalks and paved courtyards within the site frontage, providing an improvement to existing pedestrian facilities. Due to vehicular volumes on Richmond Rd, only Assaly Rd could meet future targets if greater than 2m sidewalks with greater than 2m boulevards were provided. Adding a boulevard to the north side of Richmond Rd would improve the PLoS from 'E' to 'C' but would still not meet the target.

Bicycle

- The cyclist BLoS targets were met on all road segments except for the north side of Richmond Rd. To meet the BLoS target, a physically separated cycling facility or if a speed survey demonstrates the 85th percentile speed is 50km/h or less, then it would meet the BLoS target for this location.

Transit

- Only Richmond Rd has active transit services. The transit TLoS targets were met.

Truck

- None of the boundary streets are truck routes. The trucking TkLoS targets were met at Richmond Rd.

4.4. Access Intersection Design

4.4.1. Location and Design of Access

As described in **Section 4.1.2**, the site will be removing one of the two existing accesses to the subject site, maintaining Starflower Ln. Starflower Ln begins at Richmond Rd permitting only inbound traffic and is located approximately 100m east of signalized Assaly/Richmond intersection. Starflower Ln reaches a T-intersection

approximately 50m north of Richmond Rd where it transitions to a private access to an existing residential complex to the east, and continues as Starflower Ln to the west.

Starflower Ln provides access to the underground parking garage ramp approximately 25m west of the T-intersection. The distance between the ramp and Assaly Rd to the west is approximately 85m. The Starflower/Assaly intersection operates as a STOP-control on Starflower and free-flow on Assaly. Starflower Ln varies in width from approximately 5m to 7m wide and has been designed to accommodate HSU vehicles.

4.4.2. Intersection Control

Due to the low forecasted traffic volumes at study area intersections, it is not anticipated that traffic signals or all-way-stop-control (AWSC) will be required in the future. The internal T-intersection for Starflower Ln and adjacent surface parking lot for 1285 Richmond Rd is currently unsignalized. A yield or STOP-control could be added here based on the judgement of City Staff and could be confirmed during detailed design. The volumes at this internal T-intersection are forecasted to be very low and poses very low risk leaving as is. **Section 4.9.2** will assess if the Richmond Rd access or Starflower/Assaly intersection are in need of alternate intersection controls.

4.4.3. Intersection Design

Given that Starflower Ln is a local street, there is no minimum throat distance requirement in the TAC manual. Storage lanes at accesses on Starflower Ln are not expected due to low turning volumes. **Section 4.9.2** will confirm if sub-par operations are present and if storage lanes are recommended.

4.5. Transportation Demand Management

4.5.1. Context for TDM

Based on the type of development, it is assumed that most trips generated by the proposed site will be residents leaving the site in the AM peak to go to work and returning from work to the proposed site in the PM peak. Sections 3.1.1 and 3.1.2 describe how many trips are anticipated per travel mode. The site is located within 600m of rapid transit.

4.5.2. Need and Opportunity

Since the development is located in a transit priority area within 600m radius of future Lincoln Fields LRT Station, measures to provide sustainable active mode shares are encouraged. Such measures are described in more detail in Section 4.5.3 below, but include reduced parking ratios (proposed 0.32/unit for residents), more aggressive Multi-Modal Levels of Service (MMLoS) such as providing wider sidewalks as described in Section 4.3 and 4.9 and safe and efficient connectivity to public transit as described in Section 4.1 and 4.7, to name a few.

4.5.3. TDM Program

The TDM infrastructure checklist and TDM Measures are attached as **Appendix H**.

Regarding the TDM Supportive Development Design and Infrastructure Checklist:

- Ten (10) out of the ten (10) “required” measures have been satisfied.
- At least eleven (11) of fourteen (14) “basic” measures related to walking, cycling, transit and parking have been satisfied or are not applicable
- One (1) of the of the seven (7) candidate “better” measures are also proposed or are non-applicable, including:
 - Separate long-term and short-term parking areas

Regarding the TDM Measures Checklist:

- Five (5) out of seven (7) “basic” measures related to walking, cycling, transit, parking and TDM marketing have been satisfied. Three (3) of those, which have been designated by an asterisk (*), are considered by the TDM Measures to be some of the most dependably effective tools to encourage sustainable travel modes. This includes:
 - Display walking and cycling information at major entrances.
 - Display transit information at major entrances.
 - *Offer preloaded PRESTO card to residents with one monthly transit pass.
 - * Unbundle parking costs from monthly rent.
 - * Provide multi-modal travel information package to new residents.
- Two (2) out of eleven (11) “better” measures related to walking, cycling, transit, parking and TDM marketing have been satisfied. One (1) of those, which has been designated by an asterisk (*), is considered by the TDM Measures to be some of the most dependably effective tools to encourage sustainable travel modes. This includes:
 - Offer on-site cycling courses for residents or subsidize off-site courses.
 - *Offer personalized trip planning to new residents.

4.6. Neighborhood Traffic Management

4.6.1. Adjacent Neighborhoods

The development proposes maintaining the one-way Starflower Ln local street, with the inbound access at Richmond Rd and outbound access at Assly Rd. Traffic volumes along this segment is anticipated to be less than 50 veh/h during the peak hours, conforming to local roads classification.

The street is approximately 155m in length, with an internal T-intersection. The segment is short and not conducive to speeding. This street is expected to be low risk for infiltration and is not expected to operate outside of its designated local road classification.

4.7. Transit

4.7.1. Route Capacity

The future development is expected to generate approximately 135 ‘new’ two-way transit trips. It is forecasted that the majority of transit trips will use the nearby high quality LRT network via Lincoln Fields Station. The future line will have separate tracks for each direction, allowing high frequency service to meet required transit demands.

Bus route 11 which operates adjacent to the site has average headways of 15 minutes during the day, and occasionally less than 15 minutes during peak hours. OC Transpo has buses such as the New Flyer D60L with a total capacity of 110 passengers or Alexander Dennis Enviro 500 with approximately 100 passengers, so it is expected to have sufficient capacity to support the remainder ‘new’ two-way transit passenger trips not using the future LRT Line.

4.7.2. Transit Priority

Richmond Rd does not have transit priority within the study area intersections. The future Confederation Line West Extension is planned completion by 2025. This corridor will continue to operate as grade separated rapid transit, with the subject development not affecting LRT times.

4.8. Review of Network Concept

The site is currently zoned as AM10 which allows general mixed-use. Under clause (f), the maximum building height is governed by the adjacent property line zoning. In this case, the site located just north of the proposed

development is zones as R3A. Subclause (i) indicated that “in any area up to and including 20 metres from a property line abutting a R1, R2 or R3 residential zone (By-law 2011-124)”, then the maximum allowable height is 11m.

The developer is proposing a 28-storey and 32-storey towers, which would be higher than 11m. On average, it can be assumed that each storey equates to approximately 3m in height including ceiling and building materials. Under this assumption, an 11m building would likely consist of 3 to 4 storeys high.

For the purpose of this assessment, it will be assumed that the first floor is occupied by a lobby and commercial uses only, with no units on the first floor. Additionally, it will be assumed that each floor has the same number of units, disregarding setbacks which would probably have a smaller GFA and fewer units on higher floors for a more conservative analysis. Using the above assumptions, a base calculation for how many projected units above existing zoning can be derived as seen in **Table 13**.

Table 13: Projected Number of Units Above Existing Zoning

Tower	Storeys Allowed	Storeys Proposed	Floors Above Existing Zoning	Units Proposed Above 4 Storeys ¹
Tower A	4	32	28	275
Tower B	4	28	24	234
Totals				509
1. Units proposed include 270 for Tower A and 230 for Tower B plus the difference split from the podium units on the 5 th floor only.				

Based on **Table 13**, approximately 509 units will be located above allowable zoning which would create approximate 210 more peak hour person trips than the equivalent volume permitted by established zoning (refer to **Appendix I** for calculations).

According to the TIA guidelines, 200 peak hour person trips or more above the equivalent volume permitted by established zoning is the trigger for additional analysis. In this case, the threshold is met by only 10 person trips.

However, this increase of peak hour trips is not anticipated to change the TMP concept for auto or transit network. Within the New Official Plan, increasing density near rapid transit corridors is a priority. This development, located within 600m of a major LRT Station will increase the local density by providing more than 200 new peak hour trips compared to the existing permitted zoning. The majority of these new trips are anticipated to make use of the LRT station currently under construction at Lincoln Fields. Additionally, a higher rate of cyclists from this development are forecasted given then proximity to high quality bike lanes.

To help promote alternate modes of transportation from this development, a low vehicle parking rate is proposed and strong TDM measures are proposed. In the event that higher vehicle use occurs, the adjacent network has ample capacity to accommodate the development. Overall, the development's increase in density near high quality transit and cycling facilities aligns with the City's future planning vision.

4.9. Intersection Design

4.9.1. Intersection Control

The site generated vehicle traffic is quite minimal and the existing intersection controls are anticipated to be kept as they are today.

4.9.2. Intersection Design

Multi-Modal Level of Service

As stated in the MMLOS Guidelines, only signalized intersections are considered for the intersection Level of Service measures. The MMLOS analysis is summarized in **Table 14**, with detailed analyses provided in **Appendix J**.

Table 14: MMLoS – Existing and Future Adjacent Signalized Intersections

Road Segment	Multi-Modal Level of Service							
	Pedestrian		Bicycle		Transit		Truck	
	PLoS	Target	BLoS	Target	TLoS	Target	TkLoS	Target
Assaly/Richmond	F	A	D	A	A	D	F	E
Croydon/Richmond	F	A	D	A	B	D	F	E

Pedestrian

- For all intersections, pedestrians must cross the equivalent of at least 6 lanes of traffic due to the cross-section of the south approach. There are no options that can help improve the PLoS significantly enough to come anywhere near achieving the target PLoS 'A'.

Bicycle

- The bicycle BLoS target was not met at any intersection due to the lack of 2-stage left-turn boxes for the east approach and lack of cycling facilities on north-south approaches.

Transit

- The Transit TLoS target was met at both intersections.

Truck

- Truck target level of service was not met at either intersection, however neither of them are truck routes.

Existing Conditions

Both Assaly and Croydon intersections with Richmond Rd have a uni-directional cross-ride on the south side of the intersections. Currently, right-turn-on-red is not permitted for the northbound movement. Given that both existing and future projected volumes have less than 150 right-turns for the eastbound movement, then no further measures were deemed necessary at this time.

The existing traffic volumes at study area intersections were assessed based on vehicle capacity v/c and delays (s) to determine their level of service. Synchro 11 software was used with summarized results in **Table 15** and details results in **Appendix K**.

Table 15: Existing Intersection Performance

Intersection	Weekday AM Peak (PM Peak)					
	Critical Movement			Intersection		
	LoS	max. v/c or avg. delay (s)	Movement	Delay (s)	LoS	v/c
Assaly/Richmond	A(B)	0.52(0.68)	EBT(WBT)	9.6(11.1)	A(B)	0.47(0.62)
Croydon/Richmond	A(B)	0.52(0.70)	EBT(WBT)	14.2(18.6)	A(B)	0.49(0.64)
Starflower/Richmond (U)	A(B)	8(10)	EB(EB)	0(0)	A(A)	-
Starflower/Assaly (U)	A(A)	9(9)	WB(WB)	1(2)	A(A)	-

Note: Analysis of signalized intersections assumes a PHF of 0.9 and a saturation flow rate of 1800 veh/h/lane. U = Unsignalized.

As shown in **Table 15**, all study area intersections operate overall very well, with LoS 'B' or better and critical movements of 'B' or better.

Background Conditions 2030

The future background 2030 conditions represent the impact of additional background developments along with forecasted east-west growth in background volumes of 0.5% annually. Since 2030 background has the same intersection layouts as 2025 and is the more critical of the two scenarios as it has been grown for a longer time, then only 2030 will be analyzed. The future projected 2030 background volumes are illustrated in **Figure 16** with projected operation outputs in **Table 16**. The detailed Synchro results can be found in **Appendix L**.

Table 16: 2030 Background Intersection Performance

Intersection	Weekday AM Peak (PM Peak)					
	Critical Movement			Intersection		
	LoS	max. v/c or avg. delay (s)	Movement	Delay (s)	LoS	v/c
Assaly/Richmond	A(B)	0.50(0.66)	EBT(WBT)	9.4(10.7)	A(A)	0.46(0.60)
Croydon/Richmond	A(B)	0.50(0.68)	EBT(WBT)	13.5(17.8)	A(B)	0.46(0.62)
Starflower/Richmond (U)	A(B)	8(10)	EB(EB)	0(0)	A(A)	-
Starflower/Assaly (U)	B(B)	10(10)	WB(WB)	0(2)	A(A)	-

Note: Analysis of signalized intersections assumes a PHF of 1.0 and a saturation flow rate of 1800 veh/h/lane. U = Unsignalized.

As seen in **Table 16**, the study area intersection are anticipated to perform very similarly to existing conditions, which performs very well.

Future Conditions 2030 – Full Buildout

Given how well the existing and background 2030 conditions performed, only the most critical future scenario 2030 will be analyzed, as it has the same road geometries and signal timing, but an additional 5 years of annual growth rate on Richmond Rd. The future full build-out 2030 volumes were derived by superimposing background 2030 volumes which include other area developments and background growth, with future site-generated volumes. The future projected 2030 volumes are illustrated in **Figure 19** with projected operation outputs in **Table 17**. The detailed Synchro results can be found in **Appendix M**.

Table 17: 2030 Full Build-out Intersection Performance

Intersection	Weekday AM Peak (PM Peak)					
	Critical Movement			Intersection		
	LoS	max. v/c or avg. delay (s)	Movement	Delay (s)	LoS	v/c
Assaly/Richmond	A(B)	0.57(0.66)	EBT(WBT)	11.2(10.9)	A(A)	0.53(0.60)
Croydon/Richmond	A(B)	0.51(0.69)	EBT(WBT)	13.6(18.0)	A(B)	0.47(0.62)
Starflower/Richmond (U)	A(B)	8(10)	EB(EB)	0(0)	A(A)	-
Starflower/Assaly (U)	B(B)	10(10)	WB(WB)	2(2)	A(A)	-

Note: Analysis of signalized intersections assumes a PHF of 1.0 and a saturation flow rate of 1800 veh/h/lane. U = Unsignalized.

As seen in **Table 17**, all study area intersections are expected to operate similarly to existing conditions and future background 2030 conditions, with very minor delays and ample capacity left. Given the ample intersection capacity, the City Safety department could see if additional PIDG measures could be implemented at Croydon/Richmond intersection to reduce collisions with vulnerable active users, however this intersection is far removed from the site and the site is not anticipated to negatively impact existing operations.

Queuing Assessment

Overall, the Synchro software shows modest queues for an arterial mainstreet, with the westbound movement in the PM peak experiencing the longest queues at approximately 200m for the 95th percentile at Assaly Rd and Croydon Rd intersections with Richmond Rd. These queues could block vehicles entering the site momentarily until the green phase is given at the signals. The average or 50th percentile queue during the PM peak is 59m at Assaly/Richmond, which would not be long enough to block the entrance to Starflower Ln. The future projected 2030 queues are similar to the existing queues.

Overall, the queues are acceptable and relatively minor, which is anticipated given that all intersections operate overall very well and with good critical movements in terms of intersection performance.

5.0 FINDINGS AND RECOMMENDATIONS

Based on the results summarized herein the following findings and recommendations are provided:

Existing Conditions

- The site is currently occupied by commercial uses and is zoned as AM10.
- The site is located in a transit oriented development zone, being located approximately 350m from Lincoln Fields major BRT station and future LRT Station by year 2025.
- Overall, there were 40 collisions recorded in five years within the study area. The Croydon/Richmond intersection experienced a higher than average rate of collision with pedestrians and cyclists. Further intersection modifications from the PIDG guide could reduce the frequency of these collisions. Although limited data, it is possible that a POX may be recommended in future years if pedestrians continue to cross Richmond Rd at unsignalized locations.
- The site is currently accessed by two entrances and two exits; one a full movement access to Richmond Rd, the second a one-way in laneway at Starflower Ln with an egress at Assaly Rd.
- Existing intersections operate at very good overall and critical movements LoS 'B' or better during the weekday peak hours.

Proposed Development

- The site proposes 590 residential units and 8,046 ft² of retail space in a 28 and 32-storey buildings connected by a 5-storey podium.
- The site will make use of the existing Starflower Ln, which is a one-way road from Richmond Rd to Assaly Rd, in order to access the underground parking garage ramp. The second existing full movement Richmond Rd access located closer to Assly Rd will be removed and reinstated according to City design standards.
- The proposed development is projected to generate approximately 135 'new' transit trips during the AM and PM peak hour periods, which can be accommodated by rapid transit Lincoln Fields LRT Station (expected completion by 2025) which is located approximately 600m walking distance. Additional capacity is available from the existing frequent bus route 11.
- The proposed development is projected to generate 'new' vehicle volumes of approximately 60 veh/h two-way total during the weekday morning and afternoon peak hours.
- The developer proposes 310 bike parking spaces which exceeds the minimum by-law requirements. The majority of bike parking will be located indoors in a well-lit secured area near elevators. Five outdoor bike parking spaces are proposed near the commercial uses.
- A total of 188 residential spaces and 60 visitor/retail spaces are proposed for the site which meets the minimum and is below the maximum allowed parking rates based on the Parking By-laws.
- A strong TDM plan is proposed for this development to encourage the use of alternate modes of transportation and reduce the need for vehicular reliance. Refer to **Section 4.5** for further details.

Future Conditions

- Other nearby developments and a 0.5% growth rate were applied to existing volumes (based on more conservative 2016 baseline volumes) to estimate background conditions. The 2030 background intersection performance of all study area intersections was similar to existing conditions.

- The MMLOS road segment analysis shows that pedestrian targets were not met at any location given the high PLoS targets given the proximity to major rapid transit facilities (LRT). The PLoS target on Assaly Rd could be met if a 2m wide sidewalk with 2m wide boulevards was built. The bicycle BLoS targets were met at all locations except for Richmond Rd north side given that fully segregated cycling facilities are not present. All other targets were met at all locations.
- The MMLOS intersection analysis shows that only transit targets were met for signalized intersections. Truck targets were not met, but none of the study area intersections had designated truck routes. The pedestrian PLoS targets weren't met given the higher-operating speeds and number of travel lanes required to cross. The bicycle target goals were also not met given the lack of cycling facilities on all approaches, the quantity of lanes required to be crossed and the higher operating speeds.
- The 2030 full buildout conditions continued to operate at overall very good LoS 'B' or better with some critical movements at LoS 'B'. No major queueing implications were noted within the network.
- The site is proposing upgraded pedestrian facilities along the site frontage on Richmond Rd and Assaly Rd, with more than 2m wide sidewalks.
- The on-going Stage 2 LRT Expansion will provide enhanced pedestrian and cyclist facilities near Lincoln Fields Station. Additional improvements to cycling facilities and intersection crossing treatments are anticipated as part of the Carling Transit Priority Corridor works. The site will provide direct connectivity to existing and future pedestrian and cycling network infrastructure.

Based on the foregoing findings, the proposed development located at 1299 Richmond Rd is recommended from a transportation perspective.

Prepared By:



Juan Lavin, P. Eng.
Transportation Engineer

Reviewed By:



Austin Shih, P.Eng.
Senior Transportation Engineer

DRAFT

Appendix A:

Screening Form and Site Plan

City of Ottawa 2017 TIA Guidelines

Date

22-Jun-22

TIA Screening Form

Project

1299 Richmond TIA

Project Number

478250-01000

Results of Screening	Yes/No
Development Satisfies the Trip Generation Trigger	Yes
Development Satisfies the Location Trigger	Yes
Development Satisfies the Safety Trigger	No

Module 1.1 - Description of Proposed Development

Municipal Address	1299 Richmond Rd, Ottawa, ON K2B 8L2, Canada
Description of location	At northwest corner of Richmond/Assaly intersection
Land Use	Two residential apartment buildings
Development Size	28 and 32-storey buildings (828 m2 each) with shared podium
Number of Accesses and Locations	One access assumed on the north along Starflower Ln
Development Phasing	Single Phase
Buildout Year	Assumed 2024
Sketch Plan / Site Plan	See attached

Module 1.2 - Trip Generation Trigger

Land Use Type	Townhomes or Apartments	
Development Size	608	Units
Trip Generation Trigger Met?	Yes	

Module 1.3 - Location Triggers

Development Proposes a new driveway to a boundary street that is designated as part of the City's Transit Priority, Rapid Transit, or Spine Bicycle Networks (See Sheet 3)	No
Development is in a Design Priority Area (DPA) or Transit-oriented Development (TOD) zone. (See Sheet 3)	Yes
Location Trigger Met?	Yes

Module 1.4 - Safety Triggers

Posted Speed Limit on any boundary road	<80	km/h
Horizontal / Vertical Curvature on a boundary street limits sight lines at a proposed driveway	No	
A proposed driveway is within the area of influence of an adjacent traffic signal or roundabout (i.e. within 300 m of intersection in rural conditions, or within 150 m of intersection in urban/ suburban conditions) or within auxiliary lanes of an intersection;	No	
A proposed driveway makes use of an existing median break that serves an existing site	No	
There is a documented history of traffic operations or safety concerns on the boundary streets within 500 m of the development	No	
The development includes a drive-thru facility	No	
Safety Trigger Met?	No	

TOPOGRAPHICAL PLAN OF SURVEY OF
PART OF LOTS 1 and 2
REGISTERED PLAN 408456
CITY OF OTTAWA
Surveyed by Arnis, O'Sullivan, Vollebek Ltd.
REVISION NOTE: Plan updated to show
topographical features on Assaly Road
April 12, 2023

Notes & Legend

○ MH-1	Maintenance Hole (Traffic)	T/G	Top of Grade
○ MH-2	Maintenance Hole (Hydro)	GV	Gas Valve
○ MH-3	Fire Hydrant	GM	Gas Meter
○ MH-4	Water Valve	AC	Air Conditioner
○ MH-5	Valve Chamber (Watermain)	WW	Wooden Retaining Wall
○ MH-6	Traffic Signal Post	BRW	Brick Retaining Wall
○ MH-7	Handhole	CRW	Concrete Retaining Wall
○ MH-8	Overhead Wires	○	Diameter
○ MH-9	Utility Pole	○	Location of Elevation
○ MH-10	Anchor	○	Top of Curb / Wall Elevations
○ MH-11	Light Standard	○	Centreline
○ MH-12	Catch Basin	○	Deciduous Tree
○ MH-13	Catch Basin Inlet	○	
○ MH-14	Sign	○	
○ MH-15	Chain Link Fence	○	

SITE AREA = 4142.3 m²

ELEVATION NOTES

- Elevations shown are geodetic, derived from the Vertical Control Monument 2015-0135 having an elevation of 68.405 metres and are referred to the CGD08 geodetic datum.
- It is the responsibility of the user of this information to verify that the job benchmark has not been altered or disturbed and that its relative elevation and description agrees with the information shown on this drawing.

UTILITY NOTES

- This drawing cannot be accepted as acknowledging all of the utilities and it will be the responsibility of the user to contact the respective utility authorities for confirmation.
- Only visible surface utilities were located.
- A field location of underground plant by the pertinent utility authority is mandatory before any work involving breaking ground, probing, excavating, etc.




SITE PLAN LEGEND

---	PROPERTY LINE
---	LINE OF UNDERGROUND GARAGE BELOW
---	MAIN BUILDING ENTRANCE
---	PETAL ENTRANCE
---	EXIT
---	VEHICLE / LOADING ENTRANCE / EXIT
---	FIRE HYDRANT
---	GAS/SEWER CONNECTION
---	MANHOLE COVER
---	AREA DRAIN
---	FLOOR DRAIN (PARKING SLAB)
---	FLOOR DRAIN (INTERIOR)
---	EXISTING LIGHT
---	TYPICAL PARKING SPACE
---	TYPICAL S.P. PARKING SPACE
---	FINISH FLOOR ELEVATION
---	EXISTING ELEVATION
---	PROPOSED ELEVATION
---	TOP OF ROOF
---	BUILDING ENVELOPE
---	GREEN ROOF
---	TERRACE PAVERS

REVISION RECORD

Date	No.	Description
2023-06-01	Zoning By-Law Amendment & Site Plan Approval	

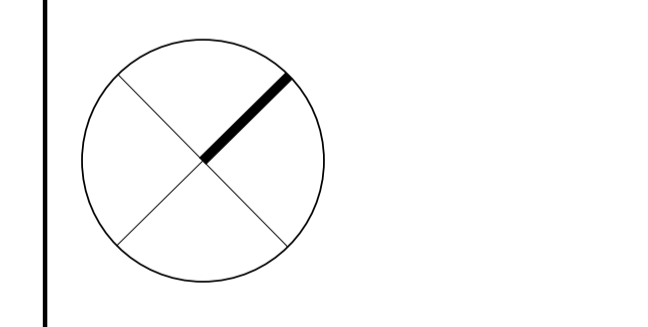

BDP. Quadrangle

Quadrangle Architects Limited
1150 Avenue Road, Suite 2100, Toronto, ON M5V 0A8
416-598-1240 | www.bdpquadrangle.com

1299 Richmond Road, Ottawa

for
Brigil

22026 1:100 BS,GZ RL
PROJECT SCALE DRAWN REVIEWED

Site Plan

A102.S

Note: This drawing is the property of the Architect and may not be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of the Architect and obtain clarification prior to commencing work.


TOPOGRAPHICAL PLAN OF SURVEY OF
PART OF LOTS 1 and 2
REGISTERED PLAN 408466
CITY OF OTTAWA
Surveyed by Annis, O'Sullivan, Vollebakk Ltd.
REVISION NOTE: Plan updated to show
topographical features on Assaly Road
April 13, 2023

Notes & Legend

---	Survey Monument Planted	○	Maintenance Hole (Traffic)	TIG	Top of Grate
---	Survey Monument Found	○	Maintenance Hole (Hydro)	○	Gas Valve
---	Standard Iron Bar	○	Fire Hydrant	○	Gas Meter
---	Short Standard Iron Bar	○	Water Valve	○	Air Conditioner
---	Iron Bar	○	Valve Chamber (Watermain)	○	Wooden Retaining Wall
---	Round Iron Bar	○	Traffic Signal Post	○	Block Retaining Wall
---	Round Iron Bar	○	Handicap Access Sign	○	Concrete Retaining Wall
---	Cut Cross	○	Overhead	○	Overhead
---	Utility Pole	○	Utility Pole	○	Location of Elevations
---	Witness	○	Anchor	○	Top of Curb / Wall Elevations
---	Measured	○	Light Standard	○	Centerline
---	Asst. O'Sullivan, Vollebakk Ltd. 1431	○	Chain Base	○	Decision Tree
---	Registered Plan 408466	○	Chain Base	○	
---	(2003) Plan May 14, 2005	○	Sign	○	
---	(1987) Plan May 13, 1994	○	Sign	○	
---	Maintenance Hole (Storm Sewer)	○	Sign	○	
---	Maintenance Hole (Storm Sewer)	○	Sign	○	
---	Maintenance Hole (Storm Sewer)	○	Sign	○	

Scale 1:250
Metric
DISTANCES SHOWN ON THIS PLAN ARE IN METRES AND CAN BE CONVERTED TO FEET BY DIVIDING BY 0.3048

SITE AREA = 4142.3 m²
ELEVATION NOTES
1. Elevations shown are generic, derived from the Vertical Control Monument 2016-0130 having an elevation of 68.405 metres and are referred to the datum.
2. A field check of this information to verify that the benchmark has not been disturbed and that its relative elevation description agrees with the information shown on this drawing.
UTILITY NOTES
1. This drawing cannot be accepted as acknowledging all of the utilities and it will be the responsibility of the user to contact the respective utility authorities for confirmation.
2. Any vertical utility structure shown on this drawing is shown as a general location of underground plant by the pertinent utility authority is responsible for any work involving any underground, probing, or excavating site.

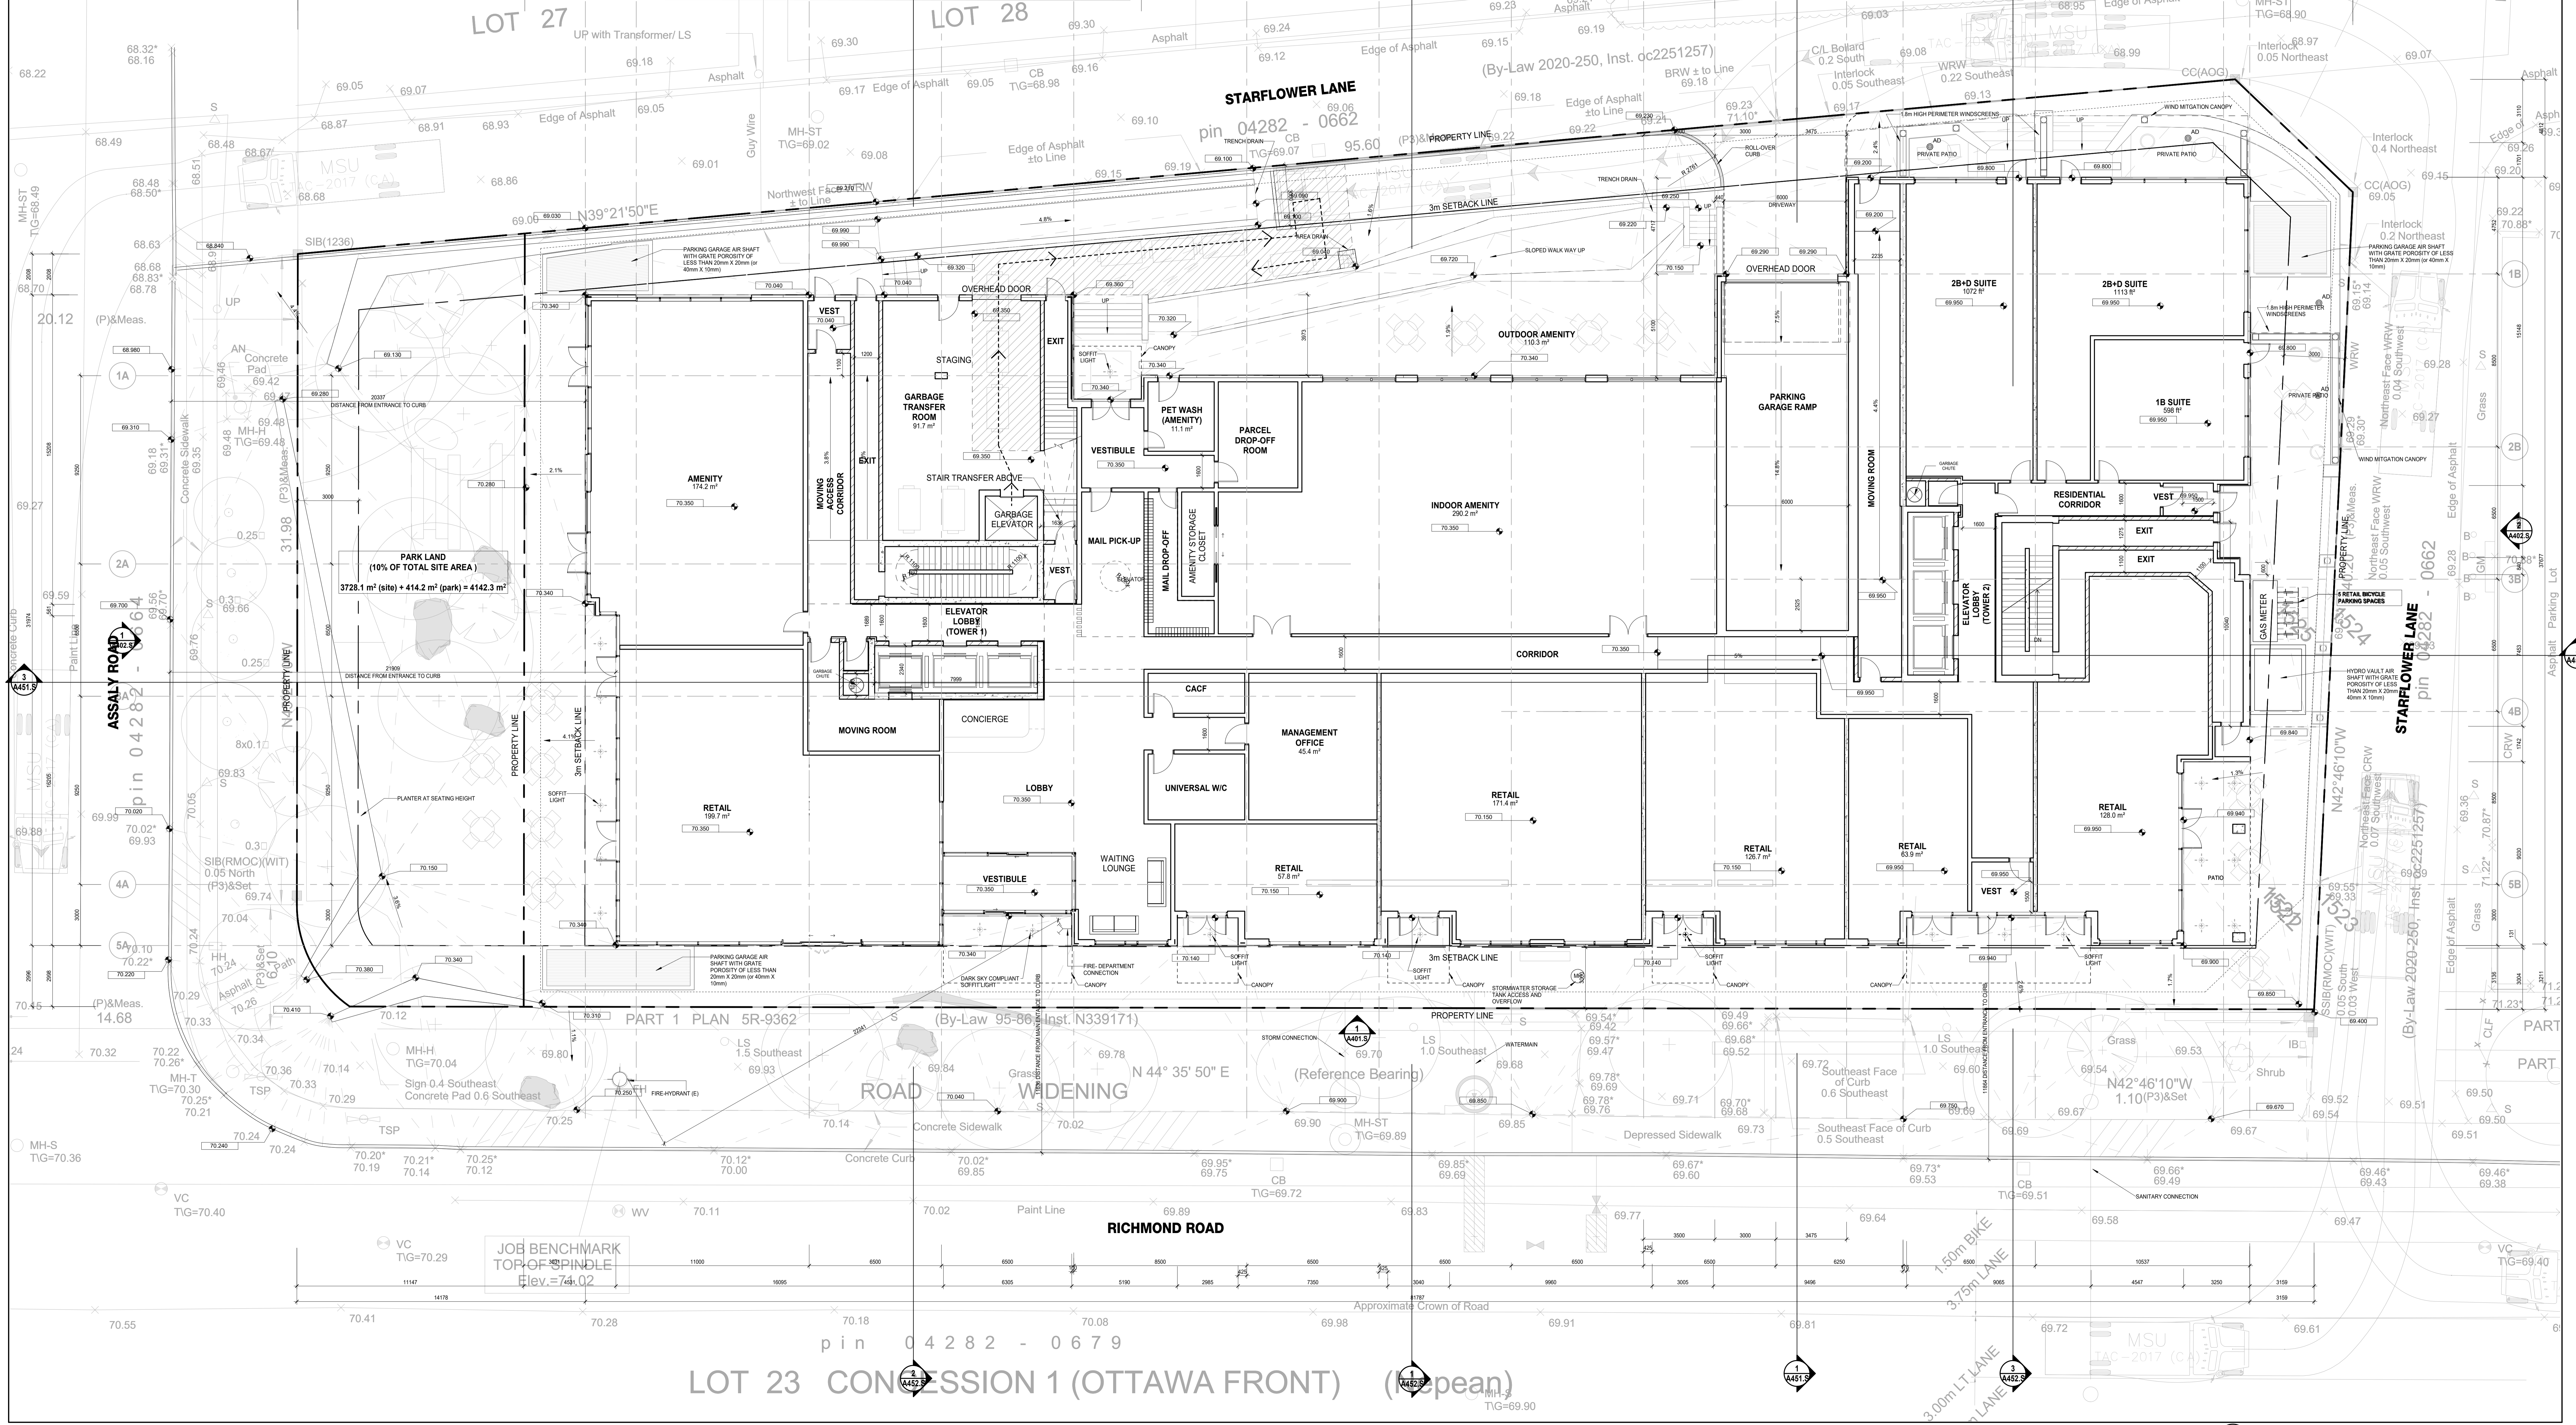

Date	No.	Description
2023-06-01	Zoning By-Law Amendment & Site Plan Approval	
	ISSUE RECORD	

BDP. Quadrangle

Quadrangle Architects Limited
The West 5th Avenue, Suite 2100, Toronto, ON M5V 0S8
416-598-1240 www.bdpquadrangle.com

1299 Richmond Road, Ottawa

for
Brigil

22026 1:100 R/J L R/J
PROJECT SCALE DRAWN REVISED

Ground Floor Plan

A201.S

Note: This drawing is the property of the Architect and may not be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without the prior written permission of the Architect and shall constitute part of the contract documents.

C:\Users\bdp\Documents\BPP\BPP_2023_1299_Richmond_Road_2023_0601\A201.S

DRAFT

Appendix B:
Transit Route Maps



11

LINCOLN FIELDS BAYSHORE


LAURIER

Fréquent

7 days a week / 7 jours par semaine

All day service

Service toute la journée

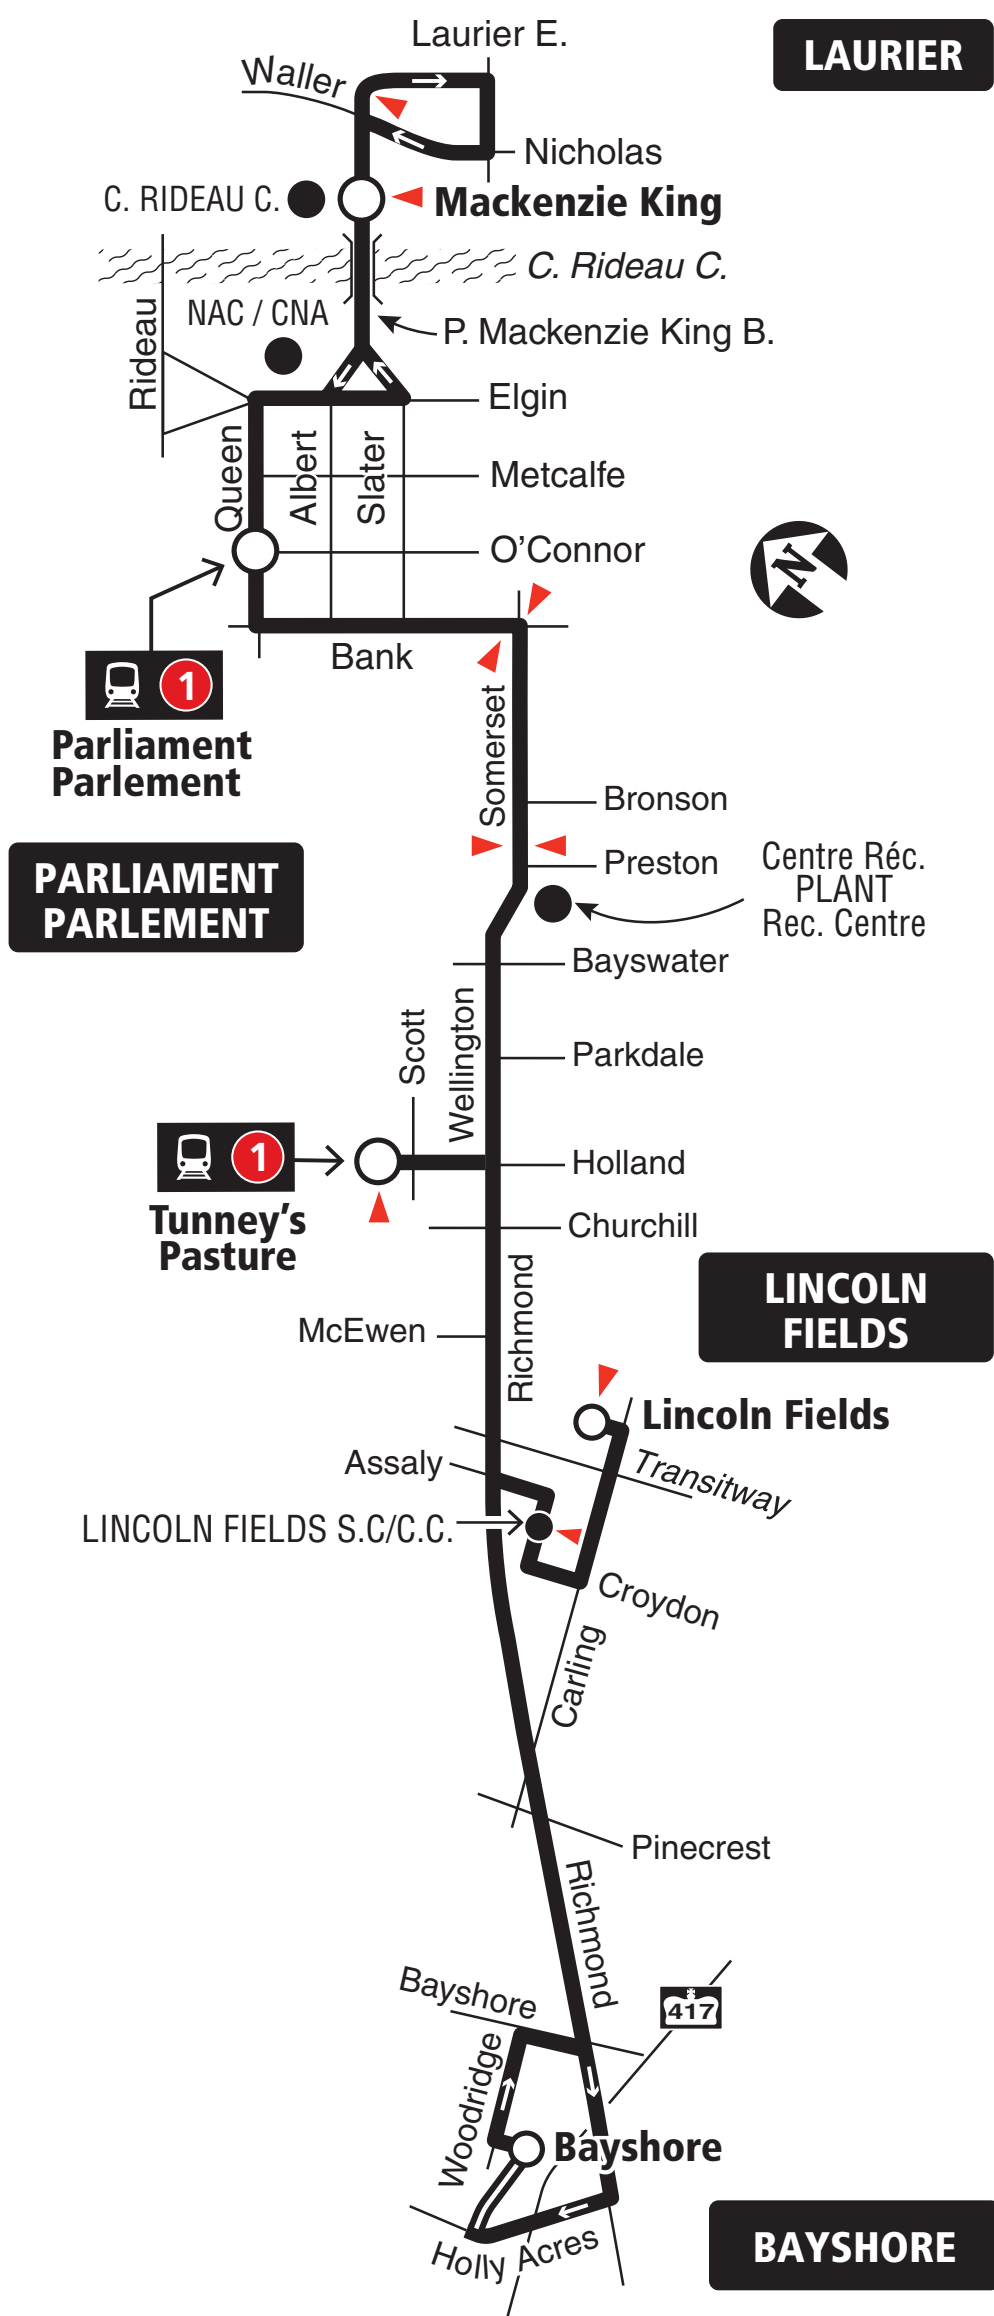

2021.09



Schedule / Horaire 613-560-1000

Text / Texto* 560560

plus your four digit bus stop number / plus votre numéro d'arrêt à quatre chiffres

*Standard message rates may apply / Les tarifs réguliers de messagerie texte peuvent s'appliquer

Customer Service

Service à la clientèle **613-560-5000**

Lost and Found / Objets perdus **613-563-4011**

Security / Sécurité **613-741-2478**

Effective September 5, 2021

En vigueur 5 septembre 2021



INFO 613-560-5000
octranspo.com



153

LINCOLN FIELDS TUNNEY'S PASTURE CARLINGWOOD

Local

7 days a week / 7 jours par semaine

Selected time periods only
Périodes sélectionnées seulement



2022.06

2022.06



Schedule / Horaire 613-560-1000

Text / Texto* 560560

plus your four digit bus stop number / plus votre numéro d'arrêt à quatre chiffres

*Standard message rates may apply / Les tarifs réguliers de messagerie texte peuvent s'appliquer

Customer Service

Service à la clientèle **613-560-5000**

Lost and Found / Objets perdus..... **613-563-4011**

Security / Sécurité **613-741-2478**

Effective June 26, 2022

En vigueur 26 juin 2022



INFO 613-560-5000
octranspo.com

DRAFT

Appendix C:

Traffic Data



Turning Movement Count


Summary, AM and PM Peak Hour

Flow Diagrams


All Vehicles Except Bicycles



Assaly Road & Richmond Road Ottawa, ON

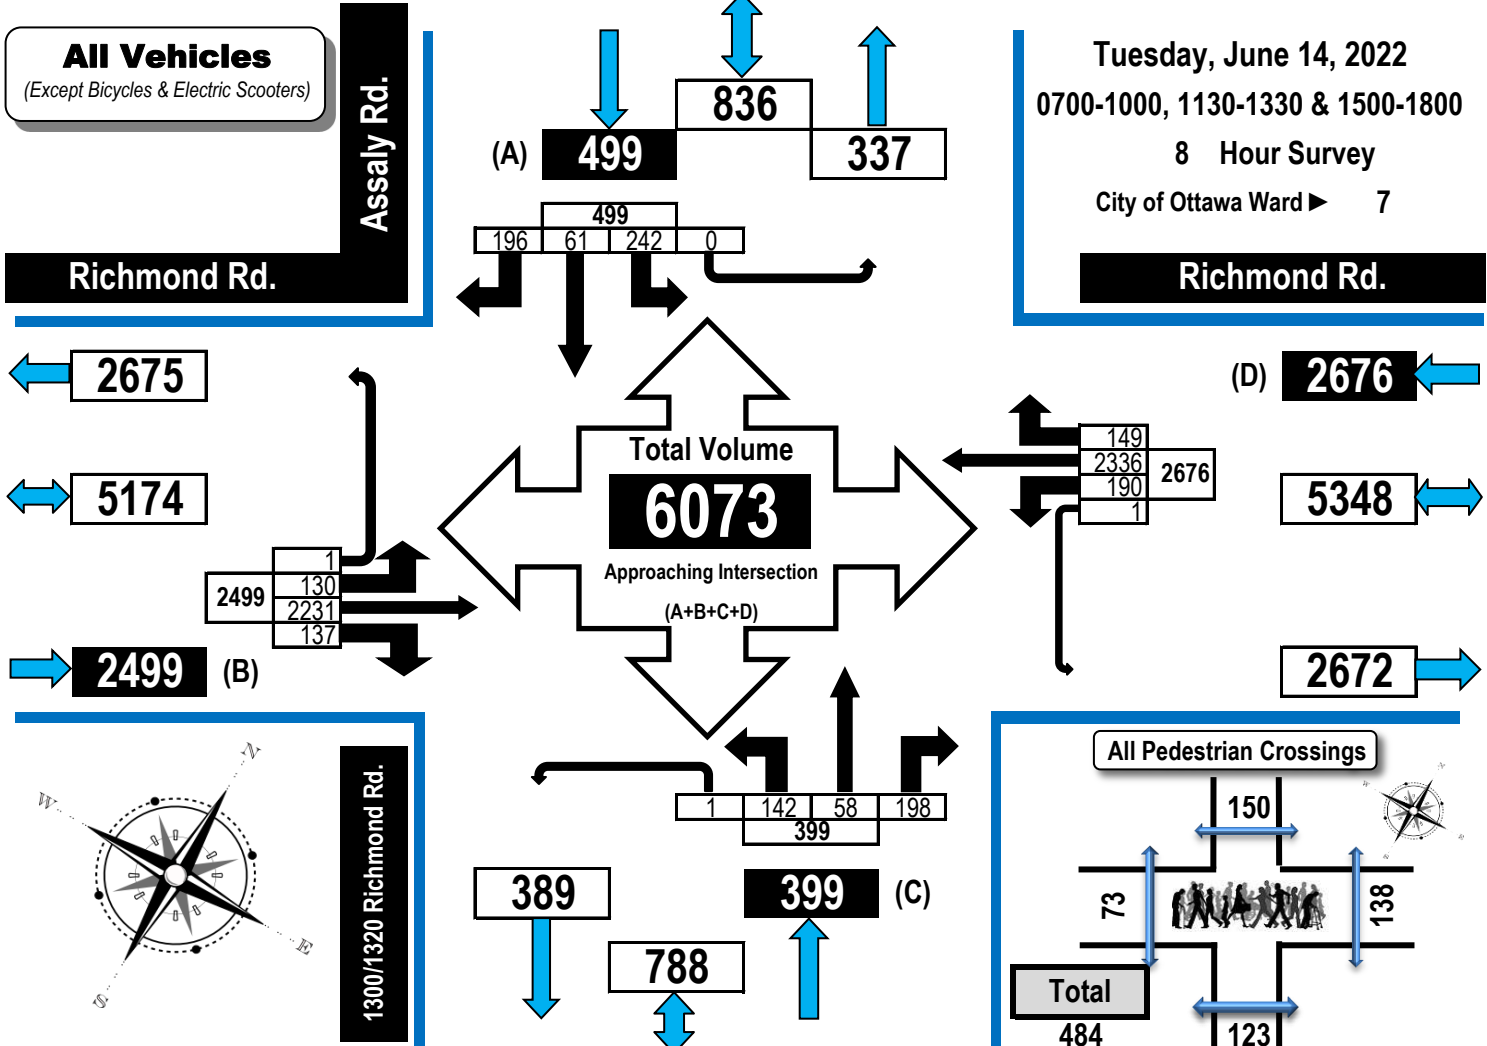

AM Peak Hour Flow Diagram PM Peak Hour Flow Diagram

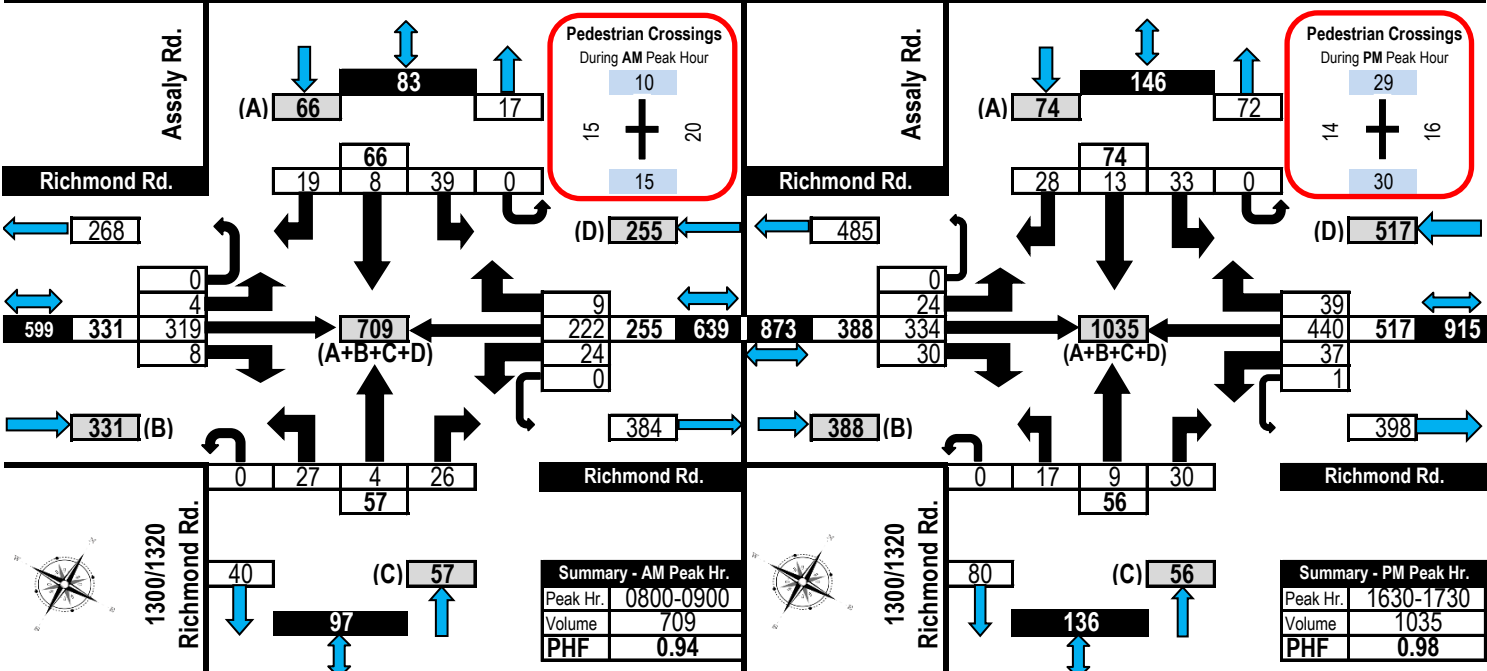



Turning Movement Count


Summary, AM and PM Peak Hour

Flow Diagrams

All Vehicles Except Bicycles



Assaly Road & Starflower Lane Ottawa, ON

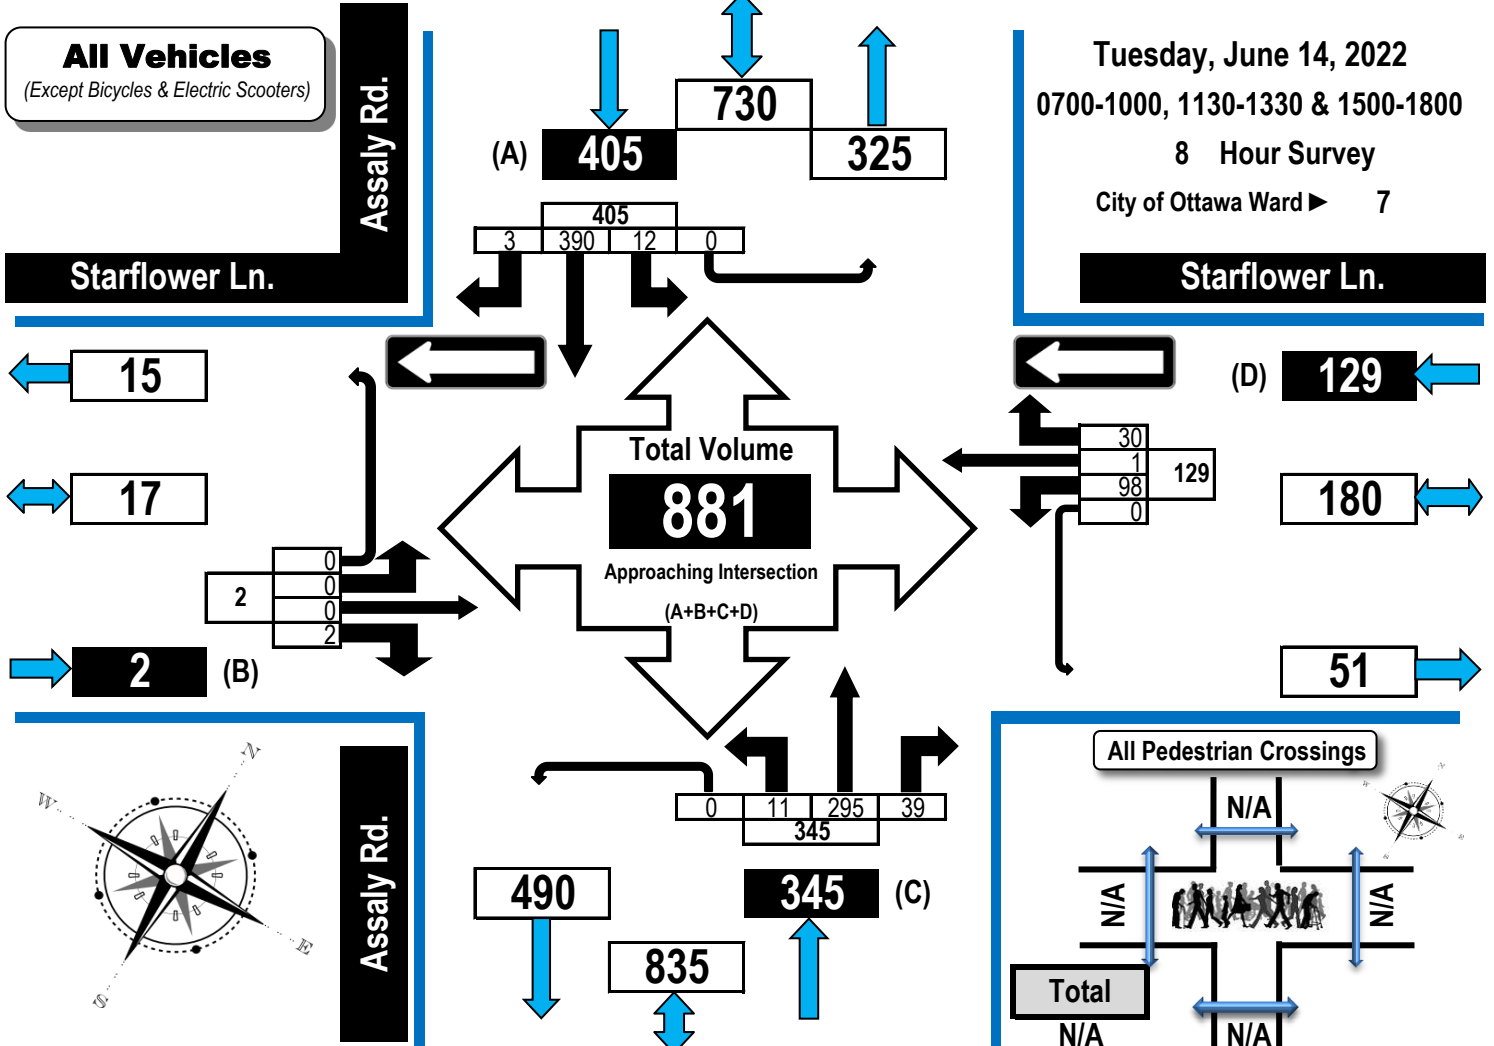

Turning Movement Count - Peak Hour Diagram


CROYDON AVE @ RICHMOND RD

Survey Date: Thursday, February 17, 2022

Start Time: 07:00

WO No: 40154

Device: Miovision

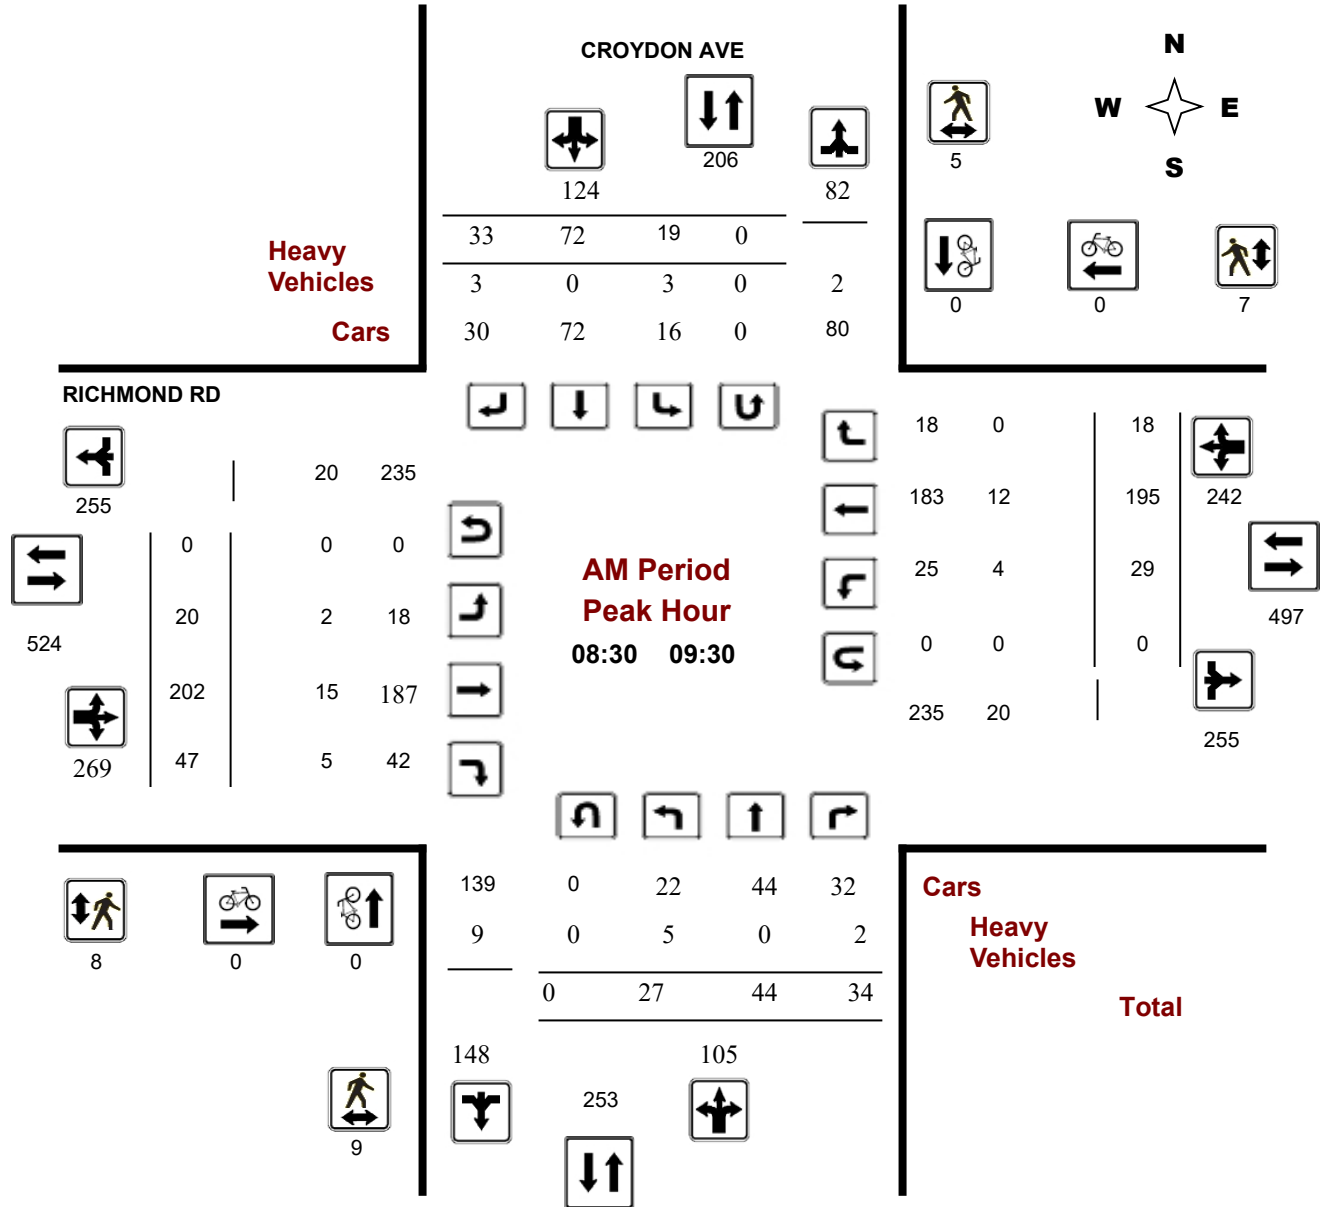

Turning Movement Count - Peak Hour Diagram


CROYDON AVE @ RICHMOND RD

Survey Date: Thursday, February 17, 2022

Start Time: 07:00

WO No: 40154

Device: Miovision

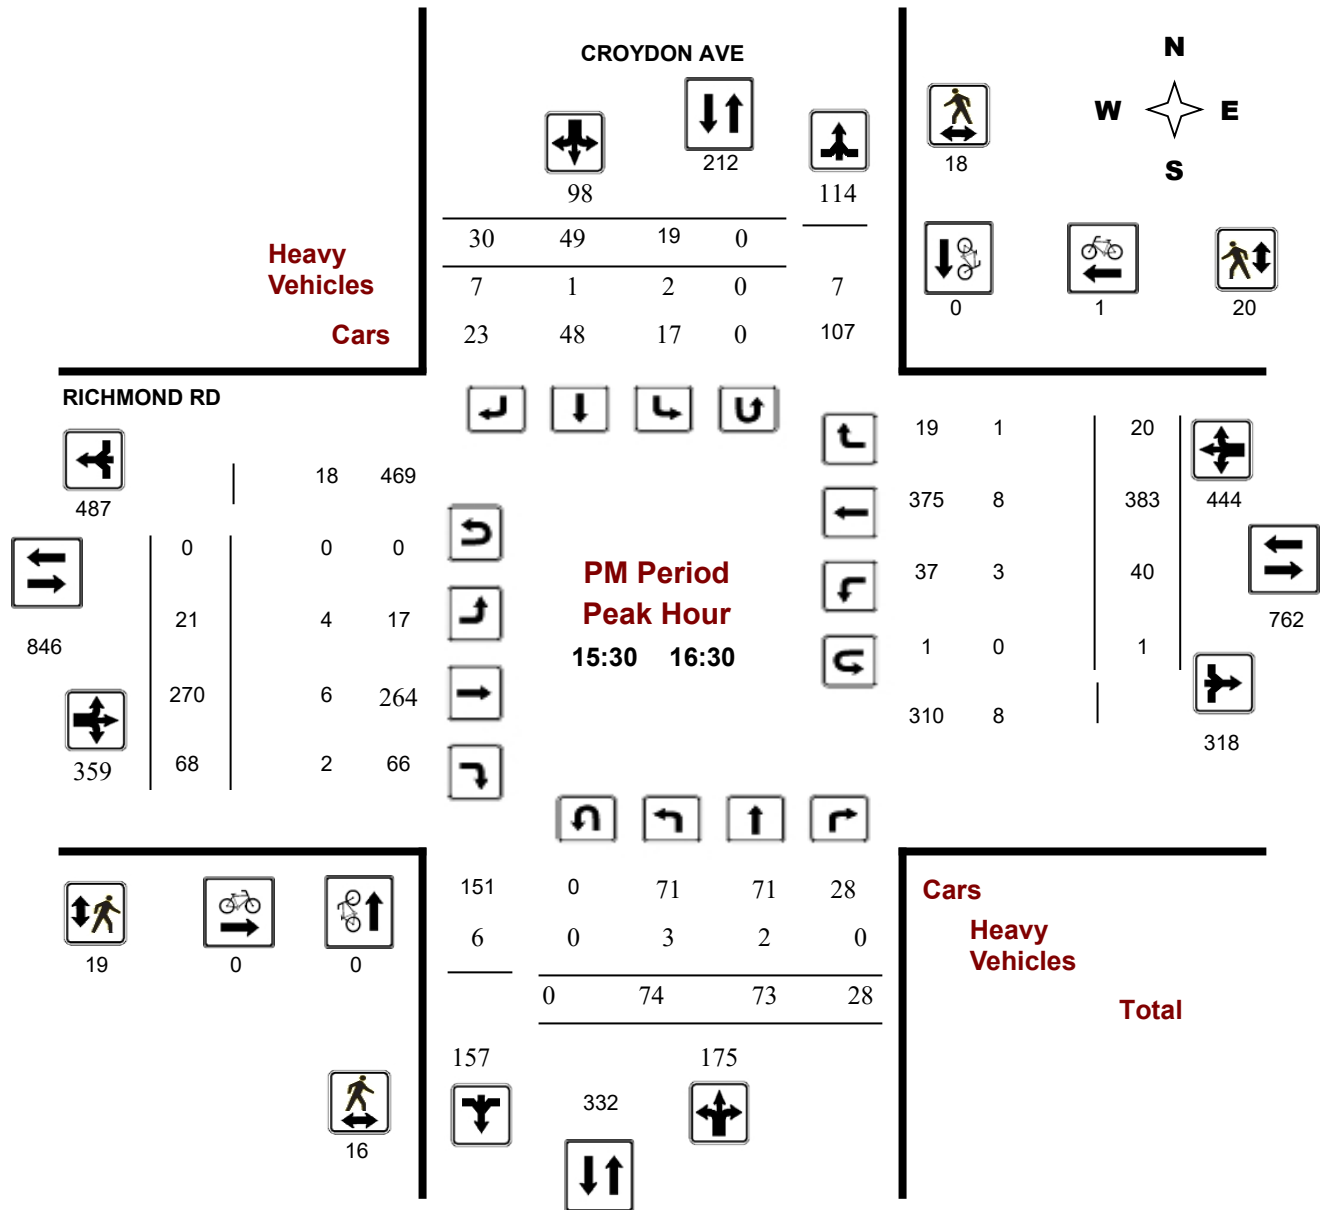

Comments



Turning Movement Count


Summary, AM and PM Peak Hour

Flow Diagrams


All Vehicles Except Bicycles



Richmond Road & 1299 Richmond Road Ottawa, ON

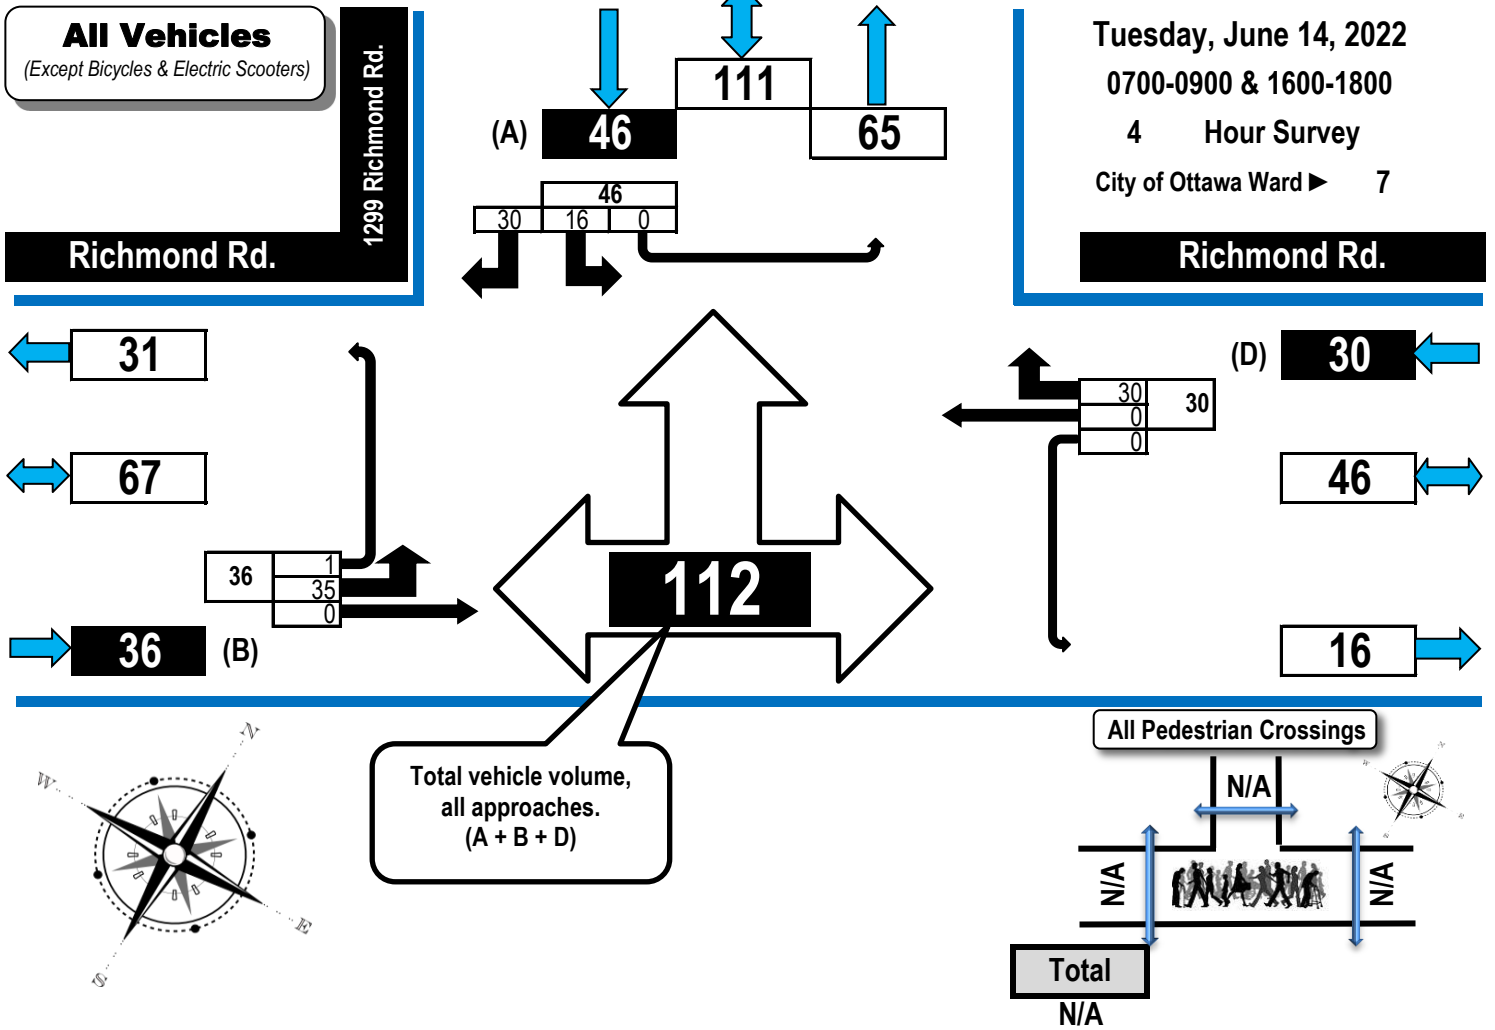

AM Peak Hour Flow Diagram PM Peak Hour Flow Diagram

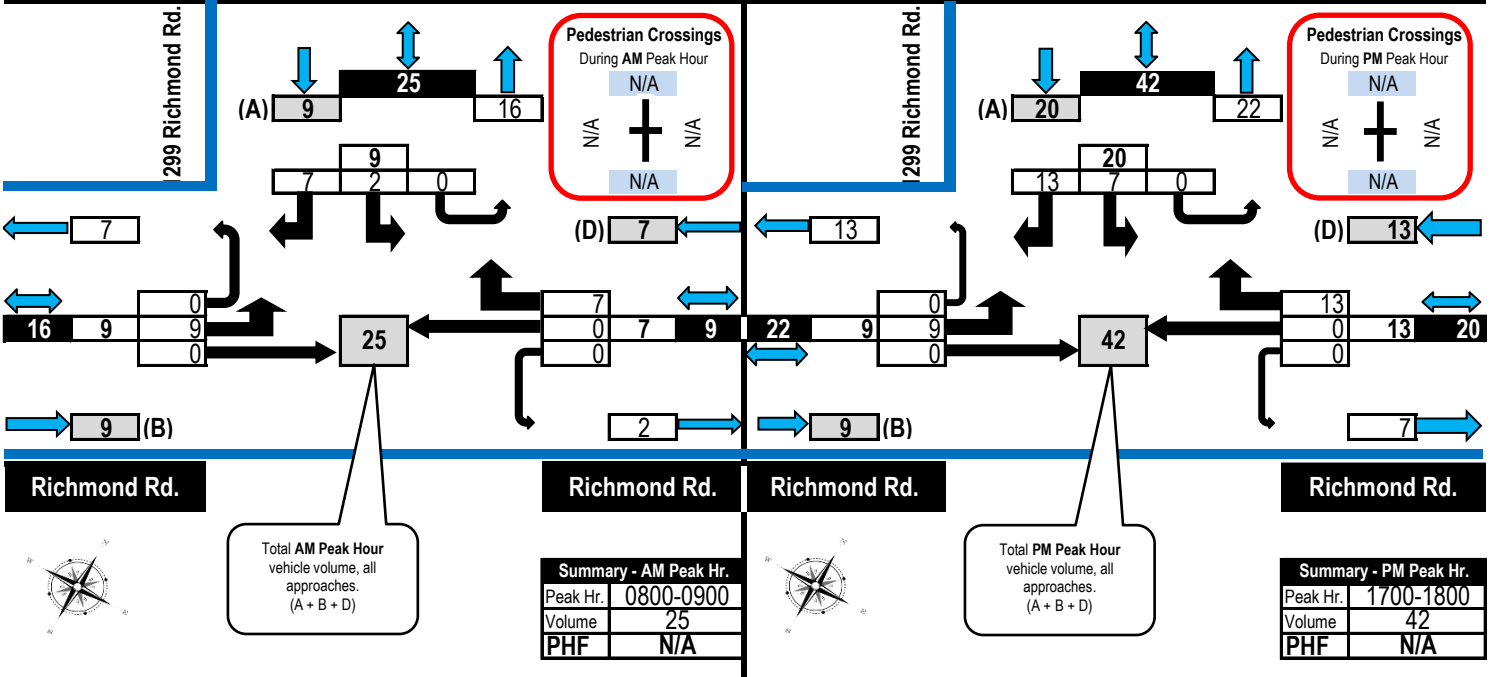

Turning Movement Count




Summary, AM and PM Peak Hour

Flow Diagrams

All Vehicles Except Bicycles



Richmond Road & Starflower Lane Ottawa, ON

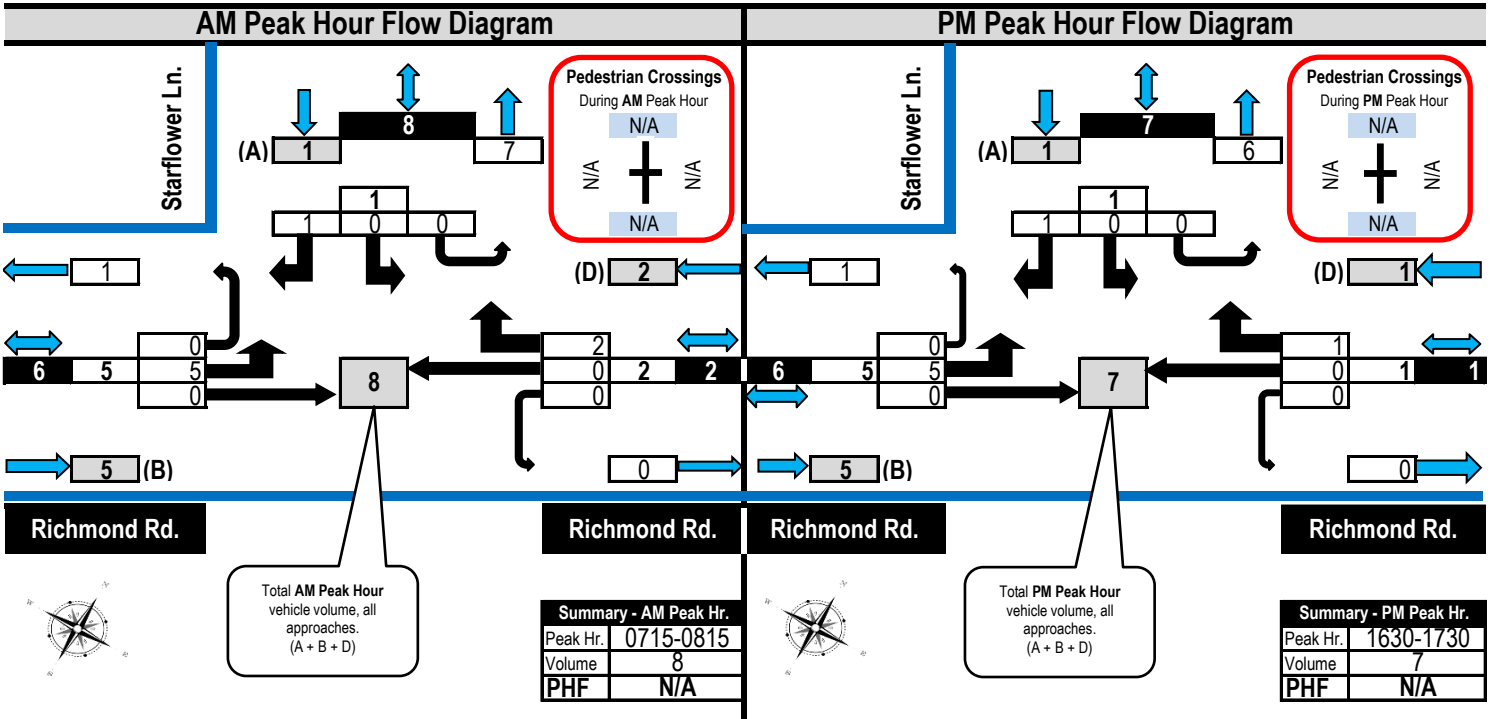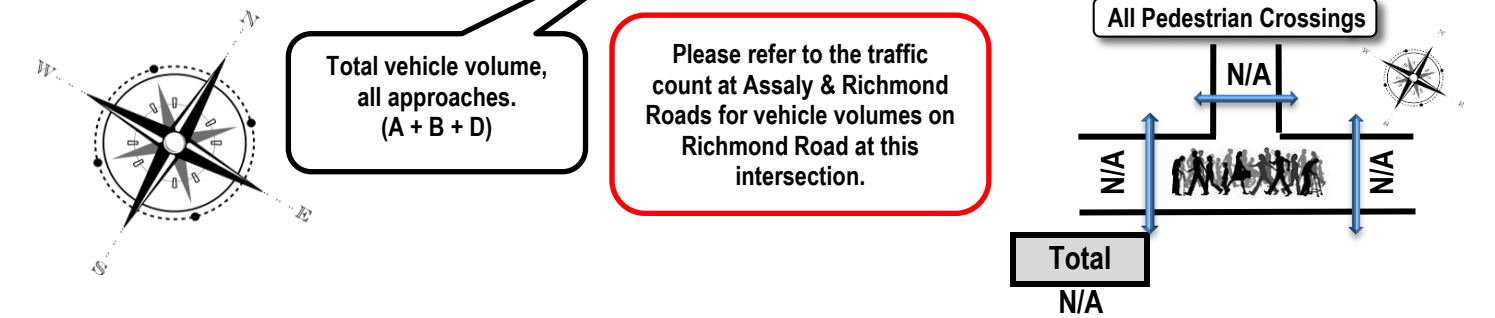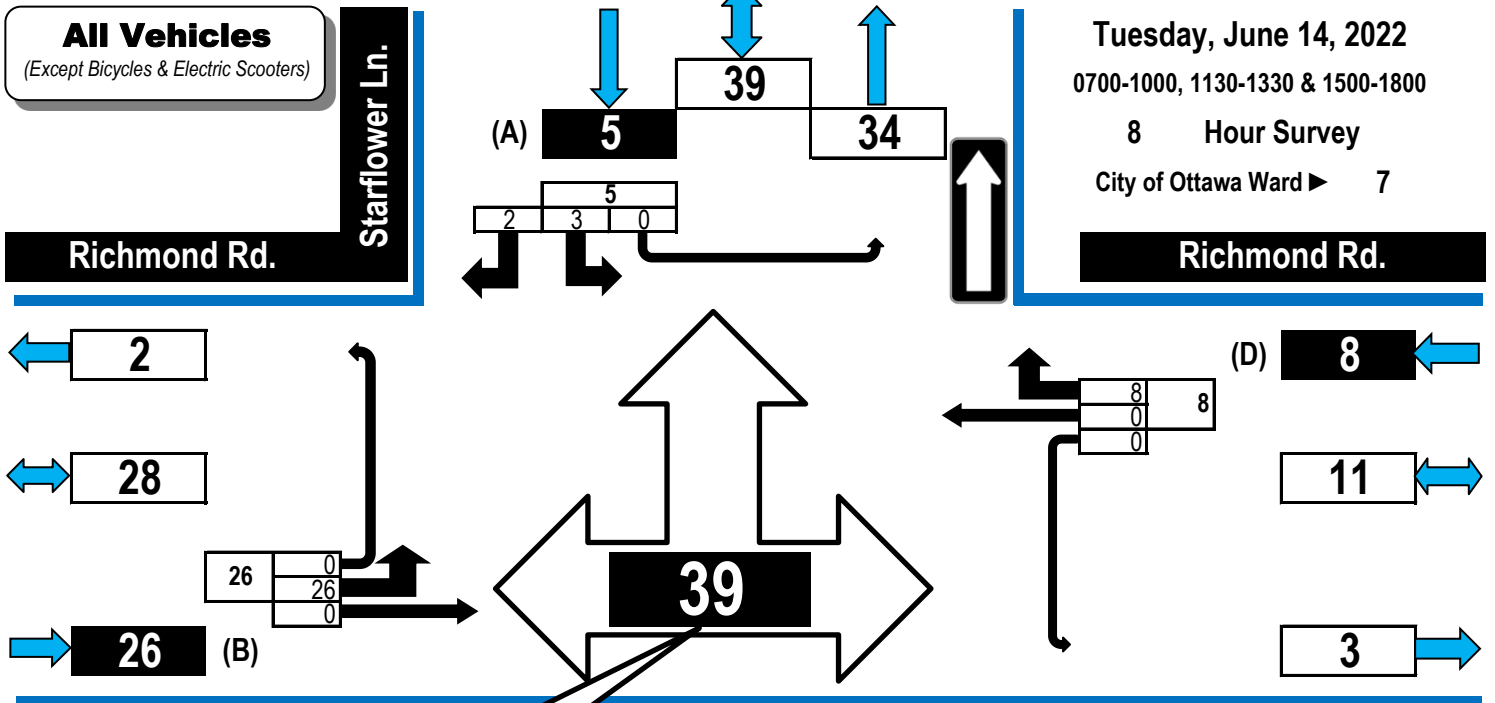



Turning Movement Count Summary, AM and PM Peak Hour Flow Diagrams

All Vehicles Except Bicycles




Starflower Lane East & Apartment Access

Ottawa, ON

All Vehicles
(Except Bicycles & Electric Scooters)



Total vehicle volume,
all approaches.
(B + C + D)

Tuesday, June 14, 2022
0700-0900 & 1600-1800
4 Hour Survey
City of Ottawa Ward 7

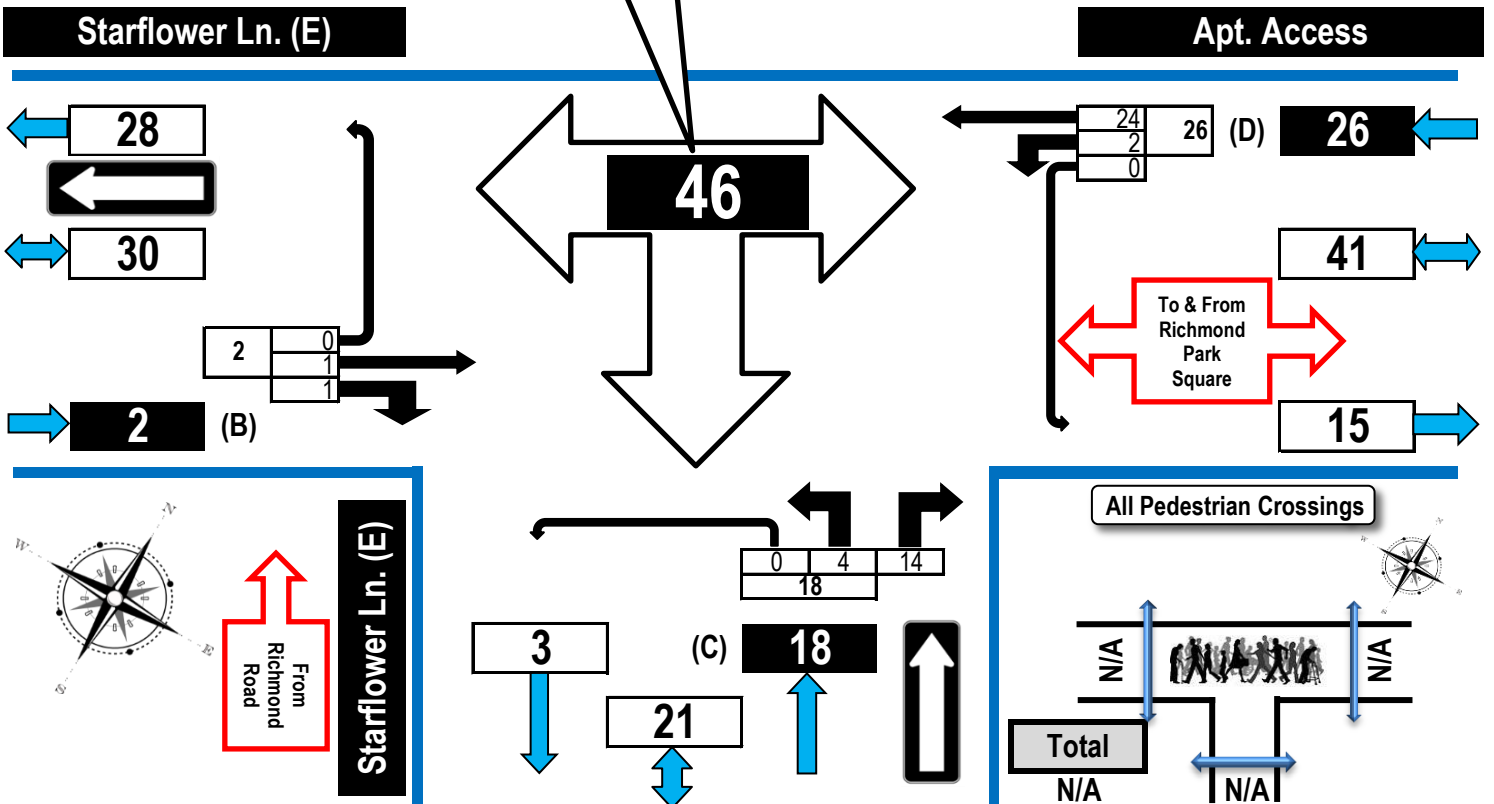

AM Peak Hour Flow Diagram

PM Peak Hour Flow Diagram

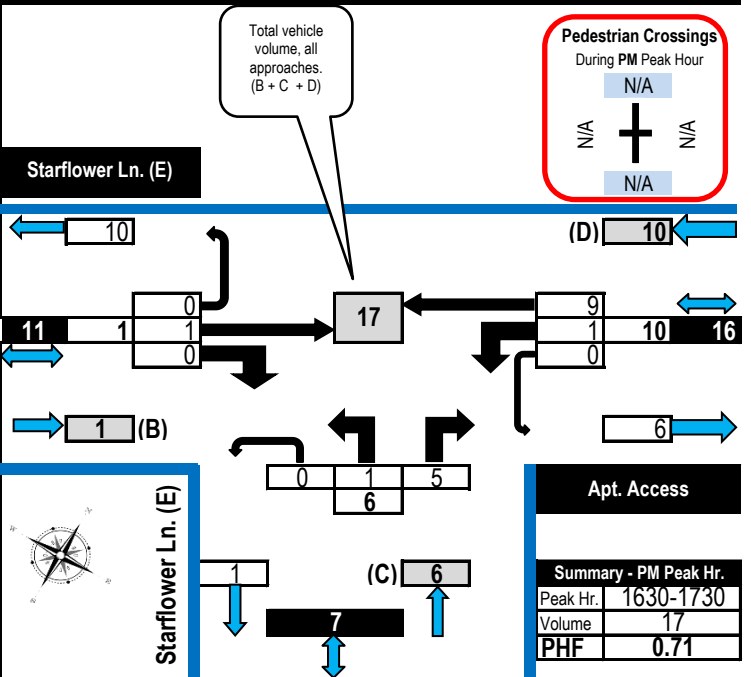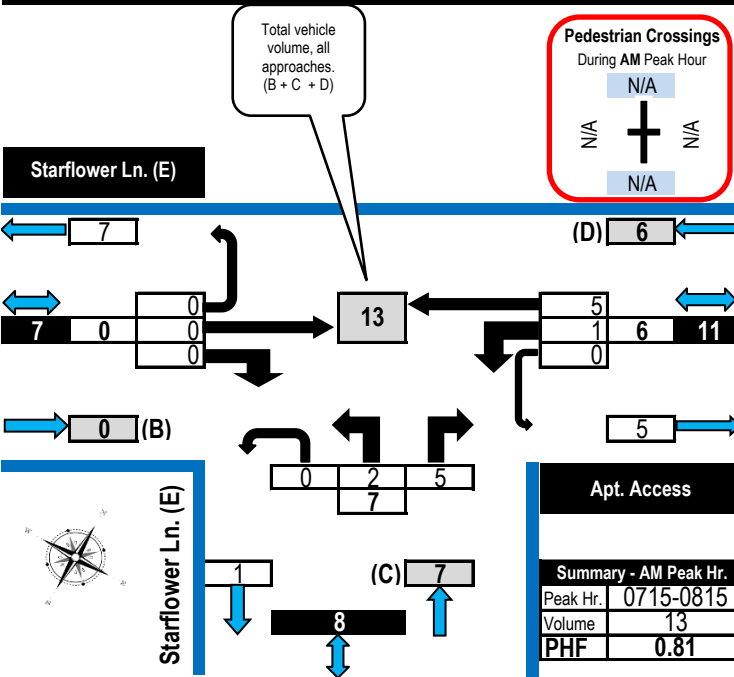



Turning Movement Count


Summary, AM and PM Peak Hour

Flow Diagrams


All Vehicles Except Bicycles



Starflower Lane West & 1299 Richmond Road Ottawa, ON

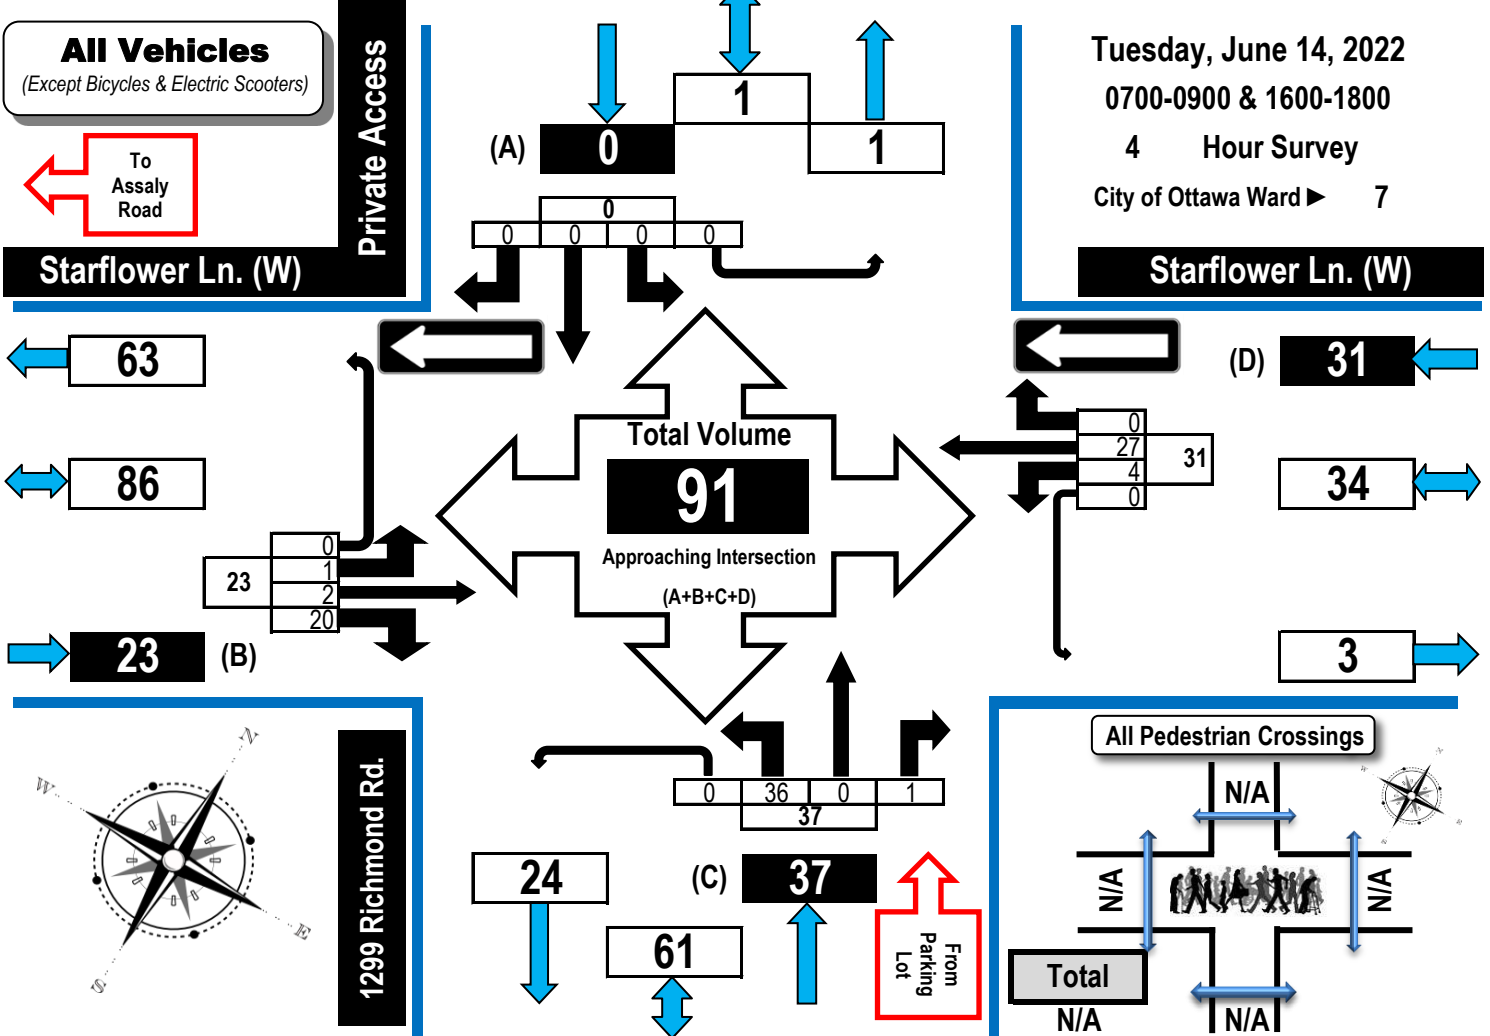

AM Peak Hour Flow Diagram PM Peak Hour Flow Diagram

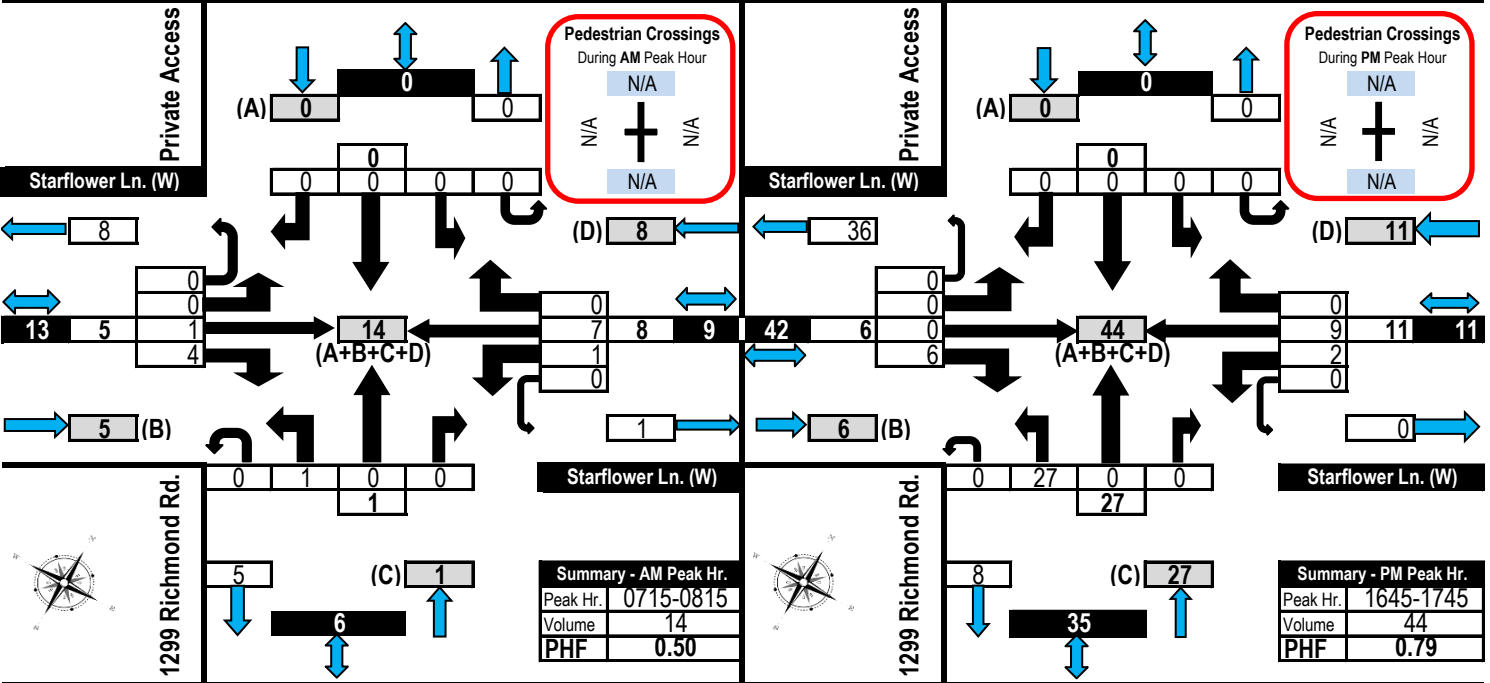

DRAFT

Appendix D:

Collision Data

Total Area

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	SMV other	SMV unattended vehicle	Other	Total
P.D. only	9	4	2	9	0	3	2	0	29
Non-fatal injury	2	1	0	1	0	7	0	0	11
Non-reportable	0	0	0	0	0	0	0	0	0
Total	11	5	2	10	0	10	2	0	40
	#1 or 28%	#4 or 13%	#5 or 5%	#2 or 25%	#7 or 0%	#2 or 25%	#5 or 5%	#7 or 0%	

73%
28%
0%
100%

ASSALY RD/RICHMOND RD

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2017-2021	6	15,264	1825	0.22

Peds	Cyclists
1	0

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	SMV other	SMV unattended vehicle	Other	Total
P.D. only	3	0	0	1	0	0	1	0	5
Non-fatal injury	0	0	0	0	0	1	0	0	1
Non-reportable	0	0	0	0	0	0	0	0	0
Total	3	0	0	1	0	1	1	0	6
	50%	0%	0%	17%	0%	17%	17%	0%	

83%
17%
0%
100%

CROYDON AVE/RICHMOND RD

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2017-2021	22	17,166	1825	0.70

Peds	Cyclists
4	1

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	SMV other	SMV unattended vehicle	Other	Total
P.D. only	4	3	1	6	0	1	0	0	15
Non-fatal injury	2	1	0	0	0	4	0	0	7
Non-reportable	0	0	0	0	0	0	0	0	0
Total	6	4	1	6	0	5	0	0	22
	27%	18%	5%	27%	0%	23%	0%	0%	

68%
32%
0%
100%

Road Segments

RICHMOND RD, ASSALY RD to REGINA LANE

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2017-2021	4	n/a	366.0922917	n/a

Peds	Cyclists
2	0

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	SMV other	SMV unattended vehicle	Other	Total
P.D. only	0	1	0	0	0	1	0	0	2
Non-fatal injury	0	0	0	0	0	2	0	0	2
Non-reportable	0	0	0	0	0	0	0	0	0
Total	0	1	0	0	0	3	0	0	4
	0%	25%	0%	0%	0%	75%	0%	0%	

50%
50%
0%
100%

RICHMOND RD, ASSALY RD to CROYDON AVE

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2017-2021	7	n/a	366.0922917	n/a

Peds	Cyclists
0	0

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	SMV other	SMV unattended vehicle	Other	Total
P.D. only	2	0	1	2	0	1	0	0	6
Non-fatal injury	0	0	0	1	0	0	0	0	1
Non-reportable	0	0	0	0	0	0	0	0	0
Total	2	0	1	3	0	1	0	0	7
	29%	0%	14%	43%	0%	14%	0%	0%	

86%
14%
0%
100%

ASSALY RD, REGINA LANE to RICHMOND RD

Years	Total # Collisions	24 Hr AADT Veh Volume	Days	Collisions/MEV
2017-2021	1	n/a	366.0922917	n/a

Peds	Cyclists
0	0

Classification of Accident	Rear End	Turning Movement	Sideswipe	Angle	Approaching	SMV other	SMV unattended vehicle	Other	Total
P.D. only	0	0	0	0	0	0	1	0	1
Non-fatal injury	0	0	0	0	0	0	0	0	0
Non-reportable	0	0	0	0	0	0	0	0	0
Total	0	0	0	0	0	0	1	0	1
	0%	0%	0%	0%	0%	0%	100%	0%	

100%
0%
0%
100%

DRAFT


Appendix E:

Lincoln Fields Station Future Connectivity Plan


TITLEBLOCK-863.6mm x 558.8mm

C:\GIS\2021\Lincoln Fields-Woodpark\Lincoln Fields Connectivity.dgn Plotted 2021-04-08 at 01:35:00 AM

DRAWING NAME		CONTRACT No.	
LINCOLN FIELDS STATION CONNECTIVITY		DESIGNED	CHECKED
		D. BERLIN	
DRAWN		SEALED	
H. ELJAJI			
DRAWING NUMBER		PRIMARY SEAL	
ENGINEERING JV		SECONDARY SEAL	


SCALE	HORIZONTAL	1:1,000 12,000	22"x34" 11"x17"	ASSET No.
				ASSET GROUP

REV	DESCRIPTION	BY	DATE
A	ISSUED FOR INFORMATION	HE	2021-04-08



NO PART OF THIS DOCUMENT MAY BE REPRODUCED, PUBLISHED, CONVERTED, OR STORED IN ANY DATA RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM BY ANY MEANS (ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING, OR OTHERWISE) WITHOUT THE PROPER WRITTEN PERMISSION.
 LAYOUT INFORMATION BASED ON 3 DEGREE MTM ZONE 9 NAD 83 ORIGINAL COORDINATE SYSTEM. COMBINED SCALE FACTOR 0.9999

**PRELIMINARY
NOT FOR CONSTRUCTION**
 2021-04-08

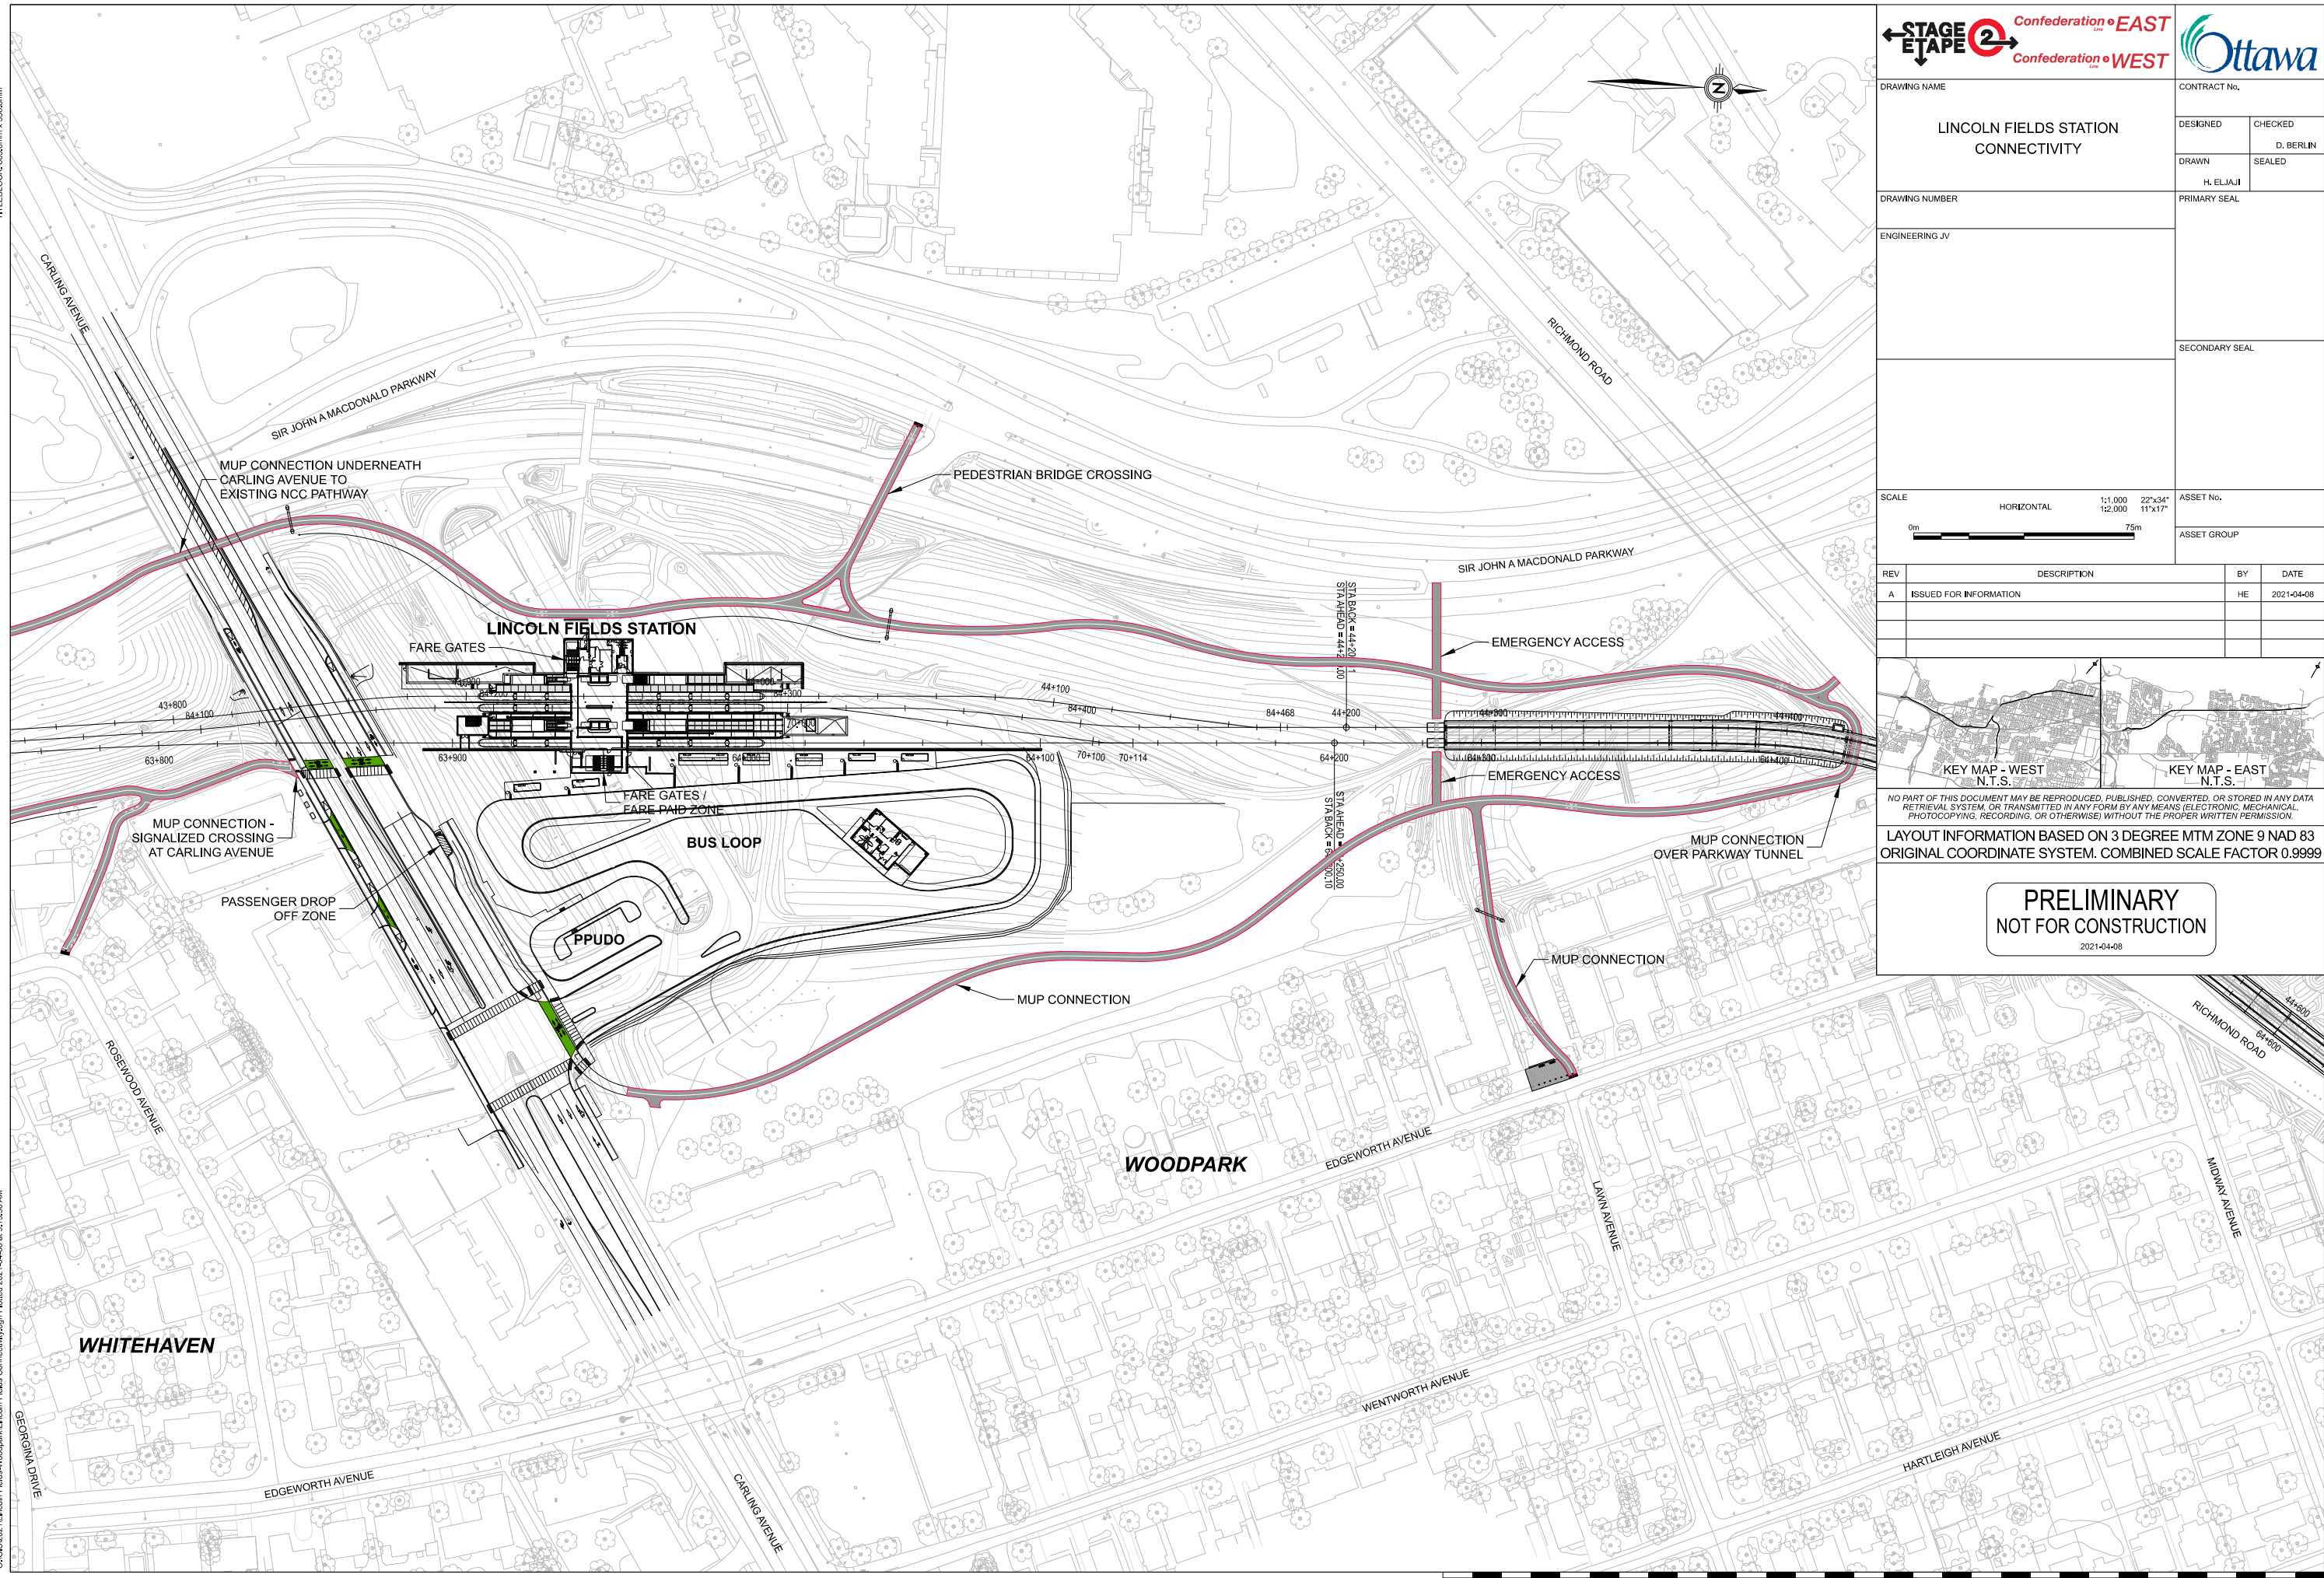


DRAFT

Appendix F:
Truck Turning Templates




Legend



HSU
 Width : 2600
 Track : 2600
 Lock to Lock Time : 6.0
 Steering Angle : 40.0
 Not to Scale

Drawing Description		HSU Truck Turning Template	
Client	Brigil	Date	June 9, 2023
Project Number	478250	Figure Number	1
Project Description		1299 Richmond Rd	

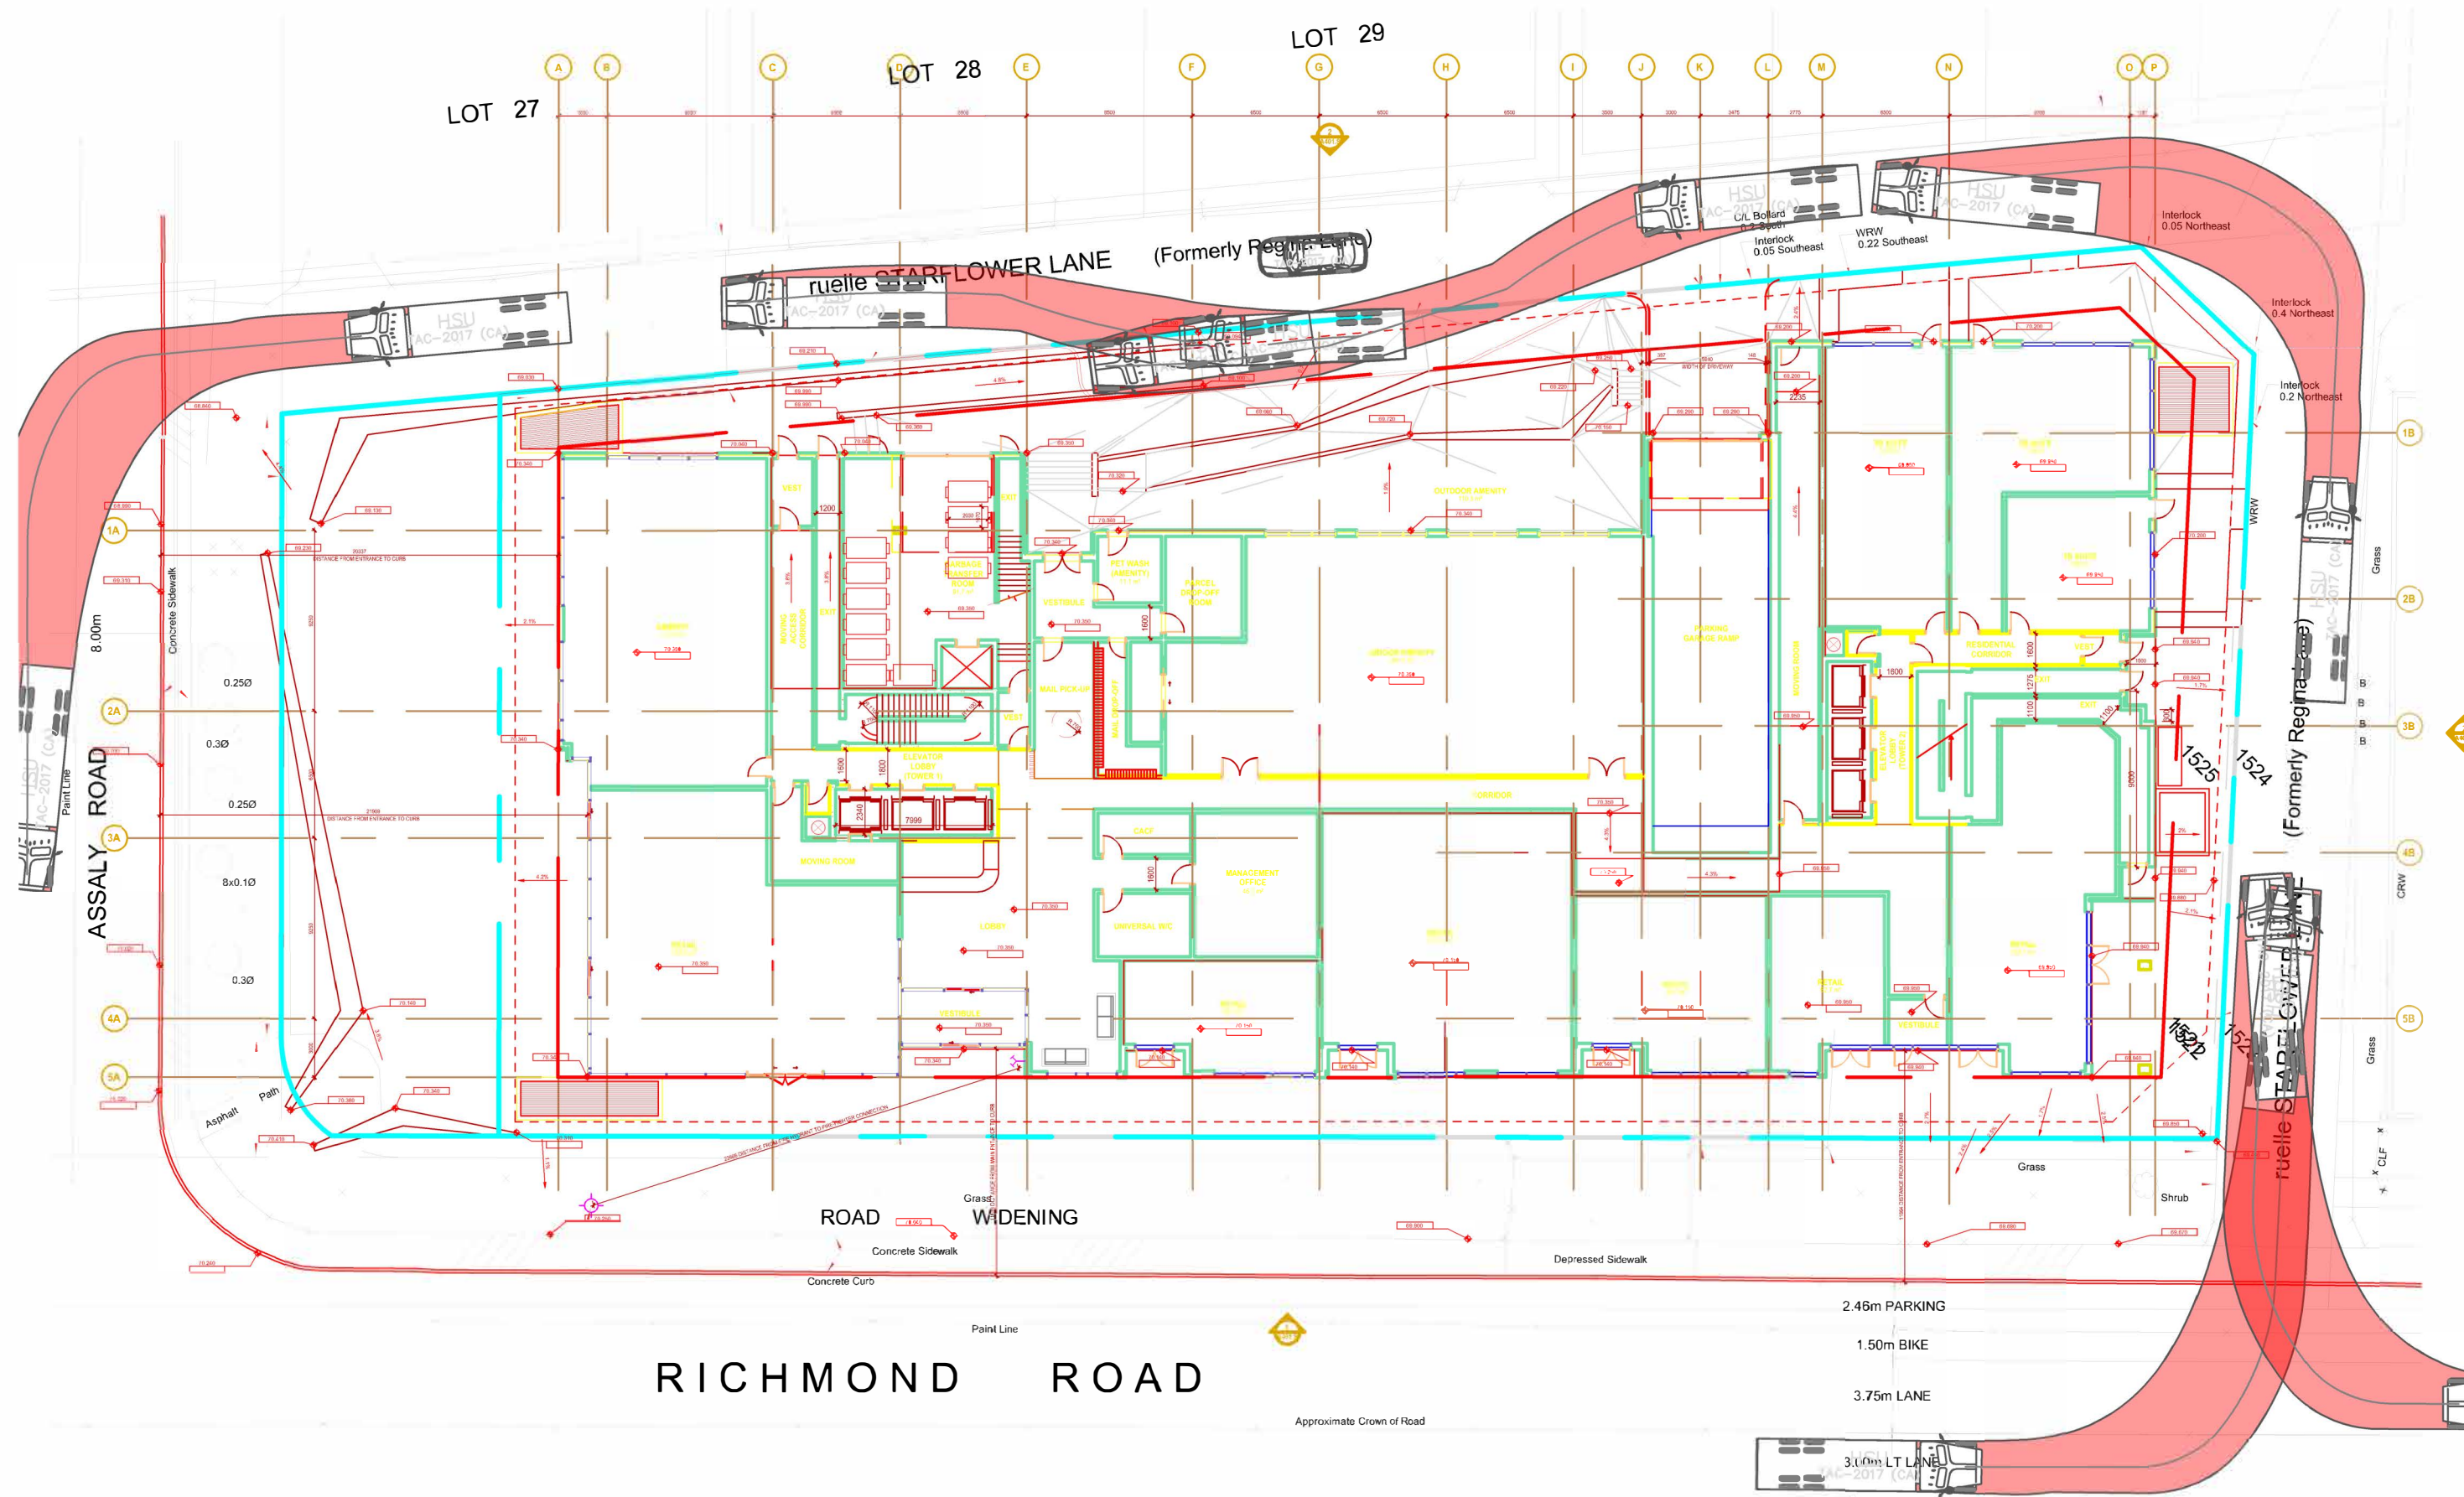

RICHMOND ROAD


2.46m PARKING
 1.50m BIKE
 3.75m LANE



Approximate Crown of Road




Legend




MSU
 Width : 2600
 Track : 2600
 Lock to Lock Time : 6.0
 Steering Angle : 40.2
 Not to Scale

Drawing Description		MSU Truck Turning Template	
Client	Brigil	Date	June 9, 2023
Project Number	478250	Figure Number	2
Project Description		1299 Richmond Rd	

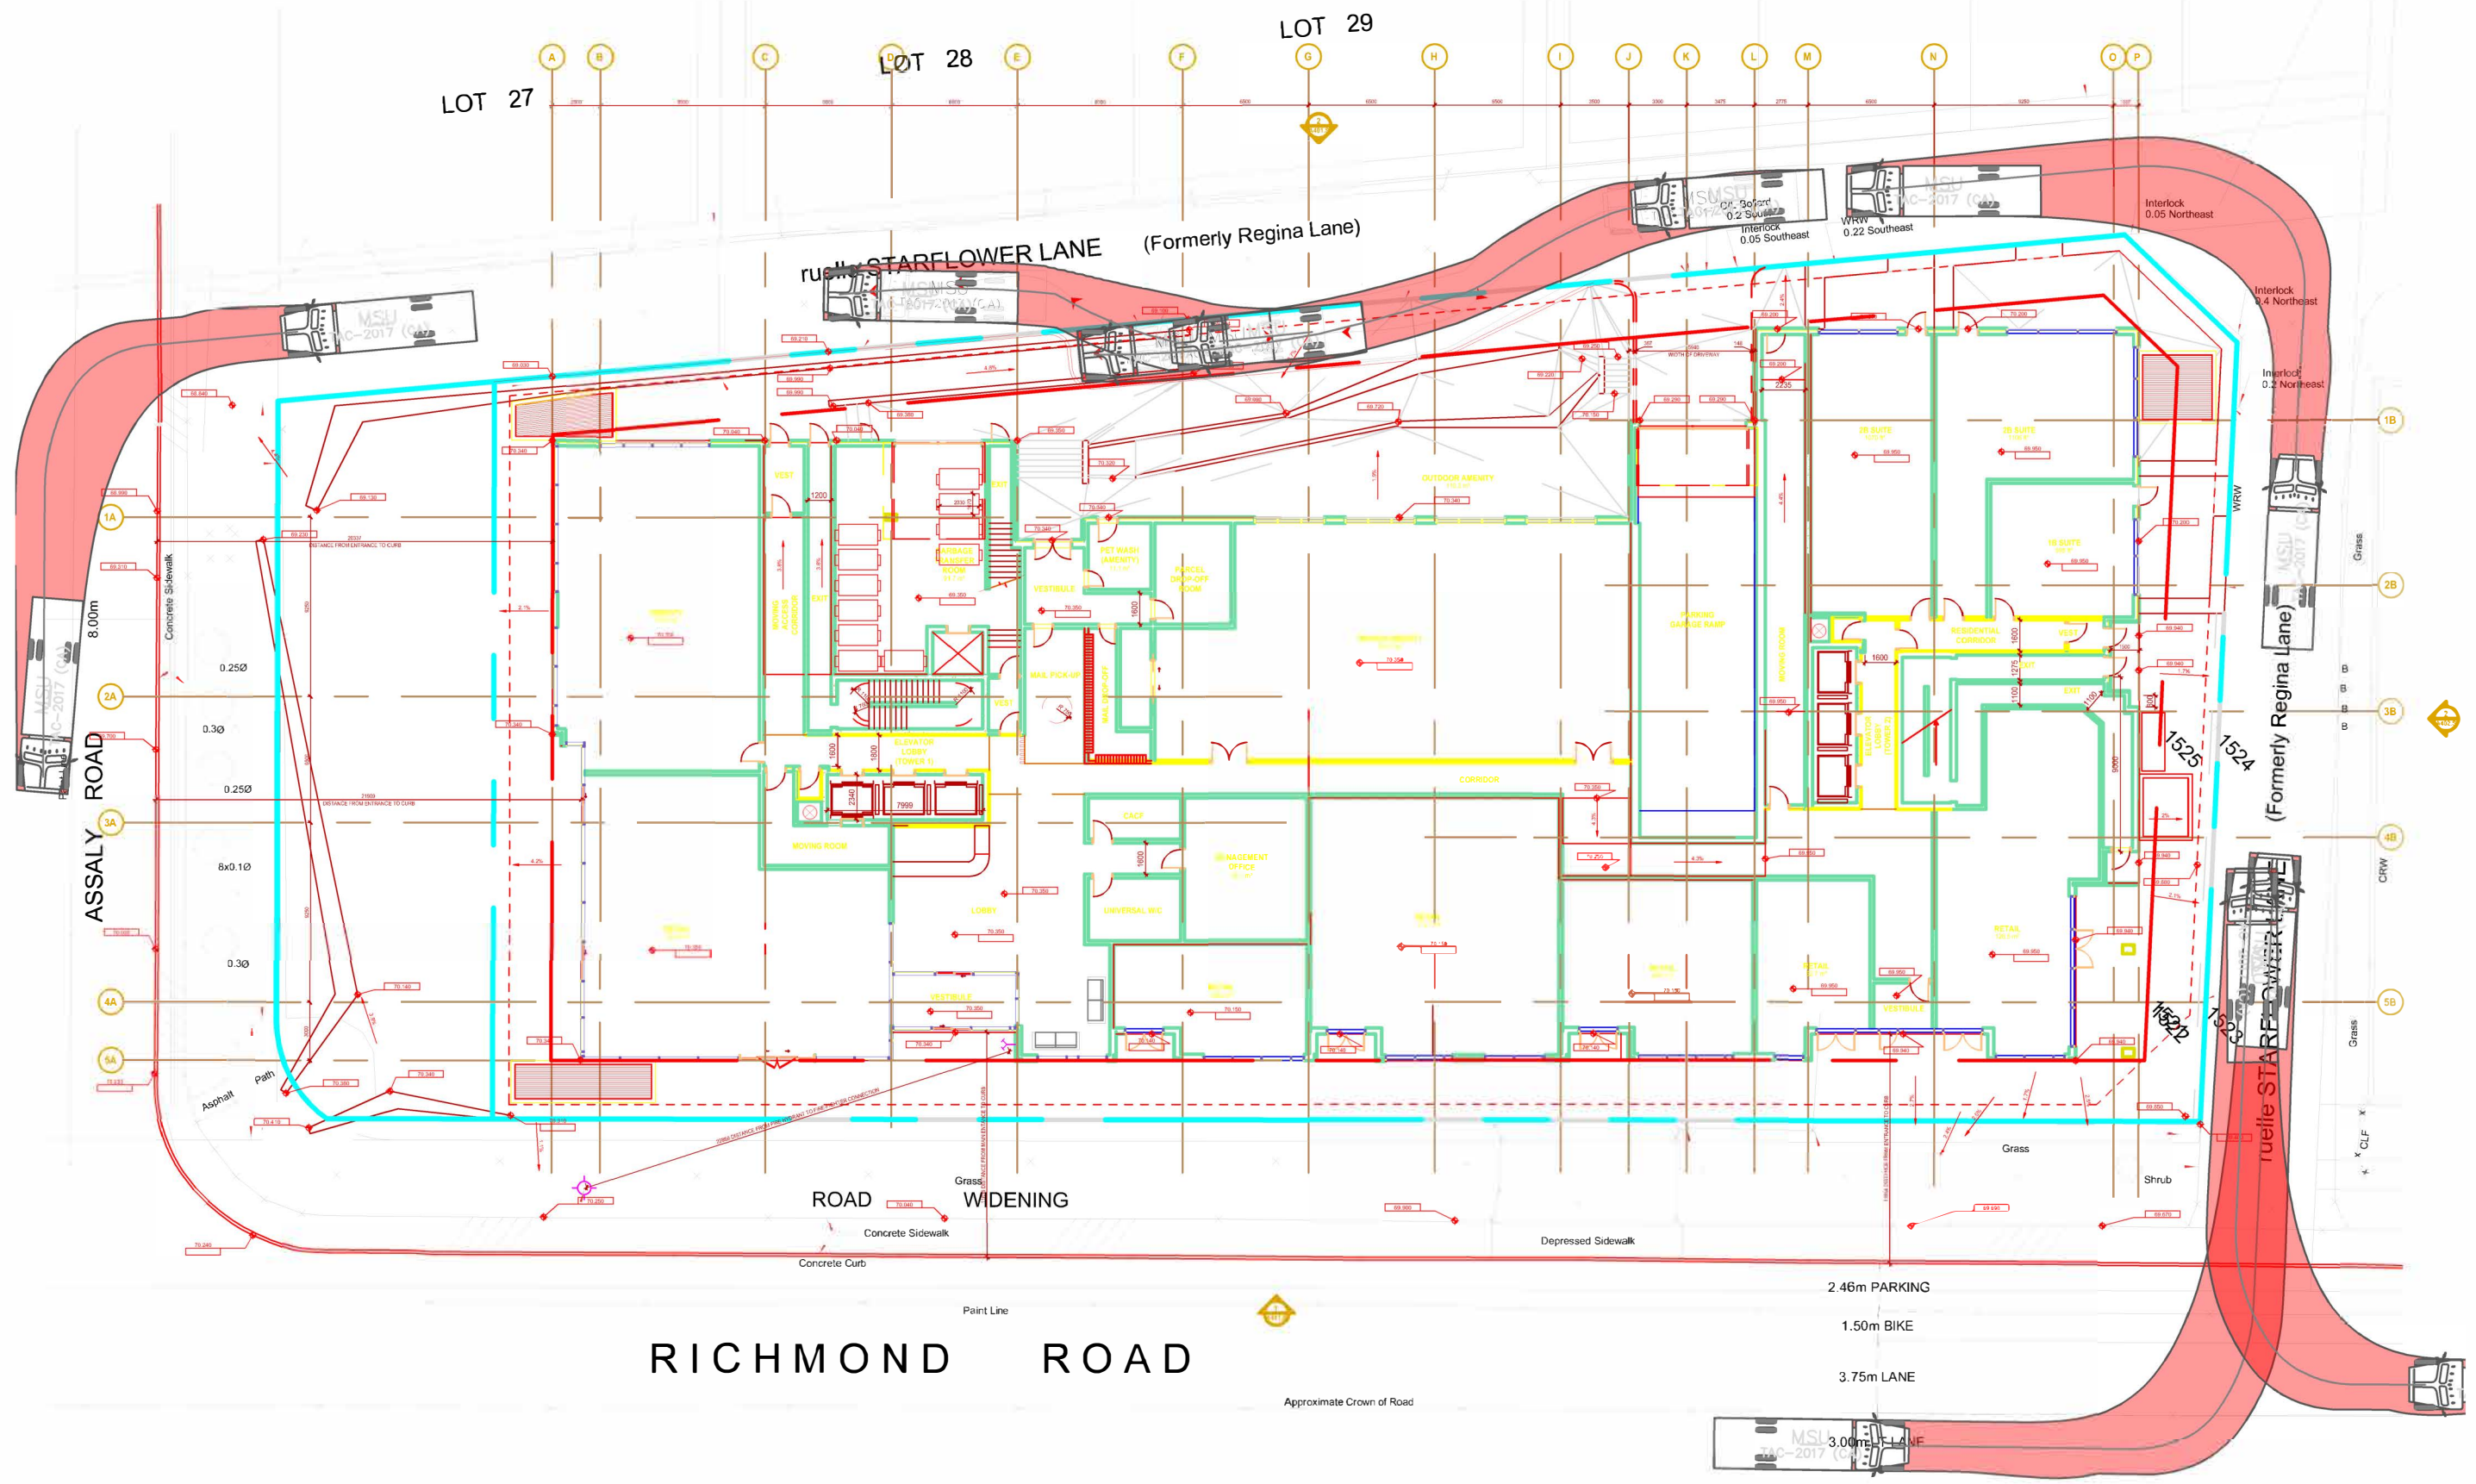

RICHMOND ROAD

2.46m PARKING
 1.50m BIKE
 3.75m LANE



DRAFT

Appendix G:

MMLOS: Road Segments

Multi-Modal Level of Service - Segments Form

Consultant	Parsons
Scenario	1299 Richmond
Comments	

Project	478250
Date	1-Jun-23

SEGMENTS	Street A	Richmond	Richmond	Assaly	Assaly	Assaly	Section	Section	Section	Section
		North	South	East	West	Future	6	7	8	9
Pedestrian	Sidewalk Width	≥ 2 m	≥ 2 m	1.5 m	≥ 2 m	≥ 2 m				
	Boulevard Width	< 0.5	> 2 m	< 0.5 m	< 0.5	< 0.5				
	Avg Daily Curb Lane Traffic Volume	> 3000	> 3000	≤ 3000	≤ 3000	≤ 3000				
	Operating Speed	> 50 to 60 km/h	> 50 to 60 km/h	> 50 to 60 km/h	> 50 to 60 km/h	> 50 to 60 km/h				
	On-Street Parking	no	no	no	no	no				
	Exposure to Traffic PLoS	E	C	F	C	C	-	-	-	-
	Effective Sidewalk Width									
Pedestrian Volume										
Crowding PLoS	-	-	-	-	-	-	-	-	-	
Level of Service	-	-	-	-	-	-	-	-	-	
Bicycle	Type of Cycling Facility	Curbside Bike Lane	Physically Separated	Mixed Traffic	Mixed Traffic	Mixed Traffic		Curbside Bike Lane		
	Number of Travel Lanes	≤ 1 each direction		≤ 2 (no centreline)	≤ 2 (no centreline)	≤ 2 (no centreline)		≤ 1 each direction		
	Operating Speed	>50 to 70 km/h		≥ 50 to 60 km/h	≥ 50 to 60 km/h	≥ 50 to 60 km/h		≤ 50 km/h		
	# of Lanes & Operating Speed LoS	C	-	D	D	D	-	A	-	-
	Bike Lane (+ Parking Lane) Width	≥1.5 to <1.8 m								
	Bike Lane Width LoS	B	-	-	-	-	-	-	-	-
	Bike Lane Blockages	Rare								
	Blockage LoS	A	-	-	-	-	-	-	-	-
	Median Refuge Width (no median = < 1.8 m)	< 1.8 m refuge		< 1.8 m refuge	< 1.8 m refuge	< 1.8 m refuge				
	No. of Lanes at Unsignalized Crossing	≤ 3 lanes		≤ 3 lanes	≤ 3 lanes	≤ 3 lanes				
	Sidestreet Operating Speed	>40 to 50 km/h		>40 to 50 km/h	>40 to 50 km/h	>40 to 50 km/h				
Unsignalized Crossing - Lowest LoS	B	A	B	B	B	-	-	-	-	
Level of Service	C	A	D	D	D	-	-	-	-	
Transit	Facility Type	Mixed Traffic	Mixed Traffic							
	Friction or Ratio Transit:Posted Speed	Vt/Vp ≥ 0.8	Vt/Vp ≥ 0.8							
	Level of Service	D	D	-	-	-	-	-	-	
Truck	Truck Lane Width	> 3.7 m	> 3.7 m							
	Travel Lanes per Direction	1	1							
	Level of Service	B	B	-	-	-	-	-	-	

DRAFT

Appendix H:

TDM Checklists

TDM-Supportive Development Design and Infrastructure Checklist:
Residential Developments (multi-family or condominium)

Legend	
REQUIRED	The Official Plan or Zoning By-law provides related guidance that must be followed
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance

TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
1. WALKING & CYCLING: ROUTES		
1.1 Building location & access points		
BASIC	1.1.1 Locate building close to the street, and do not locate parking areas between the street and building entrances	<input checked="" type="checkbox"/> no parking between front door and street
BASIC	1.1.2 Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations	<input checked="" type="checkbox"/> buildings near sidewalk
BASIC	1.1.3 Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort	<input checked="" type="checkbox"/> modern design building
1.2 Facilities for walking & cycling		
REQUIRED	1.2.1 Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather-protected (where possible) environment between rapid transit accesses and building entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations (<i>see Official Plan policy 4.3.3</i>)	<input checked="" type="checkbox"/> sidewalks connect to existing infrastructure. Paved facilities from front door to Lincoln Fields Station
REQUIRED	1.2.2 Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and other design elements wherever possible (<i>see Official Plan policy 4.3.12</i>)	<input checked="" type="checkbox"/> sidewalks connect building entrance to existing facilities connecting to transit

TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
REQUIRED	1.2.3 Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (see <i>Official Plan policy 4.3.10</i>)	<input checked="" type="checkbox"/> sidewalks built to city standards.
REQUIRED	1.2.4 Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (see <i>Official Plan policy 4.3.10</i>)	<input checked="" type="checkbox"/> sidewalks built to city standards.
REQUIRED	1.2.5 Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and on-road cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (see <i>Official Plan policy 4.3.11</i>)	<input checked="" type="checkbox"/> sidewalks connect building entrance to existing facilities connecting to transit
BASIC	1.2.6 Provide safe, direct and attractive walking routes from building entrances to nearby transit stops	<input checked="" type="checkbox"/> refer to comment above
BASIC	1.2.7 Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible	<input checked="" type="checkbox"/> existing street lighting and bus shelter
BASIC	1.2.8 Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility	<input checked="" type="checkbox"/> Starflower posted <30km/h, Richmond has separated facilities
1.3 Amenities for walking & cycling		
BASIC	1.3.1 Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails	<input checked="" type="checkbox"/> refer to landscape plan
BASIC	1.3.2 Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)	<input checked="" type="checkbox"/> signage will be added

TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
2. WALKING & CYCLING: END-OF-TRIP FACILITIES		
2.1 Bicycle parking		
REQUIRED	2.1.1 Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see <i>Official Plan policy 4.3.6</i>)	<input checked="" type="checkbox"/> mostly located indoors in sheltered secure area
REQUIRED	2.1.2 Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well-used areas (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/> exceeds minimum
REQUIRED	2.1.3 Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/> meets bylaw
BASIC	2.1.4 Provide bicycle parking spaces equivalent to the expected number of resident-owned bicycles, plus the expected peak number of visitor cyclists	<input type="checkbox"/>
2.2 Secure bicycle parking		
REQUIRED	2.2.1 Where more than 50 bicycle parking spaces are provided for a single residential building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/> meets bylaw
BETTER	2.2.2 Provide secure bicycle parking spaces equivalent to at least the number of units at condominiums or multi-family residential developments	<input type="checkbox"/>
2.3 Bicycle repair station		
BETTER	2.3.1 Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)	<input type="checkbox"/>
3. TRANSIT		
3.1 Customer amenities		
BASIC	3.1.1 Provide shelters, lighting and benches at any on-site transit stops	<input type="checkbox"/> shelter and lighting already exist on Richmond Road
BASIC	3.1.2 Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	<input type="checkbox"/>
BETTER	3.1.3 Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building	<input type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
4. RIDESHARING		
4.1 Pick-up & drop-off facilities		
BASIC	4.1.1 Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	<input checked="" type="checkbox"/> layby north side of building
5. CARSHARING & BIKESHARING		
5.1 Carshare parking spaces		
BETTER	5.1.1 Provide up to three carshare parking spaces in an R3, R4 or R5 Zone for specified residential uses (see <i>Zoning By-law Section 94</i>)	<input type="checkbox"/>
5.2 Bikeshare station location		
BETTER	5.2.1 Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	<input type="checkbox"/>
6. PARKING		
6.1 Number of parking spaces		
REQUIRED	6.1.1 Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	<input checked="" type="checkbox"/> meets bylaw
BASIC	6.1.2 Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	<input checked="" type="checkbox"/> visitor and resident parking separated
BASIC	6.1.3 Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly (see <i>Zoning By-law Section 104</i>)	<input checked="" type="checkbox"/> shared parking provisions proposed
BETTER	6.1.4 Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking (see <i>Zoning By-law Section 111</i>)	<input type="checkbox"/>
6.2 Separate long-term & short-term parking areas		
BETTER	6.2.1 Provide separate areas for short-term and long-term parking (using signage or physical barriers) to permit access controls and simplify enforcement (i.e. to discourage residents from parking in visitor spaces, and vice versa)	<input checked="" type="checkbox"/> visitor and resident parking separated

TDM Measures Checklist:
Residential Developments (multi-family, condominium or subdivision)

Legend	
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance
★	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

TDM measures: <i>Residential developments</i>		Check if proposed & add descriptions
1. TDM PROGRAM MANAGEMENT		
1.1 Program coordinator		
BASIC	★ 1.1.1 Designate an internal coordinator, or contract with an external coordinator	<input type="checkbox"/>
1.2 Travel surveys		
BETTER	1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress	<input type="checkbox"/>
2. WALKING AND CYCLING		
2.1 Information on walking/cycling routes & destinations		
BASIC	2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances (<i>multi-family, condominium</i>)	<input checked="" type="checkbox"/>
2.2 Bicycle skills training		
BETTER	2.2.1 Offer on-site cycling courses for residents, or subsidize off-site courses	<input checked="" type="checkbox"/>

TDM measures: <i>Residential developments</i>		Check if proposed & add descriptions
3. TRANSIT		
3.1 Transit information		
BASIC	3.1.1 Display relevant transit schedules and route maps at entrances (<i>multi-family, condominium</i>)	<input checked="" type="checkbox"/>
BETTER	3.1.2 Provide real-time arrival information display at entrances (<i>multi-family, condominium</i>)	<input type="checkbox"/>
3.2 Transit fare incentives		
BASIC ★	3.2.1 Offer PRESTO cards preloaded with one monthly transit pass on residence purchase/move-in, to encourage residents to use transit	<input checked="" type="checkbox"/>
BETTER	3.2.2 Offer at least one year of free monthly transit passes on residence purchase/move-in	<input type="checkbox"/>
3.3 Enhanced public transit service		
BETTER ★	3.3.1 Contract with OC Transpo to provide early transit services until regular services are warranted by occupancy levels (<i>subdivision</i>)	<input type="checkbox"/>
3.4 Private transit service		
BETTER	3.4.1 Provide shuttle service for seniors homes or lifestyle communities (e.g. scheduled mall or supermarket runs)	<input type="checkbox"/>
4. CARSHARING & BIKESHARING		
4.1 Bikeshare stations & memberships		
BETTER	4.1.1 Contract with provider to install on-site bikeshare station (<i>multi-family</i>)	<input type="checkbox"/>
BETTER	4.1.2 Provide residents with bikeshare memberships, either free or subsidized (<i>multi-family</i>)	<input type="checkbox"/>
4.2 Carshare vehicles & memberships		
BETTER	4.2.1 Contract with provider to install on-site carshare vehicles and promote their use by residents	<input type="checkbox"/>
BETTER	4.2.2 Provide residents with carshare memberships, either free or subsidized	<input type="checkbox"/>
5. PARKING		
5.1 Priced parking		
BASIC ★	5.1.1 Unbundle parking cost from purchase price (<i>condominium</i>)	<input type="checkbox"/>
BASIC ★	5.1.2 Unbundle parking cost from monthly rent (<i>multi-family</i>)	<input checked="" type="checkbox"/>

TDM measures: <i>Residential developments</i>		Check if proposed & add descriptions
6. TDM MARKETING & COMMUNICATIONS		
6.1 Multimodal travel information		
BASIC	★ 6.1.1 Provide a multimodal travel option information package to new residents	<input checked="" type="checkbox"/>
6.2 Personalized trip planning		
BETTER	★ 6.2.1 Offer personalized trip planning to new residents	<input checked="" type="checkbox"/>

TDM-Supportive Development Design and Infrastructure Checklist: Non-Residential Developments (office, institutional, retail or industrial)

Legend	
REQUIRED	The Official Plan or Zoning By-law provides related guidance that must be followed
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
1. WALKING & CYCLING: ROUTES		
1.1 Building location & access points		
BASIC	1.1.1 Locate building close to the street, and do not locate parking areas between the street and building entrances	<input checked="" type="checkbox"/>
BASIC	1.1.2 Locate building entrances in order to minimize walking distances to sidewalks and transit stops/stations	<input checked="" type="checkbox"/>
BASIC	1.1.3 Locate building doors and windows to ensure visibility of pedestrians from the building, for their security and comfort	<input checked="" type="checkbox"/>
1.2 Facilities for walking & cycling		
REQUIRED	1.2.1 Provide convenient, direct access to stations or major stops along rapid transit routes within 600 metres; minimize walking distances from buildings to rapid transit; provide pedestrian-friendly, weather-protected (where possible) environment between rapid transit accesses and building entrances; ensure quality linkages from sidewalks through building entrances to integrated stops/stations (see <i>Official Plan policy 4.3.3</i>)	<input checked="" type="checkbox"/>
REQUIRED	1.2.2 Provide safe, direct and attractive pedestrian access from public sidewalks to building entrances through such measures as: reducing distances between public sidewalks and major building entrances; providing walkways from public streets to major building entrances; within a site, providing walkways along the front of adjoining buildings, between adjacent buildings, and connecting areas where people may congregate, such as courtyards and transit stops; and providing weather protection through canopies, colonnades, and other design elements wherever possible (see <i>Official Plan policy 4.3.12</i>)	<input checked="" type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
REQUIRED	1.2.3 Provide sidewalks of smooth, well-drained walking surfaces of contrasting materials or treatments to differentiate pedestrian areas from vehicle areas, and provide marked pedestrian crosswalks at intersection sidewalks (<i>see Official Plan policy 4.3.10</i>)	<input checked="" type="checkbox"/>
REQUIRED	1.2.4 Make sidewalks and open space areas easily accessible through features such as gradual grade transition, depressed curbs at street corners and convenient access to extra-wide parking spaces and ramps (<i>see Official Plan policy 4.3.10</i>)	<input checked="" type="checkbox"/>
REQUIRED	1.2.5 Include adequately spaced inter-block/street cycling and pedestrian connections to facilitate travel by active transportation. Provide links to the existing or planned network of public sidewalks, multi-use pathways and on-road cycle routes. Where public sidewalks and multi-use pathways intersect with roads, consider providing traffic control devices to give priority to cyclists and pedestrians (<i>see Official Plan policy 4.3.11</i>)	<input checked="" type="checkbox"/>
BASIC	1.2.6 Provide safe, direct and attractive walking routes from building entrances to nearby transit stops	<input checked="" type="checkbox"/>
BASIC	1.2.7 Ensure that walking routes to transit stops are secure, visible, lighted, shaded and wind-protected wherever possible	<input checked="" type="checkbox"/>
BASIC	1.2.8 Design roads used for access or circulation by cyclists using a target operating speed of no more than 30 km/h, or provide a separated cycling facility	<input checked="" type="checkbox"/> Starflower posted <30km/h. Richmond has separated cycling facilities
1.3 Amenities for walking & cycling		
BASIC	1.3.1 Provide lighting, landscaping and benches along walking and cycling routes between building entrances and streets, sidewalks and trails	<input checked="" type="checkbox"/>
BASIC	1.3.2 Provide wayfinding signage for site access (where required, e.g. when multiple buildings or entrances exist) and egress (where warranted, such as when directions to reach transit stops/stations, trails or other common destinations are not obvious)	<input checked="" type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
2. WALKING & CYCLING: END-OF-TRIP FACILITIES		
2.1 Bicycle parking		
REQUIRED	2.1.1 Provide bicycle parking in highly visible and lighted areas, sheltered from the weather wherever possible (see <i>Official Plan policy 4.3.6</i>)	<input checked="" type="checkbox"/>
REQUIRED	2.1.2 Provide the number of bicycle parking spaces specified for various land uses in different parts of Ottawa; provide convenient access to main entrances or well-used areas (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/>
REQUIRED	2.1.3 Ensure that bicycle parking spaces and access aisles meet minimum dimensions; that no more than 50% of spaces are vertical spaces; and that parking racks are securely anchored (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/>
BASIC	2.1.4 Provide bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met), plus the expected peak number of customer/visitor cyclists	<input type="checkbox"/>
BETTER	2.1.5 Provide bicycle parking spaces equivalent to the expected number of commuter and customer/visitor cyclists, plus an additional buffer (e.g. 25 percent extra) to encourage other cyclists and ensure adequate capacity in peak cycling season	<input type="checkbox"/>
2.2 Secure bicycle parking		
REQUIRED	2.2.1 Where more than 50 bicycle parking spaces are provided for a single office building, locate at least 25% of spaces within a building/structure, a secure area (e.g. supervised parking lot or enclosure) or bicycle lockers (see <i>Zoning By-law Section 111</i>)	<input checked="" type="checkbox"/>
BETTER	2.2.2 Provide secure bicycle parking spaces equivalent to the expected number of commuter cyclists (assuming the cycling mode share target is met)	<input checked="" type="checkbox"/>
2.3 Shower & change facilities		
BASIC	2.3.1 Provide shower and change facilities for the use of active commuters	<input type="checkbox"/>
BETTER	2.3.2 In addition to shower and change facilities, provide dedicated lockers, grooming stations, drying racks and laundry facilities for the use of active commuters	<input type="checkbox"/>
2.4 Bicycle repair station		
BETTER	2.4.1 Provide a permanent bike repair station, with commonly used tools and an air pump, adjacent to the main bicycle parking area (or secure bicycle parking area, if provided)	<input type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
3. TRANSIT		
3.1 Customer amenities		
BASIC	3.1.1 Provide shelters, lighting and benches at any on-site transit stops	<input checked="" type="checkbox"/>
BASIC	3.1.2 Where the site abuts an off-site transit stop and insufficient space exists for a transit shelter in the public right-of-way, protect land for a shelter and/or install a shelter	<input type="checkbox"/>
BETTER	3.1.3 Provide a secure and comfortable interior waiting area by integrating any on-site transit stops into the building	<input type="checkbox"/>
4. RIDESHARING		
4.1 Pick-up & drop-off facilities		
BASIC	4.1.1 Provide a designated area for carpool drivers (plus taxis and ride-hailing services) to drop off or pick up passengers without using fire lanes or other no-stopping zones	<input checked="" type="checkbox"/>
4.2 Carpool parking		
BASIC	4.2.1 Provide signed parking spaces for carpools in a priority location close to a major building entrance, sufficient in number to accommodate the mode share target for carpools	<input type="checkbox"/>
BETTER	4.2.2 At large developments, provide spaces for carpools in a separate, access-controlled parking area to simplify enforcement	<input type="checkbox"/>
5. CARSHARING & BIKESHARING		
5.1 Carshare parking spaces		
BETTER	5.1.1 Provide carshare parking spaces in permitted non-residential zones, occupying either required or provided parking spaces (<i>see Zoning By-law Section 94</i>)	<input type="checkbox"/>
5.2 Bikeshare station location		
BETTER	5.2.1 Provide a designated bikeshare station area near a major building entrance, preferably lighted and sheltered with a direct walkway connection	<input type="checkbox"/>

TDM-supportive design & infrastructure measures: <i>Non-residential developments</i>		Check if completed & add descriptions, explanations or plan/drawing references
6. PARKING		
6.1 Number of parking spaces		
REQUIRED	6.1.1 Do not provide more parking than permitted by zoning, nor less than required by zoning, unless a variance is being applied for	<input checked="" type="checkbox"/>
BASIC	6.1.2 Provide parking for long-term and short-term users that is consistent with mode share targets, considering the potential for visitors to use off-site public parking	<input checked="" type="checkbox"/>
BASIC	6.1.3 Where a site features more than one use, provide shared parking and reduce the cumulative number of parking spaces accordingly (<i>see Zoning By-law Section 104</i>)	<input checked="" type="checkbox"/>
BETTER	6.1.4 Reduce the minimum number of parking spaces required by zoning by one space for each 13 square metres of gross floor area provided as shower rooms, change rooms, locker rooms and other facilities for cyclists in conjunction with bicycle parking (<i>see Zoning By-law Section 111</i>)	<input type="checkbox"/>
6.2 Separate long-term & short-term parking areas		
BETTER	6.2.1 Separate short-term and long-term parking areas using signage or physical barriers, to permit access controls and simplify enforcement (i.e. to discourage employees from parking in visitor spaces, and vice versa)	<input type="checkbox"/>
7. OTHER		
7.1 On-site amenities to minimize off-site trips		
BETTER	7.1.1 Provide on-site amenities to minimize mid-day or mid-commute errands	<input type="checkbox"/>

TDM Measures Checklist:
Non-Residential Developments (office, institutional, retail or industrial)

Legend	
BASIC	The measure is generally feasible and effective, and in most cases would benefit the development and its users
BETTER	The measure could maximize support for users of sustainable modes, and optimize development performance
★	The measure is one of the most dependably effective tools to encourage the use of sustainable modes

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
1. TDM PROGRAM MANAGEMENT		
1.1 Program coordinator		
BASIC	★	1.1.1 Designate an internal coordinator, or contract with an external coordinator <input type="checkbox"/>
1.2 Travel surveys		
BETTER		1.2.1 Conduct periodic surveys to identify travel-related behaviours, attitudes, challenges and solutions, and to track progress <input type="checkbox"/>
2. WALKING AND CYCLING		
2.1 Information on walking/cycling routes & destinations		
BASIC		2.1.1 Display local area maps with walking/cycling access routes and key destinations at major entrances <input checked="" type="checkbox"/>
2.2 Bicycle skills training		
<i>Commuter travel</i>		
BETTER	★	2.2.1 Offer on-site cycling courses for commuters, or subsidize off-site courses <input checked="" type="checkbox"/>
2.3 Valet bike parking		
<i>Visitor travel</i>		
BETTER		2.3.1 Offer secure valet bike parking during public events when demand exceeds fixed supply (e.g. for festivals, concerts, games) <input type="checkbox"/>

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
3. TRANSIT		
3.1 Transit information		
BASIC	3.1.1 Display relevant transit schedules and route maps at entrances	<input checked="" type="checkbox"/>
BASIC	3.1.2 Provide online links to OC Transpo and STO information	<input checked="" type="checkbox"/>
BETTER	3.1.3 Provide real-time arrival information display at entrances	<input type="checkbox"/>
3.2 Transit fare incentives		
<i>Commuter travel</i>		
BETTER	3.2.1 Offer preloaded PRESTO cards to encourage commuters to use transit	<input checked="" type="checkbox"/>
BETTER ★	3.2.2 Subsidize or reimburse monthly transit pass purchases by employees	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.2.3 Arrange inclusion of same-day transit fare in price of tickets (e.g. for festivals, concerts, games)	<input type="checkbox"/>
3.3 Enhanced public transit service		
<i>Commuter travel</i>		
BETTER	3.3.1 Contract with OC Transpo to provide enhanced transit services (e.g. for shift changes, weekends)	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.3.2 Contract with OC Transpo to provide enhanced transit services (e.g. for festivals, concerts, games)	<input type="checkbox"/>
3.4 Private transit service		
<i>Commuter travel</i>		
BETTER	3.4.1 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for shift changes, weekends)	<input type="checkbox"/>
<i>Visitor travel</i>		
BETTER	3.4.2 Provide shuttle service when OC Transpo cannot offer sufficient quality or capacity to serve demand (e.g. for festivals, concerts, games)	<input type="checkbox"/>

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
4. RIDESHARING		
4.1 Ridematching service		
<i>Commuter travel</i>		
BASIC	★ 4.1.1 Provide a dedicated ridematching portal at OttawaRideMatch.com	<input type="checkbox"/>
4.2 Carpool parking price incentives		
<i>Commuter travel</i>		
BETTER	4.2.1 Provide discounts on parking costs for registered carpools	<input type="checkbox"/>
4.3 Vanpool service		
<i>Commuter travel</i>		
BETTER	4.3.1 Provide a vanpooling service for long-distance commuters	<input type="checkbox"/>
5. CARSHARING & BIKESHARING		
5.1 Bikeshare stations & memberships		
BETTER	5.1.1 Contract with provider to install on-site bikeshare station for use by commuters and visitors	<input type="checkbox"/>
<i>Commuter travel</i>		
BETTER	5.1.2 Provide employees with bikeshare memberships for local business travel	<input type="checkbox"/>
5.2 Carshare vehicles & memberships		
<i>Commuter travel</i>		
BETTER	5.2.1 Contract with provider to install on-site carshare vehicles and promote their use by tenants	<input type="checkbox"/>
BETTER	5.2.2 Provide employees with carshare memberships for local business travel	<input type="checkbox"/>
6. PARKING		
6.1 Priced parking		
<i>Commuter travel</i>		
BASIC	★ 6.1.1 Charge for long-term parking (daily, weekly, monthly)	<input type="checkbox"/>
BASIC	6.1.2 Unbundle parking cost from lease rates at multi-tenant sites	<input checked="" type="checkbox"/>
<i>Visitor travel</i>		
BETTER	6.1.3 Charge for short-term parking (hourly)	<input type="checkbox"/>

TDM measures: <i>Non-residential developments</i>		Check if proposed & add descriptions
7. TDM MARKETING & COMMUNICATIONS		
7.1 Multimodal travel information		
<i>Commuter travel</i>		
BASIC ★	7.1.1 Provide a multimodal travel option information package to new/relocating employees and students	<input checked="" type="checkbox"/>
<i>Visitor travel</i>		
BETTER ★	7.1.2 Include multimodal travel option information in invitations or advertising that attract visitors or customers (e.g. for festivals, concerts, games)	<input type="checkbox"/>
7.2 Personalized trip planning		
<i>Commuter travel</i>		
BETTER ★	7.2.1 Offer personalized trip planning to new/relocating employees	<input checked="" type="checkbox"/>
7.3 Promotions		
<i>Commuter travel</i>		
BETTER	7.3.1 Deliver promotions and incentives to maintain awareness, build understanding, and encourage trial of sustainable modes	<input type="checkbox"/>
8. OTHER INCENTIVES & AMENITIES		
8.1 Emergency ride home		
<i>Commuter travel</i>		
BETTER ★	8.1.1 Provide emergency ride home service to non-driving commuters	<input type="checkbox"/>
8.2 Alternative work arrangements		
<i>Commuter travel</i>		
BASIC ★	8.2.1 Encourage flexible work hours	<input type="checkbox"/>
BETTER	8.2.2 Encourage compressed workweeks	<input type="checkbox"/>
BETTER ★	8.2.3 Encourage telework	<input type="checkbox"/>
8.3 Local business travel options		
<i>Commuter travel</i>		
BASIC ★	8.3.1 Provide local business travel options that minimize the need for employees to bring a personal car to work	<input type="checkbox"/>
8.4 Commuter incentives		
<i>Commuter travel</i>		
BETTER	8.4.1 Offer employees a taxable, mode-neutral commuting allowance	<input type="checkbox"/>
8.5 On-site amenities		
<i>Commuter travel</i>		
BETTER	8.5.1 Provide on-site amenities/services to minimize mid-day or mid-commute errands	<input type="checkbox"/>

DRAFT

Appendix I:

Above Zoning Peak Person Trip Calculations

Time	Number of Units	Type of Unit	District	AM peak			PM peak			AM peak	PM peak	
Peak Hour	509	High-Rise	Bayshore/Cedarview	In	Out	Total	In	Out	Total	Mode Share	Mode Share	
				Auto Driver	24	53	78	47	34	81	40%	40%
				Auto Passenger	7	17	24	17	13	30	12%	15%
				Transit	27	59	86	41	29	70	38%	33%
				Cycling	1	3	4	1	1	2	2%	1%
				Pedestrian	6	13	19	16	11	27	8%	11%
				Total	65	145	210	122	88	210	100%	100%

DRAFT

Appendix J:
MMLOS: Intersections

Multi-Modal Level of Service - Intersections Form

Consultant
Scenario
Comments

Parsons
1299 Richmond

Project
Date

478250
1-Jun-23

Unlocked Rows for Replicating

INTERSECTIONS													
Crossing Side	Assaly/Richmond				Croydon/Richmond				Intersection C				
	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	
Pedestrian	Lanes	4	6	5	5	3	6	4	6				
	Median	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	No Median - 2.4 m	Median > 2.4 m	No Median - 2.4 m				
	Conflicting Left Turns	Permissive	Permissive	Permissive	Permissive	Permissive	Permissive	Permissive	Permissive				
	Conflicting Right Turns	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control	Permissive or yield control				
	Right Turns on Red (RTOR) ?	RTOR allowed	RTOR prohibited	RTOR allowed	RTOR allowed	RTOR allowed	RTOR prohibited	RTOR allowed	RTOR allowed				
	Ped Signal Leading Interval?	No	No	No	No	No	No	No	No				
	Right Turn Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel	No Channel				
	Corner Radius	5-10m	15-25m	5-10m	10-15m	5-10m	10-15m	5-10m	10-15m				
	Crosswalk Type	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings	Std transverse markings				
	PETSI Score	54	21	38	37	71	23	56	20				
	Ped. Exposure to Traffic LoS	D	F	E	E	C	F	D	F	-	-	-	-
	Cycle Length												
Effective Walk Time													
Average Pedestrian Delay													
Pedestrian Delay LoS	-	-	-	-	-	-	-	-	-	-	-	-	
Level of Service	D	F	E	E	C	F	D	F	-	-	-	-	
	F				F				-				
Approach From	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	NORTH	SOUTH	EAST	WEST	
Bicycle	Bicycle Lane Arrangement on Approach	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP	Mixed Traffic	Mixed Traffic	Curb Bike Lane, Cycletrack or MUP	Curb Bike Lane, Cycletrack or MUP				
	Right Turn Lane Configuration	≤ 50 m	≤ 50 m	Not Applicable	Not Applicable	≤ 50 m	≤ 50 m	Not Applicable	Not Applicable				
	Right Turning Speed	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable	≤ 25 km/h	≤ 25 km/h	Not Applicable	Not Applicable				
	Cyclist relative to RT motorists	D	D	Not Applicable	Not Applicable	D	D	Not Applicable	Not Applicable	-	-	-	-
	Separated or Mixed Traffic	Mixed Traffic	Mixed Traffic	Separated	Separated	Mixed Traffic	Mixed Traffic	Separated	Separated	-	-	-	-
	Left Turn Approach	No lane crossed	No lane crossed	1 lane crossed	2-stage, LT box	No lane crossed	No lane crossed	1 lane crossed	2-stage, LT box				
	Operating Speed	> 50 to < 60 km/h	> 50 to < 60 km/h	> 50 to < 60 km/h	> 50 to < 60 km/h	> 50 to < 60 km/h	> 50 to < 60 km/h	> 50 to < 60 km/h	> 50 to < 60 km/h				
	Left Turning Cyclist	C	C	D	A	C	C	D	A	-	-	-	-
Level of Service	D	D	D	A	D	D	D	A	-	-	-	-	
	D				D				-				
Transit	Average Signal Delay			0 sec	0 sec			≤ 10 sec	0 sec				
	Level of Service	-	-	A	A	-	-	B	A	-	-	-	-
	A				B				-				
Truck	Effective Corner Radius	< 10 m	> 15 m	< 10 m	10 - 15 m	< 10 m	10 - 15 m	< 10 m	10 - 15 m				
	Number of Receiving Lanes on Departure from Intersection	1	1	1	1	1	1	1	1				
	Level of Service	F	C	F	E	F	E	F	E	-	-	-	-
	F				F				-				
Auto	Volume to Capacity Ratio												
	Level of Service									-	-	-	-

DRAFT

Appendix K:

Synchro Analysis: Existing Intersection Performance

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

Existing AM



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	7	558	15	25	344	18	25	6	33	67	2	25
Future Volume (vph)	7	558	15	25	344	18	25	6	33	67	2	25
Satd. Flow (prot)	1695	1775	0	1695	1769	0	0	1717	1517	0	1644	0
Flt Permitted	0.518			0.359				0.760			0.767	
Satd. Flow (perm)	917	1775	0	637	1769	0	0	1338	1446	0	1282	0
Satd. Flow (RTOR)		3			5						28	
Lane Group Flow (vph)	8	637	0	28	402	0	0	35	37	0	104	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2		2	6		
Detector Phase	4	4		8	8		2	2	2	6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	30.3	30.3		30.3	30.3		33.3	33.3	33.3	33.3	33.3	
Total Split (s)	37.0	37.0		37.0	37.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	52.9%	52.9%		52.9%	52.9%		47.1%	47.1%	47.1%	47.1%	47.1%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3		6.3	6.3		6.3	6.3	6.3	6.3	6.3	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None	None	None	None	
Act Effct Green (s)	48.3	48.3		48.3	48.3			13.6	13.6		13.6	
Actuated g/C Ratio	0.69	0.69		0.69	0.69			0.19	0.19		0.19	
v/c Ratio	0.01	0.52		0.06	0.33			0.13	0.13		0.38	
Control Delay	3.7	7.3		8.4	8.4			21.6	21.5		20.9	
Queue Delay	0.0	0.0		0.0	0.0			0.0	0.0		0.0	
Total Delay	3.7	7.3		8.4	8.4			21.6	21.5		20.9	
LOS	A	A		A	A			C	C		C	
Approach Delay		7.3			8.4			21.6			20.9	
Approach LOS		A			A			C			C	
Queue Length 50th (m)	0.2	15.6		1.0	18.0			4.1	4.3		9.2	
Queue Length 95th (m)	m0.5	#121.0		6.5	59.4			8.1	8.3		15.9	
Internal Link Dist (m)		290.9			84.7			127.4			31.1	
Turn Bay Length (m)	210.0			50.0					15.0			
Base Capacity (vph)	632	1225		439	1221			510	551		506	
Starvation Cap Reductn	0	0		0	0			0	0		0	
Spillback Cap Reductn	0	0		0	0			0	0		0	
Storage Cap Reductn	0	0		0	0			0	0		0	
Reduced v/c Ratio	0.01	0.52		0.06	0.33			0.07	0.07		0.21	

Intersection Summary

Cycle Length: 70

Actuated Cycle Length: 70

Offset: 64 (91%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

Existing AM

Maximum v/c Ratio: 0.52

Intersection Signal Delay: 9.6

Intersection LOS: A

Intersection Capacity Utilization 76.9%

ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Assaly/Assaly Rd & Richmond Rd

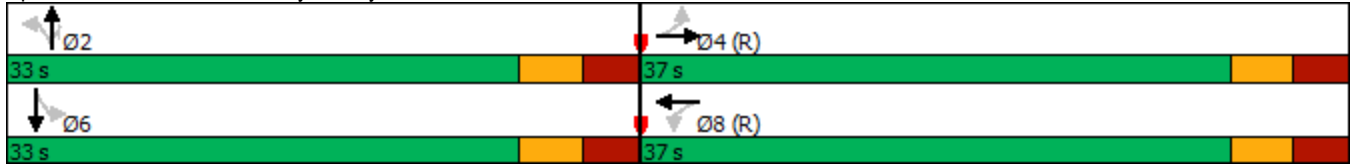

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

Existing AM



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	20	512	57	15	343	15	34	26	73	25	65	34
Future Volume (vph)	20	512	57	15	343	15	34	26	73	25	65	34
Satd. Flow (prot)	1695	1751	0	1695	1771	0	1695	1553	0	0	1687	0
Flt Permitted	0.524			0.366			0.697				0.901	
Satd. Flow (perm)	931	1751	0	650	1771	0	1232	1553	0	0	1532	0
Satd. Flow (RTOR)		11			4						30	
Lane Group Flow (vph)	22	632	0	17	398	0	38	110	0	0	138	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6			8				4
Permitted Phases	2			6			8			4		
Detector Phase	2	2		6	6		8	8		4	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	26.4	26.4		26.4	26.4		31.1	31.1		31.1	31.1	
Total Split (s)	39.0	39.0		39.0	39.0		31.0	31.0		31.0	31.0	
Total Split (%)	55.7%	55.7%		55.7%	55.7%		44.3%	44.3%		44.3%	44.3%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.1	3.1		3.1	3.1		2.8	2.8		2.8	2.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Lost Time (s)	6.4	6.4		6.4	6.4		6.1	6.1			6.1	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	48.8	48.8		48.8	48.8		12.4	12.4				12.3
Actuated g/C Ratio	0.70	0.70		0.70	0.70		0.18	0.18				0.18
v/c Ratio	0.03	0.52		0.04	0.32		0.17	0.40				0.47
Control Delay	7.5	10.7		11.2	12.4		22.9	27.6				23.4
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Total Delay	7.5	10.7		11.2	12.4		22.9	27.6				23.4
LOS	A	B		B	B		C	C				C
Approach Delay		10.6			12.3			26.4				23.4
Approach LOS		B			B			C				C
Queue Length 50th (m)	0.8	34.4		1.0	27.8		4.4	13.5				13.2
Queue Length 95th (m)	4.9	#108.7		m6.0	75.4		9.0	20.2				21.1
Internal Link Dist (m)		287.8			290.9			143.4				166.2
Turn Bay Length (m)	50.0			45.0			50.0					
Base Capacity (vph)	649	1224		453	1235		438	552				564
Starvation Cap Reductn	0	0		0	0		0	0				0
Spillback Cap Reductn	0	0		0	0		0	0				0
Storage Cap Reductn	0	0		0	0		0	0				0
Reduced v/c Ratio	0.03	0.52		0.04	0.32		0.09	0.20				0.24

Intersection Summary

Cycle Length: 70

Actuated Cycle Length: 70

Offset: 40 (57%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

Existing AM

Maximum v/c Ratio: 0.52

Intersection Signal Delay: 14.2

Intersection LOS: B

Intersection Capacity Utilization 58.3%

ICU Level of Service B

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: Croydon & Richmond Rd



HCM 2010 TWSC
 3: Assaly Rd/Assaly & Starflower Ln

Existing AM

Intersection												
Int Delay, s/veh	0.7											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Traffic Vol, veh/h	0	0	0	6	0	1	1	19	0	0	76	0
Future Vol, veh/h	0	0	0	6	0	1	1	19	0	0	76	0
Conflicting Peds, #/hr	0	0	0	0	0	0	15	0	15	15	0	15
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	-	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	7	0	1	1	21	0	0	84	0

Major/Minor	Minor1	Major1	Major2				
Conflicting Flow All	107	122	21	99	0	-	-
Stage 1	23	23	-	-	-	-	-
Stage 2	84	99	-	-	-	-	-
Critical Hdwy	6.42	6.52	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	5.52	-	-	-	-	-
Critical Hdwy Stg 2	5.42	5.52	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	891	768	1056	1494	-	0	0
Stage 1	1000	876	-	-	-	0	0
Stage 2	939	813	-	-	-	0	0
Platoon blocked, %					-	-	-
Mov Cap-1 Maneuver	890	0	1056	1494	-	-	-
Mov Cap-2 Maneuver	890	0	-	-	-	-	-
Stage 1	999	0	-	-	-	-	-
Stage 2	939	0	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	9	0.4	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBTWBLn1	SBT	SBR
Capacity (veh/h)	1494	-	910	-
HCM Lane V/C Ratio	0.001	-	0.009	-
HCM Control Delay (s)	7.4	0	9	-
HCM Lane LOS	A	A	A	-
HCM 95th %tile Q(veh)	0	-	0	-

HCM Unsignalized Intersection Capacity Analysis 2: Richmond Rd & Starflower Ln

Existing AM



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	5	651	387	2	0	0
Future Volume (Veh/h)	5	651	387	2	0	0
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	6	723	430	2	0	0
Pedestrians					15	
Lane Width (m)					0.0	
Walking Speed (m/s)					1.1	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (m)		109				
pX, platoon unblocked					0.80	
vC, conflicting volume	447				1181	446
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	447				1102	446
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				100	100
cM capacity (veh/h)	1113				187	612
Direction, Lane #	EB 1	EB 2	WB 1			
Volume Total	6	723	432			
Volume Left	6	0	0			
Volume Right	0	0	2			
cSH	1113	1700	1700			
Volume to Capacity	0.01	0.43	0.25			
Queue Length 95th (m)	0.1	0.0	0.0			
Control Delay (s)	8.3	0.0	0.0			
Lane LOS	A					
Approach Delay (s)	0.1		0.0			
Approach LOS						
Intersection Summary						
Average Delay			0.0			
Intersection Capacity Utilization			39.5%	ICU Level of Service		A
Analysis Period (min)			15			

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

Existing PM



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	16	426	24	54	758	48	21	13	45	39	2	30
Future Volume (vph)	16	426	24	54	758	48	21	13	45	39	2	30
Satd. Flow (prot)	1695	1763	0	1695	1760	0	0	1731	1517	0	1608	0
Flt Permitted	0.238			0.457				0.806			0.808	
Satd. Flow (perm)	425	1763	0	798	1760	0	0	1420	1445	0	1317	0
Satd. Flow (RTOR)		5			6						33	
Lane Group Flow (vph)	18	500	0	60	895	0	0	37	50	0	78	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2		2	6		
Detector Phase	4	4		8	8		2	2	2	6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	30.3	30.3		30.3	30.3		33.3	33.3	33.3	33.3	33.3	
Total Split (s)	52.0	52.0		52.0	52.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	61.2%	61.2%		61.2%	61.2%		38.8%	38.8%	38.8%	38.8%	38.8%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3		6.3	6.3		6.3	6.3	6.3	6.3	6.3	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None	None	None	None	
Act Effct Green (s)	63.6	63.6		63.6	63.6			13.3	13.3		13.3	
Actuated g/C Ratio	0.75	0.75		0.75	0.75			0.16	0.16		0.16	
v/c Ratio	0.06	0.38		0.10	0.68			0.17	0.22		0.33	
Control Delay	2.6	2.9		6.7	13.3			30.1	31.3		22.5	
Queue Delay	0.0	0.0		0.0	0.0			0.0	0.0		0.0	
Total Delay	2.6	2.9		6.7	13.3			30.1	31.3		22.5	
LOS	A	A		A	B			C	C		C	
Approach Delay		2.9			12.9			30.8			22.5	
Approach LOS		A			B			C			C	
Queue Length 50th (m)	0.3	9.4		2.3	63.5			5.6	7.6		6.8	
Queue Length 95th (m)	m0.8	13.2		10.8	#212.7			10.9	13.6		15.0	
Internal Link Dist (m)		290.9			84.7			127.4			31.1	
Turn Bay Length (m)	210.0			50.0					15.0			
Base Capacity (vph)	318	1320		596	1318			446	453		436	
Starvation Cap Reductn	0	0		0	0			0	0		0	
Spillback Cap Reductn	0	0		0	0			0	0		0	
Storage Cap Reductn	0	0		0	0			0	0		0	
Reduced v/c Ratio	0.06	0.38		0.10	0.68			0.08	0.11		0.18	

Intersection Summary

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 64 (75%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

Existing PM

Maximum v/c Ratio: 0.68

Intersection Signal Delay: 11.1

Intersection LOS: B

Intersection Capacity Utilization 73.5%

ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Assaly/Assaly Rd & Richmond Rd

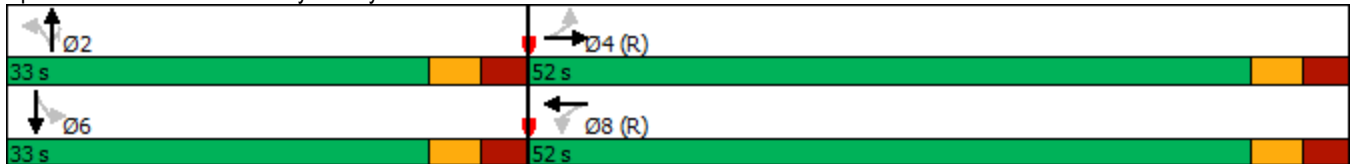

Lanes, Volumes, Timings
8: Croydon & Richmond Rd

Existing PM



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	23	419	82	54	744	16	118	89	33	13	56	18
Future Volume (vph)	23	419	82	54	744	16	118	89	33	13	56	18
Satd. Flow (prot)	1695	1725	0	1695	1777	0	1695	1686	0	0	1704	0
Flt Permitted	0.242			0.410			0.760				0.940	
Satd. Flow (perm)	432	1725	0	723	1777	0	1318	1686	0	0	1606	0
Satd. Flow (RTOR)		19			2						16	
Lane Group Flow (vph)	26	557	0	60	845	0	131	136	0	0	96	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		6			2			8				4
Permitted Phases	6			2			8			4		
Detector Phase	6	6		2	2		8	8		4	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	26.4	26.4		26.4	26.4		31.1	31.1		31.1	31.1	
Total Split (s)	54.0	54.0		54.0	54.0		31.0	31.0		31.0	31.0	
Total Split (%)	63.5%	63.5%		63.5%	63.5%		36.5%	36.5%		36.5%	36.5%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.1	3.1		3.1	3.1		2.8	2.8		2.8	2.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Lost Time (s)	6.4	6.4		6.4	6.4		6.1	6.1			6.1	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	57.8	57.8		57.8	57.8		14.7	14.7			14.7	
Actuated g/C Ratio	0.68	0.68		0.68	0.68		0.17	0.17			0.17	
v/c Ratio	0.09	0.47		0.12	0.70		0.57	0.47			0.33	
Control Delay	7.7	9.1		12.4	18.8		40.7	35.1			26.5	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Delay	7.7	9.1		12.4	18.8		40.7	35.1			26.5	
LOS	A	A		B	B		D	D			C	
Approach Delay		9.0			18.3			37.8			26.5	
Approach LOS		A			B			D			C	
Queue Length 50th (m)	1.2	33.6		3.3	79.3		20.1	20.4			11.6	
Queue Length 95th (m)	5.8	81.2		m13.5	#190.7		31.7	31.2			21.0	
Internal Link Dist (m)		287.8			290.9			143.4			166.2	
Turn Bay Length (m)	50.0			45.0			50.0					
Base Capacity (vph)	293	1178		491	1208		386	493			481	
Starvation Cap Reductn	0	0		0	0		0	0			0	
Spillback Cap Reductn	0	0		0	0		0	0			0	
Storage Cap Reductn	0	0		0	0		0	0			0	
Reduced v/c Ratio	0.09	0.47		0.12	0.70		0.34	0.28			0.20	

Intersection Summary

Cycle Length: 85
 Actuated Cycle Length: 85
 Offset: 40 (47%), Referenced to phase 2:WBTL and 6:EBTL, Start of Green
 Natural Cycle: 80
 Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

Existing PM

Maximum v/c Ratio: 0.70

Intersection Signal Delay: 18.6

Intersection LOS: B

Intersection Capacity Utilization 76.4%

ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: Croydon & Richmond Rd



HCM 2010 TWSC
 3: Assaly Rd/Assaly & Starflower Ln

Existing PM

Intersection												
Int Delay, s/veh	2.1											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Traffic Vol, veh/h	0	0	0	23	0	13	2	74	0	0	53	1
Future Vol, veh/h	0	0	0	23	0	13	2	74	0	0	53	1
Conflicting Peds, #/hr	0	0	0	0	0	0	15	0	15	15	0	15
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	-	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	90	90	90	90	90	90
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	26	0	14	2	82	0	0	59	1

Major/Minor	Minor1		Major1		Major2		
Conflicting Flow All	146	161	82	75	0	-	0
Stage 1	86	86	-	-	-	-	-
Stage 2	60	75	-	-	-	-	-
Critical Hdwy	6.42	6.52	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	5.52	-	-	-	-	-
Critical Hdwy Stg 2	5.42	5.52	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	846	731	978	1524	-	0	0
Stage 1	937	824	-	-	-	0	0
Stage 2	963	833	-	-	-	0	0
Platoon blocked, %					-	-	-
Mov Cap-1 Maneuver	845	0	978	1524	-	-	-
Mov Cap-2 Maneuver	845	0	-	-	-	-	-
Stage 1	936	0	-	-	-	-	-
Stage 2	963	0	-	-	-	-	-


Approach	WB	NB	SB
HCM Control Delay, s	9.2	0.2	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBTWBLn1	SBT	SBR
Capacity (veh/h)	1524	-	889	-
HCM Lane V/C Ratio	0.001	-	0.045	-
HCM Control Delay (s)	7.4	0	9.2	-
HCM Lane LOS	A	A	A	-
HCM 95th %tile Q(veh)	0	-	0.1	-

HCM Unsignalized Intersection Capacity Analysis

2: Richmond Rd & Starflower Ln

Existing PM



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	5	515	860	1	0	0
Future Volume (Veh/h)	5	515	860	1	0	0
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	6	572	956	1	0	0
Pedestrians					15	
Lane Width (m)					0.0	
Walking Speed (m/s)					1.1	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (m)		109				
pX, platoon unblocked					0.89	
vC, conflicting volume	972				1556	972
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	972				1562	972
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				100	100
cM capacity (veh/h)	709				109	307
Direction, Lane #	EB 1	EB 2	WB 1			
Volume Total	6	572	957			
Volume Left	6	0	0			
Volume Right	0	0	1			
cSH	709	1700	1700			
Volume to Capacity	0.01	0.34	0.56			
Queue Length 95th (m)	0.2	0.0	0.0			
Control Delay (s)	10.1	0.0	0.0			
Lane LOS	B					
Approach Delay (s)	0.1		0.0			
Approach LOS						
Intersection Summary						
Average Delay			0.0			
Intersection Capacity Utilization			51.2%	ICU Level of Service		A
Analysis Period (min)			15			

Appendix L:

Synchro Analysis: Background Intersection Performance

Lanes, Volumes, Timings
1: Assaly/Assaly Rd & Richmond Rd

AM BG2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	20	595	15	25	377	23	25	6	33	79	2	54
Future Volume (vph)	20	595	15	25	377	23	25	6	33	79	2	54
Satd. Flow (prot)	1695	1775	0	1695	1765	0	0	1715	1517	0	1614	0
Flt Permitted	0.519			0.375				0.753			0.802	
Satd. Flow (perm)	919	1775	0	665	1765	0	0	1326	1446	0	1313	0
Satd. Flow (RTOR)		2			6						54	
Lane Group Flow (vph)	20	610	0	25	400	0	0	31	33	0	135	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2		2	6		
Detector Phase	4	4		8	8		2	2	2	6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	30.3	30.3		30.3	30.3		33.3	33.3	33.3	33.3	33.3	
Total Split (s)	37.0	37.0		37.0	37.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	52.9%	52.9%		52.9%	52.9%		47.1%	47.1%	47.1%	47.1%	47.1%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3		6.3	6.3		6.3	6.3	6.3	6.3	6.3	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None	None	None	None	
Act Effct Green (s)	48.2	48.2		48.2	48.2			13.8	13.8		13.8	
Actuated g/C Ratio	0.69	0.69		0.69	0.69			0.20	0.20		0.20	
v/c Ratio	0.03	0.50		0.05	0.33			0.12	0.12		0.45	
Control Delay	3.7	6.8		8.4	8.5			21.2	21.1		18.8	
Queue Delay	0.0	0.0		0.0	0.0			0.0	0.0		0.0	
Total Delay	3.7	6.8		8.4	8.5			21.2	21.1		18.8	
LOS	A	A		A	A			C	C		B	
Approach Delay		6.7			8.5			21.1			18.8	
Approach LOS		A			A			C			B	
Queue Length 50th (m)	0.5	14.5		0.9	17.8			3.6	3.9		9.8	
Queue Length 95th (m)	m1.1	#63.7		6.0	58.7			7.3	7.7		17.6	
Internal Link Dist (m)		290.9			84.7			127.4			31.1	
Turn Bay Length (m)	210.0			50.0					15.0			
Base Capacity (vph)	632	1221		457	1216			505	551		534	
Starvation Cap Reductn	0	0		0	0			0	0		0	
Spillback Cap Reductn	0	0		0	0			0	0		0	
Storage Cap Reductn	0	0		0	0			0	0		0	
Reduced v/c Ratio	0.03	0.50		0.05	0.33			0.06	0.06		0.25	

Intersection Summary

Cycle Length: 70
 Actuated Cycle Length: 70
 Offset: 64 (91%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green
 Natural Cycle: 65
 Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

AM BG2030

Maximum v/c Ratio: 0.50

Intersection Signal Delay: 9.4

Intersection LOS: A

Intersection Capacity Utilization 79.2%

ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Assaly/Assaly Rd & Richmond Rd

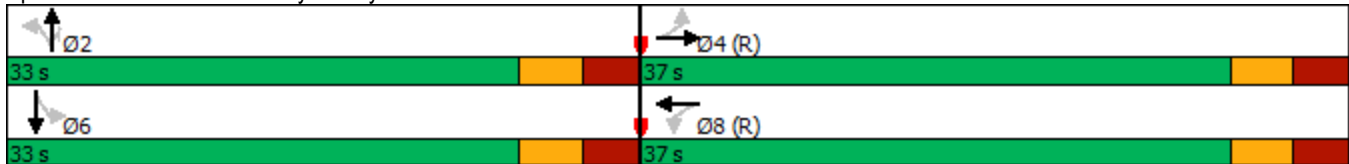

Lanes, Volumes, Timings
8: Croydon & Richmond Rd

AM BG2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	20	555	57	15	394	15	34	26	78	25	65	34
Future Volume (vph)	20	555	57	15	394	15	34	26	78	25	65	34
Satd. Flow (prot)	1695	1754	0	1695	1772	0	1695	1548	0	0	1687	0
Flt Permitted	0.516			0.380			0.738				0.905	
Satd. Flow (perm)	917	1754	0	675	1772	0	1304	1548	0	0	1539	0
Satd. Flow (RTOR)		10			4						30	
Lane Group Flow (vph)	20	612	0	15	409	0	34	104	0	0	124	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6			8				4
Permitted Phases	2			6			8			4		
Detector Phase	2	2		6	6		8	8		4		4
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	26.4	26.4		26.4	26.4		31.1	31.1		31.1	31.1	
Total Split (s)	39.0	39.0		39.0	39.0		31.0	31.0		31.0	31.0	
Total Split (%)	55.7%	55.7%		55.7%	55.7%		44.3%	44.3%		44.3%	44.3%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.1	3.1		3.1	3.1		2.8	2.8		2.8	2.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Lost Time (s)	6.4	6.4		6.4	6.4		6.1	6.1			6.1	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	49.0	49.0		49.0	49.0		12.2	12.2			12.1	
Actuated g/C Ratio	0.70	0.70		0.70	0.70		0.17	0.17			0.17	
v/c Ratio	0.03	0.50		0.03	0.33		0.15	0.39			0.43	
Control Delay	7.5	10.1		10.7	12.0		22.6	27.5			22.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Delay	7.5	10.1		10.7	12.0		22.6	27.5			22.2	
LOS	A	B		B	B		C	C			C	
Approach Delay		10.0			12.0			26.3			22.2	
Approach LOS		B			B			C			C	
Queue Length 50th (m)	0.7	32.0		0.8	27.4		4.0	12.7			11.4	
Queue Length 95th (m)	4.7	99.3		m5.2	74.1		8.3	19.2			19.0	
Internal Link Dist (m)		287.8			290.9			143.4			166.2	
Turn Bay Length (m)	50.0			45.0			50.0					
Base Capacity (vph)	642	1231		472	1242		463	550			566	
Starvation Cap Reductn	0	0		0	0		0	0			0	
Spillback Cap Reductn	0	0		0	0		0	0			0	
Storage Cap Reductn	0	0		0	0		0	0			0	
Reduced v/c Ratio	0.03	0.50		0.03	0.33		0.07	0.19			0.22	

Intersection Summary

Cycle Length: 70

Actuated Cycle Length: 70

Offset: 40 (57%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 60

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

AM BG2030

Maximum v/c Ratio: 0.50

Intersection Signal Delay: 13.5

Intersection LOS: B


Intersection Capacity Utilization 60.7%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: Croydon & Richmond Rd

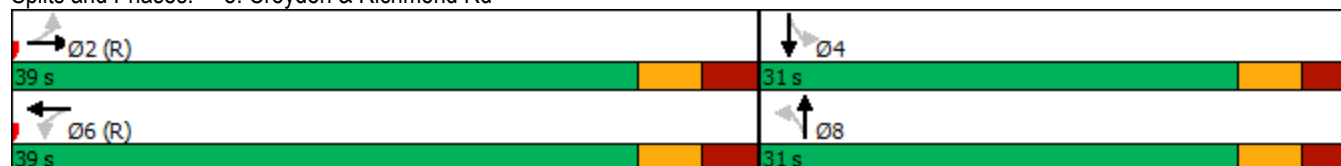

Intersection												
Int Delay, s/veh	0.4											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↔			↔			↔	
Traffic Vol, veh/h	0	0	0	6	0	1	1	37	0	0	117	0
Future Vol, veh/h	0	0	0	6	0	1	1	37	0	0	117	0
Conflicting Peds, #/hr	0	0	0	0	0	0	15	0	15	15	0	15
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	-	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	100	100	100	100	100	100	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	6	0	1	1	37	0	0	117	0

Major/Minor	Minor1		Major1		Major2		
Conflicting Flow All	156	171	37	132	0	-	0
Stage 1	39	39	-	-	-	-	-
Stage 2	117	132	-	-	-	-	-
Critical Hdwy	6.42	6.52	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	5.52	-	-	-	-	-
Critical Hdwy Stg 2	5.42	5.52	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	835	722	1035	1453	-	0	0
Stage 1	983	862	-	-	-	0	0
Stage 2	908	787	-	-	-	0	0
Platoon blocked, %					-	-	-
Mov Cap-1 Maneuver	834	0	1035	1453	-	-	-
Mov Cap-2 Maneuver	834	0	-	-	-	-	-
Stage 1	982	0	-	-	-	-	-
Stage 2	908	0	-	-	-	-	-


Approach	WB	NB	SB
HCM Control Delay, s	9.2	0.2	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBTWBLn1	SBT	SBR
Capacity (veh/h)	1453	-	858	-
HCM Lane V/C Ratio	0.001	-	0.008	-
HCM Control Delay (s)	7.5	0	9.2	-
HCM Lane LOS	A	A	A	-
HCM 95th %tile Q(veh)	0	-	0	-

HCM Unsignalized Intersection Capacity Analysis

2: Richmond Rd & Starflower Ln

AM BG2030



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	5	703	427	2	0	0
Future Volume (Veh/h)	5	703	427	2	0	0
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Hourly flow rate (vph)	5	703	427	2	0	0
Pedestrians					15	
Lane Width (m)					0.0	
Walking Speed (m/s)					1.1	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (m)		109				
pX, platoon unblocked					0.81	
vC, conflicting volume	444				1156	443
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	444				1077	443
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	100				100	100
cM capacity (veh/h)	1116				196	615
Direction, Lane #	EB 1	EB 2	WB 1			
Volume Total	5	703	429			
Volume Left	5	0	0			
Volume Right	0	0	2			
cSH	1116	1700	1700			
Volume to Capacity	0.00	0.41	0.25			
Queue Length 95th (m)	0.1	0.0	0.0			
Control Delay (s)	8.2	0.0	0.0			
Lane LOS	A					
Approach Delay (s)	0.1		0.0			
Approach LOS						
Intersection Summary						
Average Delay			0.0			
Intersection Capacity Utilization			42.4%	ICU Level of Service		A
Analysis Period (min)			15			

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

PM BG2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	41	460	24	54	806	59	21	13	45	47	2	48
Future Volume (vph)	41	460	24	54	806	59	21	13	45	47	2	48
Satd. Flow (prot)	1695	1765	0	1695	1757	0	0	1731	1517	0	1590	0
Flt Permitted	0.252			0.467				0.813			0.829	
Satd. Flow (perm)	450	1765	0	815	1757	0	0	1433	1445	0	1335	0
Satd. Flow (RTOR)		5			7						48	
Lane Group Flow (vph)	41	484	0	54	865	0	0	34	45	0	97	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2		2	6		
Detector Phase	4	4		8	8		2	2	2	6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	30.3	30.3		30.3	30.3		33.3	33.3	33.3	33.3	33.3	
Total Split (s)	52.0	52.0		52.0	52.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	61.2%	61.2%		61.2%	61.2%		38.8%	38.8%	38.8%	38.8%	38.8%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3		6.3	6.3		6.3	6.3	6.3	6.3	6.3	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None	None	None	None	
Act Effct Green (s)	63.5	63.5		63.5	63.5			13.5	13.5		13.5	
Actuated g/C Ratio	0.75	0.75		0.75	0.75			0.16	0.16		0.16	
v/c Ratio	0.12	0.37		0.09	0.66			0.15	0.20		0.39	
Control Delay	3.1	3.0		6.6	12.8			29.5	30.6		20.9	
Queue Delay	0.0	0.0		0.0	0.0			0.0	0.0		0.0	
Total Delay	3.1	3.0		6.6	12.8			29.5	30.6		20.9	
LOS	A	A		A	B			C	C		C	
Approach Delay		3.0			12.4			30.1			20.9	
Approach LOS		A			B			C			C	
Queue Length 50th (m)	0.8	9.6		2.0	59.3			5.1	6.8		7.4	
Queue Length 95th (m)	m1.9	13.5		9.9	#201.6			10.1	12.5		16.5	
Internal Link Dist (m)		290.9			84.7			127.4			31.1	
Turn Bay Length (m)	210.0			50.0					15.0			
Base Capacity (vph)	336	1319		608	1313			450	453		452	
Starvation Cap Reductn	0	0		0	0			0	0		0	
Spillback Cap Reductn	0	0		0	0			0	0		0	
Storage Cap Reductn	0	0		0	0			0	0		0	
Reduced v/c Ratio	0.12	0.37		0.09	0.66			0.08	0.10		0.21	

Intersection Summary

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 64 (75%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

PM BG2030

Maximum v/c Ratio: 0.66

Intersection Signal Delay: 10.7

Intersection LOS: B

Intersection Capacity Utilization 76.0%

ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Assaly/Assaly Rd & Richmond Rd

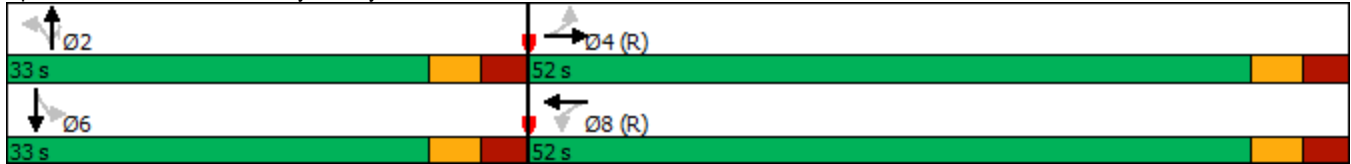

Lanes, Volumes, Timings
8: Croydon & Richmond Rd

PM BG2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	23	469	82	54	803	16	118	89	42	13	56	18
Future Volume (vph)	23	469	82	54	803	16	118	89	42	13	56	18
Satd. Flow (prot)	1695	1731	0	1695	1777	0	1695	1670	0	0	1704	0
Flt Permitted	0.257			0.414			0.788				0.940	
Satd. Flow (perm)	459	1731	0	730	1777	0	1366	1670	0	0	1606	0
Satd. Flow (RTOR)		17			2						16	
Lane Group Flow (vph)	23	551	0	54	819	0	118	131	0	0	87	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		6			2			8				4
Permitted Phases	6			2			8			4		
Detector Phase	6	6		2	2		8	8		4	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	26.4	26.4		26.4	26.4		31.1	31.1		31.1	31.1	
Total Split (s)	54.0	54.0		54.0	54.0		31.0	31.0		31.0	31.0	
Total Split (%)	63.5%	63.5%		63.5%	63.5%		36.5%	36.5%		36.5%	36.5%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.1	3.1		3.1	3.1		2.8	2.8		2.8	2.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Lost Time (s)	6.4	6.4		6.4	6.4		6.1	6.1			6.1	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	57.9	57.9		57.9	57.9		14.6	14.6			14.6	
Actuated g/C Ratio	0.68	0.68		0.68	0.68		0.17	0.17			0.17	
v/c Ratio	0.07	0.46		0.11	0.68		0.51	0.46			0.30	
Control Delay	7.5	9.0		12.0	17.9		37.7	35.1			25.9	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Delay	7.5	9.0		12.0	17.9		37.7	35.1			25.9	
LOS	A	A		B	B		D	D			C	
Approach Delay		8.9			17.5			36.3			25.9	
Approach LOS		A			B			D			C	
Queue Length 50th (m)	1.0	32.7		2.8	70.0		17.9	19.7			10.3	
Queue Length 95th (m)	5.2	79.8		m12.3	#181.7		28.5	30.4			19.2	
Internal Link Dist (m)		287.8			290.9			143.4			166.2	
Turn Bay Length (m)	50.0			45.0			50.0					
Base Capacity (vph)	313	1185		497	1212		400	489			481	
Starvation Cap Reductn	0	0		0	0		0	0			0	
Spillback Cap Reductn	0	0		0	0		0	0			0	
Storage Cap Reductn	0	0		0	0		0	0			0	
Reduced v/c Ratio	0.07	0.46		0.11	0.68		0.29	0.27			0.18	

Intersection Summary

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 40 (47%), Referenced to phase 2:WBTL and 6:EBTL, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

PM BG2030

Maximum v/c Ratio: 0.68

Intersection Signal Delay: 17.8

Intersection LOS: B

Intersection Capacity Utilization 76.4%

ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: Croydon & Richmond Rd



Intersection												
Int Delay, s/veh	1.5											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Traffic Vol, veh/h	0	0	0	23	0	13	2	110	0	0	79	1
Future Vol, veh/h	0	0	0	23	0	13	2	110	0	0	79	1
Conflicting Peds, #/hr	0	0	0	0	0	0	15	0	15	15	0	15
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	-	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	100	100	100	100	100	100	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	23	0	13	2	110	0	0	79	1

Major/Minor	Minor1		Major1		Major2		
Conflicting Flow All	194	209	110	95	0	-	0
Stage 1	114	114	-	-	-	-	-
Stage 2	80	95	-	-	-	-	-
Critical Hdwy	6.42	6.52	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	5.52	-	-	-	-	-
Critical Hdwy Stg 2	5.42	5.52	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	795	688	943	1499	-	0	0
Stage 1	911	801	-	-	-	0	0
Stage 2	943	816	-	-	-	0	0
Platoon blocked, %					-	-	-
Mov Cap-1 Maneuver	794	0	943	1499	-	-	-
Mov Cap-2 Maneuver	794	0	-	-	-	-	-
Stage 1	910	0	-	-	-	-	-
Stage 2	943	0	-	-	-	-	-

Approach	WB	NB	SB
HCM Control Delay, s	9.5	0.1	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBTWBLn1	SBT	SBR
Capacity (veh/h)	1499	-	842	-
HCM Lane V/C Ratio	0.001	-	0.043	-
HCM Control Delay (s)	7.4	0	9.5	-
HCM Lane LOS	A	A	A	-
HCM 95th %tile Q(veh)	0	-	0.1	-

HCM Unsignalized Intersection Capacity Analysis

2: Richmond Rd & Starflower Ln

PM BG2030



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	5	560	922	1	0	0
Future Volume (Veh/h)	5	560	922	1	0	0
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Hourly flow rate (vph)	5	560	922	1	0	0
Pedestrians					15	
Lane Width (m)					0.0	
Walking Speed (m/s)					1.1	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (m)		109				
pX, platoon unblocked					0.90	
vC, conflicting volume	938				1508	938
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	938				1508	938
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				100	100
cM capacity (veh/h)	730				118	321
Direction, Lane #	EB 1	EB 2	WB 1			
Volume Total	5	560	923			
Volume Left	5	0	0			
Volume Right	0	0	1			
cSH	730	1700	1700			
Volume to Capacity	0.01	0.33	0.54			
Queue Length 95th (m)	0.2	0.0	0.0			
Control Delay (s)	10.0	0.0	0.0			
Lane LOS	A					
Approach Delay (s)	0.1		0.0			
Approach LOS						
Intersection Summary						
Average Delay			0.0			
Intersection Capacity Utilization			54.6%	ICU Level of Service		A
Analysis Period (min)			15			

DRAFT


Appendix M:

Synchro Analysis: Future Projected Intersection Performance

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

AM Projected 2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	20	606	15	25	377	23	25	6	33	96	2	79
Future Volume (vph)	20	606	15	25	377	23	25	6	33	96	2	79
Satd. Flow (prot)	1695	1775	0	1695	1765	0	0	1715	1517	0	1604	0
Flt Permitted	0.509			0.350				0.757			0.814	
Satd. Flow (perm)	901	1775	0	620	1765	0	0	1335	1446	0	1323	0
Satd. Flow (RTOR)		2			6						67	
Lane Group Flow (vph)	20	621	0	25	400	0	0	31	33	0	177	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		4			8			2				6
Permitted Phases	4			8			2		2	6		
Detector Phase	4	4		8	8		2	2	2	6		6
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	30.3	30.3		30.3	30.3		33.3	33.3	33.3	33.3	33.3	
Total Split (s)	37.0	37.0		37.0	37.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	52.9%	52.9%		52.9%	52.9%		47.1%	47.1%	47.1%	47.1%	47.1%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3		6.3	6.3		6.3	6.3	6.3	6.3	6.3	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None	None	None	None	
Act Effct Green (s)	42.9	42.9		42.9	42.9			14.5	14.5			14.5
Actuated g/C Ratio	0.61	0.61		0.61	0.61			0.21	0.21			0.21
v/c Ratio	0.04	0.57		0.07	0.37			0.11	0.11			0.54
Control Delay	3.9	9.0		8.9	9.5			20.3	20.2			20.4
Queue Delay	0.0	0.0		0.0	0.0			0.0	0.0			0.0
Total Delay	3.9	9.0		8.9	9.5			20.3	20.2			20.4
LOS	A	A		A	A			C	C			C
Approach Delay		8.9			9.5			20.3				20.4
Approach LOS		A			A			C				C
Queue Length 50th (m)	0.5	15.0		1.0	19.4			3.5	3.8			13.4
Queue Length 95th (m)	m1.1	#116.3		6.1	58.7			7.3	7.7			22.8
Internal Link Dist (m)		290.9			84.7			127.4				31.1
Turn Bay Length (m)	210.0			50.0					15.0			
Base Capacity (vph)	553	1089		380	1085			509	551			546
Starvation Cap Reductn	0	0		0	0			0	0			0
Spillback Cap Reductn	0	0		0	0			0	0			0
Storage Cap Reductn	0	0		0	0			0	0			0
Reduced v/c Ratio	0.04	0.57		0.07	0.37			0.06	0.06			0.32

Intersection Summary

Cycle Length: 70

Actuated Cycle Length: 70

Offset: 64 (91%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

AM Projected 2030

Maximum v/c Ratio: 0.57

Intersection Signal Delay: 11.2

Intersection LOS: B

Intersection Capacity Utilization 81.5%

ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Assaly/Assaly Rd & Richmond Rd

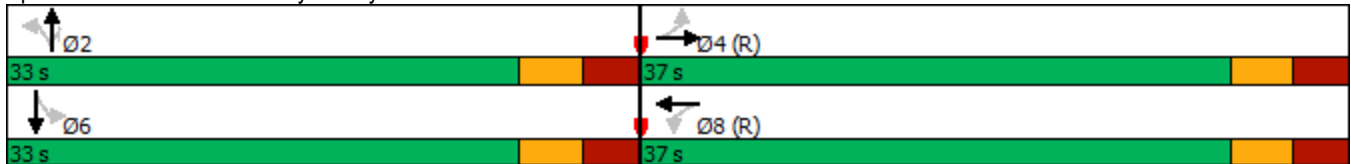

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

AM Projected 2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	20	564	57	21	413	15	34	26	81	25	65	34
Future Volume (vph)	20	564	57	21	413	15	34	26	81	25	65	34
Satd. Flow (prot)	1695	1754	0	1695	1774	0	1695	1545	0	0	1687	0
Flt Permitted	0.502			0.374			0.738				0.905	
Satd. Flow (perm)	892	1754	0	664	1774	0	1304	1545	0	0	1539	0
Satd. Flow (RTOR)		10			3						30	
Lane Group Flow (vph)	20	621	0	21	428	0	34	107	0	0	124	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		2			6			8				4
Permitted Phases	2			6			8			4		
Detector Phase	2	2		6	6		8	8		4	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	26.4	26.4		26.4	26.4		31.1	31.1		31.1	31.1	
Total Split (s)	39.0	39.0		39.0	39.0		31.0	31.0		31.0	31.0	
Total Split (%)	55.7%	55.7%		55.7%	55.7%		44.3%	44.3%		44.3%	44.3%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.1	3.1		3.1	3.1		2.8	2.8		2.8	2.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Lost Time (s)	6.4	6.4		6.4	6.4		6.1	6.1			6.1	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	48.9	48.9		48.9	48.9		12.3	12.3				12.2
Actuated g/C Ratio	0.70	0.70		0.70	0.70		0.18	0.18				0.17
v/c Ratio	0.03	0.51		0.05	0.35		0.15	0.39				0.42
Control Delay	7.5	10.4		10.6	12.1		22.4	27.6				22.0
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0				0.0
Total Delay	7.5	10.4		10.6	12.1		22.4	27.6				22.0
LOS	A	B		B	B		C	C				C
Approach Delay		10.3			12.0			26.3				22.0
Approach LOS		B			B			C				C
Queue Length 50th (m)	0.7	33.3		1.3	33.3		4.0	13.1				11.4
Queue Length 95th (m)	4.7	#102.2		m6.4	73.9		8.3	19.6				19.0
Internal Link Dist (m)		287.8			290.9			143.4				166.2
Turn Bay Length (m)	50.0			45.0			50.0					
Base Capacity (vph)	623	1229		464	1240		463	549				566
Starvation Cap Reductn	0	0		0	0		0	0				0
Spillback Cap Reductn	0	0		0	0		0	0				0
Storage Cap Reductn	0	0		0	0		0	0				0
Reduced v/c Ratio	0.03	0.51		0.05	0.35		0.07	0.19				0.22

Intersection Summary

Cycle Length: 70

Actuated Cycle Length: 70

Offset: 40 (57%), Referenced to phase 2:EBTL and 6:WBTL, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

AM Projected 2030

Maximum v/c Ratio: 0.51

Intersection Signal Delay: 13.6

Intersection LOS: B

Intersection Capacity Utilization 61.2%

ICU Level of Service B

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: Croydon & Richmond Rd



HCM 2010 TWSC
 3: Assaly Rd/Assaly & Starflower Ln

AM Projected 2030

Intersection												
Int Delay, s/veh	2.3											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Traffic Vol, veh/h	0	0	0	48	0	1	1	37	0	0	117	0
Future Vol, veh/h	0	0	0	48	0	1	1	37	0	0	117	0
Conflicting Peds, #/hr	0	0	0	0	0	0	15	0	15	15	0	15
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	-	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	100	100	100	100	100	100	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	48	0	1	1	37	0	0	117	0

Major/Minor	Minor1	Major1	Major2				
Conflicting Flow All	156	171	37	132	0	-	-
Stage 1	39	39	-	-	-	-	-
Stage 2	117	132	-	-	-	-	-
Critical Hdwy	6.42	6.52	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	5.52	-	-	-	-	-
Critical Hdwy Stg 2	5.42	5.52	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	835	722	1035	1453	-	0	0
Stage 1	983	862	-	-	-	0	0
Stage 2	908	787	-	-	-	0	0
Platoon blocked, %					-	-	-
Mov Cap-1 Maneuver	834	0	1035	1453	-	-	-
Mov Cap-2 Maneuver	834	0	-	-	-	-	-
Stage 1	982	0	-	-	-	-	-
Stage 2	908	0	-	-	-	-	-


Approach	WB	NB	SB
HCM Control Delay, s	9.6	0.2	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBTWBLn1	SBT	SBR
Capacity (veh/h)	1453	-	837	-
HCM Lane V/C Ratio	0.001	-	0.059	-
HCM Control Delay (s)	7.5	0	9.6	-
HCM Lane LOS	A	A	A	-
HCM 95th %tile Q(veh)	0	-	0.2	-

HCM Unsignalized Intersection Capacity Analysis

2: Richmond Rd & Starflower Ln

AM Projected 2030



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	16	720	427	10	0	0
Future Volume (Veh/h)	16	720	427	10	0	0
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Hourly flow rate (vph)	16	720	427	10	0	0
Pedestrians					15	
Lane Width (m)					0.0	
Walking Speed (m/s)					1.1	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (m)		109				
pX, platoon unblocked					0.79	
vC, conflicting volume	452				1199	447
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	452				1118	447
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				100	100
cM capacity (veh/h)	1109				178	612
Direction, Lane #	EB 1	EB 2	WB 1			
Volume Total	16	720	437			
Volume Left	16	0	0			
Volume Right	0	0	10			
cSH	1109	1700	1700			
Volume to Capacity	0.01	0.42	0.26			
Queue Length 95th (m)	0.3	0.0	0.0			
Control Delay (s)	8.3	0.0	0.0			
Lane LOS	A					
Approach Delay (s)	0.2		0.0			
Approach LOS						
Intersection Summary						
Average Delay			0.1			
Intersection Capacity Utilization			43.3%		ICU Level of Service	A
Analysis Period (min)			15			

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

PM Projected 2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	41	481	24	54	806	59	21	13	45	57	2	64
Future Volume (vph)	41	481	24	54	806	59	21	13	45	57	2	64
Satd. Flow (prot)	1695	1766	0	1695	1757	0	0	1731	1517	0	1585	0
Flt Permitted	0.251			0.453				0.780			0.835	
Satd. Flow (perm)	448	1766	0	791	1757	0	0	1376	1445	0	1340	0
Satd. Flow (RTOR)		5			7						64	
Lane Group Flow (vph)	41	505	0	54	865	0	0	34	45	0	123	0
Turn Type	Perm	NA		Perm	NA		Perm	NA	Perm	Perm	NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2		2	6		
Detector Phase	4	4		8	8		2	2	2	6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0	10.0	10.0	10.0	
Minimum Split (s)	30.3	30.3		30.3	30.3		33.3	33.3	33.3	33.3	33.3	
Total Split (s)	52.0	52.0		52.0	52.0		33.0	33.0	33.0	33.0	33.0	
Total Split (%)	61.2%	61.2%		61.2%	61.2%		38.8%	38.8%	38.8%	38.8%	38.8%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3	3.3	3.3	3.3	
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0	3.0	3.0	3.0	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0	0.0	0.0	0.0	
Total Lost Time (s)	6.3	6.3		6.3	6.3		6.3	6.3	6.3	6.3	6.3	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None	None	None	None	
Act Effct Green (s)	63.3	63.3		63.3	63.3			13.7	13.7		13.7	
Actuated g/C Ratio	0.74	0.74		0.74	0.74			0.16	0.16		0.16	
v/c Ratio	0.12	0.38		0.09	0.66			0.15	0.19		0.46	
Control Delay	3.2	3.2		6.8	12.9			29.4	30.3		21.0	
Queue Delay	0.0	0.0		0.0	0.0			0.0	0.0		0.0	
Total Delay	3.2	3.2		6.8	12.9			29.4	30.3		21.0	
LOS	A	A		A	B			C	C		C	
Approach Delay		3.2			12.6			29.9			21.0	
Approach LOS		A			B			C			C	
Queue Length 50th (m)	0.9	10.5		2.0	59.3			5.1	6.8		9.0	
Queue Length 95th (m)	m2.0	14.5		10.0	#201.6			10.1	12.5		19.4	
Internal Link Dist (m)		290.9			84.7			127.4			31.1	
Turn Bay Length (m)	210.0			50.0					15.0			
Base Capacity (vph)	333	1315		588	1309			432	453		464	
Starvation Cap Reductn	0	0		0	0			0	0		0	
Spillback Cap Reductn	0	0		0	0			0	0		0	
Storage Cap Reductn	0	0		0	0			0	0		0	
Reduced v/c Ratio	0.12	0.38		0.09	0.66			0.08	0.10		0.27	

Intersection Summary

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 64 (75%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 90

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

1: Assaly/Assaly Rd & Richmond Rd

PM Projected 2030

Maximum v/c Ratio: 0.66

Intersection Signal Delay: 10.9

Intersection LOS: B

Intersection Capacity Utilization 77.0%

ICU Level of Service D


Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 1: Assaly/Assaly Rd & Richmond Rd

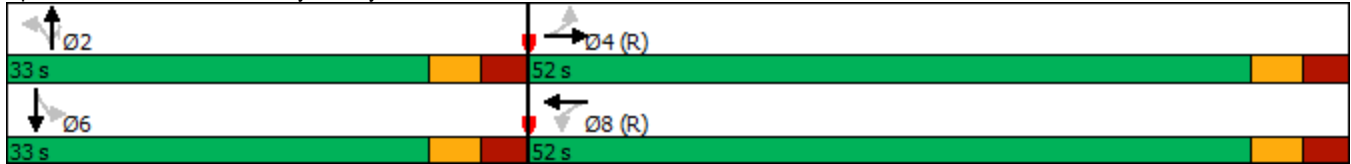

Lanes, Volumes, Timings
8: Croydon & Richmond Rd

PM Projected 2030



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	23	485	82	58	815	16	118	89	47	13	56	18
Future Volume (vph)	23	485	82	58	815	16	118	89	47	13	56	18
Satd. Flow (prot)	1695	1732	0	1695	1777	0	1695	1660	0	0	1704	0
Flt Permitted	0.250			0.404			0.788				0.939	
Satd. Flow (perm)	446	1732	0	713	1777	0	1366	1660	0	0	1604	0
Satd. Flow (RTOR)		16			2						16	
Lane Group Flow (vph)	23	567	0	58	831	0	118	136	0	0	87	0
Turn Type	Perm	NA		Perm	NA		Perm	NA		Perm	NA	
Protected Phases		6			2			8				4
Permitted Phases	6			2			8			4		
Detector Phase	6	6		2	2		8	8		4	4	
Switch Phase												
Minimum Initial (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Minimum Split (s)	26.4	26.4		26.4	26.4		31.1	31.1		31.1	31.1	
Total Split (s)	54.0	54.0		54.0	54.0		31.0	31.0		31.0	31.0	
Total Split (%)	63.5%	63.5%		63.5%	63.5%		36.5%	36.5%		36.5%	36.5%	
Yellow Time (s)	3.3	3.3		3.3	3.3		3.3	3.3		3.3	3.3	
All-Red Time (s)	3.1	3.1		3.1	3.1		2.8	2.8		2.8	2.8	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Lost Time (s)	6.4	6.4		6.4	6.4		6.1	6.1			6.1	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None		None	None	
Act Effct Green (s)	57.9	57.9		57.9	57.9		14.6	14.6			14.6	
Actuated g/C Ratio	0.68	0.68		0.68	0.68		0.17	0.17			0.17	
v/c Ratio	0.08	0.48		0.12	0.69		0.50	0.48			0.30	
Control Delay	7.5	9.2		12.1	18.2		37.7	35.7			25.9	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0			0.0	
Total Delay	7.5	9.2		12.1	18.2		37.7	35.7			25.9	
LOS	A	A		B	B		D	D			C	
Approach Delay		9.1			17.8			36.6			25.9	
Approach LOS		A			B			D			C	
Queue Length 50th (m)	1.0	34.3		3.0	71.1		17.9	20.5			10.3	
Queue Length 95th (m)	5.2	83.5		m13.2	#186.3		28.5	31.3			19.2	
Internal Link Dist (m)		287.8			290.9			143.4			166.2	
Turn Bay Length (m)	50.0			45.0			50.0					
Base Capacity (vph)	303	1185		485	1211		400	486			481	
Starvation Cap Reductn	0	0		0	0		0	0			0	
Spillback Cap Reductn	0	0		0	0		0	0			0	
Storage Cap Reductn	0	0		0	0		0	0			0	
Reduced v/c Ratio	0.08	0.48		0.12	0.69		0.29	0.28			0.18	

Intersection Summary

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 40 (47%), Referenced to phase 2:WBTL and 6:EBTL, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Lanes, Volumes, Timings

8: Croydon & Richmond Rd

PM Projected 2030

Maximum v/c Ratio: 0.69

Intersection Signal Delay: 18.0

Intersection LOS: B

Intersection Capacity Utilization 79.9%

ICU Level of Service D

Analysis Period (min) 15

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 8: Croydon & Richmond Rd



HCM 2010 TWSC
 3: Assaly Rd/Assaly & Starflower Ln

PM Projected 2030

Intersection												
Int Delay, s/veh	2.4											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Traffic Vol, veh/h	0	0	0	49	0	13	2	110	0	0	79	1
Future Vol, veh/h	0	0	0	49	0	13	2	110	0	0	79	1
Conflicting Peds, #/hr	0	0	0	0	0	0	15	0	15	15	0	15
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	-	-	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	-	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	100	100	100	100	100	100	100	100	100	100	100	100
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	0	49	0	13	2	110	0	0	79	1

Major/Minor	Minor1		Major1		Major2		
Conflicting Flow All	194	209	110	95	0	-	0
Stage 1	114	114	-	-	-	-	-
Stage 2	80	95	-	-	-	-	-
Critical Hdwy	6.42	6.52	6.22	4.12	-	-	-
Critical Hdwy Stg 1	5.42	5.52	-	-	-	-	-
Critical Hdwy Stg 2	5.42	5.52	-	-	-	-	-
Follow-up Hdwy	3.518	4.018	3.318	2.218	-	-	-
Pot Cap-1 Maneuver	795	688	943	1499	-	0	0
Stage 1	911	801	-	-	-	0	0
Stage 2	943	816	-	-	-	0	0
Platoon blocked, %					-	-	-
Mov Cap-1 Maneuver	794	0	943	1499	-	-	-
Mov Cap-2 Maneuver	794	0	-	-	-	-	-
Stage 1	910	0	-	-	-	-	-
Stage 2	943	0	-	-	-	-	-


Approach	WB	NB	SB
HCM Control Delay, s	9.7	0.1	0
HCM LOS	A		

Minor Lane/Major Mvmt	NBL	NBTWBLn1	SBT	SBR
Capacity (veh/h)	1499	-	821	-
HCM Lane V/C Ratio	0.001	-	0.076	-
HCM Control Delay (s)	7.4	0	9.7	-
HCM Lane LOS	A	A	A	-
HCM 95th %tile Q(veh)	0	-	0.2	-

HCM Unsignalized Intersection Capacity Analysis

2: Richmond Rd & Starflower Ln

PM Projected 2030



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	26	570	922	15	0	0
Future Volume (Veh/h)	26	570	922	15	0	0
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	1.00	1.00	1.00	1.00	1.00	1.00
Hourly flow rate (vph)	26	570	922	15	0	0
Pedestrians					15	
Lane Width (m)					0.0	
Walking Speed (m/s)					1.1	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (m)		109				
pX, platoon unblocked					0.89	
vC, conflicting volume	952				1566	944
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	952				1574	944
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	96				100	100
cM capacity (veh/h)	722				104	318
Direction, Lane #	EB 1	EB 2	WB 1			
Volume Total	26	570	937			
Volume Left	26	0	0			
Volume Right	0	0	15			
cSH	722	1700	1700			
Volume to Capacity	0.04	0.34	0.55			
Queue Length 95th (m)	0.9	0.0	0.0			
Control Delay (s)	10.2	0.0	0.0			
Lane LOS	B					
Approach Delay (s)	0.4		0.0			
Approach LOS						
Intersection Summary						
Average Delay			0.2			
Intersection Capacity Utilization			55.5%		ICU Level of Service	B
Analysis Period (min)			15			