

Water Meter Service Address:
Project Proposed (New / Existing):

Property Owner:
Building Service Class (BSC):
 Questionnaire Completed by:
 Contact Phone Number:
 Mechanical Contractor (if applicable):
 Mech. Contact Phone Number:
 Submission Date: (dd-mmm-yy)

Water Data Card

City of Ottawa

fax: (613) 728-4183
 phone: 311 x

REV0_2024

3030 St Joseph

New

Theberge Developments Ltd

Apartment With More Than 4 Floors

Ryan Robineau

6137146611

QME Engineering

6133664763

Today is: 10-Oct-24

Fixture Description	# of Fixtures		
Bathtub	319		
Bedpan Washers			
Bidet			
Dental Unit			
Drinking Fountains			
Faucet (kitchen sink)	206		
Faucet (lavatory)	319		
Shower (single head)			
Utility Sink			
Toilet (flush valve)			
Toilet (tank)	319		
Urinal (flush valve)			
Urinal (wall or stall)			
Dishwasher	206		
Clothes Washer	206		
1/2" Hose (50 ft. Wash Down)			
5/8" Hose (50 ft. Wash Down)			
3/4" Hose (50 ft. Wash Down)	8		
<u>Enter Continuous Demand below (if applicable) *</u>			
			0.0
			0.0
			0.0
fixture description	Qty.	(L/min)	

Note: Irrigation is assumed to occur off peak demand period.

Part C - Technical Information

	Value	Units	Response
Property Area Class Code : R8	0.26	ha	.01 to 200
# of Connections to City Watermain:	2		0 to 20
# of Buildings on Site:	1		0 to 100
<u>Length of Private Main (if applicable)</u>	0.28	km	.01 to 100
# of Private Hydrants on Property:	0		0 to 200
<u>Maximum Fire Flow Available</u>		l/min.	1,000 to 50,000
<u>Phased Development?</u>	No		yes/no
<u>Static Main Pressure @ Property Line</u>	64	psi	36 to 99
<u>Service Length (supply main to meter)</u>	13.9	m	2 to 1,500
<u>Service Dia. (supply main to building)</u>	152	mm	19 to 406
<u>Supply main elev. minus meter elev.</u>	-0.9	m	-30 to 30
<u>Existing Isolation Valve Clearance:</u>		mm	190 to 3,000
<u>Meter Isolation Valve Size:</u>	4"	in	3/4" to 6"
<u>Pipe Dia. (outlet side of meter)</u>	100	mm	19 to 406
<u>Required Fire Flow @ 20 psi</u>	83	l/sec	10 to 1000
# of Units/Suites/Apts	206		1 to 2,000
# of Stories (above grade)	18		1 to 50
Booster Pumps (Domestic Supply)	Yes		yes/no
Booster Pumps (Fire Protection)	Yes		yes/no
			Calc. Value
<u>Fixture Value Total</u>	2,238	(FV)	6,504
<u>Maximum/Peak Demand (Domestic)</u>	1,135	l/min.	421
<u>Continuous Demand (if applicable)</u>		l/min.	0
	1135	total	421

Office #45575 Use Only

	Date	10-Oct-24	dd-mmm-yy	10-Oct-24
^ City Officer ^	^ City File # ^	^PIN ok^		^ Project # ^
		1135	l/min.	
Min. required pressure for Customer >		20	psi	Static PSI=64
Max.Available Head/Pressure Loss			psi	42.7
Piping Losses			psi	0.2
Loss Available for valves/fittings			psi	40.2
Meter Size/Type	3" Ultrasonic	U075	HL@ GD >	2.4 psi
	1.9 > Flow Range (lpm) < 1892.705892		Safe max.	60%
template size/length	3"	584	mm (B)	
Min. Isolation Valves Clearance (MIVC)		1130	mm (A)	

Water Data Card - Instructions and Definitions
Owner/Applicant to complete Parts A, B and C and return to City of Ottawa

Water Meter Service Address

Contact the Customer Service Department at (613) 580-2424 ext 22300, to determine the service address for existing meters. New service addresses will be assigned by the City, and may differ from the Property Address.

Static Main Pressure @ Property Line

The pressure is used for determining meter sizing. Please use City of Ottawa - Water Distribution System Facilities & Feeder mains to calculated static pressure at service entry point to subject property. (Refer to Tab MAP)

Project Proposed (New / Existing)

New - No previous meter for the address Existing -
Previous meter at this address; includes any additions, renovations or meter sizing reviews.

Service Length (watermain to meter)

"Water service" means a potable water pipe of any size, tapped or teed from a watermain to a building.

Building Service Class - Class Code

Single Detached - R1, Semi Detached - R2 Duplex - R3, Row & Townhouse - R5
Apartment Less Than 5 Floors - R7
Apartment With More Than 4 Floors - R8
Residential - Commercial - RC
Government & Private Offices - OF
Regional Shopping Center - C1
Strip Mall - C2, Other Commercial - C3
Transportation Facility - TR
Agricultural Farms - AG, Utilities - UT
Active Recreational Facilities - RA,
Passive Recreational Facilities - RP, Indust-Manuf Warehousing & Whole - M1 Industrial Mall - M2, Elementary School - I1
Secondary School - I2
Post-Secondary School - I3
Hospital, Rehab/Nursing Home - I4
Other Institutions - I5, Vacant Land - V1

Pipe Diameter (outlet side of meter)

Pipe diameter downstream of the water meter is used to evaluate water meter sizing. This pipe may in some cases be referred to as the "header".

Fixture Value Total

Each plumbing fixture is given a fixture unit value. "Fixture values", (FV) are used for water meter sizing purposes. Completion of Part B - Fixtures will assist in determining the Fixture Value Total.

Maximum/Peak Demand (Domestic)

The maximum/peak demand is used for meter and service sizing and has been calculated based upon AWWA standard curves.

Continuous Demand (if applicable)

Continuous demands are known demands expressed in (US) gallons/min. For example a new car wash will use 20 USGPM. Continuous requirements for water are typically seen in industry and manufacturing. (Do not include the usgpm requirements for closed systems).

Length of Private Main (if applicable)

Do you have water mains on your property? Private
water mains are potable water pipes that supply water to water services and hydrants. The length of private watermain is the cumulative length measured from the property line to any connected private hydrant. All other pipes on private property are defined as "water services".

Existing/Minimum Isolation Valve Clearance

Existing Installations - the distance (flange to flange) between the meter isolation valves in millimeters.


New Installations - the minimum distance (flange to flange) to be maintained between the meter isolation valves in millimeters.

Maximum Fire Flow Available

NOTE: Complete only if your site has Private Hydrant's
The highest calculated flow rate achievable from a maximum of two private hydrants flowing simultaneously @ 20 psi dynamic, through any one City connection. This calculation is likely obtained through a hydraulic analysis.

Phased Development?

Often larger developments or projects are phased over several years which means oversizing piping initially to meet anticipated future demand requirements. Water meters will be sized for the initial phase with provision for the installation of a larger meter in the future when the expansion occurs.

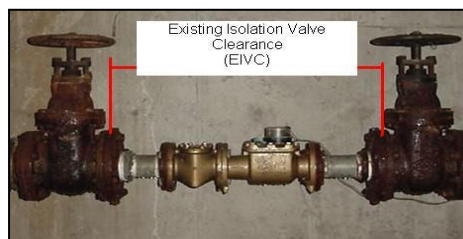

Elevation Differential (supply main elevation minus meter elevation)

Calculate the "elevation differential" between the watermain and the meter. Water mains are typically buried 2.4m below grade.

Required Fire Flow @ 20 psi (FUS or OBC)

NOTE: Complete only as required by the Approvals Department.

Some developments may require a Site Servicing Study. In these cases, or as directed by the City, the required fire flow @ 20 psi must be calculated. Boundary conditions can be provided upon request

by the City.

|