



CLIENT NAME:

CONTINENTAL FLOORING

) ALL WORK TO BE IN COMPLIANCE WITH LOCAL BUILDING CODES, EGULATIONS AND BY-LAWS. 2) ADDITIONAL DRAWINGS MAY BE ISSUED FOR CLARIFICATION TO ASSIST PROPER EXECUTION OF WORK. SUCH DRAWINGS WILL HAVE THE SAME MEANING AND INTENT AS IF THEY WERE INCLUDED WITH ANS IN CONTRACT DOCUMENTS.

4) ALL SUB-CONTRACTORS TO TAKE THEIR OWN ON-SITE MEASUREMENTS AND BE RESPONSIBLE FOR THEIR ACCURACY. 5) NOTIFY SHAWN J. LAWRENCE ARCHITECT FOR ANY ERRORS AND/OR OMISSIONS PRIOR TO START OF WORK.

DO NOT SCALE DRAWINGS.

01 GARBAGE ENCLOSURE A0.1 SCALE: 1:75

> DOME CONCRETE FILLING TO PROVIDE RUN-OFF ·152mm DIA. x 6.4mm (6"x ¼") STEEL PIPE FILLED WITH CONC. AFTER SET IN PLACE. (PAINTED AS PER NOTES) CONCRETE: fc'=20MPa, F-2 SH GRADE SEE ARCH./SOILS REPORT FOR DETAILS

02 ACCESSIBLE PARKING SIGNAGE DETAIL A0.1 SCALE: NTS

TYPICAL BOLLARD @GRADE DETAIL 03 \ A0.1 / SCALE: 1:50

500 (20")

22 Other (describe)

2 3 4 5 6 7 8	Building Gross Ar Number Height of Number Building	ccupancy Area (m² rea (m²) of Storey	(s) G	Change	_	New	☐ Part	11	⊠ Pa	rt 3		☐ Part 9	1
3 4 5 6 7 8	Building Gross Ar Number Height of Number Building	Area (m²) rea (m²) of Storey	(s) G	Change									
3 4 5 6 7 8	Building Gross Ar Number Height of Number Building	Area (m²) rea (m²) of Storey	` '		of Use	☐ Addition☐ Alteration	11.1 to	11.4	1.1.2.	[A]		1.1.2. [A]	§ 9.10.1.3.
4 5 6 7 8	Gross And Number Height of Number Building	rea (m²) of Storey) F	Major Occupancy (s) Group F2					3.1.2.1. (1)		9.10.2.		
5 6 7 8	Number Height o Number Building	of Store	ilding Area (m²) Existing			0 New 1467m² Total 1467m²		7m²	1.4.1.2. [A]		1.1.1.2. [A]		
6 7 8	Height of Number Building		Gross Area (m²) Existing 0 New 1555m² Total 1555r			5m²	1.4.1.2. [A]		1.1.1.2. [A]				
7 8	Number Building		Number of Storeys Above Grade 1 Below Grade 0				1.4.1.2	2. [A] & 3.2.	1.1.	1.1.1.2. [/	A] & 9.10.4.		
8	Building		` '	8.1									
		Number of Streets/ Fire Fighter Access 1			3.2.2.	10. & 3.2.5.		9.10.20.					
9	Sprinkle				3.2.2.70 3.2.2.2083				9.10.2.				
				Entire Building Selected Compartments Selected Floor Areas Basement in lieu of roof rating Not Required			ing	3.2.2.2083 3.2.1.5. 3.2.2.17. INDEX		9.10.8.2. INDEX			
10	Standpip	e Requi	ed			☐ Yes	⊠ No		3.2.9.			N/A	
11	Fire Alar	m Requi	ed			☐ Yes	□ No		3.2.4.			9.10.18.	
12	Water Service/ Supply is adequate ☐ Yes ☐ No 3.2.5.7.				N/A								
13	High Bui	lding				☐ Yes	⊠ No		3.2.6.			N/A	
	Permitted Construction ☐ Combustible ☐ Non-Combustible ☐ 3.2.2.2083 ☐ Actual Construction ☐ Combustible ☐ Non-Combustible ☐ Non-Co												
15	Mezzani	ne(s) Are	a (m²)	0					3.2.1.	1. (3)-(8)		9.10.4.1.	
	1 st Floor	:: Occu	pancy	Gro	up "x"	Load x	Persons						
17	Barrier-fr	ee Desi	ın				3.8.			9.5.2.			
18	Hazardo	us Subst	ances	□Ye	es 🗵	No			3.3.1.	2. & 3.3.1.1	9	9.10.1.3.	(4)
19	Required Horizontal Asser Fire FRR (Hours Resistance			or Description (SG-2)			2)	3.2.2.2083 & 3.2.1.4.			9.10.8. 9.10.9.		
	Rating r		Floors X Hours										
	(FRR	.) —	Roof x Hour Mezzanine x Hour FRR of Supporting			lours							
		_					Design No.						
		Flo	Me ors	Members x Hours				2)					
		Ro	Roof x Hou		Hours								
		Me	zzanin	ne x	Hours								
20	Spatial S	Separatio	n - Coı	nstructio	on of Exte	rior Walls			3.2.3.			9.10.14.	
	Wall Area of EBF (m²)		1	L.D. (m)	L/H or H/L	Permitted Max % of	FRR (Hours)	Listed Design or			ruction		dding
						openings			ription	Comb.	NonComb.	Comb.	NonComb
	North	-		-	N/A	100%	0		SB-0	X			X
	South	-		-	N/A	100%	0		SB-0	X			X
	East	-		-	N/A	100%	0		SB-0	X			X
-	West	- - Fiss4:	De z:::	-	N/A	100%	0	ORC	SB-0	X			X
21	Plumbing Fixture Requirements												
	Male/Female Count @ 0 % / 0 % except as noted otherwise							-			de Reference		
					Occupant BC Table Load Number		Fixtures Required	.	tures ovided	☐ Part 3		☐ Part 9	
	Basement Occupancy "X" Occupancy "X"		0 Table # 0 Table #		0					9.0.0. 9.0.0.			
	1st Floor Occupancy "X" Occupancy "X"												
	2 nd Floor Occupancy "X" Occupancy "X"												

GENERAL NOTES:

- 1. ALL WALLS TO BE CONTINUOUS FROM SLAB TO SLAB UNLESS NOTED OTHERWISE.
- 2. ALL INTERIOR CORRIDORS AND DEMISING WALLS BETWEEN SUITES TO BE TYPE Wi1 UNLESS OTHERWISE NOTED.
- 3. REFER TO FINISH SCHEDULE ON DRAWINGS. REPLACE GYPSUM BOARD WITH CEMENT BOARDS IN ALL AREAS HAVING CERAMIC TILE WALL FINISH.
- 4. INTERIOR STUD WALLS: PROVIDE TWO ROWS OF CONTINUOUS ACOUSTIC CAULKING AT STUD TRACK AT TOP OF SLAB, UNDERSIDE OF SLAB AND AT VERTICAL FACE WHERE STUDS ABUT STRUCTURE.
- 5. PIECEMEAL OF GYPSUM BOARD SHEETS IS NOT ACCEPTABLE. 6. INNER LAYERS OF GYPSUM BOARD SHOULD HAVE NO GAPS OVER ½".
- 7. INNER LAYERS OF GYPSUM BOARD SHOULD BE TAPED NOT SANDED.
- 8. JOINTS OF LAYERED GYPSUM BOARD SHOULD BE STAGGERED. 9. CAULK AT TOP AND BOTTOM OF WALLS AT EDGE OF GYPSUM BOARD PANELS.
- 10. PROVIDE CAULKING ROD BACKUP AT ANY GAP OVER 1/2".
- 11. ELECTRICAL BOXES ON OPPOSING FACES OF WALL SHALL BE LOCATED IN SEPARATE STUD CAVITIES.
- 12. RUN FIBERGLASS BATT INSULATION BEHIND AND AROUND ALL ELECTRICAL BOXES. NO BACK TO BACK ELECTRICAL BOXES.
- 13. BACKING TO BE PROVIDED AT ALL MILLWORK LOCATIONS, TO BE COORDINATED ON SITE.
- 14. ALL PENETRATIONS THROUGH ACOUSTICAL RATED WALLS (PARTY WALLS AND CORRIDOR WALLS) MUST BE SEALED TIGHT WITH A COMBINATION OF JOINT COMPOUND AND ACOUSTICAL CAULK.
- 15. ALL PENETRATIONS THROUGH FIRE-RATED WALLS (PARTY WALLS, CORRIDOR WALLS, ETC) MUST BE SEALED TIGHT WITH A COMBINATION OF JOINT COMPOUND AND FIRE CAULK, TO ENSURE A
- 16. PROVIDE WOOD BLOCKING WITHIN WALL TO PROVIDE ANCHORAGE FOR CABINETS, WASHROOM ACCESSORIES, HAND RAILINGS, ETC. BLOCKING SHALL NOT LINK BOTH SIDES OF A WALL. PLYWOOD MAY BE USED AS BLOCKING ON THE INNER LAYER OF DOUBLE LAYER WALL ASSEMBLIES. 18GA METAL STRIPS IN 6" IN WIDTH & CONTINUOUS THROUGHOUT LENGTH OF BLOCKING REQUIREMENT MAY ALSO BE
- 17. PROVIDE ¾" DOUGLAS FIR PLYWOOD, GOOD ONE SIDE WITH FIRE RETARDANT PAINT, FOR MOUNTING OF ALL ELECTRICAL PANELS, CABLING, COMMUNICATION, BELL, AND SECURITY PANELS. REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS.
- 18. ALL OPENINGS FOR DOORS WITHIN CONCRETE BLOCK WALLS WITH EXPOSED BLOCK JAMBS SHALL HAVE EXPOSED JAMBS CONSTRUCTED USING BULLNOSE BLOCK.
- 19. THICKEN WALLS AS REQUIRED TO ACCOMMODATE ELECTRICAL PANELS & MECHANICAL ITEMS. CONTRACTOR TO CONFIRM CODE COMPLIANCE WITH ARCHITECT BEFORE SITE WORK BEGINS. 20. PROVIDE WALL ASSEMBLY ABOVE ALL DOORS, WINDOWS, GLAZED SCREENS & GLASS BLOCK SIMILAR TO ADJACENT WALL TYPE UP TO U/S OF STRUCTURAL SLAB ABOVE.
- 21. ALL EXPOSED CONCRETE TO BE ENCLOSED WITH 12.7mm GYPSUM BOARD ON 22mm FURRING CHANNELS UNLESS NOTED OTHERWISE ON PLANS OR DETAILS.
- 22. FOR ASSEMBLIES REQUIRING TO CONFORM TO A LISTED ULC/UL RATING, MATERIALS WITHIN THE ASSEMBLY SHALL BE EXACTLY AS PER THE TESTED ASSEMBLY. ALL MATERIAL SHALL BE LABELED WITH
- 23. ALL ELECTRICAL SWITCHES ARE TO BE LOCATED BETWEEN 4"-8" FROM THE ENTRANCE DOOR TO A ROOM. LOCATE STUDS TO ACCOMMODATE THE LOCATION OF SWITCHES SHOWN ON ELECTRICAL DRAWINGS AND SUIT THE APPROVED SUITE MOCK-UP.
- 24. PROVIDE SCUPPERS AT EDGES OF ROOF WHERE OVER FLOW CONTROL ROOF DRAINS ARE SPECIFIED. CONFIRM LOCATIONS WITH ARCHITECT.
- 25. ALL FIRE DAMPER INSTALLATION TO BE PER MANUFACTURER INSTRUCTIONS HVAC CONTRACTOR TO COORDINATE ON SITE WITH DRYWALL/FRAMING CONTRACTOR TO ENSURE INSTALLATION INSTRUCTIONS ARE FOLLOWED EXACTLY.
- 26. PROVIDE ALL CLOSETS WITH MINIMUM 1 FULL WIDTH SHELF 12" DEEP AND WITH ONE FULL WIDTH HANGER ROD.
- 27. ANY WASHROOM WALLS ADJACENT TO LIVING SPACES/PUBLIC AREAS ARE TO HAVE SOUND ATTENUATING BATT INSULATION -ULC APPROVED- IN THE STUD CAVITIES (TO FILL CAVITY).
- 28. ALL STEEL STUDS TO BE FRAMED @ 400mm o/c U.N.O ON PLAN.
- 29. ALL STEEL STUDS ARE TO EXTEND TO UNDERSIDE OF CONC. SLAB U.N.O.
- 30. ALL GYPSUM BOARD IS TO EXTEND TO FULL HEIGHT OF PARTITION U.N.O.


LIST OF	ABBREVIATIONS
ACT	ACCURATIO OF ILINO TILE
ACT	ACOUSTIC CEILING TILE
AFF	ABOVE FINISH FLOOR
ALUM	ALUMINUM
ARCH	ARCHITECTURAL
ASSY	ASSEMBLY
BD	BOARD
BG	BUILDING GRADE
BLDG	BUILDING
CB	CATCH BASIN
CC	CENTER TO CENTER
CJ	CONTROL JOINT
CL	CENTER LINE
CLG	CEILING
CLR	CLEAR
COL	COLUMN
CONC	CONCRETE
CPT	CARPET
CR	CARD READER
CT	CERAMIC TILE
CW	CURTAIN WALL
DIM	DIMENSION
DO	HANDICAP DOOR OPERATOR
EL	ELEVATION
ELEC	ELECTRICAL
ELEV	ELEVATOR
EIFS	EXTERIOR INSULATED & FINISH SYSTEM
EP	ELECTRICAL PANEL
EQ	EQUAL
ES	EMERGENCY SCUPPER
EXP	EXPOSED
EXT	EXTERIOR
FA	FIRE ALARM
FD	FLOOR DRAIN
FEC	FIRE EXTINGUISHER CABINET
FHC	FIRE HOSE CABINET
FIN	FINISH
FL	FLOOR
FRR	FIRE RESISTANCE RATING
GL	GLASS/ GLAZING
GB	GRAB BAR
GYP	GYPSUM WALLBOARD
HM	HOLLOW METAL
HWT	HOT WATER TANK
INT	INTERIOR
JT	JOINT
LTG	LIGHTING
MAX	MAXIMUM
MECH	MECHANICAL
MC	MEDICINE CABINET
MIN	MINIMUM
NBC	NATIONAL BUILDING CODE
NO	NUMBER
NTS	NOT TO SCALE
OC	ON CENTER
OH	OVERHEAD
PT	PRESSURE TREATED
PLAM	PLASTIC LAMINATE
PSF	PRESSED STEEL FRAME
PVC	POLY VINYL CHLORIDE
RCP	REFLECTED CEILING PLAN
RD	ROOF DRAIN
REINF	REINFORCED
REQD	REQUIRED
RWL	RAIN WATER LEADER
S	SHOWER
SIM	SIMILAR
SS	STAINLESS STEEL
T/O	TOP OF
TYP	TYPICAL
U/S	UNDERSIDE


VINYL COMPOSITION TILE


VESTIBULE


WATER CLOSET


VEST WC

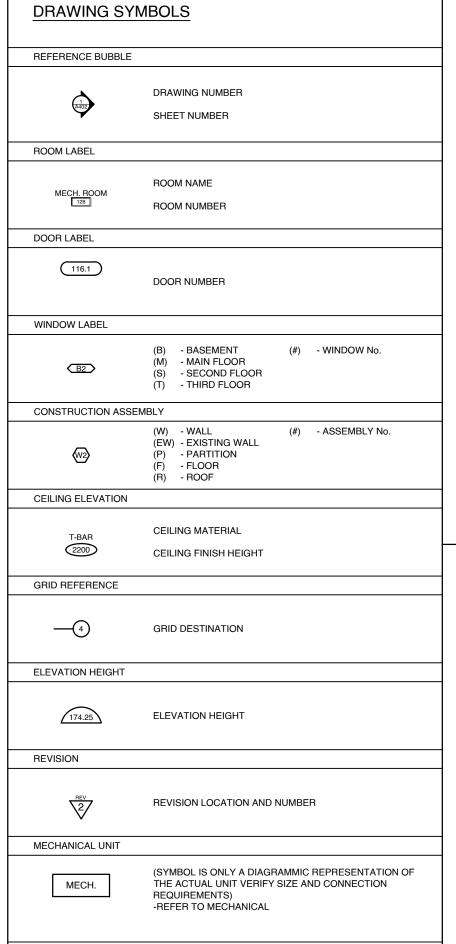


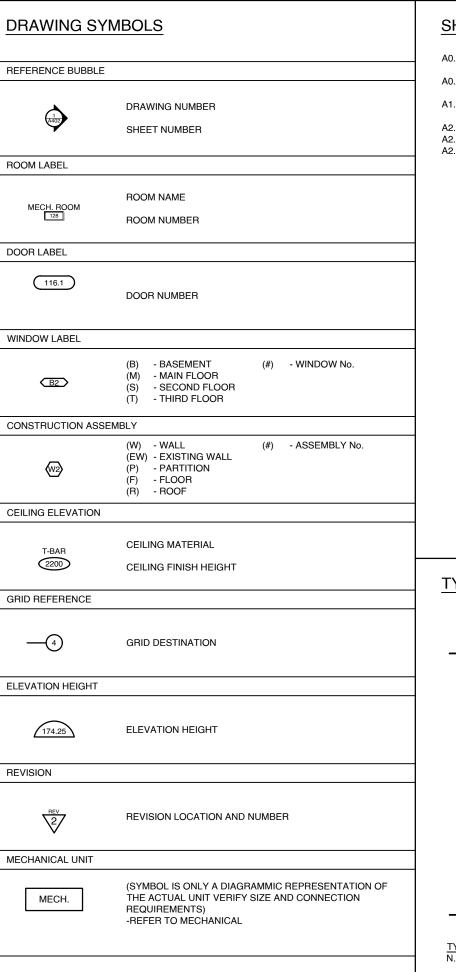

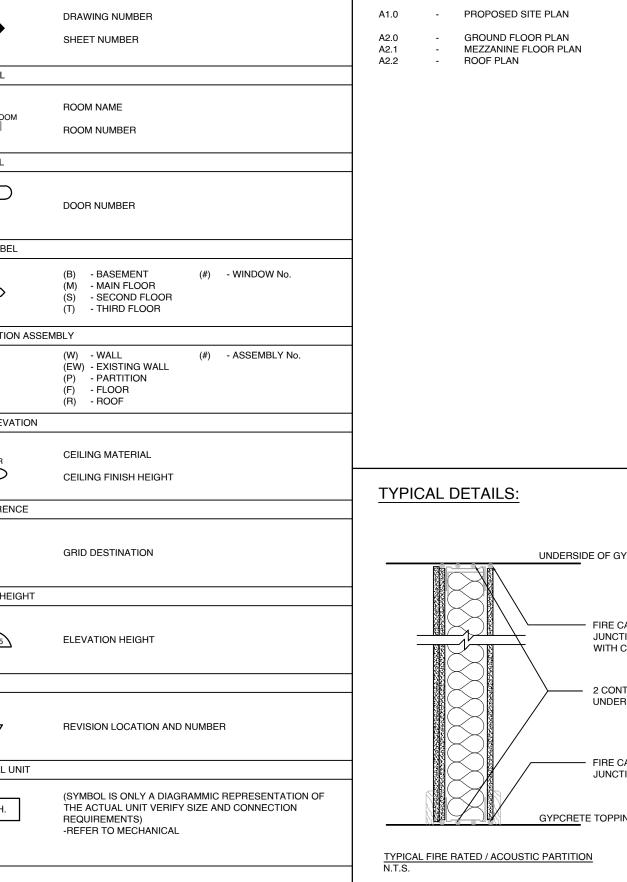

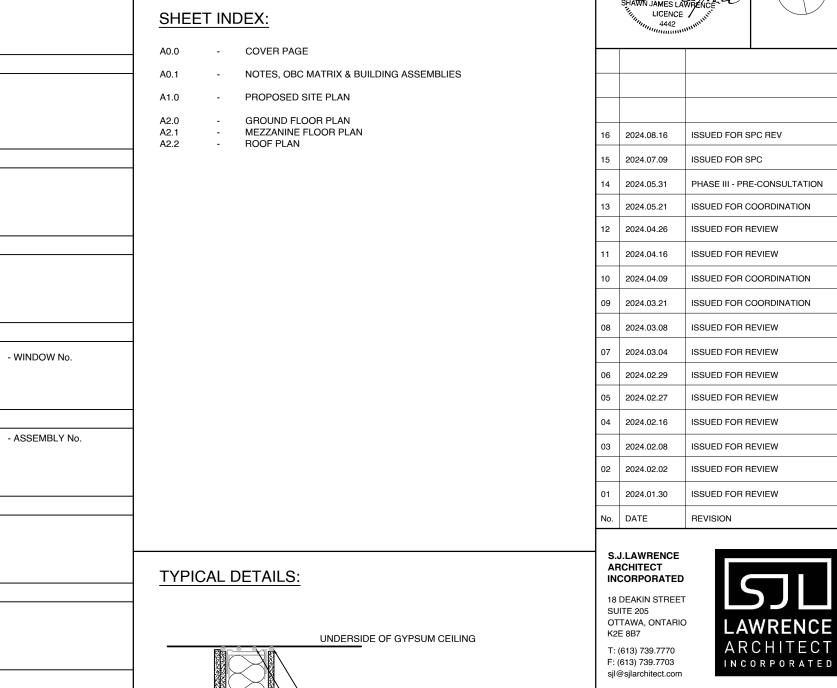

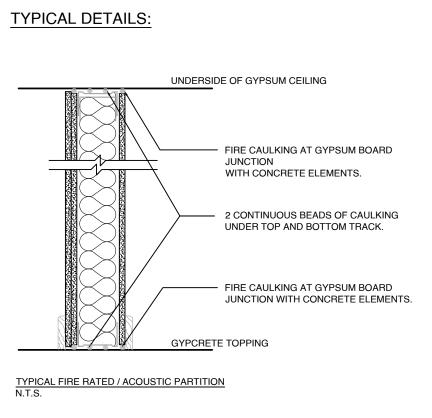

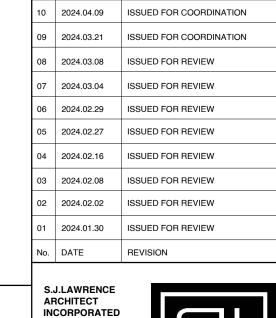

ARCHITECTS


NORTH ARROW:



THIS DRAWING IS THE SOLE PROPERTY OF S.J. LAWRENCE ARCHITECT INCORPORATED REPRODUCTION IS NOT PERMITTED
PROJECT: CONTINENTAL FLOORING OFFICE + WAREHOUSE
100 BILL LEATHEM, OTTAWA, ON

SHEET TITLE: NOTES, OBC MATRIX & BUILDING ASSEMBLIE	
DRAWN BY: B.L.	CHECKED BY: S.L.
PLOT DATE: 2024.08.16	PROJECT DATE: 2024.01.16
JOB NUMBER: SL-1117-24	SCALE: AS SHOWN

SL-1117-24 SHEET NUMBER:

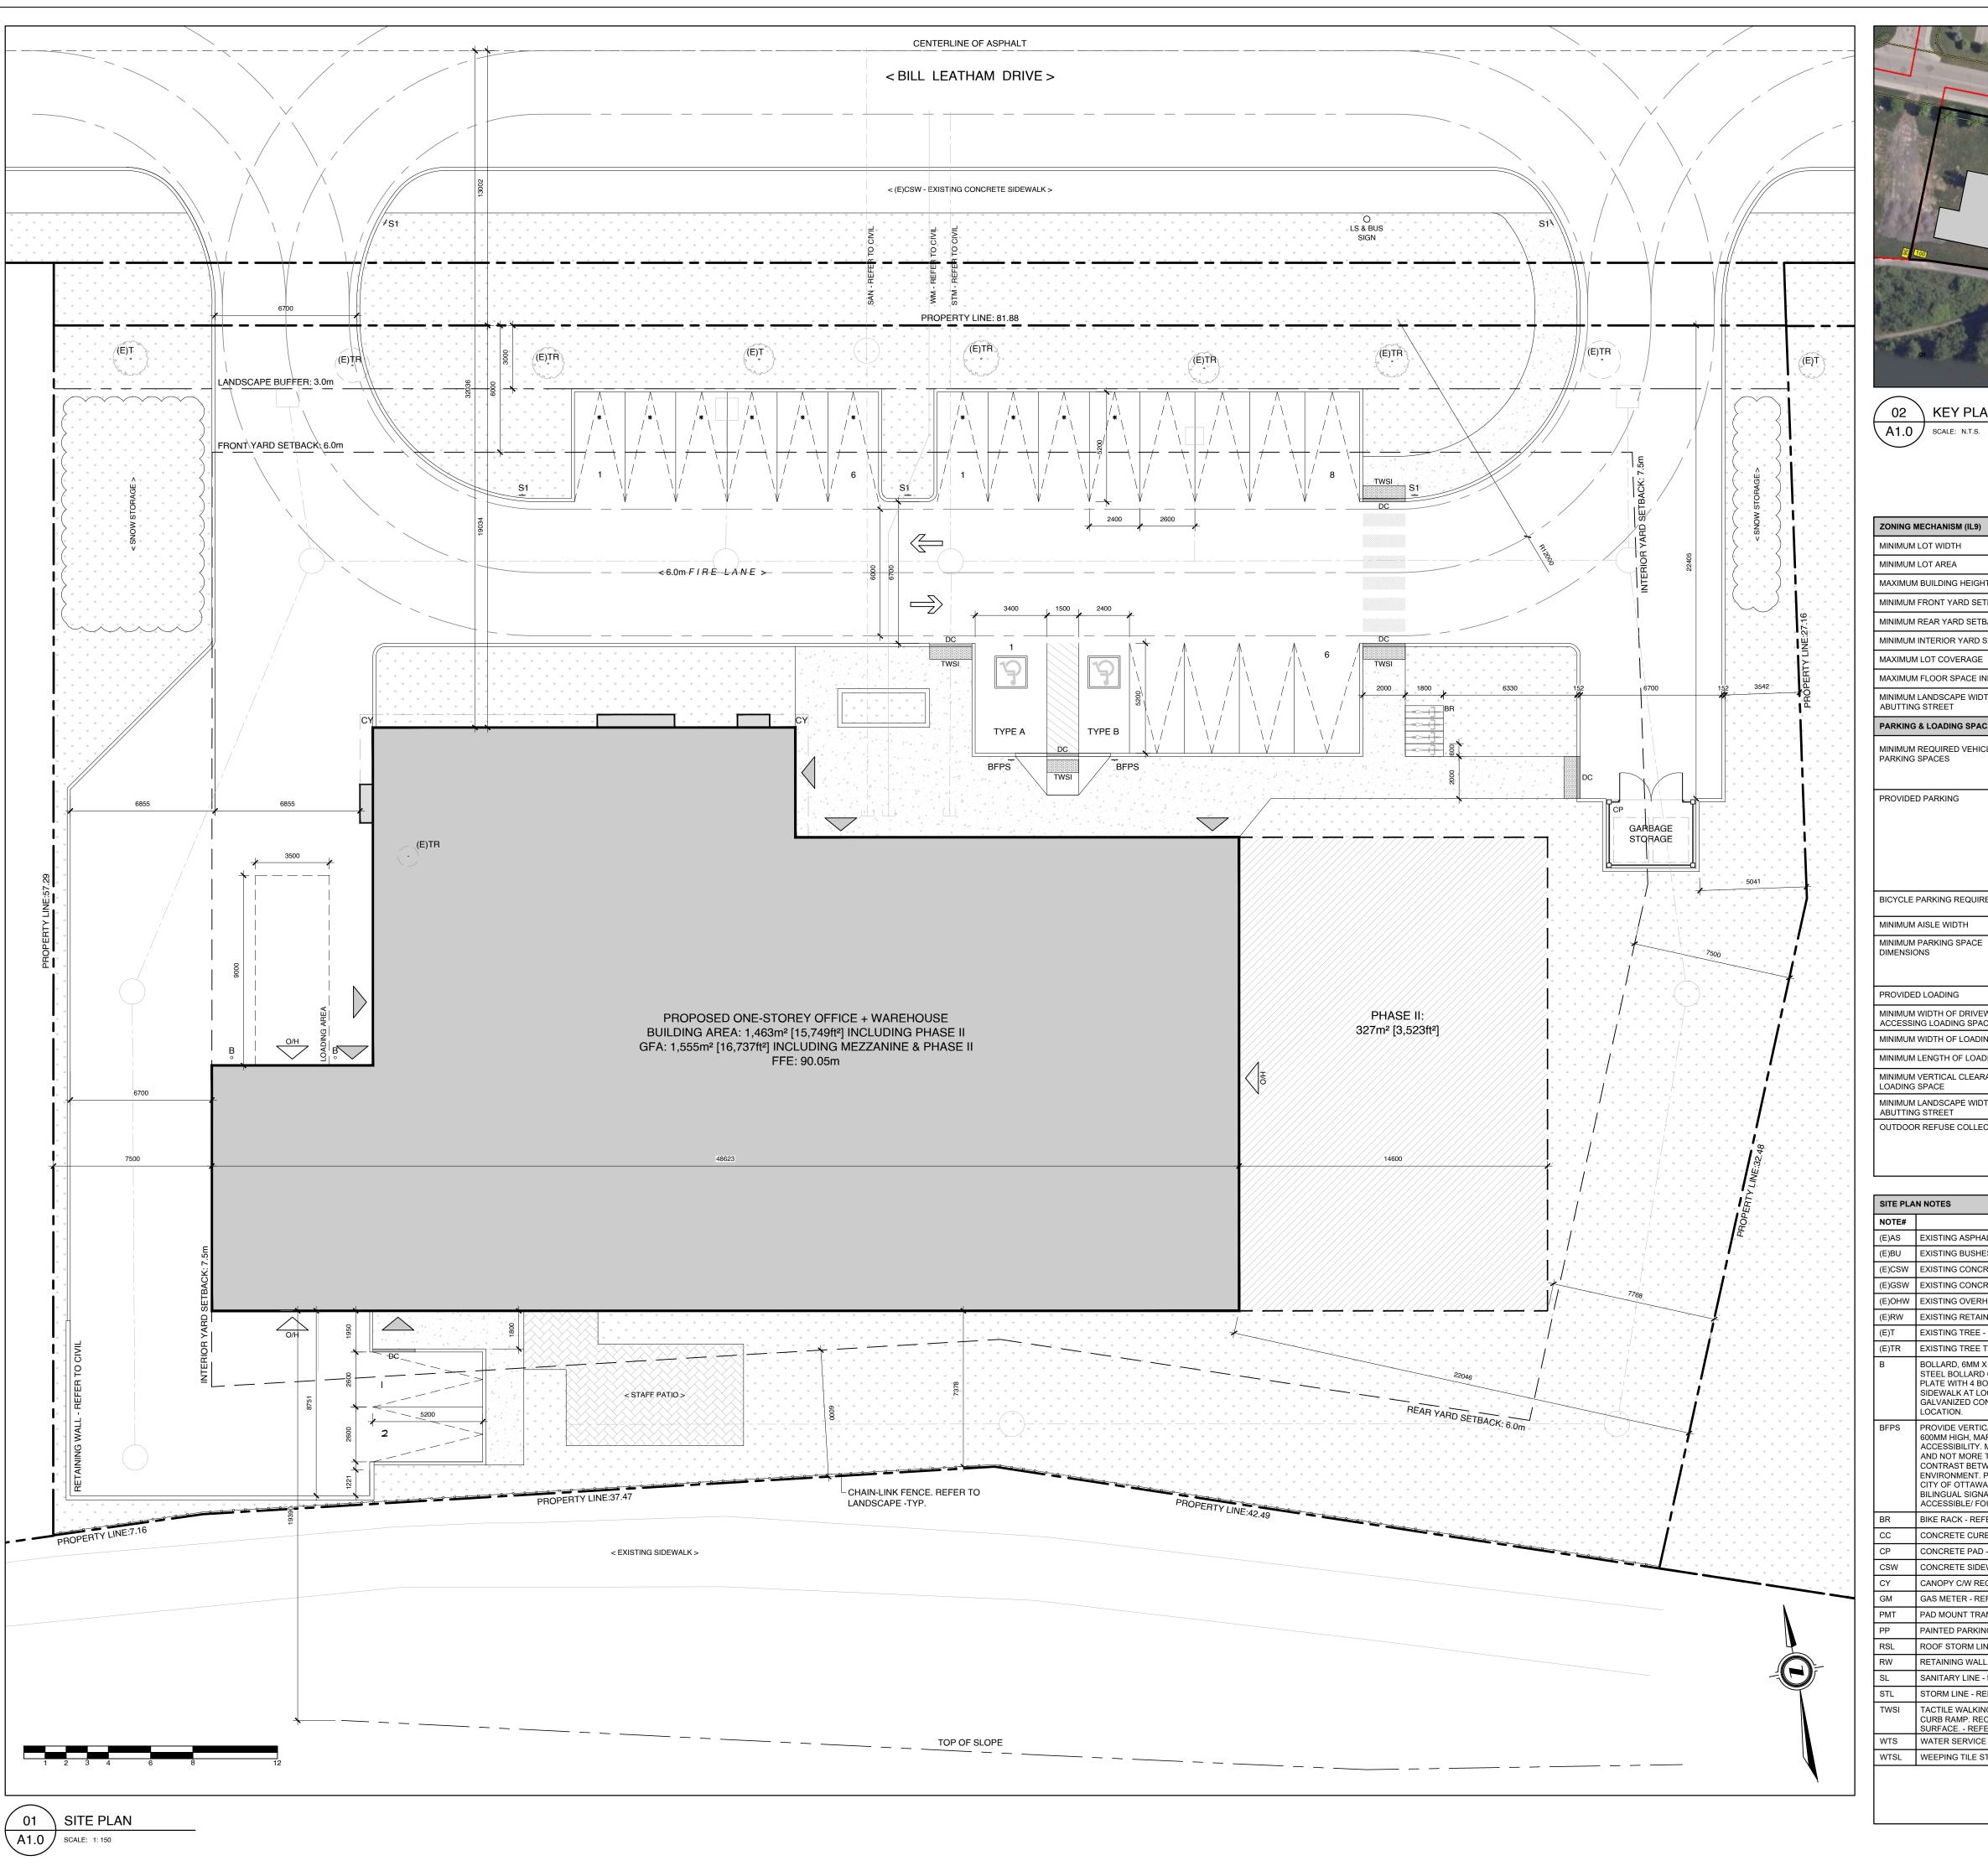



02 \ KEY PLAN A1.0 SCALE: N.T.S.

GROSS FLOOR AREA: WAREHOUSE (PHASE I) WAREHOUSE (PHASE IÍ) 221m² (15% OF GFA) 2,379ft² 991ft² PROJECT ZONING REVIEW/STATISTICS MUNICIPALITY: CITY OF OTTAWA

PART 1

PLAN 4R-35586

(RIDEAU FRONT)

CITY OF OTTAWA

Dated July 27, 2023

BUILDING AREAS

BUILDING FOOTPRINT

Prepared by Stantec Geomatics Ltd.

GEOGRAPHIC TOWNSHIP OF NEPEAN

SQ.M.

1 STOREY OFFICE + WAREHOUSE

MUNICIPAL ADDRESS: 100 BILL LEATHEM DRIVE CONTINENTAL FLOORING INC. REGISTERED OWNER: LOT AREA: ZONING ANALYSIS OTTAWA ZONE: PROPOSED USE:

PROVIDED 82.2m 4,530m²

MINIMUM LOT AREA MAXIMUM BUILDING HEIGHT MINIMUM FRONT YARD SETBACK MINIMUM REAR YARD SETBACK MINIMUM INTERIOR YARD SETBACK MAXIMUM LOT COVERAGE MAXIMUM FLOOR SPACE INDEX MINIMUM LANDSCAPE WIDTH ABUTTING STREET PARKING & LOADING SPACE PROVISIONS

REQUIRED

22 SPACES MINIMUM REQUIRED VEHICLE 2.4 PER 100m² GFA = 12 SPACES (469m²) PARKING SPACES 0.8 PER 100m² FOR FIRST 5,000m² GFA = 9 SPACES (1,061m²) REGULAR SPACES (NEW) 10 SPACES PROVIDED PARKING 1 SPACE ACCESSIBLE SPACE (TYPE A) 1 SPACE ACCESSIBLE SPACE (TYPE B) COMPACT SPACES "*" (50% OF PARKING SPACES: BY-LAW 2021-218, PART 4 - SECTION 106) 10 SPACES 22 SPACES OFFICE USE - 1 PER 250m² GFA = 2 SPACES BICYCLE PARKING REQUIRED 4 SPACES WAREHOUSE USE - 1 PER 2,000m² GFA = 1 SPACE MINIMUM AISLE WIDTH PARKING LOT: 6.0m MINIMUM PARKING SPACE LENGTH: 5.2m LENGTH: 5.2m DIMENSIONS WIDTH: 2.6m WIDTH: 2.6m UP TO 50% OF REQUIRED PARKING SPACES MAY BE 4.6m x 2.4m = 10 SPACES PROVIDED PROVIDED LOADING 1 SPACE PER 1000-1999m² OF OFFICE/WAREHOUSE MINIMUM WIDTH OF DRIVEWAY SINGLE TRAFFIC LANE - 3.5m ACCESSING LOADING SPACE MINIMUM WIDTH OF LOADING SPACE MINIMUM LENGTH OF LOADING SPACE MINIMUM VERTICAL CLEARANCE OF LOADING SPACE MINIMUM LANDSCAPE WIDTH ABUTTING STREET OUTDOOR REFUSE COLLECTION MIN. SETBACK FROM A PUBLIC STREET: 9.0m MIN. SETBACK FROM ANY LOT LINE: 3.0m

SCREENING MIN. HEIGHT: 2.0m

		- 1		
SITE PLA	N NOTES		SITE PLAN SYMB	OLS
NOTE#	NOTE			NE
(E)AS	EXISTING ASPHALT SURFACE - REFER TO SURVEY		O/H	
(E)BU	EXISTING BUSHES - REFER TO SURVEY			NE
(E)CSW	EXISTING CONCRETE CURB - REFER TO SURVEY			
(E)GSW	EXISTING CONCRETE SIDEWALK - REFER TO SURVEY		-0:3	ВІ
(E)OHW	EXISTING OVERHEAD UTILITY WIRES - REFER TO SURVEY			
(E)RW	EXISTING RETAINING WALL - REFER TO SURVEY			N
(E)T	EXISTING TREE - REFER TO SURVEY			
(E)TR	EXISTING TREE TO BE REMOVED - REFER TO SURVEY		#	PA
В	BOLLARD, 6MM X 125MM DIA. X 1050MM PAINTED GALVANIZED STEEL BOLLARD C/W WELDED CAP AND 6MM X 150MM BASE PLATE WITH 4 BOLT HOLES; SECURE TO PAVEMENT OR SIDEWALK AT LOCATIONS INDICATED WITH 16MM DIA. GALVANIZED CONCRETE OR ASPHALT ANCHORS DEPENDANT ON LOCATION.		S#	NE FII
BFPS	PROVIDE VERTICALLY-MOUNTED SIGN, MINIMUM 300MM WIDE X 600MM HIGH, MARKED WITH INTERNATIONAL SYMBOL OF ACCESSIBILITY. MOUNT NOT LESS THAN 1500MM ABOVE GRADE AND NOT MORE THAN 2000MM ABOVE GRADE. ENSURE TONAL		SL O	ST
	CONTRAST BETWEEN BF PARKING SIGN AND BACKGROUND ENVIRONMENT. PROVIDE INFORMATION TEXT COMPLIANT WITH CITY OF OTTAWA BY LAW REQUIREMENTS. PROVIDE ADDITIONAL BILINGUAL SIGNAGE THAT IDENTIFIES TYPE "A" SPACES AS "VAN ACCESSIBLE".		5	DE AG VI
BR	BIKE RACK - REFER TO LANDSCAPE		•	
CC	CONCRETE CURB - REFER TO CIVIL			ΤV
CP	CONCRETE PAD - REFER TO CIVIL		\Rightarrow	. •
CSW	CONCRETE SIDEWALK - REFER TO CIVIL			DE
CY	CANOPY C/W RECESSED POT LIGHTS - REFER TO ELECTRICAL			DL
GM	GAS METER - REFER TO SITE SERVICING			TA
PMT	PAD MOUNT TRANSFORMER - REFER TO CIVIL		V-V-V-V-V-I	IN
PP	PAINTED PARKING LINES, TYP., - REFER TO CIVIL			PF
RSL	ROOF STORM LINE - REFER TO CIVIL			
RW	RETAINING WALL - REFER TO CIVIL			MI
SL	SANITARY LINE - REFER TO CIVIL			NE
STL	STORM LINE - REFER TO CIVIL		$\times \times \times$	
TWSI	TACTILE WALKING SURFACE INDICATOR (TWSI), FULL WIDTH OF CURB RAMP. RECESSED TO BE FLUSH WITH CONCRETE WALKING SURFACE REFER TO CIVIL		* * * *	E) S(
WTS	WATER SERVICE - REFER TO CIVIL			<u>~</u>
WTSL	WEEPING TILE STORM LINE - REFER TO CIVIL			C

O/H	NEW OVERHEAD DOOR
	NEW DOOR / ENTRANCE
***	BICYCLE PARKING SPACE (1.8Mx0.6M)
	NO PARKING LINES
#	PARKING STALL COUNT PER ROW
S#	NEW SIGN, REFER TO SIGN LEGEND
S1	FIRE ROUTE SIGN
SL O	STREET LIGHT
E	DESIGNATED ACCESSIBLE PARKING SPACE AS AODA STANDARDS
V	VISITOR PARKING
₩	TWO WAY TRAFFIC
	DEPRESSED CURB (DC)
0000000	TACTILE WALKING SURFACE INDICATORS (TWSI)
	PROPERTY LINE
	MINIMUM SETBACKS (ZONING)

NEW CONSTRUCTION

EXISTING BUILDINGS

SOFT LANDSCAPING

CONCRETE SIDEWALK

BUILDING MOUNTED LIGHTS

REFER TO ELECTRICAL DWGs

INDICATION OF COMPACT PARKING SPACES

CLIENT NAME: PROPERTY LEGAL DESCRIPTION 1) ALL WORK TO BE IN COMPLIANCE WITH LOCAL BUILDING CODES, REGULATIONS AND BY-LAWS. PART OF LOTS 17 & 18 CONCESSION 1

SQ.FT.

7,901ft² 3,523ft² 1,689ft²


16,483ft²

CONTINENTAL FLOORING

2) ADDITIONAL DRAWINGS MAY BE ISSUED FOR CLARIFICATION TO ASSIST PROPER EXECUTION OF WORK, SUCH DRAWINGS WILL HAVE THE SAME MEANING AND INTENT AS IF THEY WERE INCLUDED WITH PLANS IN CONTRACT DOCUMENTS. 3) DO NOT SCALE DRAWINGS. 4) ALL SUB-CONTRACTORS TO TAKE THEIR OWN ON-SITE MEASUREMENTS AND BE RESPONSIBLE FOR THEIR ACCURACY.

5) NOTIFY SHAWN J. LAWRENCE ARCHITECT FOR ANY ERRORS AND/OR OMISSIONS PRIOR TO START OF WORK. PLANNER/ CIVIL

NOVATECH ENGINEERING CONSULTING LTD. 240 MICHAELCOWPLAND DRIVE, SUITE 200. OTTAWA, ONTARIO, K2M 1P6 (P) 613 254-9643 (F) 613 254-5867



NORTH ARROW:

2024.08.16 ISSUED FOR SPC REV 2024.07.09 ISSUED FOR SPC 2024.05.31 PHASE III - PRE-CONSULTATION 2024.05.21 ISSUED FOR COORDINATION 2024.04.26 ISSUED FOR REVIEW 2024.04.16 ISSUED FOR REVIEW 2024.04.09 ISSUED FOR COORDINATION 2024.03.21 ISSUED FOR COORDINATION 2024.03.08 ISSUED FOR REVIEW 2024.03.04 ISSUED FOR REVIEW 06 2024.02.29 ISSUED FOR REVIEW 05 2024.02.27 ISSUED FOR REVIEW 4 2024.02.16 ISSUED FOR REVIEW 03 2024.02.08 ISSUED FOR REVIEW 02 2024.02.02 ISSUED FOR REVIEW

S.J.LAWRENCE ARCHITECT INCORPORATED 18 DEAKIN STREE SUITE 205 OTTAWA, ONTARIO T: (613) 739.7770 F: (613) 739.7703 INCORPORATED sjl@sjlarchitect.com

2024.01.30 ISSUED FOR REVIEW

REVISION

No. DATE

S.J. LAWRENCE ARCHITECT INCORPORATED REPRODUCTION IS NOT PERMITTED

CONTINENTAL FLOORING OFFICE + WAREHOUSE 100 BILL LEATHEM, OTTAWA, ON


SHEET TITLE: SITE PLAN


SHEET NUMBER:


DRAWN BY: PLOT DATE: PROJECT DATE: 2024.08.16 2024.01.16 SCALE: 1:150 JOB NUMBER: SL-1117-24

A1.0



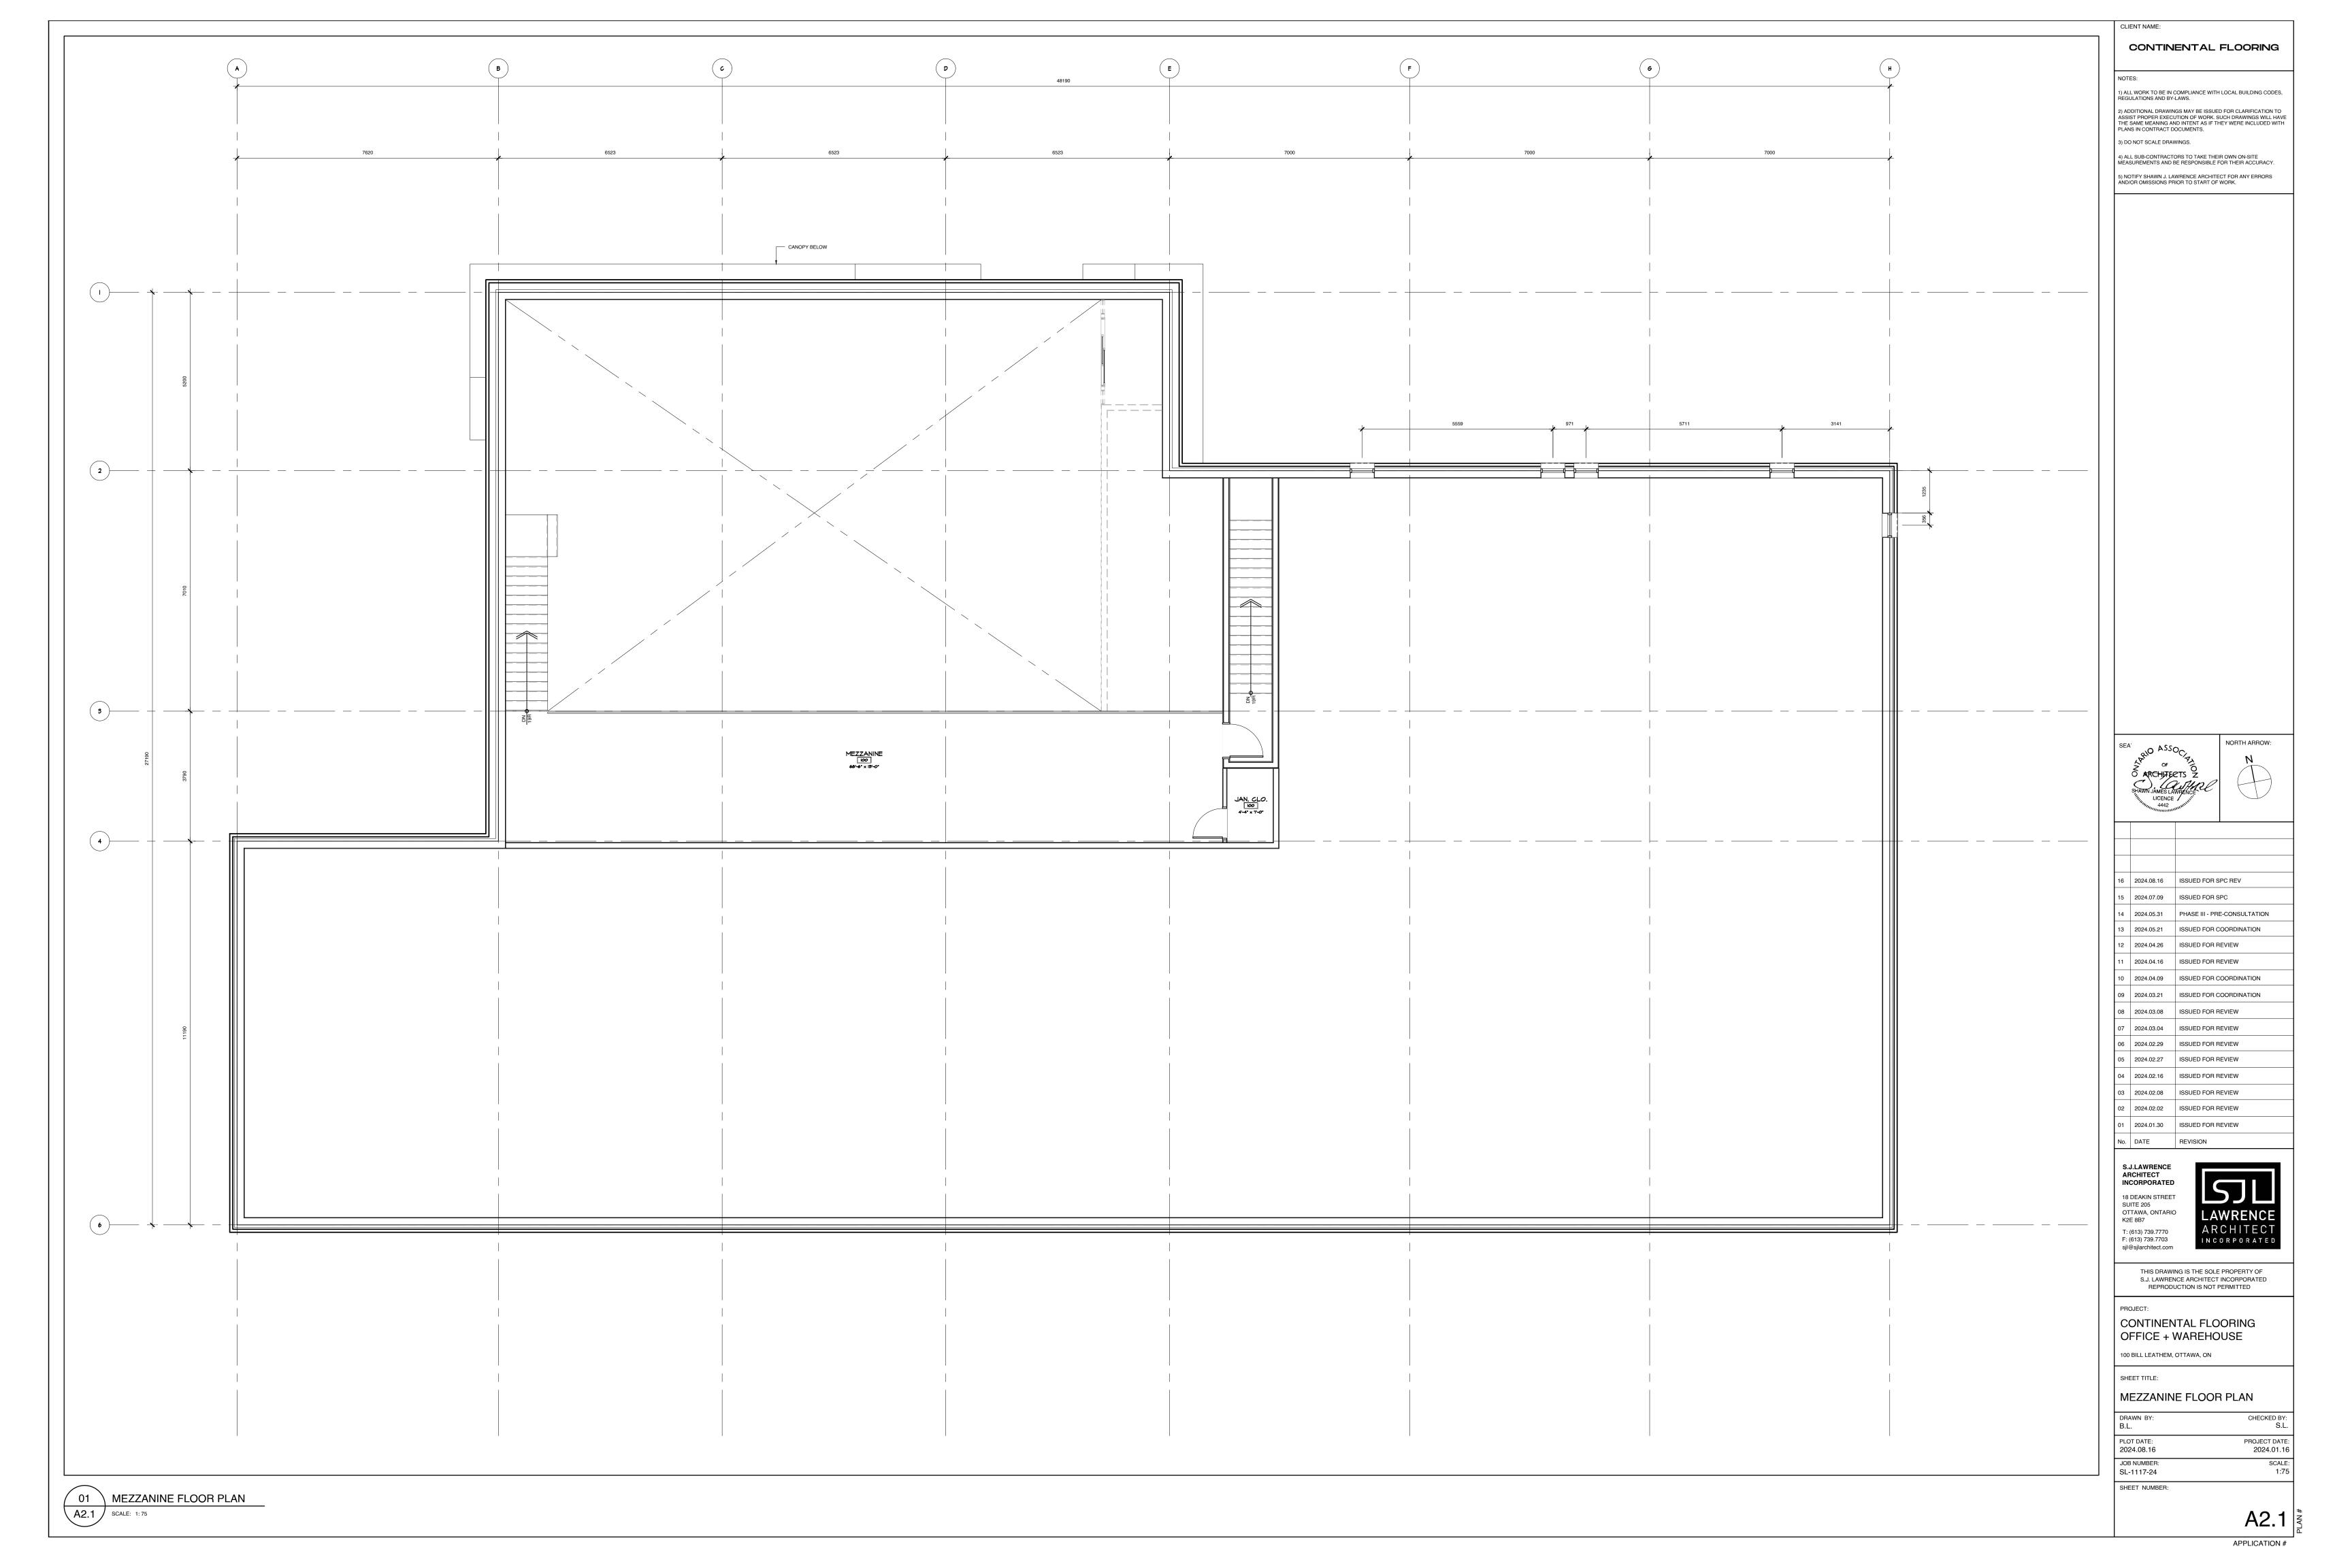


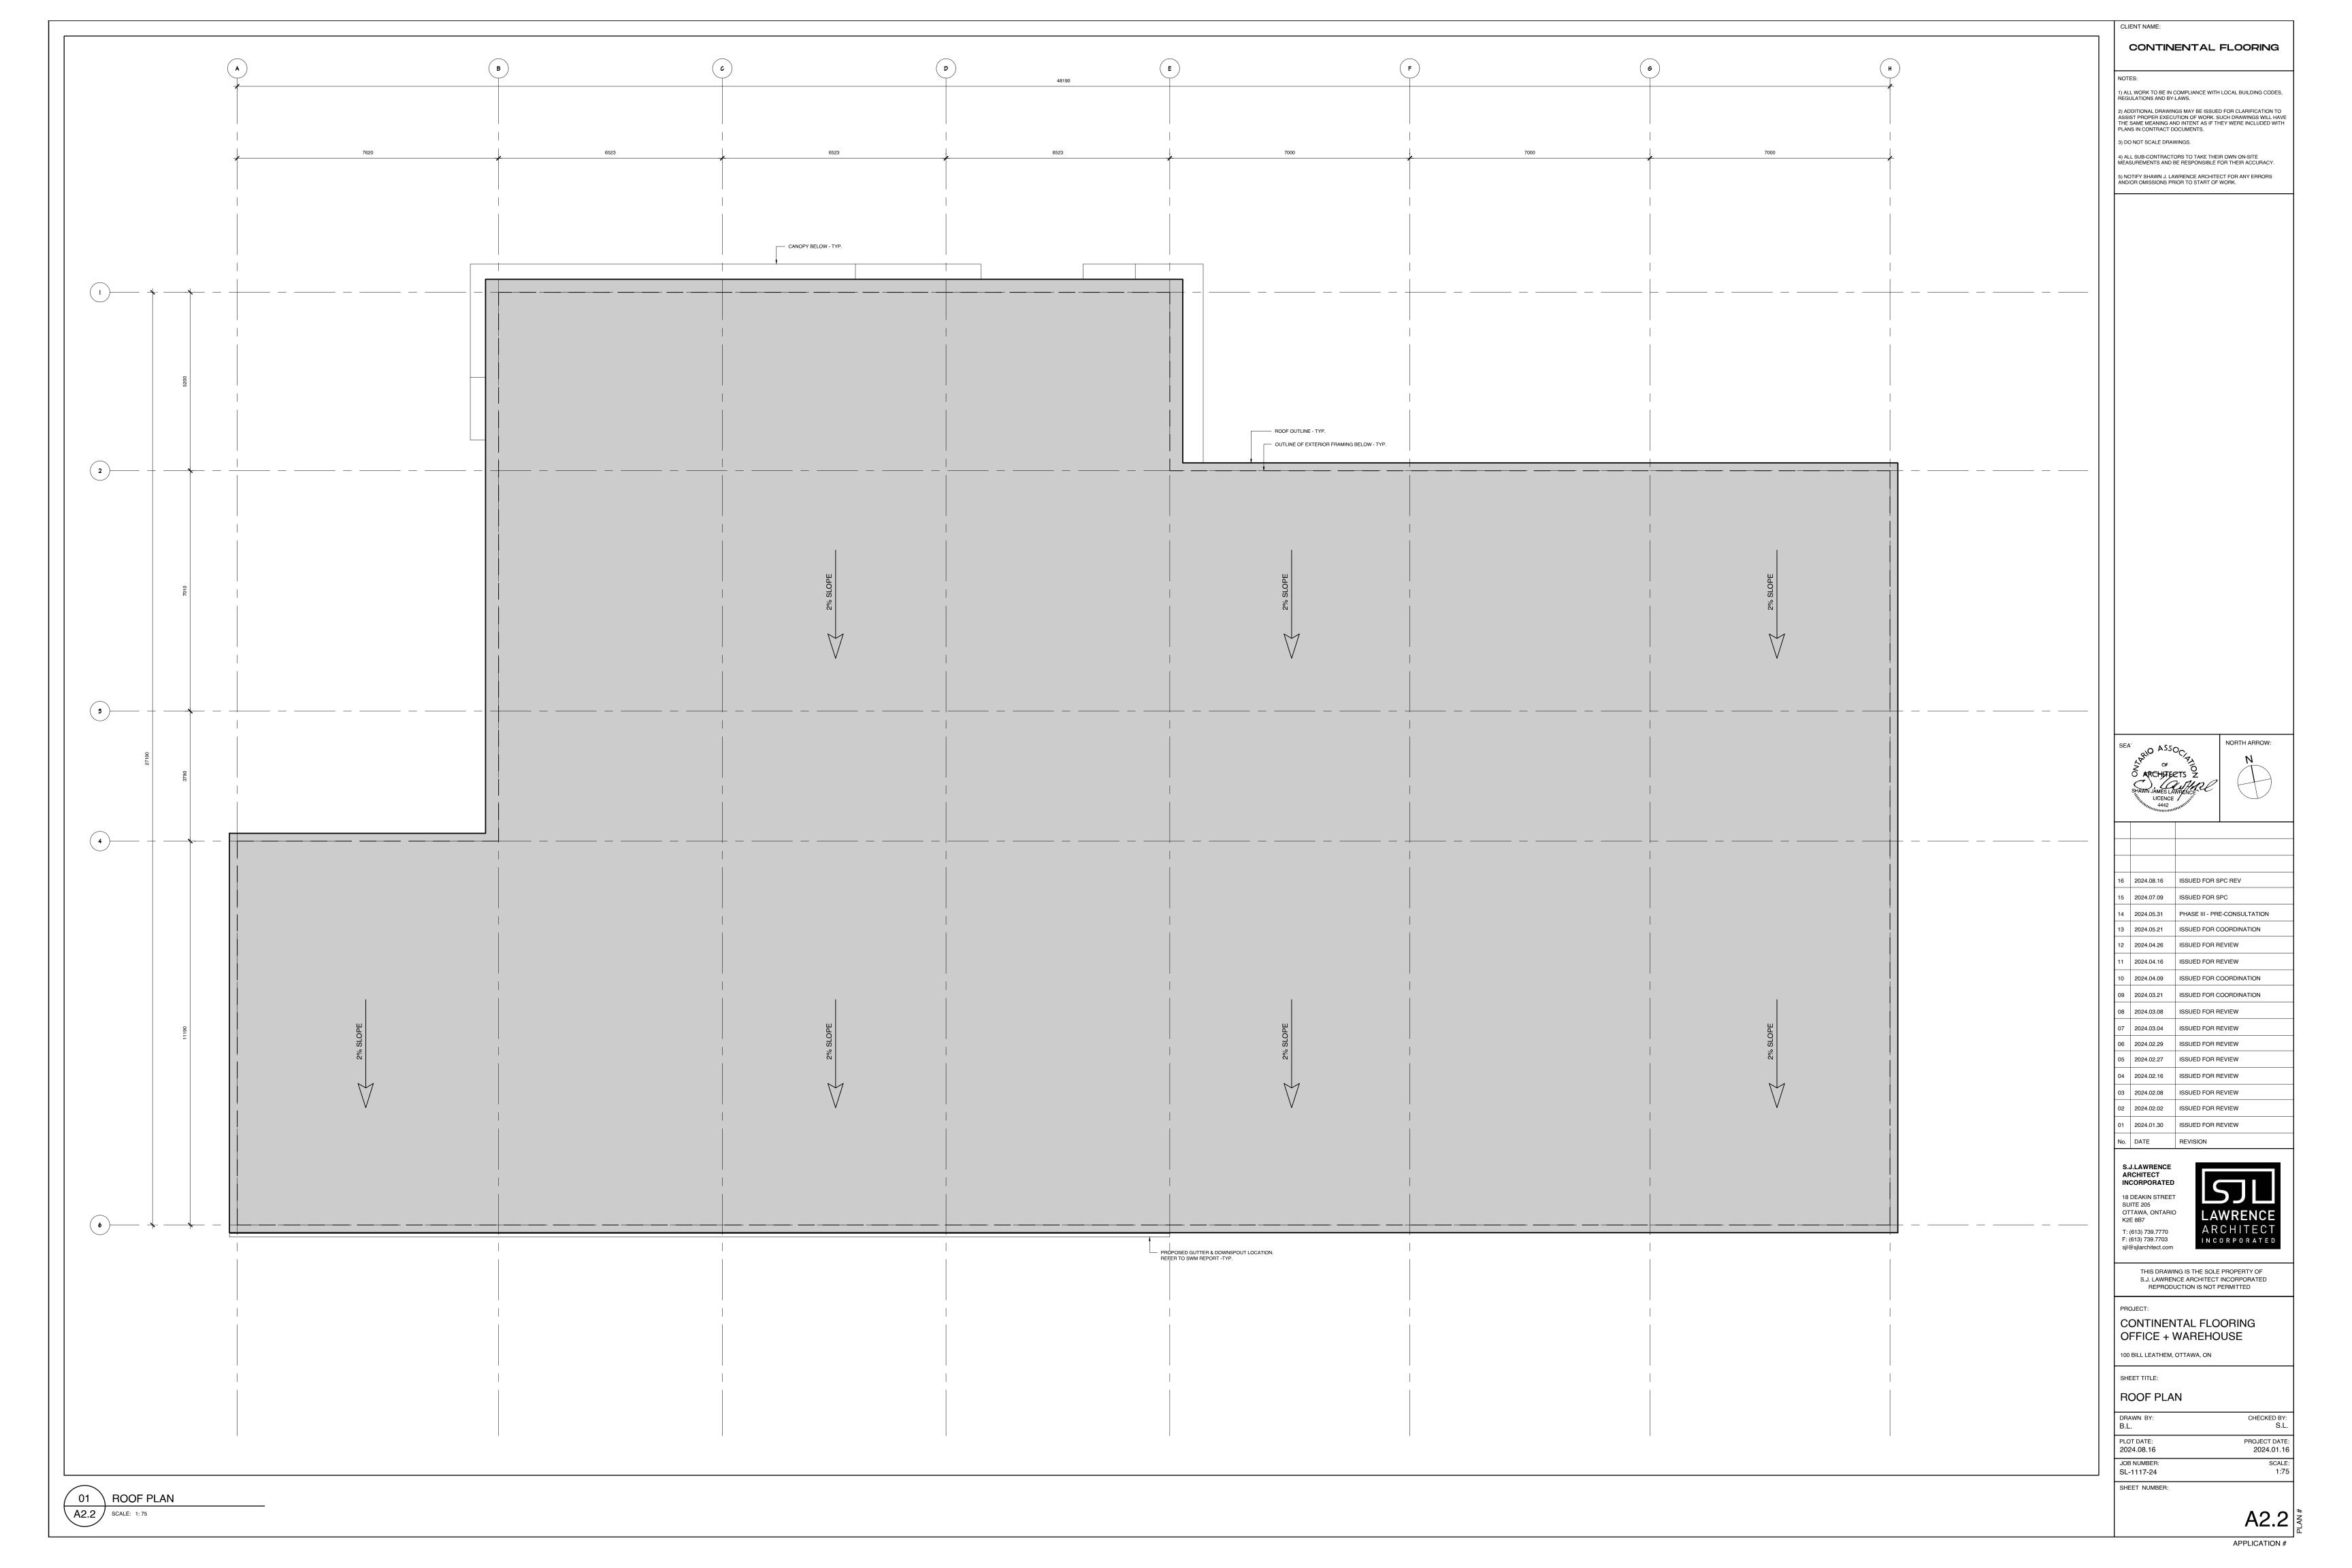

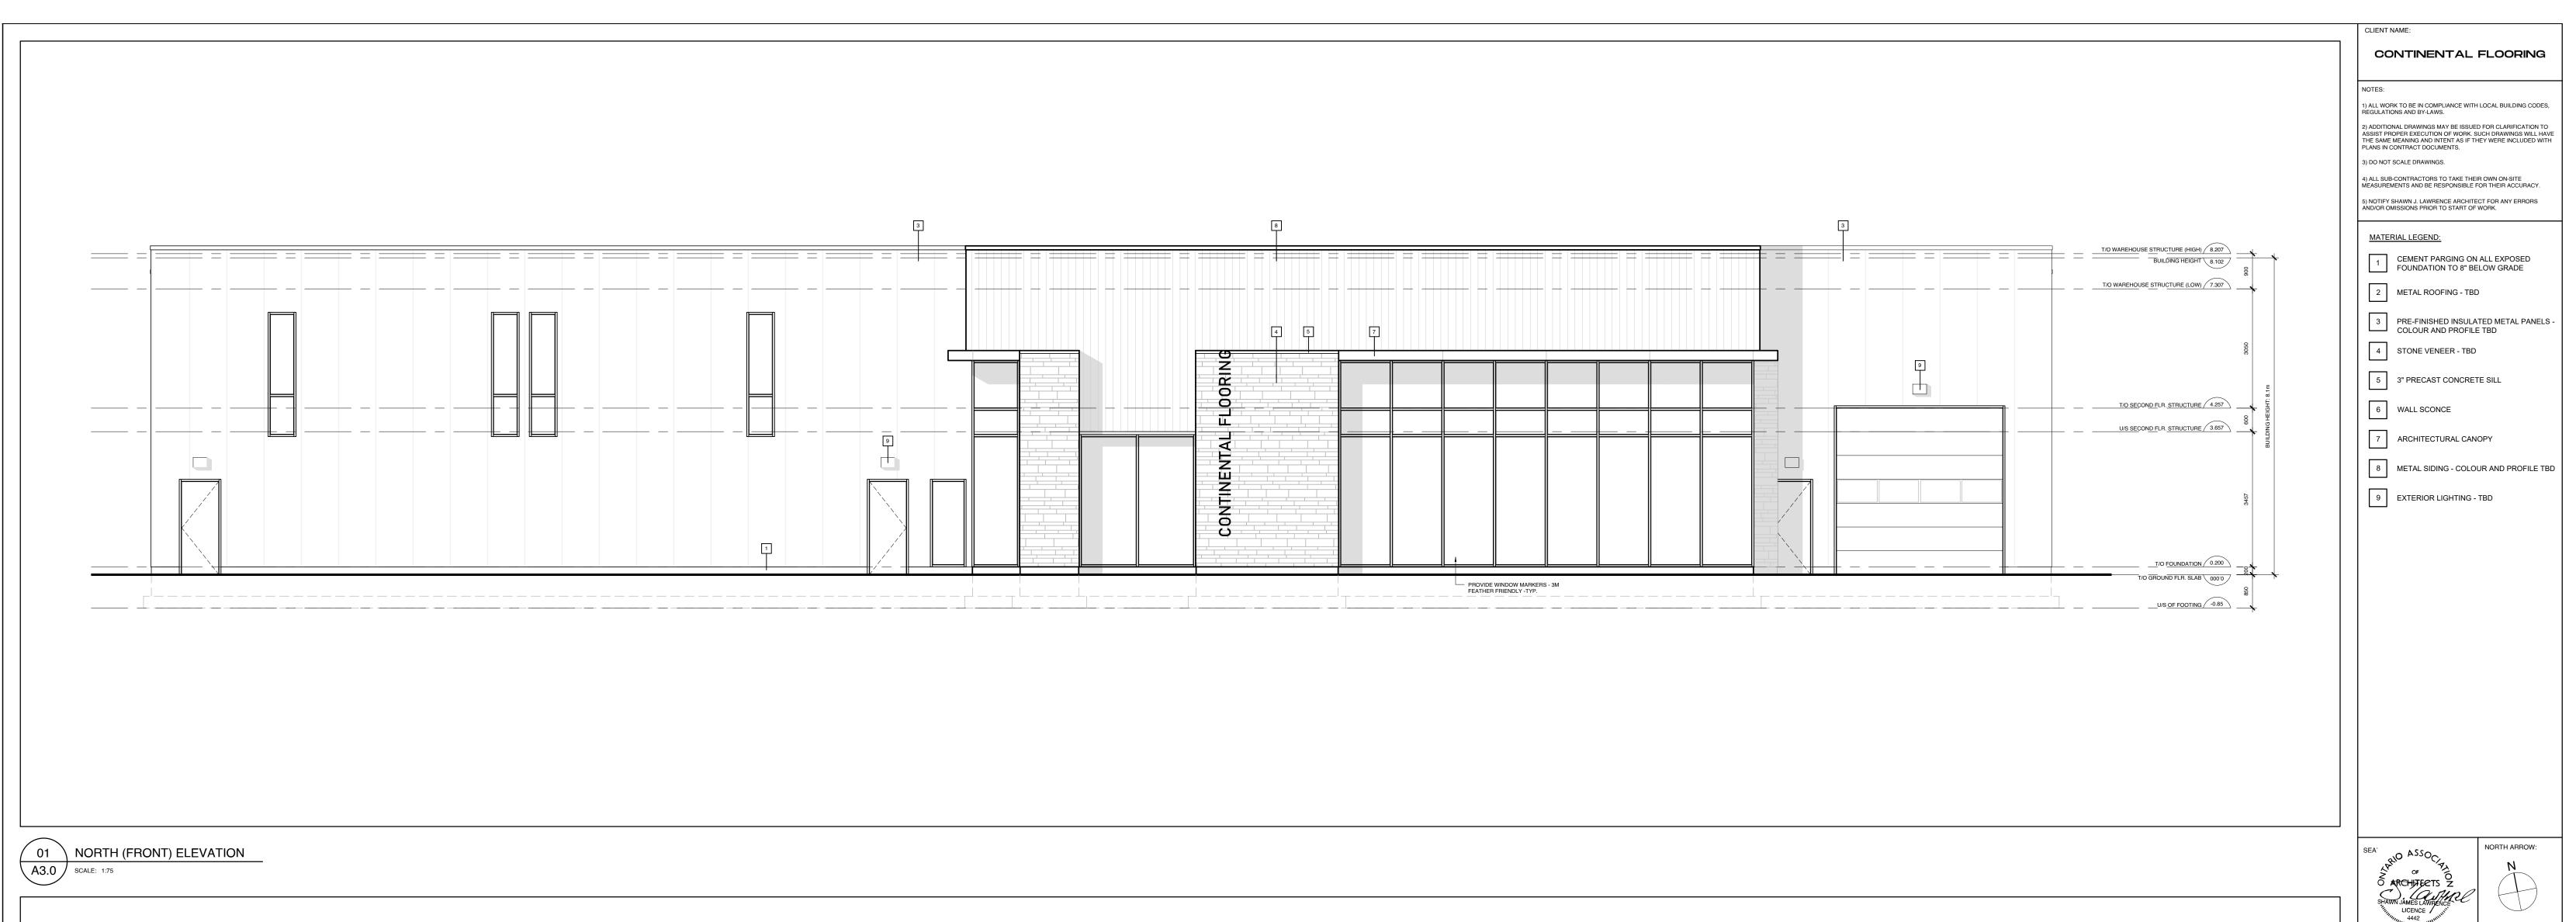

T/O WAREHOUSE STRUCTURE (HIGH) 8.207

BUILDING HEIGHT 8.102



T/O WAREHOUSE STRUCTURE (LOW) 7.307


T/O SECOND FLR. STRUCTURE 4.257

U/S SECOND FLR. STRUCTURE 3.657

T/O FOUNDATION 0.200

T/O GROUND FLR. SLAB 000'0

U/S OF FOOTING -0.85



2024.08.16 ISSUED FOR SPC REV 2024.07.09 ISSUED FOR SPC 2024.05.31 PHASE III - PRE-CONSULTATION 2024.05.21 ISSUED FOR COORDINATION 2024.04.26 ISSUED FOR REVIEW 2024.04.16 ISSUED FOR REVIEW 2024.04.09 ISSUED FOR COORDINATION 2024.03.21 ISSUED FOR COORDINATION 2024.03.08 ISSUED FOR REVIEW 2024.03.04 ISSUED FOR REVIEW 06 2024.02.29 ISSUED FOR REVIEW 05 2024.02.27 ISSUED FOR REVIEW 04 2024.02.16 ISSUED FOR REVIEW 03 2024.02.08 ISSUED FOR REVIEW 2024.02.02 ISSUED FOR REVIEW 2024.01.30 ISSUED FOR REVIEW No. DATE REVISION

S.J.LAWRENCE ARCHITECT INCORPORATED 18 DEAKIN STREET SUITE 205 OTTAWA, ONTARIO K2E 8B7 T: (613) 739.7770 F: (613) 739.7703 sjl@sjlarchitect.com

THIS DRAWING IS THE SOLE PROPERTY OF S.J. LAWRENCE ARCHITECT INCORPORATED REPRODUCTION IS NOT PERMITTED


CONTINENTAL FLOORING OFFICE + WAREHOUSE 100 BILL LEATHEM, OTTAWA, ON

SHEET TITLE:

ELEVATIONS

PLOT DATE: 2024.08.16 PROJECT DATE: 2024.01.16 SCALE: AS SHOWN JOB NUMBER: SL-1117-24 SHEET NUMBER:

02 SOUTH (REAR) ELEVATION
A3.0 SCALE: 1:75

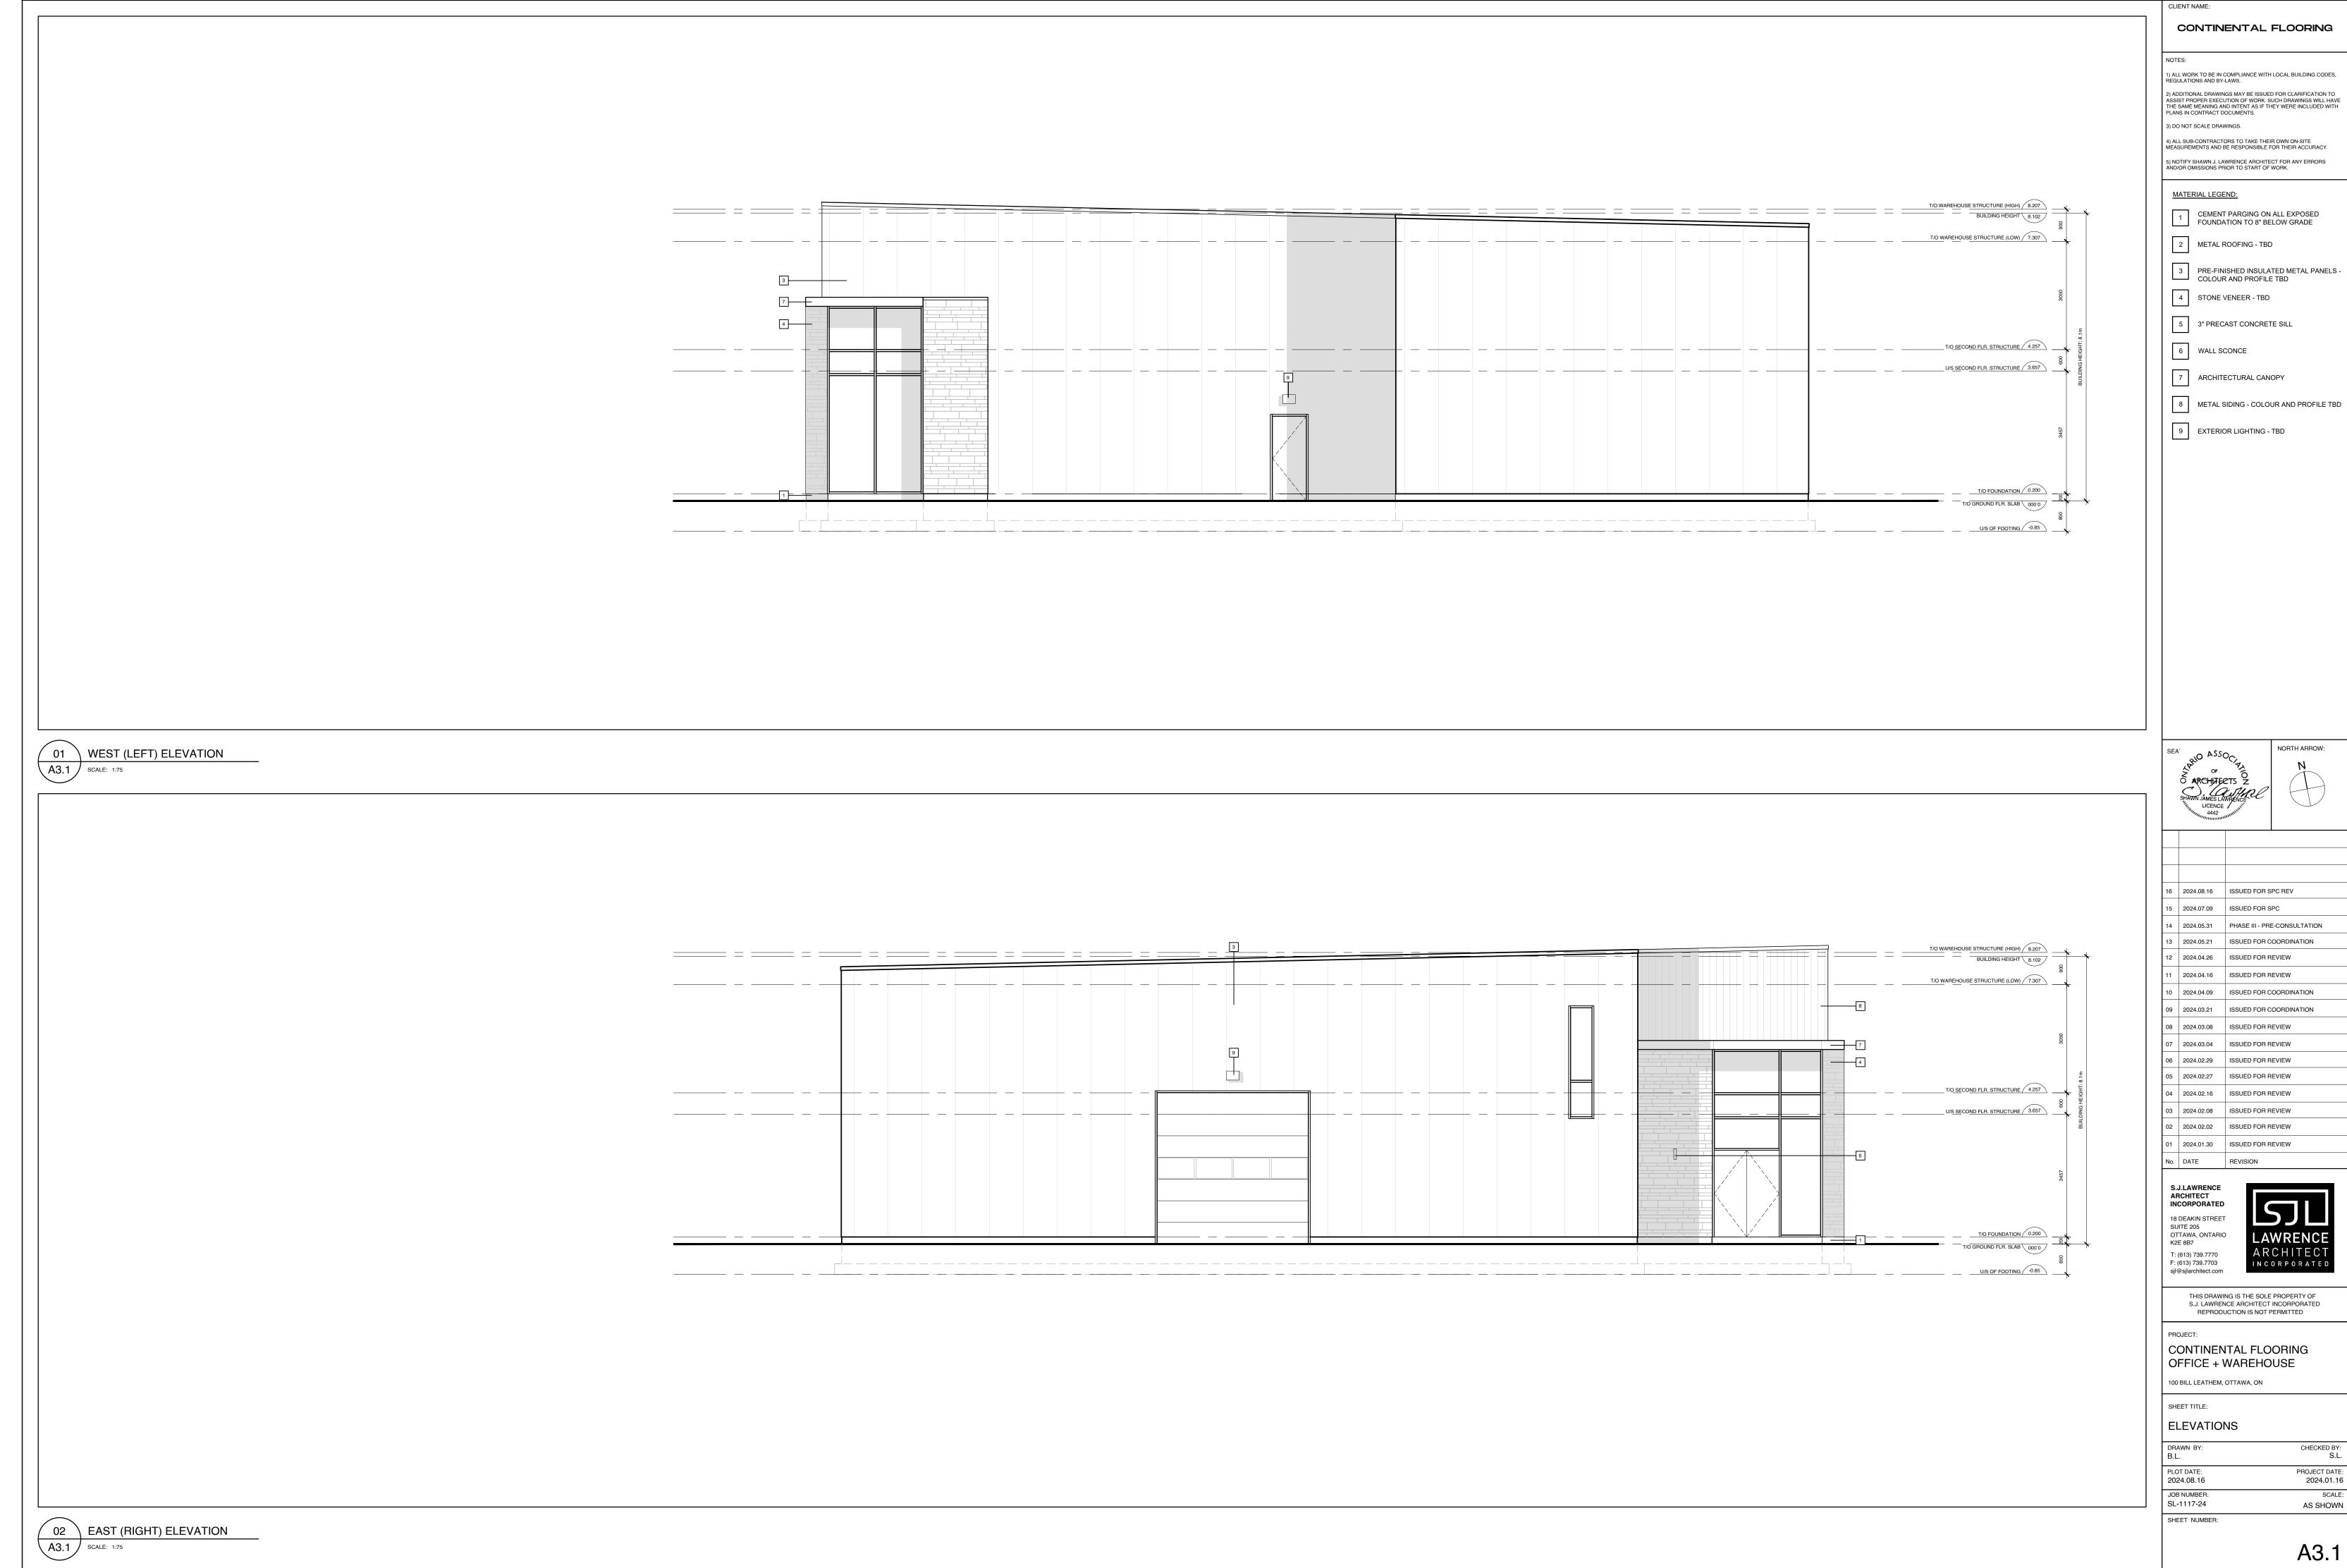

APPLICATION #

