

154 Colonnade Road South  
Ottawa, Ontario  
Canada, K2E 7J5  
Tel: (613) 226-7381  
Fax: (613) 226-6344

July 19, 2023

File: PH4146-LET.01.REV.03

### **Stoked Industries Inc.**

14 Knoll Terrace  
Ottawa (Nepean), Ontario  
K2J 2K6

Geotechnical Engineering  
Environmental Engineering  
Hydrogeology  
Geological Engineering  
Materials Testing  
Building Science

[www.patersongroup.ca](http://www.patersongroup.ca)

Attention: **Jason Kovar**

Subject: **Hydrogeological Report and Terrain Analysis**  
**2167 McGee Side Road**  
**Carp, Ontario**

## **Introduction**

Further to your request, Paterson Group (Paterson) has conducted a Hydrogeological Report and Terrain Analysis in support of the proposed construction of a slab-on-grade commercial building which consists of office space and warehouse units to be located within the central portion of the subject site at 2167 McGee Side Road in Carp, Ontario. The purpose of these works has been to determine the suitability of the water supply aquifer underlying the site to service the proposed development and the suitability of the soils to adequately attenuate sewage effluent through a Class 4 Sewage System.

## **Description of Proposed Property**

The majority of the subject site is currently occupied by a gravel-surfaced parking area. The ground surface is relatively flat within the central portion of the site and slopes down at the eastern and southern boundaries of the subject site, where a culvert system is present. The subject site is bordered to the north by undeveloped, densely tree land, to the east by John Cavanaugh Drive, to the south by McGee Side Road and a commercial building to the west. The site is currently zoned as General Heavy Industrial (RG). The surrounding properties to the north and west are also zoned RG, while the properties to the east and south is zoned as a Rural Commercial (RC).

## Field Program

As a means to demonstrate the adequacy of the aquifer underlying the subject lands, with respect to water quality and quantity, a new drilled well was constructed and tested. The new drilled well, with a Water Well Record (WWR) ID of A313110, is referred to as TW1 for the purpose of this assessment. TW1 has a 150 mm diameter steel casing extending to a depth of 17.7 m below ground surface (bgs). The total depth of the well was indicated to be 152.4 m bgs. According to the well record, grey to brown limestone bedrock was encountered at a depth of approximately 3.0 m bgs. Based upon available geological mapping, the drift thickness varies from 3 to 5 m bgs.

The new drilled well is located in the southwest corner of the property. Refer to attached Paterson Drawing PH4146 -2 - Site Plan for the well location. The new drilled well is fully accessible with the 150 mm diameter steel casing extending 0.42 m above the existing ground surface. The well stick-up meets the minimum height requirement as per Ontario Regulation 903.

As a means to evaluate the water supply aquifer intercepted by the well, the well was subjected to a 8 hour constant rate pumping test. Due to observed elevated turbidity of the water during the test, the 8 hour pumping test was subsequently extended by a duration of 1.5 hours, totalling 9.5 hours. The extended 9.5 hour pump test successfully demonstrated a reduction in the turbidity of the water. The pumping test was conducted on March 4, 2021 under the full-time supervision of Paterson personnel.

A submersible pump was provided by Air Rock Drilling Co. (Air Rock) for the 9.5 hour pumping test. A licensed water well technician (Air Rock) was retained to complete the necessary plumbing related activities. A discharge hose assembly with a gate valve was connected to the rented pump. The discharge line was placed at a sufficient distance to ensure that the discharge water was being directed away from the well. Upon completion of the test, the pump was removed and the well was disinfected by Air Rock.

The pumping test was carried out at a pumping rate of 12 L/min for a duration of 9.5 hours. During the pumping test, the pumping rate was periodically measured using the timed volume correlation method. The pump rate was maintained within 5% of the selected pump rate. The static water level was recorded manually and an electronic datalogger (VanEssen TD-Diver) was installed in the test well prior to the start of the pumping test. The data logger recorded water levels at 30 second intervals. In addition, manual water level readings were taken at periodic intervals during the test.

Recovery data was collected from the well following the completion of the pumping. The well was noted to have achieved 95% recovery approximately 2 hours and 35 minutes after the completion of the pumping.

Groundwater samples were collected at 4 hours and 9.5 hours after the start of pumping. Prior to collection of the groundwater samples, the free chlorine residual was verified to be non-detectable. The water samples were submitted for comprehensive testing of bacteriological, chemical and physical water quality parameters consistent with the standard 'Subdivision Supply' suite of parameters.

All samples were collected unfiltered and unchlorinated and were placed directly into clean bottles supplied by the analytical laboratory. Samples were placed immediately into a cooler with ice and were transported directly to the Eurofins laboratory in Ottawa. All samples were received by the laboratory within 24 hours of collection.

A series of field tests of the pumped water were carried out at the well head during the 9.5 hour pumping test. The parameters tested at the well head included: pH, total dissolved solids, conductivity, turbidity and temperature.

## Aquifer Analysis

### Water Quantity

Pumping test data was analyzed using AquiferTest Pro (v. 2016.1) aquifer analysis software package by Schlumberger Water Services. Drawdown data was measured using an electronic water level tape and an electronic datalogger unit.

TABLE 1:SUMMARY OF WATER SUPPLY AQUIFER CHARACTERISTICS OF TW1	
AQUIFER PARAMETER	RESULT OF ANALYSIS
Transmissivity (m <sup>2</sup> /day)	0.09
Pumping Rate (L/min)	12
Pre-test Static Water Level (m)	4.01
Post-test Water level (m)	41.30
Available Drawdown (m)	148.39
% Drawdown During Pumping Test	25.13
Specific Capacity (L/min/m drawdown)	0.32

The drawdown data was analyzed using the Theis (Theis, 1935) and the Theis Recovery methods of analysis. Aquifer transmissivity is estimated to be approximately 0.09 m<sup>2</sup>/day.

The pumping test results show that TW1 has a high yield to support the water demands for the proposed building. Overall maximum drawdown at a constant pumping rate for a period of 9.5 hrs was approximately 37.29 m (25.13 % of the available drawdown). 95%

recovery was achieved approximately 2.6 hours after the end of pumping. The total volume of water pumped during the 9.5 hour pumping test was approximately 6,840 L. This is approximately 1.6 times the maximum total daily design volume of water required to support the proposed commercial development (maximum 4,327 L/day). The total daily design sewage flow (TDDSF) volume was provided by D.B. Gray Engineering and is discussed in the Terrain Analysis portion of this report.

The suitability of the aquifer to supply the proposed commercial development was assessed using the methodology provided in MECP Procedure D-5-5 (MOEE, 1996).


Based on the information summarized in Table 1, it is readily apparent that the new water supply well has intercepted an adequately strong water supply aquifer. It is considered to have sufficient quantity to service the proposed commercial development under typical usage, in addition to the neighboring buildings whose wells may intercept the same water supply aquifer.

The majority of the available water well records for the neighbouring properties on the MECP Well Record mapping website consist of agricultural use, commercial use, or public use well records. All surrounding WWR are attached to this report.

## **Water Quality**

### ***Field Data***

Turbidity, electrical conductivity, total dissolved solids (TDS), pH and temperature were measured at the wellhead during the pumping test. The measurements and time intervals for each of these parameters are summarized on the graphical representation below. In addition, a Hach Pocket Colorimeter II chlorine reader was used to measure the free chlorine residual level. No chlorine residual was detected in the discharge water prior to the collection of the water samples.

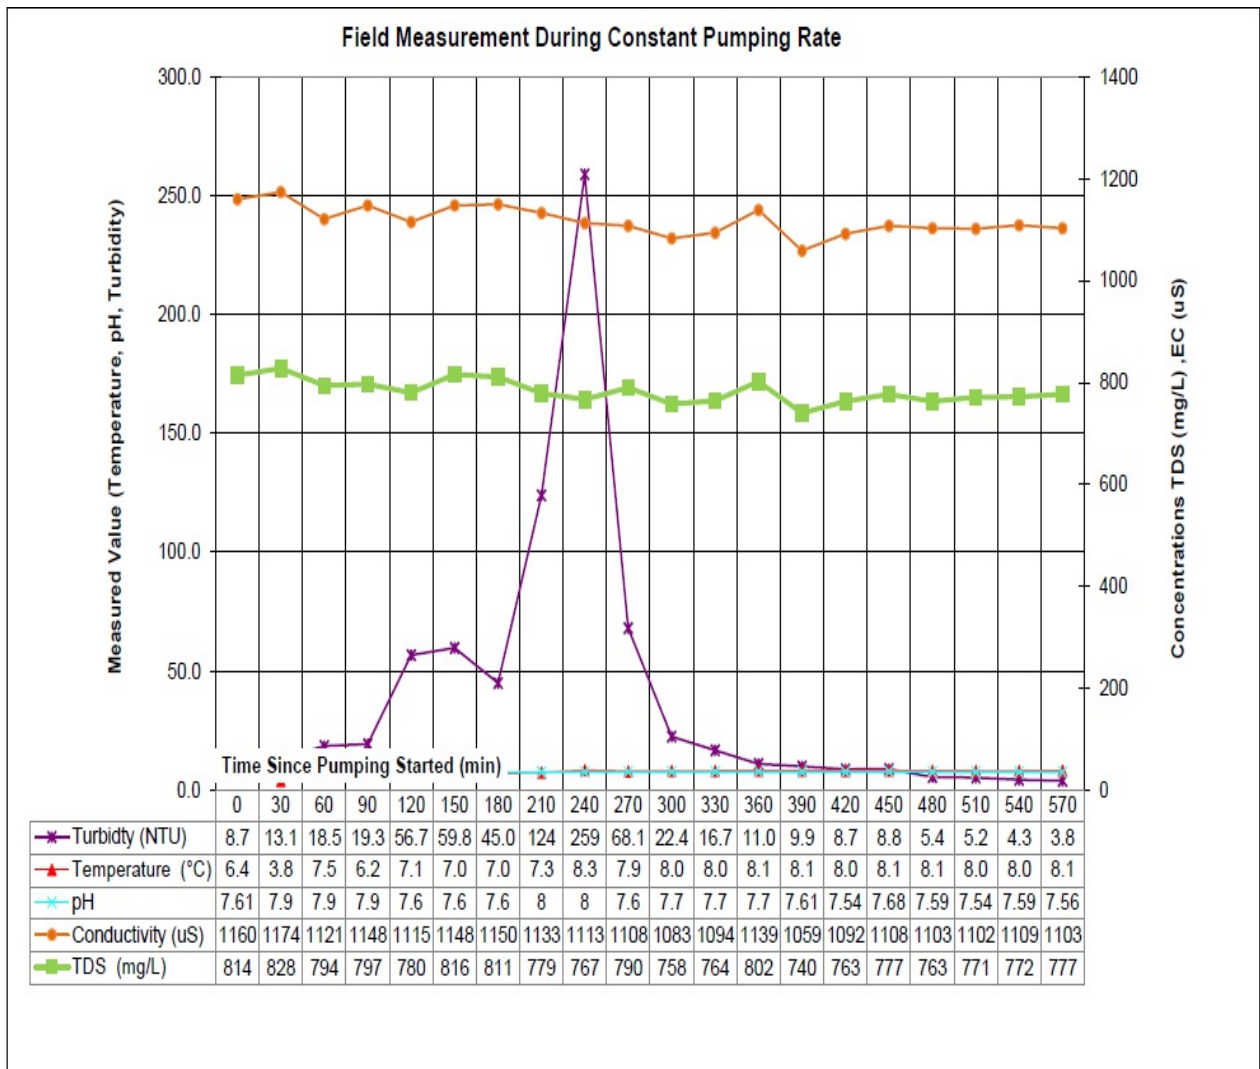

**Laboratory Data**

The laboratory water quality obtained from the pumping test of TW1 is provided in Table 2 below and the laboratory analyses reports can be found attached.

TABLE 2: GROUNDWATER GEOCHEMISTRY (TW1)					
PARAMETER	UNITS	ODWS		TW1	
		LIMIT	TYPE	GW1 (4 hr)	GW2 (9.5 hr)
				2021-03-05	2021-03-05
<b>MICROBIOLOGICAL</b>					
Escherichia Coli (E.Coli)	ct/100mL	0	MAC	0	0
Total Coliforms	ct/100mL	0	MAC	0	0
<b>GENERAL CHEMICAL - HEALTH RELATED</b>					
Fluoride	mg/L	1.5(2.4)	MAC	0.15	0.14
N-NO2 (Nitrite)	mg/L	1	MAC	<0.10	<0.10
N-NO3 (Nitrate)	mg/L	10	MAC	<0.10	<0.10
Turbidity (Laboratory)	NTU	1.0 (5.0)	MAC/AO	>100	2.00
Turbidity (Field)	NTU	1.0 (5.0)	MAC/AO	>100	3.83
N-NH3 (Ammonia)	mg/L	-	-	0.02	0.02
Total Kjeldahl Nitrogen	mg/L	-	-	0.20	0.10
<b>GENERAL CHEMICAL - AESTHETIC RELATED</b>					
Hardness (as CaCO3)	mg/L	100	OG	382	391
Ion Balance	unitless	-	-	1.02	1.04
Total Dissolved Solids	mg/L	500	AO	640	640
Alkalinity (as CaCO3)	mg/L	500	OG	346	344
Chloride	mg/L	250	AO	120	119
Colour	TCU	5	AO	<2	<2
Conductivity	uS/cm	-	-	1,100	1,100
pH	unitless	6.5-8.5	AO	7.98	8.02
Sulphide	mg/L	0.05	AO	<0.1	0.03
Sulphate	mg/L	500	AO	83	79
Calcium	mg/L	-	-	115	117
Iron	mg/L	0.3	AO	3.69	0.09
Potassium	mg/L	-	-	5	4
Magnesium	mg/L	-	-	23	24
Manganese	mg/L	0.05	AO	0.06	<0.01
Sodium	mg/L	200	AO	105	103
Phenols	mg/L	-	-	<0.001	<0.001
Tannin & Lignin	mg/L	-	-	<0.1	<0.1
Dissolved Organic Carbon	mg/L	5	AO	1.50	1.50

- ODWS identifies the following types of parameters:
  - MAC=Maximum Allowable Concentration
  - AO = Aesthetic Objective
  - OG= Operational Guideline
- Shaded Concentration Indicates an Exceedance of the ODWS Objective



The bacteriological test results (Certificate of Analysis - Report No. 1948880) indicated that E.Coli and Total Coliforms were non detect in the well water (0 ct/100mL). Paterson personnel confirmed that the free chlorine residual was 0 mg/L prior to the collection of the bacteriological sample.

The water quality of the subject water supply well meets all the Ontario Drinking Water Standards (ODWS) maximum acceptable concentrations (MAC). Furthermore, the water meets all of the aesthetic objectives (AO) and operational guidelines (OG) with the exception of the following:

- Hardness (As CaCO<sub>3</sub>)
- TDS
- Turbidity

Each of these groundwater parameters are discussed in detail below. It should be noted that the results of the 4 hour field tests were likely effected by sediments from seams within the bedrock aquifer which were disturbed by the pump test. This is further supported by the substantial reduction in turbidity, iron and manganese observed in the 9.5 hour test results.

### **Hardness as CaCO<sub>3</sub>**

Hardness, expressed as calcium carbonate, an operational guideline, does not appear in the ODWS. Rather, it appears in the Technical Support Documents for Ontario Drinking Water Standards, Objectives and Guidelines as a parameter with an operational guideline of 100 mg/L. At the measured concentration of 391 mg/L, the water is considered to be hard. The Technical Support Document for ODWS publication states that water with hardness in excess of 500 mg/L may be unacceptable for most domestic purposes, however, there is no maximum treatable value available. It is expected the hardness concentration can be treated using commercial grade water softener technologies, if desired by the owner.

### **TDS**

Total dissolved solids (TDS) refers to the concentration of inorganic substances dissolved in water. The main constituents are typically chloride, sulphates, calcium, magnesium and bicarbonates. Water with a TDS concentration above 500 mg/L of TDS may not palatable. Procedure D-5-5 does not provide a 'treatability limit' for TDS, but it does require written rationale that corrosion, encrustation, or taste problems will not occur.

If desired, the owner has the ability to install an off-the-shelf reverse osmosis system that can adequately treat the TDS levels noted in the results. It should be noted this is not considered a recommendation and should only be installed if taste is considered an issue

by the end user. The owner has the ability to retain a water treatment specialist to ensure the taste of the water meets their needs.

The Langelier Saturation Index (Langelier, 1936) is used to predict the calcium carbonate stability of water. It indicates whether the water will precipitate, dissolve, or be in equilibrium with calcium carbonate. The results of the Langelier calculation (LSI = 0.8) indicate the water is super saturated and tends to precipitate a scale layer of calcium carbonate (scale forming but non-corrosive). See Langelier Saturation Index Calculation attached for calculation details.

### **Turbidity**

Turbidity, which is generally an aesthetic parameter, was detected in the laboratory test samples at values of >100 and 2.0 NTU in the 4 and 9.5 hour tests, respectively. Field testing detected the samples at values of >100 and 3.83 NTU in the 4 and 9.5 hour tests, respectively. The pump test was extended from 8 to 9.5 hours to demonstrate that continued pumping would result in a decrease in turbidity. It is expected that further development of the well would further reduce turbidity values. The elevated turbidity in the laboratory sample from the 4 hour test result (>100 NTU) is attributed to the clearing out of seams within the bedrock.

The ODWS maximum acceptable concentration for turbidity in drinking water entering the distribution system is 1 NTU. The Aesthetic Objective for turbidity in drinking water reaching the consumer is 5 NTU. The field test parameters at 9.5 hours are below the 5 NTU objective.

### **Sodium**

Sodium is an aesthetic parameter, and was detected in the test samples at a concentration of 105 and 103 mg/L, which is less than the ODWS aesthetic objective of 200 mg/L. Sodium is a unique water quality parameter in that it has a cautionary limit of 20 mg/L for health related purposes, but can be present in raw water up to 200 mg/L and still be within the aesthetic objective. It is a requirement of the ODWS that the Medical Officer of Health be notified of the water quality results where sodium is present in concentrations exceeding 20 mg/L and it is intended for consumption. The purpose of this is such that the information can be disseminated to local physicians for their use in the treatment of individuals requiring reduced sodium dietary needs.



## **Terrain Analysis**

### **Surficial Geology**

Field investigations were carried out on November 20, 2020 as part of the Geotechnical Investigation. The investigation consisted of advancing 7 boreholes to maximum depths ranging from 1.6 and 4.8 m below ground surface (bgs), respectively. The test holes were distributed in a manner to provide general coverage of the proposed development taking into consideration site features. The location of the test holes on the property are delineated on the Test Hole Location Plan, Drawing No. PG6662-1 - Test Hole Location Plan, attached.

The test hole locations were recorded and the subsurface conditions, including the soil morphology and depth to the groundwater table (if encountered), were carefully observed and recorded. The soils encountered were classified texturally in the field, and later reviewed in the laboratory.

The subsurface profile consisted of fill material extending to depths of 0.3 to 0.6 m bgs and consists of various amounts of silty sand with crushed stone, gravel and organics. The fill material is underlain by a glacial till deposit consisting of brown silty sand with gravel, cobbles and boulders. Practical refusal to augering was encountered at depths ranging from 1.6 and 4.8 m bgs. Groundwater levels were measured in the boreholes at depths ranging from 0.9 to 4.0 m bgs.

Reference should be made to the borehole logs appended to this report for the details of the soil profiles encountered at each test hole location. The client should be aware that any information pertaining to soils are furnished as a matter of general information only and borehole descriptions are not be interpreted as descriptive of conditions at locations other than those described by the boreholes themselves.

A sieve was submitted from BH 7-20 - SS2 at a depth of 0.8 to 1.4 m near the proposed area of the septic bed. In accordance with Unified Soil Classification System (USCS) the soil type is defined as a silty sand. Analytical results from the sieve testing can be found attached.

### **Hydrogeological Sensitivity of the Site**

The subject site is bordered to the north by undeveloped, densely tree land, to the east by John Cavanaugh Drive, to the south by McGee Side Road and a commercial building to the west. The subject development will be serviced by a private well and septic system.

Based upon the field investigations, the overburden thickness ranges from approximately

1.6 to 4.8 m depth at the borehole locations. The overburden soils are recorded to consist of fill material overlying a glacial till.

As the proposed site is expected to have bedrock within 2 m of the ground surface in areas, the site is considered hydrogeologically sensitive. Horizontal separation distances have been doubled between the septic components and the onsite well to a minimum of 30 m. The minimum well casing depth for the constructed TW1 has been extended to greater than double the minimum length (>12 m), at 17.7 m below ground surface.

The topography of the site is relatively flat within the central portion of the site and slopes down at the eastern and southern boundaries of the subject site, where a culvert system is present. The regional groundwater flow is considered to be in a northeasterly direction, towards the Carp River.

The water quality of the bedrock aquifer targeted as the preferred water supply aquifer for the development, shows no indications of surface water or surface impacts from sewage system effluent.

Additionally, a Phase I Environmental Site Assessment was completed by Paterson in February 2021. At that time, a historical review of neighbouring sites was completed to determine nearby potentially contaminating activities (PCAs). One (1) PCA was identified within the Phase 1 Study Area, however, based on the location and type of waste products produced at the property, the operation was not considered to pose a risk to the subject site. Further, the depth of the well, (152.4 m bgs) and the well casing (17.7 m bgs) protect the well from contamination.

### **Conceptual Lot Development Plan**

It is proposed that a slab-on-grade commercial building which consists of office space and warehouse units will be constructed within the centre of the subject site. The location of the proposed structure can be found on the attached Paterson Drawing PH4146 - 2 - Site Plan. It illustrates that the proposed design layout is adequate to accommodate the associated private services and meet all the regulated separation criteria.

### **Sewage System Design**

In order to minimize the risk of long-term contamination of services, a minimum horizontal separation distance of 30 metres is recommended between the onsite drilled well and the closest distribution pipe of the onsite sewage system. This separation distance shall be increased according to the OBC requirements for beds constructed above the original ground surface. In consideration of the proposed location of the septic area, the existing wells, the proximity of the neighbouring sewage systems and wells with respect to the

proposed sewage system, the minimum regulatory separation distances can be easily attained on the subject property. In addition, a minimum of 100 mm of imported soil seal may be required to provide system isolation due to the shallow overburden (<2 m). The sewage system design is being completed by D.B. Gray Engineering.

### **Total Daily Design Sewage Flow**

A total daily design sewage flow (TDDSF) of 4,327 L/day was provided by D.B. Gray Engineering for the office space and the warehouse unit. It is understood that the above noted TDDSF is based on available design details provided by Stoked Industries Inc. at the time of report preparation. Typical commercial developments will have lower actual loading compared to the conservative design loads as per the OBC.

### **Proposed Sewage System**

Based on the approved septic permit, it is understood that a Class 4 Sewage System will be installed at the subject site. The system is expected to have a daily design load capacity of 4,327 L/day and will govern the allowable flows under the current Ontario Building Code (OBC). Also, a minimum of 100 mm of imported soil seal may be required to provide system isolation due to the shallow overburden (<2 m).

### **PREDICTIVE NITRATE IMPACT ASSESSMENT**

In order to demonstrate that private services would adequately support the proposed commercial development, a predictive nitrate impact assessment for the subject site was completed. The values shown in the Predictive Nitrate Impact Assessment attached to this report are summarized below.

<input type="checkbox"/>	Site area	0.8 Ha
<input type="checkbox"/>	Impervious area %	56 %
<input type="checkbox"/>	Daily sewage flow (Average daily flow - Peak. It is expected that actual volumes will be much lower)	Maximum 4.3 m <sup>3</sup>
<input type="checkbox"/>	Concentration of nitrate in effluent (Value based on typical effluent concentration)	40 mg/L
<input type="checkbox"/>	Concentration of nitrate in effluent with treatment (Value based on tertiary treatment system with 90% nitrate reduction)	4 mg/L
<input type="checkbox"/>	Surplus Water	402 mm/year

(The surplus water value was estimated based on Environment Canada Climate Office values with a soil type comprised of fine sand (Urban Lawn/Shallow Rooted Crops) and anthropogenic sources.

- Combined infiltration factor based on: 0.65
  - Topography infiltration factor 0.25
  - Soil texture infiltration factor 0.30
  - Cover infiltration factor 0.10

The topography infiltration factor of 0.25 is based upon a combination of flat land with average slope < 0.6 m/km and rolling land, average slope 2.8 to 3.8 m/km for the proposed development.

The soil texture infiltration factor was based upon an “open sandy loam” with a value of 0.3 which is a reasonable generalization based upon the site investigation and available geological mapping.

The “vegetative cover infiltration factor” was calculated as 0.1 based upon the minimum value for cultivated land.

The calculation for a standard septic system results in a predicted nitrate concentration of 25.8 mg/L nitrate concentration for the subject site, using a value of 40 mg/L nitrate concentration within the effluent. This value was based upon using a conservative value of up to 4,327 L/day for the daily sewage flow. It is expected that the actual usage should be much lower and could be verified after construction based upon water usage.

An existing approved tertiary treatment system capable of reducing the nitrate loading in the effluent is the Waterloo Biofilter brand. The system has an available nitrate reduction of 25 to 35% based upon the standard single pass system and 50 to 65% based upon a double pass re-circulation system. With the addition of the WaterNOx system, 90 to 95% total nitrogen removal can be achieved. This would reduce the nitrate concentration in the effluent from 40 mg/L down to as low as 4 mg/L. Provided the value of 25.8 mg/L of nitrates for the fully sized system, a 50 to 65% reduction would result in a value of 9.0 to 12.9 mg/L and a 90% reduction would provide a value of 2.6 mg/L.

Based on the predicted nitrate concentration, nitrate reduction will be required for the sewage system in order for the development to reach the required value at the property boundaries. As the building is not expected to be filled with tenants immediately, nitrate concentrations and flows can be monitored to determine the actual nitrate concentration as the building is receiving tenants with the potential to add in the WaterNOx system to ensure compliance. Additionally, there are other

approved and readily available technologies that can provide similar treatment levels. These can be explored during the design process to ensure the appropriate treatment level is provided based on the design flows.

Based on the results of the predicted nitrate impact assessment, it is our opinion that the proposed property can adequately support the proposed commercial development without having an adverse impact on the underlying bedrock aquifer.

## Conclusions

Based on the information contained within the body of this report, the following conclusions can be drawn:

1. The results of the water supply assessment have provided satisfactory evidence that the water supply aquifer underlying the subject site can support the proposed commercial development from both a quality and quantity perspective.
2. The preferred water supply aquifer intercepted by TW1 contains a water supply that is potable, and contains only elevated concentrations of hardness, TDS, and turbidity. The above noted parameters can be treated with current readily available water conditioning equipment.
3. It is anticipated that further development of the onsite well will reduce turbidity levels to below 1 NTU.
4. The sodium concentrations were measured to be above the 20 mg/L reporting limit and, as such, the Medical Officer of Health for the City of Ottawa should be informed to assist area physicians in the treatment of local residents on sodium reduced diets.
5. The onsite well and septic system components must have a minimum of 30 m horizontal separation as the site is considered hydrogeologically sensitive. Any onsite wells must be designed to have double the minimum casing length required by O.Reg 903 for a total of 12 m.
6. The predicted nitrate concentrations at the property boundaries are predicted to be near the required 10 mg/L threshold with a standard double pass Waterloo Biofilter treatment system based on a maximum volume of 4,327 L/day. As the tenants are not determined at this stage, the total volume is expected to be below the maximum calculated value. If additional denitrification is deemed necessary, a standard system such as the Waterloo Biofilter WaterNOx system would easily provide the required treatment necessary. This is a sample system to indicate treatment is possible and equivalent systems can be used to meet the required criteria.
7. The subject site is sufficient in size to accommodate a new sewage system and meet all the regulatory separation criteria.
8. A Sewage System Permit and Building Permit need to be issued prior to the commencement of construction on the proposed commercial development or the proposed septic system.



9. The results of the Hydrogeological Report and Terrain Analysis have provided satisfactory evidence that the subject site can support the proposed commercial development with respect to water quality, quantity and sewage system placement.
10. The construction of an onsite sewage system will not affect the performance or water quality associated with a drilled well, contingent upon the on site sewage system is designed in accordance with the Ontario Building Code (i.e. properly sized sewage system and conforming to all separation distances) and a minimum 100 mm soil seal provided beneath the leaching bed/mantle area to ensure system isolation.

We trust that this satisfies your present requirements. Should you have any questions regarding this submission, please do not hesitate to contact the undersigned.

Yours truly,

**PATERSON GROUP INC.**



Kevin A. Pickard, EIT



Michael S. Killam, P.Eng.

Attachments:

- MECP Water Well Record's
- Eurofins Certificate of Analysis
- AquiferTest Pro - Pumping Test Analysis Reports
- Langelier Saturation Index Calculation
- PG5602: Soil Profile and Test Data Logs
- Paterson Drawing PG6662-1 - Test Hole Location Plan
- Paterson Drawing PH4146-2 - Site Plan
- Paterson Sieve Analysis
- Predictive Nitrate Impact Assessment Calculations
- D.B. Gray Engineering Drawing C - 1 - Site Servicing Plan
- D.B. Gray Engineering Drawing C - 2 - Septic System
- Waterloo Biofilter WaterNOx System Information
- Water Well Disinfection Instructions.

## Paterson Group Inc.

**Ottawa Head Office**  
154 Colonnade Road South  
Ottawa - Ontario - K2E 7J5  
Tel: (613) 226-7381 Fax: (613) 226-6344

**Ottawa Laboratory**  
28 Concourse Gate  
Ottawa - Ontario - K2E 7T7  
Tel: (613) 226-7381 Fax: (613) 226-6344

**Northern Office and Laboratory**  
63 Gibson Street  
North Bay - Ontario - P1B 8Z4  
Tel: (705) 472-5331 Fax: (705) 472-2334

Measurements recorded in:  Metric  Imperial

Page \_\_\_ of \_\_\_

Well Owner's Information

First Name: 11840398 Last Name/Organization: Canada Inc. E-mail Address:  Well Constructed by Well Owner  
 Mailing Address (Street Number/Name): Unit #4-11 Triston Court Municipality: Nepean Ont Province: KAM Postal Code: 1B4 Telephone No. (inc. area code): 184

Well Location

Address of Well Location (Street Number/Name): #2167 MCGEE SIDE ROAD Township: Huntley Lot: 11 Concession: 2  
 County/District/Municipality: Ottawa-Carleton City/Town/Village: Carp Province: Ontario Postal Code:   
 UTM Coordinates Zone: Easting: 18421937 Northing: 5018421 Municipal Plan and Sublot Number: PLAN 5R-126 10 Other:   
 NAD: 83

Overburden and Bedrock Materials/Abandonment Sealing Record (see instructions on the back of this form)

General Colour	Most Common Material	Other Materials	General Description	Depth (mft) From To
(Hard packed)	Sand & Gravel			0' 10'
	Grey limestone			10' 130'
	Grey & Brown limestone			130' 200'
	Grey limestone			200' 500'

Annular Space

Depth Set at (mft) From To	Type of Sealant Used (Material and Type)	Volume Placed (m³/ft³)
58' 48'	Neat Cement Slurry	10.92
48' 0'	Bentonite Slurry	16.80

Method of Construction:  Air percussion  
 Well Use:  Domestic  Commercial  Not used  Municipal  Dewatering  Livestock  Test Hole  Monitoring  Irrigation  Cooling & Air Conditioning  Industrial  Other, specify

Construction Record - Casing

Inside Diameter (cm/in)	Open Hole OR Material (Galvanized, Fibreglass, Concrete, Plastic, Steel)	Wall Thickness (cm/in)	Depth (mft) From To	Status of Well
6 1/4"	Steel	.188"	+2' 58'	<input checked="" type="checkbox"/> Water Supply <input checked="" type="checkbox"/> Replacement Well <input type="checkbox"/> Test Hole <input type="checkbox"/> Recharge Well <input type="checkbox"/> Dewatering Well <input type="checkbox"/> Observation and/or Monitoring Hole <input type="checkbox"/> Alteration (Construction) <input type="checkbox"/> Abandoned, Insufficient Supply <input type="checkbox"/> Abandoned, Poor Water Quality <input type="checkbox"/> Abandoned, other, specify <input type="checkbox"/> Other, specify
6"	Open Hole		58' 500'	

Construction Record - Screen

Outside Diameter (cm/in)	Material (Plastic, Galvanized, Steel)	Slot No.	Depth (mft) From To

Water Details

Water found at Depth (mft)	Kind of Water: <input type="checkbox"/> Fresh <input checked="" type="checkbox"/> Untested <input type="checkbox"/> Other, specify	Hole Diameter Depth (mft) From To Diameter (cm/in)
297	<input type="checkbox"/> Gas <input checked="" type="checkbox"/> Untested	0' 58' 9 3/4"
487	<input type="checkbox"/> Gas <input checked="" type="checkbox"/> Untested	58' 500' 6"

Well Contractor and Well Technician Information

Business Name of Well Contractor: AIR ROCK DRILLING Co LTD Well Contractor's Licence No.: C7681  
 Business Address (Street Number/Name): 6639 Franktown Road Municipality: Richmond  
 Province: Ont Postal Code: K6A2Z6 Business E-mail Address:   
 Bus. Telephone No. (inc. area code): 6158382170 Name of Well Technician (Last Name, First Name): HANNA Jeremy  
 Well Technician's Licence No.: T3632 Signature: [Signature] Date Submitted: 00210430


Results of Well Yield Testing

After test of well yield, water was:  Clear and sand free  Other, specify

If pumping discontinued, give reason:

Pump Intake set at (mft)	Draw Down		Recovery	
	Time (min)	Water Level (mft)	Time (min)	Water Level (mft)
290'	1	18.9	1	62.7
	2	20.7	2	61.7
	3	22.3	3	60.6
	4	23.7	4	59.4
	5	25.	5	58.3
	10	31.	10	52.7
	15	36.1	15	47.6
	20	40.8	20	42.9
	25	45.	25	38.8
	30	48.9	30	35.1
	40	52.9	40	29.1
	50	62.	50	24.7
	60	65.8"	60	19.2

Recommended pump depth (mft): 450'  
 Recommended pump rate (l/min/GPM): 2  
 Well production (l/min/GPM): 2  
 Disinfected?  Yes  No

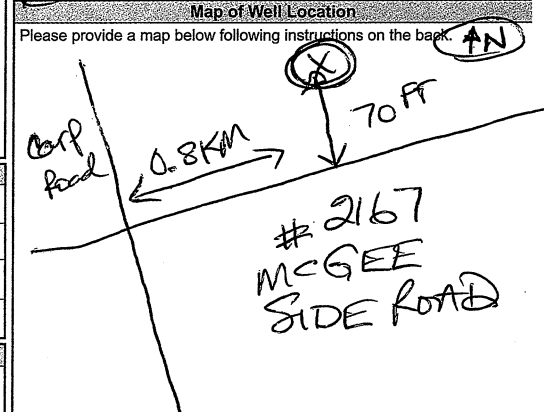

Comments: 1HP 5GPM SA @ 450 FT

Well owner's information package delivered	Date Package Delivered	Ministry Use Only
<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	002104223	Audit No: 2355007
	Date Work Completed	Received

UTM <sup>286</sup> 18Z 421860E



GROUND WATER BRANCH  
 15 JUN 1 1962 No. 3005  
 ONTARIO WATER RESOURCES COMMISSION

The Ontario Water Resources Commission Act

Elev. 5R 5018000N  
 5R 0380

# WATER WELL RECORD

Basin 25 | *Carleton* | Township, Village, Town or City *Huntley*  
 County or District  
 Con. 2 | Lot 10 | Date completed 30 April 1962  
 (day month year)  
 Address *RR 3 Corp.*

### Casing and Screen Record

Inside diameter of casing *4"*  
 Total length of casing *25'*  
 Type of screen \_\_\_\_\_  
 Length of screen \_\_\_\_\_  
 Depth to top of screen \_\_\_\_\_  
 Diameter of finished hole *4"*

### Pumping Test

Static level *16'*  
 Test-pumping rate *6* G.P.M.  
 Pumping level *18'*  
 Duration of test pumping *1 hr.*  
 Water clear or cloudy at end of test *clear*  
 Recommended pumping rate *5* G.P.M.  
 with pump setting of *35* feet below ground surface

### Well Log


### Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<i>Clay</i>	<i>0</i>	<i>2</i>		
<i>limestone</i>	<i>2</i>	<i>120</i>	<i>120</i>	<i>FRESH</i>

For what purpose(s) is the water to be used? *house*  
 Is well on upland, in valley, or on hillside? *upland*  
 Drilling or Boring Firm *Ben Edwards*  
 Address \_\_\_\_\_  
 Licence Number *000*  
 Name of Driller or Borer *Ben Edwards*  
 Address *413 Edgeworth*  
 Date *May 28/62*  
 (Signature of Licensed Drilling or Boring Contractor *Ben Edwards*)

### Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

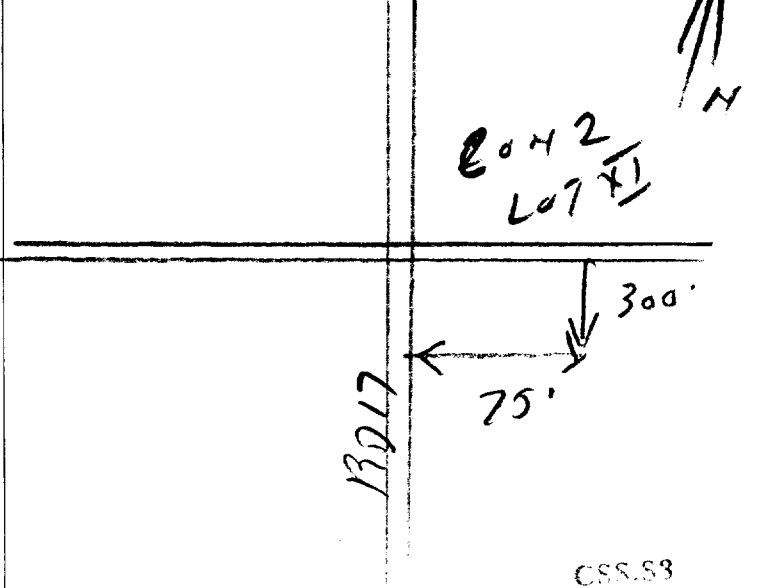



UTM 18 Z 421735 E

5 R 5018140 N

Elev. 4 R 0380

Basin 25 Carleton

Con. 2 Lot 11

Township, Village, Town or City Bentley  
Date completed 28 May 62  
(day month year)  
Address RR3 Corp



GROUND WATER BRANCH  
JUN 15 1962  
ONTARIO WATER RESOURCES COMMISSION

3069

The Ontario Water Resources Commission Act

# WATER WELL RECORD

### Casing and Screen Record

Inside diameter of casing 4 1/2"  
Total length of casing 12  
Type of screen  
Length of screen  
Depth to top of screen  
Diameter of finished hole 4"

### Pumping Test

Static level 20'  
Test-pumping rate 6 G.P.M.  
Pumping level 55'  
Duration of test pumping 1 1/2  
Water clear or cloudy at end of test clear  
Recommended pumping rate 5 G.P.M.  
with pump setting of 100 feet below ground surface

### Well Log


### Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>previously drilled</u>		<u>70</u>		
<u>limestone</u>	<u>70</u>	<u>130</u>	<u>125'</u>	<u>fresh</u>

For what purpose(s) is the water to be used? home  
Is well on upland, in valley, or on hillside? upland  
Drilling or Boring Firm Ben Edwards  
Address  
Licence Number 700  
Name of Driller or Borer Ben Edwards  
Address 413 Edgeworth  
Date May 28/62  
(Signature of Licensed Drilling or Boring Contractor)  
Ben Edwards

### Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.



RD17  
COH2  
LOT10



UTM 18Z 421750E

WATER RESOURCES COMMISSION  
15 No 3070  
JUN 13 1964  
ONTARIO WATER RESOURCES COMMISSION

5R 5018265N

The Ontario Water Resources Commission Act

Elev: 4R 0380

# WATER WELL RECORD

Basin 25  
County or District Hamilton

Township, Village, Town or City Huntley

Con. 2 Lot 11

Date completed 5 (day) June (month) 1964 (year)

Address Camp

### Casing and Screen Record

Inside diameter of casing 6 1/4"  
Total length of casing 22'  
Type of screen ✓  
Length of screen ✓  
Depth to top of screen ✓  
Diameter of finished hole 6"

### Pumping Test

Static level 20'  
Test-pumping rate 8 G.P.M.  
Pumping level 90'  
Duration of test pumping 1 hr.  
Water clear or cloudy at end of test clear  
Recommended pumping rate 5 G.P.M.  
with pump setting of 100 feet below ground surface

### Well Log

### Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>loam gray limestone</u>	<u>0</u>	<u>4</u>	<u>71</u>	<u>fresh</u>
	<u>4</u>	<u>105</u>	<u>105</u>	

For what purpose(s) is the water to be used?

New house

Is well on upland, in valley, or on hillside? upland.

Drilling or Boring Firm A. Stanton

Address Pakenham

Licence Number 1475

Name of Driller or Borer A. Stanton


Address Pakenham

Date June 5/64

Arthur Stanton  
(Signature of Licensed Drilling or Boring Contractor)

### Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

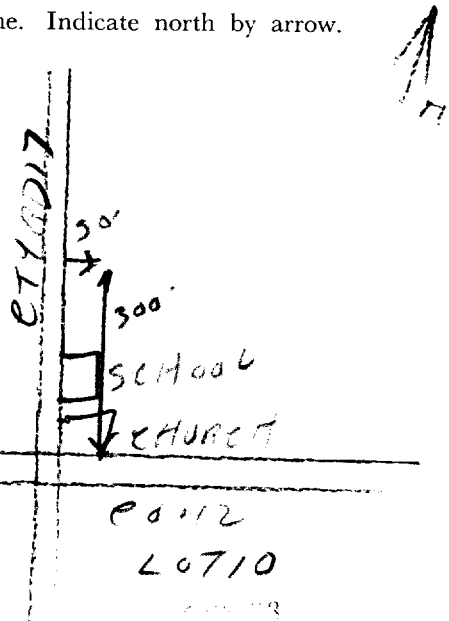



13



GROUND WATER BRANCH  
15 FEB 20 1962 No. 324  
ONTARIO WATER RESOURCES COMMISSION

UTM 18 721710 E

5R 5018050 N

Elev. 4R 0375

The Ontario Water Resources Commission Act

# WATER WELL RECORD

Basin 25 | Carlton

Township, Village, Town or City Huntley

County or District 3 Lot 11

Date completed 28 Sept 1961  
(day month year)

Address Carp Ont

### Casing and Screen Record

### Pumping Test

Inside diameter of casing 4"  
Total length of casing 7'  
Type of screen none  
Length of screen \_\_\_\_\_  
Depth to top of screen \_\_\_\_\_  
Diameter of finished hole 4"

Static level 20'  
Test-pumping rate 5 G.P.M.  
Pumping level 25'  
Duration of test pumping 1/2 hr  
Water clear or cloudy at end of test clear  
Recommended pumping rate 5 G.P.M.  
with pump setting of 90' feet below ground surface

### Well Log

### Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>Clay loam</u>	<u>0'</u>	<u>7'</u>		
<u>grey limestone</u>	<u>7'</u>	<u>101'</u>	<u>100-101'</u>	<u>fresh</u>

For what purpose(s) is the water to be used?

house & farm

Is well on upland, in valley, or on hillside? upland

Drilling or Boring Firm W M E Sparks

413 Edgeworth Ave

Address Ottawa 3

Licence Number 485

Name of Driller or Borer W M E Sparks


Address \_\_\_\_\_

Date Sept 28 1961

W M E Sparks  
(Signature of Licensed Drilling or Boring Contractor)

### Location of Well

In diagram below show distances of well from road at line. Indicate north by arrow

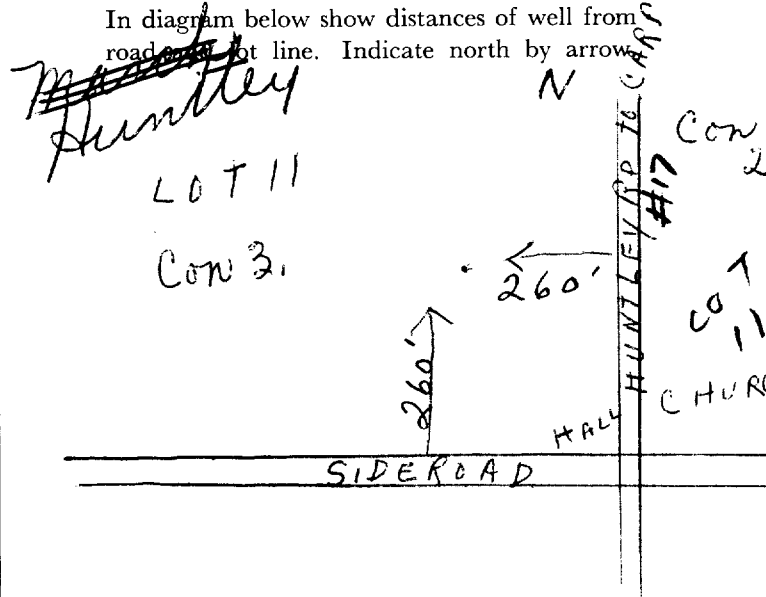

UTM CON III  
78 421600 E  
5R 5618220 N



15 No. 3126  
 SEP 1964  
 HUNTLEY  
 Sept 3 1964

Elev. 4 R 0390

# WATER WELL RECORD

Basin 25 Carleton  
 County or District

Township, Village, Town or City Huntley

Con. 3 Lot 11

Date completed 3 (day) Sept (month) 1964 (year)

Address Carp

### Casing and Screen Record

Inside diameter of casing 6 1/4"  
 Total length of casing 14'  
 Type of screen ✓  
 Length of screen ✓  
 Depth to top of screen ✓  
 Diameter of finished hole 6"

### Pumping Test

Static level 23  
 Test-pumping rate 6 G.P.M.  
 Pumping level 90'  
 Duration of test pumping 1 hr.  
 Water clear or cloudy at end of test clear  
 Recommended pumping rate 5 G.P.M.  
 with pump setting of 100 feet below ground surface

### Well Log

### Water Record

Overburden and Bedrock Record	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>shale</u>	<u>0</u>	<u>12</u>	<u>71</u>	<u>fresh</u>
<u>grey limestone</u>	<u>12</u>	<u>108</u>	<u>108</u>	

For what purpose(s) is the water to be used? house

Is well on upland, in valley, or on hillside? upland

Drilling or Boring Firm A. Stanton

Address Pakenham

Licence Number 1475

Name of Driller or Borer A. Stanton


Address Pakenham

Date Sept 3/64

A. Stanton  
 (Signature of Licensed Drilling or Boring Contractor)

### Location of Well

In diagram below show distances of well from road and lot line. Indicate north by arrow.

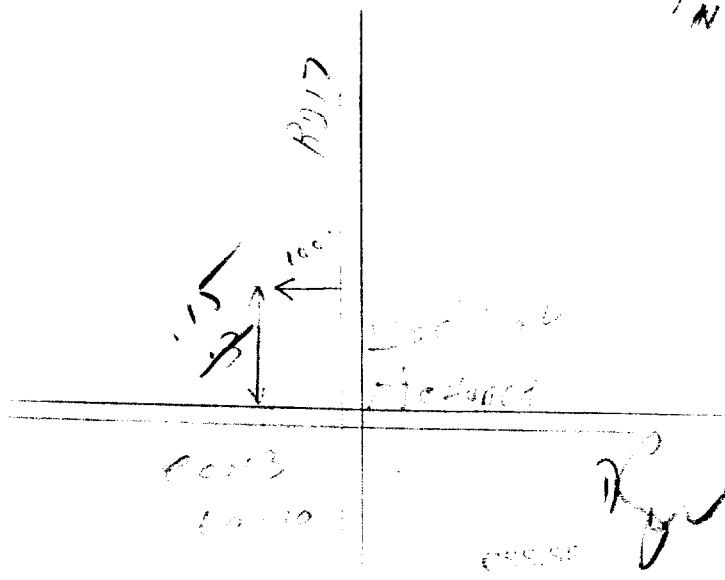

H. Easthouse



# The Ontario Water Resources Commission Act

# WATER WELL RECORD

316/5d

Water management in Ontario 1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

COUNTY OR DISTRICT: Carleton TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: Huntley CON., BLOCK, TRACT, SURVEY, ETC.: 1510511 LOT: 25-27

DATE COMPLETED: DAY 24 MO. 07 YR. 69

INSIDE DIAM. INCHES: 0.18 WALL THICKNESS INCHES: 4 ELEVATION: 0380 BASIN CODE: 25

## LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
<u>Grey shale</u>				<u>0</u>	<u>9</u>
<u>" limestone</u>				<u>9</u>	<u>121</u>

31 0009217 0121215

32

### 41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER			
10-13	<input checked="" type="checkbox"/> FRESH	<input type="checkbox"/> SALTY	<input type="checkbox"/> SULPHUR	<input type="checkbox"/> MINERAL
15-18	<input checked="" type="checkbox"/> FRESH	<input type="checkbox"/> SALTY	<input type="checkbox"/> SULPHUR	<input type="checkbox"/> MINERAL
20-23	<input type="checkbox"/> FRESH	<input type="checkbox"/> SALTY	<input type="checkbox"/> SULPHUR	<input type="checkbox"/> MINERAL
25-28	<input type="checkbox"/> FRESH	<input type="checkbox"/> SALTY	<input type="checkbox"/> SULPHUR	<input type="checkbox"/> MINERAL
30-33	<input type="checkbox"/> FRESH	<input type="checkbox"/> SALTY	<input type="checkbox"/> SULPHUR	<input type="checkbox"/> MINERAL

### 51 CASING & OPEN HOLE RECORD

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
<u>06</u>	<input checked="" type="checkbox"/> STEEL	<u>.188</u>	<u>0</u>	<u>0027</u>
<u>6 1/4</u>	<input type="checkbox"/> GALVANIZED			<u>27</u>
	<input type="checkbox"/> CONCRETE			
	<input type="checkbox"/> OPEN HOLE			
	<input type="checkbox"/> STEEL			<u>0121</u>
	<input type="checkbox"/> GALVANIZED			
	<input type="checkbox"/> CONCRETE			
	<input type="checkbox"/> OPEN HOLE			

### SCREEN

SIZE(S) OF OPENING (SLOT NO.)	DIAMETER INCHES	LENGTH FEET

MATERIAL AND TYPE: \_\_\_\_\_ DEPTH TO TOP OF SCREEN: \_\_\_\_\_

### 61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
10-13	
18-21	
26-29	

### 71 PUMPING TEST

PUMPING TEST METHOD:  PUMP  BAILER


PUMPING RATE: 0010 GPM. DURATION OF PUMPING: 01 HOURS 00 MINS.

STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING PUMPING			
19-21	22-24	15 MINUTES	30 MINUTES	45 MINUTES	60 MINUTES
<u>021</u> FEET	<u>080</u> FEET	<u>038</u> FEET	<u>050</u> FEET	<u>068</u> FEET	<u>080</u> FEET

RECOMMENDED PUMP TYPE:  SHALLOW  DEEP

RECOMMENDED PUMP SETTING: 100 FEET

RECOMMENDED PUMPING RATE: 0010 GPM.

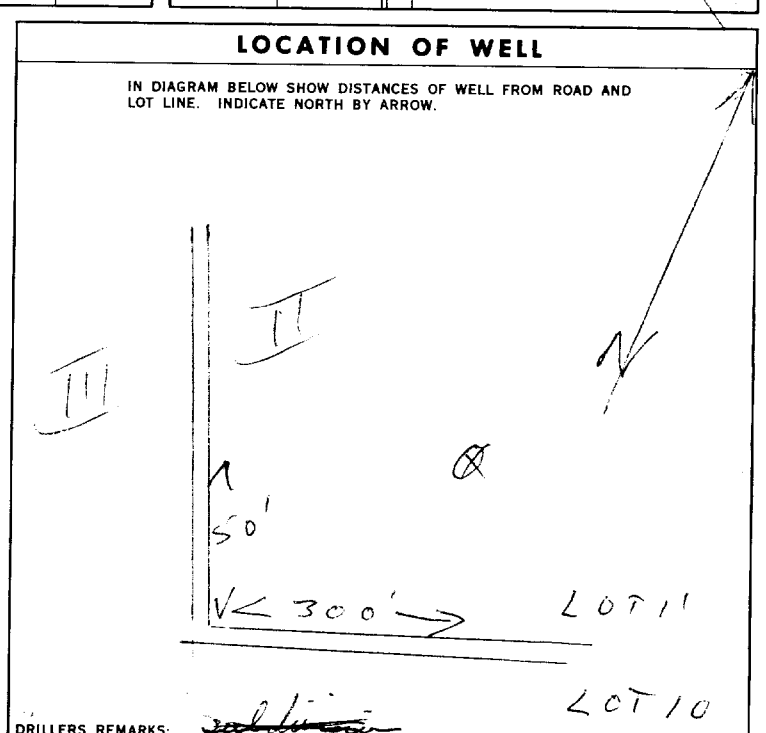

### FINAL STATUS OF WELL

WATER SUPPLY  ABANDONED, INSUFFICIENT SUPPLY

OBSERVATION WELL  ABANDONED, POOR QUALITY

TEST HOLE  UNFINISHED

RECHARGE WELL

### WATER USE

DOMESTIC  COMMERCIAL

STOCK  MUNICIPAL

IRRIGATION  PUBLIC SUPPLY

INDUSTRIAL  COOLING OR AIR CONDITIONING

OTHER  NOT USED

### METHOD OF DRILLING

CABLE TOOL  BORING

ROTARY (CONVENTIONAL)  DIAMOND

ROTARY (REVERSE)  JETTING

ROTARY (AIR)  DRIVING

AIR PERCUSSION

### CONTRACTOR

NAME OF WELL CONTRACTOR: Austin Stanton LICENCE NUMBER: 3389

ADDRESS: 19 Kenilworth

NAME OF DRILLER OR BORER: SEMP LICENCE NUMBER: \_\_\_\_\_

SIGNATURE OF CONTRACTOR: Austin Stanton SUBMISSION DATE: DAY 24 MO. 7 YR. 69

### OFFICE USE ONLY

DATA SOURCE: 1 CONTRACTOR: 4806 DATE RECEIVED: 170270

DATE OF INSPECTION: \_\_\_\_\_ INSPECTOR: \_\_\_\_\_

REMARKS: \_\_\_\_\_



# The Ontario Water Resources Commission Act WATER WELL RECORD

31F8a

Water management in Ontario

1. PRINT ONLY IN SPACES PROVIDED

2. CHECK  CORRECT BOX WHERE APPLICABLE

11 1511759 151005 CAN 02

COUNTY OR DISTRICT: Carleton TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: Huntley 3 9 CON., BLOCK, TRACT, SURVEY, ETC.: 2 2 DATE COMPLETED: 03 MO: May 72

OWNER (SURNAME FIRST): [REDACTED] ADDRESS: 18320 4 10385 5 125

## LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
grey	clay	gravel		0	11
grey	limestone			11	139

31 001120511 0139215

32

### 41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
0139	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

### 51 CASING & OPEN HOLE RECORD

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
10-11	1 <input checked="" type="checkbox"/> STEEL			
	2 <input type="checkbox"/> GALVANIZED			
	3 <input type="checkbox"/> CONCRETE			
	4 <input type="checkbox"/> OPEN HOLE			
17-18	1 <input type="checkbox"/> STEEL			
	2 <input type="checkbox"/> GALVANIZED			
	3 <input type="checkbox"/> CONCRETE			
	4 <input type="checkbox"/> OPEN HOLE			
24-25	1 <input type="checkbox"/> STEEL			
	2 <input type="checkbox"/> GALVANIZED			
	3 <input type="checkbox"/> CONCRETE			
	4 <input type="checkbox"/> OPEN HOLE			

### SCREEN

SIZE(S) OF OPENING (SLOT NO.)	DIAMETER	LENGTH

MATERIAL AND TYPE: \_\_\_\_\_ DEPTH TO TOP OF SCREEN: \_\_\_\_\_

### 61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
10-13	14-17
18-21	22-25
26-29	30-33

### 71 PUMPING TEST

PUMPING TEST METHOD: 1  PUMP 2  BAILER


PUMPING RATE: 0005 GPM DURATION OF PUMPING: 01 HOURS

STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING
022	070	15 MINUTES: 045 30 MINUTES: 060 45 MINUTES: 070 60 MINUTES: 070

RECOMMENDED PUMP TYPE:  SHALLOW  DEEP

RECOMMENDED PUMP SETTING: 070 FEET

RECOMMENDED PUMPING RATE: 0005 GPM

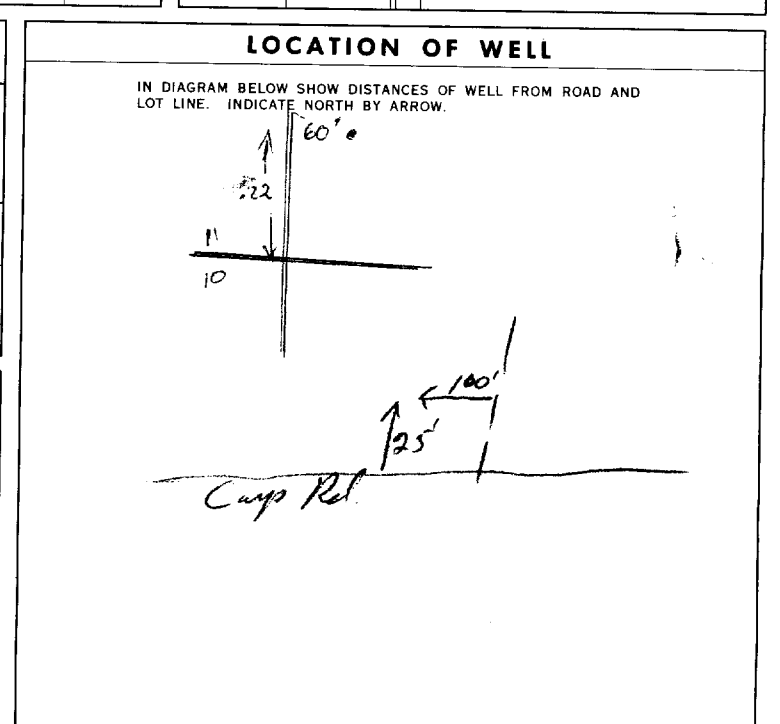

### FINAL STATUS OF WELL

1  WATER SUPPLY 5  ABANDONED, INSUFFICIENT SUPPLY  
2  OBSERVATION WELL 6  ABANDONED, POOR QUALITY  
3  TEST HOLE 7  UNFINISHED  
4  RECHARGE WELL

### WATER USE

1  DOMESTIC 5  COMMERCIAL  
2  STOCK 6  MUNICIPAL  
3  IRRIGATION 7  PUBLIC SUPPLY  
4  INDUSTRIAL 8  COOLING OR AIR CONDITIONING  
9  NOT USED

### METHOD OF DRILLING

1  CABLE TOOL 6  BORING  
2  ROTARY (CONVENTIONAL) 7  DIAMOND  
3  ROTARY (REVERSE) 8  JETTING  
4  ROTARY (AIR) 9  DRIVING  
5  AIR PERCUSSION


### WELL CONTRACTOR

NAME OF WELL CONTRACTOR: Henry Mavis Well Drilling LICENCE NUMBER: 3644  
ADDRESS: 366 326, Repinone Ont.  
NAME OF MILLER OR OPERATOR: Brent Robitton LICENCE NUMBER: \_\_\_\_\_  
SIGNATURE OF CONTRACTOR: Henry Mavis SUBMISSION DATE: 3 May 72

### OFFICE USE ONLY

DATA SOURCE: 1 CONTRACTOR: 3644 DATE RECEIVED: 180572  
DATE OF INSPECTION: \_\_\_\_\_ INSPECTOR: \_\_\_\_\_  
REMARKS: \_\_\_\_\_  
P K  
WI

MRC COPY



# The Ontario Water Resources Commission Act WATER WELL RECORD

319/5d

Water management in Ontario 1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

11 | 1511921 | 15005 | CON. | 02

COUNTY OR DISTRICT: Coquitlam TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: Huntsley 3 9 CON., BLOCK, TRACT, SURVEY, ETC.: 2 LOT: 011

OWNER (SURNAME FIRST): [REDACTED] ADDRESS: Bram Maric Rd. RR #2 DATE COMPLETED: 06 05 72

ING: 018326 RC: 4 ELEVATION: 394 RC: 4 BASIN CODE: 26 JAN 12, 1975 44

### LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
<u>brown</u>	<u>sand</u>		<u>fill</u>	<u>0</u>	<u>3</u>
<u>brown</u>	<u>"</u>	<u>stones</u>	<u>packed</u>	<u>3</u>	<u>9</u>
<u>grey</u>	<u>limestone</u>			<u>9</u>	<u>141</u>

31 | 000362801 | 000962812 | 0141215

32 | 10 14 15 21 32 43 54 65 75 80

**41 WATER RECORD**

WATER FOUND AT - FEET	KIND OF WATER
<u>0090</u>	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
<u>0138</u>	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

**51 CASING & OPEN HOLE RECORD**

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
<u>1 1/4</u>	<input checked="" type="checkbox"/> STEEL	<u>188</u>	<u>0</u>	<u>0022</u>
<u>1 1/8</u>	<input type="checkbox"/> GALVANIZED <input type="checkbox"/> CONCRETE <input checked="" type="checkbox"/> OPEN HOLE		<u>22</u>	<u>141</u>
<u>06</u>	<input checked="" type="checkbox"/> STEEL		<u>22</u>	<u>0141</u>
	<input type="checkbox"/> GALVANIZED <input type="checkbox"/> CONCRETE <input type="checkbox"/> OPEN HOLE			

**61 PLUGGING & SEALING RECORD**

DEPTH SET AT - FEET	MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
FROM: <u>10-13</u> TO: <u>14-17</u>	
FROM: <u>18-21</u> TO: <u>22-25</u>	
FROM: <u>26-29</u> TO: <u>30-33</u>	

**71 PUMPING TEST**

1  PUMP 2  BAILER


PUMPING RATE: 0007 GPM. DURATION OF PUMPING: 01 HOURS 00 MINS.

STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING			
19-21 FEET	22-24 FEET	15 MINUTES 26-28 FEET	30 MINUTES 29-31 FEET	45 MINUTES 32-34 FEET	60 MINUTES 35-37 FEET
<u>020</u>	<u>075</u>	<u>075</u>	<u>075</u>	<u>075</u>	<u>075</u>

IF FLOWING, GIVE RATE: \_\_\_\_\_ PUMP INTAKE SET AT: \_\_\_\_\_ WATER AT END OF TEST: \_\_\_\_\_

RECOMMENDED PUMP TYPE:  SHALLOW  DEEP PUMP SETTING: 090 FEET RECOMMENDED PUMPING RATE: 0005 GPM.

50-53 000.1 GPM/FT. SPECIFIC CAPACITY

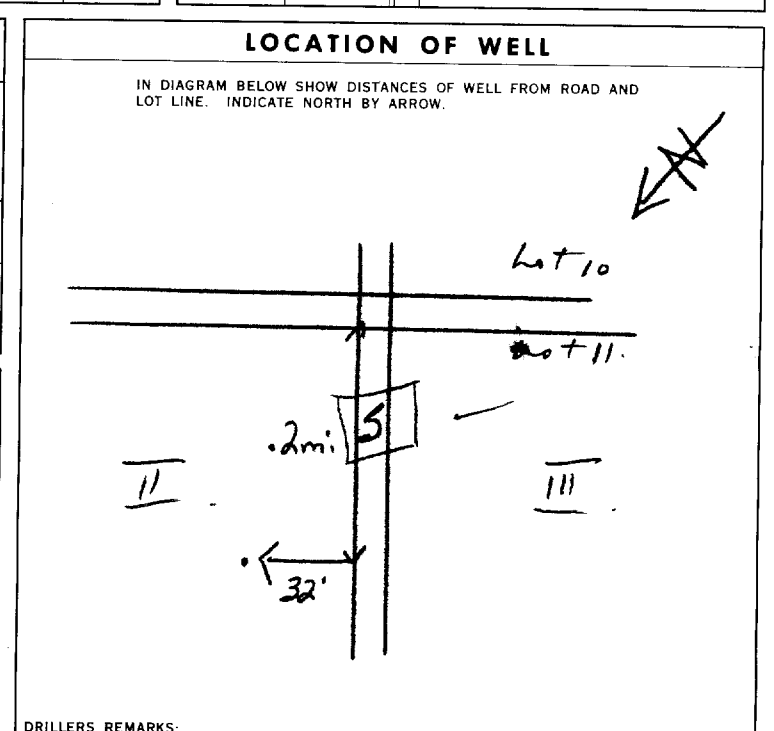

**FINAL STATUS OF WELL**

1  WATER SUPPLY 5  ABANDONED, INSUFFICIENT SUPPLY  
2  OBSERVATION WELL 6  ABANDONED, POOR QUALITY  
3  TEST HOLE 7  UNFINISHED  
4  RECHARGE WELL

**WATER USE**

1  DOMESTIC 5  COMMERCIAL  
2  STOCK 6  MUNICIPAL  
3  IRRIGATION 7  PUBLIC SUPPLY  
4  INDUSTRIAL 8  COOLING OR AIR CONDITIONING  
 OTHER 9  NOT USED

**METHOD OF DRILLING**

1  CABLE TOOL 6  BORING  
2  ROTARY (CONVENTIONAL) 7  DIAMOND  
3  ROTARY (REVERSE) 8  JETTING  
4  ROTARY (AIR) 9  DRIVING  
5  AIR PERCUSSION

**CONTRACTOR**

NAME OF WELL CONTRACTOR: Capital Water Supply LICENCE NUMBER: 1558  
ADDRESS: Box 490 Stittsville Ont.

NAME OF DRILLER OR BORER: Walter Hannagh LICENCE NUMBER: \_\_\_\_\_  
SIGNATURE OF CONTRACTOR: Walter Hannagh SUBMISSION DATE: DAY 5 MO 5 YR 72

**OFFICE USE ONLY**

DATA SOURCE: 1 58 CONTRACTOR: 1558 59-62 DATE RECEIVED: 041072 63-68 80  
DATE OF INSPECTION: \_\_\_\_\_ INSPECTOR: \_\_\_\_\_  
REMARKS: \_\_\_\_\_  
P. R. WI







1512382

316/59 P

3502376

The Ontario Water Resources Commission Act

# WATER WELL RECORD

1 8 7 4 2 1 6 4 0  
 4 R 5 0 1 8 3 1 0  
 5 R 0 3 9 5  
 Basin 2 5

County or District Toronto Township, Village, Town or City Huntley  
 Con. 2 Lot 11 Date completed 18 Sept. 1968  
 (day) (month) (year)  
 Address Car.

### Casing and Screen Record

Inside diameter of casing 6 1/4"  
 Total length of casing 22'  
 Type of screen L  
 Length of screen —  
 Depth to top of screen —  
 Diameter of finished hole 6"

### Pumping Test

Static level 10  
 Test-pumping rate 6 G.P.M.  
 Pumping level 90  
 Duration of test pumping 1 hr.  
 Water clear or cloudy at end of test clear  
 Recommended pumping rate \_\_\_\_\_ G.P.M.  
 with pump setting of 100 feet below ground surface


### Well Log

### Water Record

Overburden and Bedrock Record	Well Log		Water Record	
	From ft.	To ft.	Depth(s) at which water(s) found	Kind of water (fresh, salty, sulphur)
<u>Shale</u>	<u>0</u>	<u>10</u>	<u>63</u>	<u>fresh</u>
<u>grey limestone</u>	<u>10</u>	<u>129</u>	<u>129</u>	

For what purpose(s) is the water to be used? house  
 Is well on upland, in valley, or on hillside? upland  
 Drilling or Boring Firm A. Stanton  
 Address Pakenham  
 Licence Number 3060  
 Name of Driller or Borer SAME  
 Address \_\_\_\_\_  
 Date Sept 18/68  
Austin Stanton  
 (Signature of Licensed Drilling or Boring Contractor)

### Location of Well

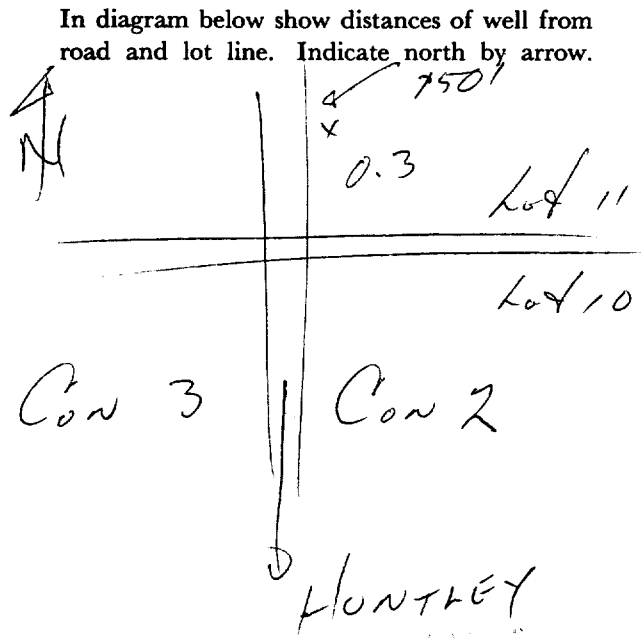



Ontario

# WATER WELL RECORD

31/5d

1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

11

1514247

MUNICIPALITY 15005

CON. C/N

02

COUNTY OR DISTRICT <b>Carleton</b>	TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE <b>Huntley</b>	CON., BLOCK, TRACT, SURVEY, ETC. <b>2</b>	LOT <b>011</b>
DATE COMPLETED DAY <b>08</b> MO. <b>07</b> YR. <b>74</b>			

1514247 10 421912 5018526 4 364 4 26 JUL 08, 1977 301

### LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
brown	clay	sand	packed	0	6
grey	hardpan	boulders & gravel	packed	6	30
grey	limestone		broken	30	39
grey	limestone		medium	33	62

31 0.0066/0.052879 0.0302/1.1314 0.0332/1.571 0.0622/1.5

32

41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
0044	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
0060	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

51 CASING & OPEN HOLE RECORD

INSIDE DIA. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
6.75	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE	1.88	0	0033
5.75	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE		33	62
06	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE			0062

SCREEN


SIZE(S) OF OPENING (SLOT NO.)	DIAMETER	LENGTH
	INCHES	FEET
MATERIAL AND TYPE		DEPTH TO TOP OF SCREEN
		FEET

61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
10-13	14-17
18-21	22-25
28-29	30-33

71 PUMPING TEST

1 <input checked="" type="checkbox"/> PUMP 2 <input type="checkbox"/> BAILER	10 PUMPING RATE <b>0030</b> GPM.	11-14 DURATION OF PUMPING 15-16 HOURS <b>00</b> MINS
25 WATER LEVELS DURING	1 <input checked="" type="checkbox"/> PUMPING 2 <input type="checkbox"/> RECOVERY	
19-21 025 FEET	22-24 040 FEET	28-28 040 FEET
29-31 040 FEET	32-34 040 FEET	35-37 040 FEET
38-41 PUMP INTAKE SET AT <b>050</b> FEET	42 WATER AT END OF TEST	1 <input checked="" type="checkbox"/> CLEAR 2 <input type="checkbox"/> CLOUDY
43-45 RECOMMENDED PUMP SETTING <b>050</b> FEET	46-49 RECOMMENDED PUMPING RATE <b>0005</b> GPM.	

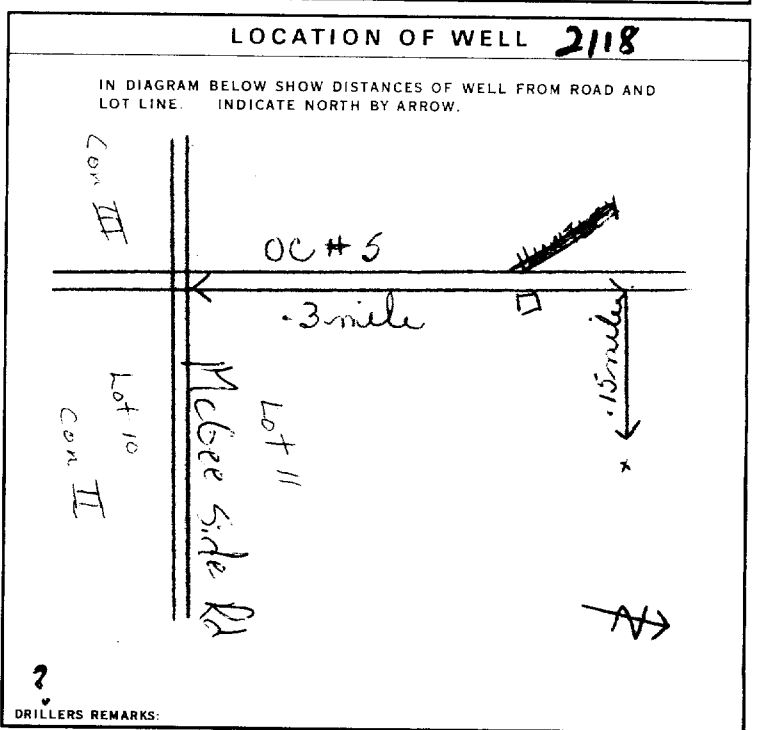

84 FINAL STATUS OF WELL

1  WATER SUPPLY 5  ABANDONED, INSUFFICIENT SUPPLY  
2  OBSERVATION WELL 6  ABANDONED, POOR QUALITY  
3  TEST HOLE 7  UNFINISHED  
4  RECHARGE WELL

85-88 WATER USE

1  DOMESTIC 5  COMMERCIAL  
2  STOCK 6  MUNICIPAL  
3  IRRIGATION 7  PUBLIC SUPPLY  
4  INDUSTRIAL 8  COOLING OR AIR CONDITIONING  
9  OTHER 9  NOT USED

87 METHOD OF DRILLING

1  CABLE TOOL 6  BORING  
2  ROTARY (CONVENTIONAL) 7  DIAMOND  
3  ROTARY (REVERSE) 8  JETTING  
4  ROTARY (AIR) 9  DRIVING  
5  AIR PERCUSSION

CONTRACTOR

NAME OF WELL CONTRACTOR: **Capital Water Supply Ltd.** LICENCE NUMBER: **1558**

ADDRESS: **Box 490 Stittsville, Ontario**

NAME OF DRILLER OR BORER: **W. Kavanagh** LICENCE NUMBER:

SIGNATURE OF CONTRACTOR: *Walter Kavanagh* SUBMISSION DATE: DAY **9** MO. **7** YR. **74**

OFFICE USE ONLY

DATA SOURCE: **1** CONTRACTOR: **1558** DATE: **22 08 74**

DATE OF INSPECTION: **May 20, 1976** INSPECTOR: **W. Kentney**

REMARKS: *checked out based at line of insp*

P *OK*  
WI

# WATER WELL RECORD

Ontario

1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

11

1516282

MUNICIPALITY 15005

CON. CEN

02

COUNTY OR DISTRICT: **CARLETON** TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: **HUNTLEY** CON. BLOCK, TRACT, SURVEY, ETC.: **CON. #1 II** LOT: **21/2**

DATE COMPLETED: DAY **16** MO **08** YR **77**  
Carp Rd - R.R. #1, KANATA

GRIDING: **018099** RC: **0380** RC: **26**

## LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
BROWN	SAND	Small Boulders	Coarse	0	37
				0	50
White	Sandstone	—	Coarse	0	21
				21	50

31 002161013 005011863  
32

### 41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
10-13	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

### 51 CASING & OPEN HOLE RECORD

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET
10-11	1 <input checked="" type="checkbox"/> STEEL		10-13
11-16	2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE	1.88	13-16
17-18	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE		20-23
24-25	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE		27-30

### SCREEN

SIZE(S) OF OPENING (SLOT NO.)	DIAMETER	LENGTH
	34-38 INCHES	39-40 FEET
MATERIAL AND TYPE		DEPTH TO TOP OF SCREEN 41-44 FEET

### 61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE	CEMENT GROUT LEAD PACKER, ETC.
10-13		
18-21		
26-29		

### 71 PUMPING TEST

PUMPING TEST METHOD: 1  PUMP 2  BAILER

PUMPING RATE: 0020 GPM


DURATION OF PUMPING: 02 HOURS 00 MINS

STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING
007	030	15 MINUTES: 030, 30 MINUTES: 030, 45 MINUTES: 030, 60 MINUTES: 030

RECOMMENDED PUMP TYPE:  SHALLOW  DEEP

RECOMMENDED PUMP SETTING: 040

RECOMMENDED PUMPING RATE: 0010 GPM

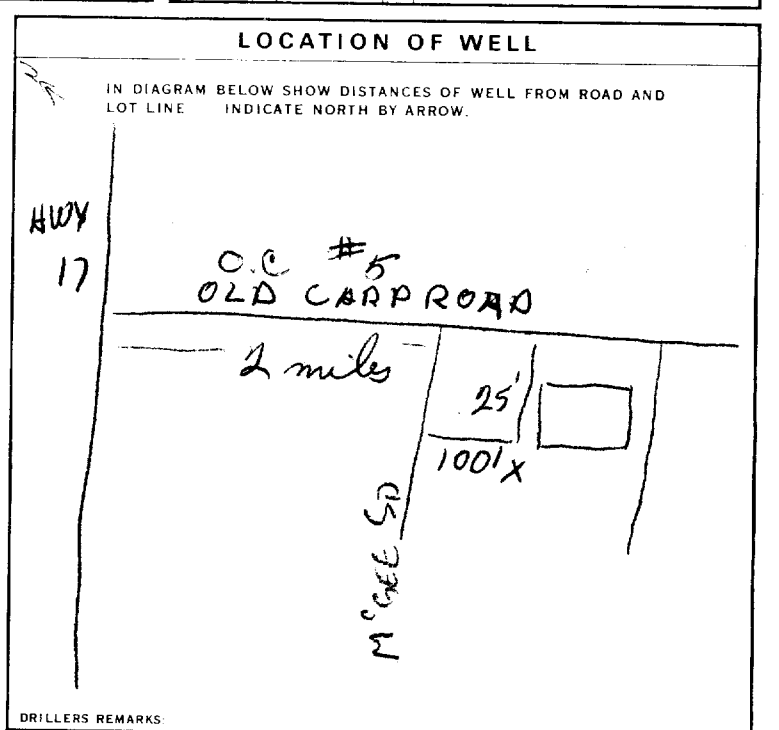

### FINAL STATUS OF WELL

1  WATER SUPPLY 5  ABANDONED, INSUFFICIENT SUPPLY  
2  OBSERVATION WELL 6  ABANDONED, POOR QUALITY  
3  TEST HOLE 7  UNFINISHED  
4  RECHARGE WELL

### WATER USE

1  DOMESTIC 5  COMMERCIAL  
2  STOCK 6  MUNICIPAL  
3  IRRIGATION 7  PUBLIC SUPPLY  
4  INDUSTRIAL 8  COOLING OR AIR CONDITIONING  
9  NOT USED

### METHOD OF DRILLING

1  CABLE TOOL 6  BORING  
2  ROTARY (CONVENTIONAL) 7  DIAMOND  
3  ROTARY (REVERSE) 8  JETTING  
4  ROTARY (AIR) 9  DRIVING  
5  AIR PERCUSSION

### CONTRACTOR

NAME OF WELL CONTRACTOR: **MARLE LEAF DRILLING CO.** LICENCE NUMBER: **1365**  
ADDRESS: **877 RIDLEY BLVD.**  
NAME OF DRILLER OR BORER: **Simon Skuse**  
SIGNATURE OF CONTRACTOR: **Robert Bissan** SUBMISSION DATE: DAY **27** NO. **10** YR. **77**

### OFFICE USE ONLY

DATA SOURCE: **1** CONTRACTOR: **1365** DATE RECEIVED: **181177**  
DATE OF INSPECTION: **14/25/73** INSPECTOR: **TH DN**  
REMARKS: **1**



# WATER WELL RECORD

1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

(11) 1516579 MUNICIPALITY 15005 CON. CQN 02

COUNTY OR DISTRICT: Carleton Place TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: Huntley CON. BLOCK, TRACT, SURVEY, ETC.: Con 2 LOT: 2507

OWNER (SURNAME FIRST): ANGEL CHRIST CHURCH DATE COMPLETED: 27 MO 06 YR 78

U.S. ZONE: 18 NORTHING: 421700 EASTING: 5018300 ELEVATION: 50385 BASIN CODE: 26

### LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
grey	hardpan	gravel		0	10
grey	shale	gravel		10	42
grey	limestone			42	64

31 001021411 004221711 0064215

32

**41 WATER RECORD**

WATER FOUND AT - FEET	KIND OF WATER
10-13	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

**51 CASING & OPEN HOLE RECORD**

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET
10-11	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE	188	0-188
17-18	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE		
24-25	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE		

**SCREEN**

SIZE(S) OF OPENING (SLOT NO.)	DIAMETER INCHES	LENGTH FEET
		41-44

MATERIAL AND TYPE: \_\_\_\_\_ DEPTH TO TOP OF SCREEN: \_\_\_\_\_

**61 PLUGGING & SEALING RECORD**

DEPTH SET AT - FEET	MATERIAL AND TYPE (CEMENT GROUT, LEAD PACKER, ETC.)
10-13	
18-21	
26-29	

**71 PUMPING TEST**

PUMPING TEST METHOD: 1  PUMP 2  BAILER


PUMPING RATE: 0006 GPM DURATION OF PUMPING: 01 HOURS 00 MINS

STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING PUMPING
020	050	15 MINUTES: 050 30 MINUTES: 050 45 MINUTES: 050 60 MINUTES: 050

RECOMMENDED PUMP TYPE:  SHALLOW  DEEP

RECOMMENDED PUMP SETTING: 050 FEET

RECOMMENDED PUMP RATE: 0005 GPM

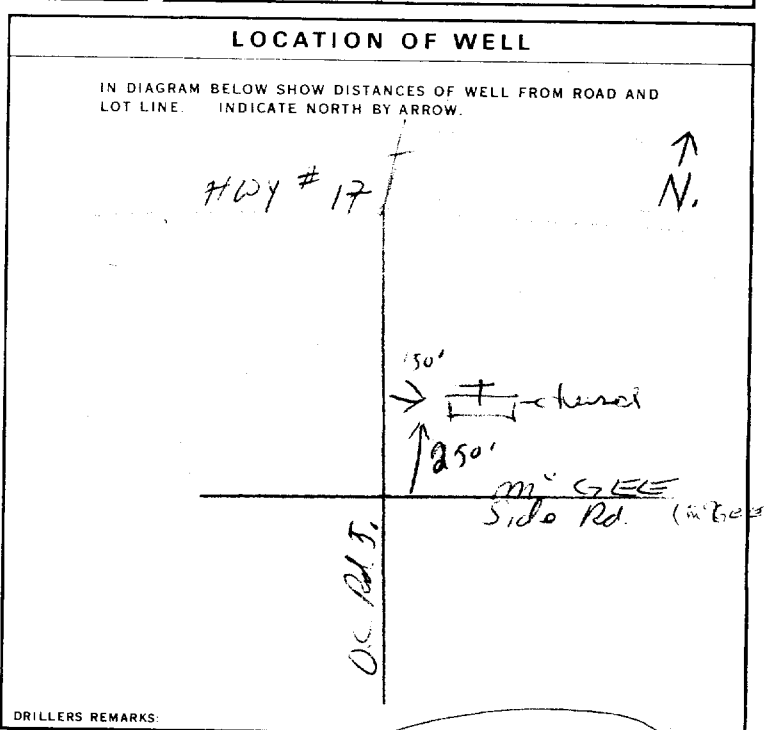

**FINAL STATUS OF WELL**

1  WATER SUPPLY 5  ABANDONED, INSUFFICIENT SUPPLY  
2  OBSERVATION WELL 6  ABANDONED, POOR QUALITY  
3  TEST HOLE 7  UNFINISHED  
4  RECHARGE WELL

**WATER USE**

1  DOMESTIC 5  COMMERCIAL  
2  STOCK 6  MUNICIPAL  
3  IRRIGATION 7  PUBLIC SUPPLY  
4  INDUSTRIAL 8  COOLING OR AIR CONDITIONING  
9  OTHER 9  NOT USED

**METHOD OF DRILLING**

1  CABLE TOOL 6  BORING  
2  ROTARY (CONVENTIONAL) 7  DIAMOND  
3  ROTARY (REVERSE) 8  JETTING  
4  ROTARY (AIR) 9  DRIVING  
5  AIR PERCUSSION

**CONTRACTOR**

NAME OF WELL CONTRACTOR: Henry Mains Well Drilling LICENCE NUMBER: 3644

ADDRESS: Box 32 60 Richmond Ont

NAME OF DRILLER OR BORER: Henry Mains LICENCE NUMBER: \_\_\_\_\_

SIGNATURE OF CONTRACTOR: \_\_\_\_\_ SUBMISSION DATE: \_\_\_\_\_

**OFFICE USE ONLY**

DATA SOURCE: 1 CONTRACTOR: 3644 DATE RECEIVED: 27 08 78

DATE OF INSPECTION: 17/05/79 INSPECTOR: [Signature]

REMARKS: \_\_\_\_\_

# WATER WELL RECORD

31589

1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

11

1517377

MUNICIPALITY 15.005

CON. CQN

02

COUNTY OR DISTRICT: Carleton  
TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE: West Carleton (Hardly)  
CON. BLOCK, PLOT, SURVEY, ETC: Con 2.  
LOT: 010  
DATE COMPLETED: DAY 30 MO 10 YR 80  
ELEVATION: 18.199  
RC: 4  
ELEVATION: 0280  
RC: 4  
BASIN CODE: 26

### LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
grey	clay	stones		0	12
grey	shaly limestone			12	84

32

#### 41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
0080	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
15-18	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

#### 51 CASING & OPEN HOLE RECORD

INSIDE DIAM INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET
06.10-11	STEEL	1/8"	0-120
17-18	STEEL		20-23
24-25	STEEL		27-30

#### SCREEN

SIZE OF OPENING (SLOT NO.)	DIAMETER	LENGTH

#### 61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE	CEMENT GROUT LEAD PACKER ETC.
10-13		
18-21		
26-29		

#### 71 PUMPING TEST

PUMPING TEST METHOD: 1  PUMP 2  BAILER

PUMPING RATE: 0004 GPM


DURATION OF PUMPING: 01 15-16 00 17-18 HOURS

STATIC LEVEL	WATER LEVEL END OF PUMPING	WATER LEVELS DURING
025	080	15 MINUTES: 080 30 MINUTES: 080 45 MINUTES: 080 60 MINUTES: 080

RECOMMENDED PUMP TYPE:  SHALLOW  DEEP

RECOMMENDED PUMP SETTING: 080

RECOMMENDED PUMPING RATE: 0004 GPM

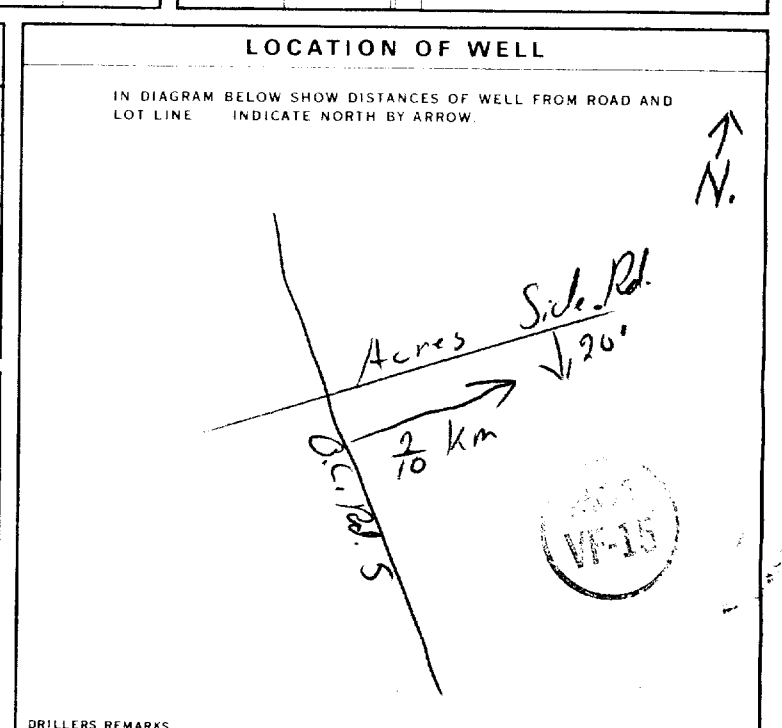

#### FINAL STATUS OF WELL

1  WATER SUPPLY  
2  OBSERVATION WELL  
3  TEST HOLE  
4  RECHARGE WELL  
5  ABANDONED - INSUFFICIENT SUPPLY  
6  ABANDONED - POOR QUALITY  
7  UNFINISHED

#### WATER USE

1  DOMESTIC  
2  STOCK  
3  IRRIGATION  
4  INDUSTRIAL  
5  OTHER  
6  COMMERCIAL  
7  MUNICIPAL  
8  PUBLIC SUPPLY  
9  COOLING OR AIR CONDITIONING  
10  NOT USED

#### METHOD OF DRILLING

1  CABLE TOOL  
2  ROTARY (CONVENTIONAL)  
3  ROTARY (REVERSE)  
4  ROTARY (AIR)  
5  AIR PERCUSSION  
6  BORING  
7  DIAMOND  
8  JETTING  
9  DRIVING

#### CONTRACTOR

NAME OF WELL CONTRACTOR: Henry Mains Well Drilling  
ADDRESS: Box 326, Richmond Ont.  
NAME OF DRILLER OR BORER: Henry Mains  
SIGNATURE OF CONTRACTOR: [Signature]  
SUBMISSION DATE: DAY 1 NO 11 YR 80

#### OFFICE USE ONLY

DATA SOURCE: 1  
CONTRACTOR: 3644  
DATE RECEIVED: 011280  
DATE OF INSPECTION: [Blank]  
INSPECTOR: [Signature]  
REMARKS: [Blank]





Ontario

# WATER WELL RECORD

31651

1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

11 1517781

MUNICIPALITY 15005 CON. 02

COUNTY OR DISTRICT Ottawa-Carleton	TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE West Carleton - Huntley	CON., BLOCK, TRACT, SURVEY, ETC. Conc. 2 II 011
OWNER (SURNAME FIRST) ██████████ Pritec Ltd.	ADDRESS Carp Rd., Carp, Ontario	DATE COMPLETED DAY 30 MO 09 YR 81

21 ZONE 18 EASTING 421899 NORTHING 5018299 RC 4 ELEVATION 0370 BASIN CODE 26

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
Brown	Sand	Boulders		0	15
Gray	Limestone			15	250
Black	Limestone			250	298

31 001562813 0250215 0298815

32


WATER FOUND AT - FEET	KIND OF WATER
0030'	1 <input checked="" type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL slight
0290'	1 <input type="checkbox"/> FRESH 3 <input checked="" type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
20-23	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
25-28	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL
30-33	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input type="checkbox"/> MINERAL

INSIDE DIAM. INCHES	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET
06	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE	188	0 0022
06	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE		22 0298
24-25	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE		27-30

SIZE (S) OF OPENING (SLOT NO.)	DIAMETER	LENGTH
	INCHES	FEET
		41-44
		80

DEPTH SET AT - FEET	MATERIAL AND TYPE	CEMENT GROUT LEAD PACKER ETC.
10-13	14-17	
18-21	22-25	
26-29	30-33	80

PUMPING TEST METHOD	PUMPING RATE	DURATION OF PUMPING
1 <input checked="" type="checkbox"/> PUMP 2 <input type="checkbox"/> BAILER	0005 GPM	01 15-16 HOURS 00 17-18 MINS
STATIC LEVEL	WATER LEVELS DURING	1 <input checked="" type="checkbox"/> PUMPING 2 <input type="checkbox"/> RECOVERY
020 FEET	15 MINUTES 22-24 125 FEET 26-28 125 FEET 30 MINUTES 29-31 125 FEET 45 MINUTES 32-34 125 FEET 60 MINUTES 35-37 125 FEET	
IF FLOWING, GIVE RATE	PUMP INTAKE SET AT	WATER AT END OF TEST
	225 FEET	
RECOMMENDED PUMP TYPE	RECOMMENDED PUMP SETTING	RECOMMENDED PUMPING RATE
<input type="checkbox"/> SHALLOW <input checked="" type="checkbox"/> DEEP	225 FEET	0005 GPM

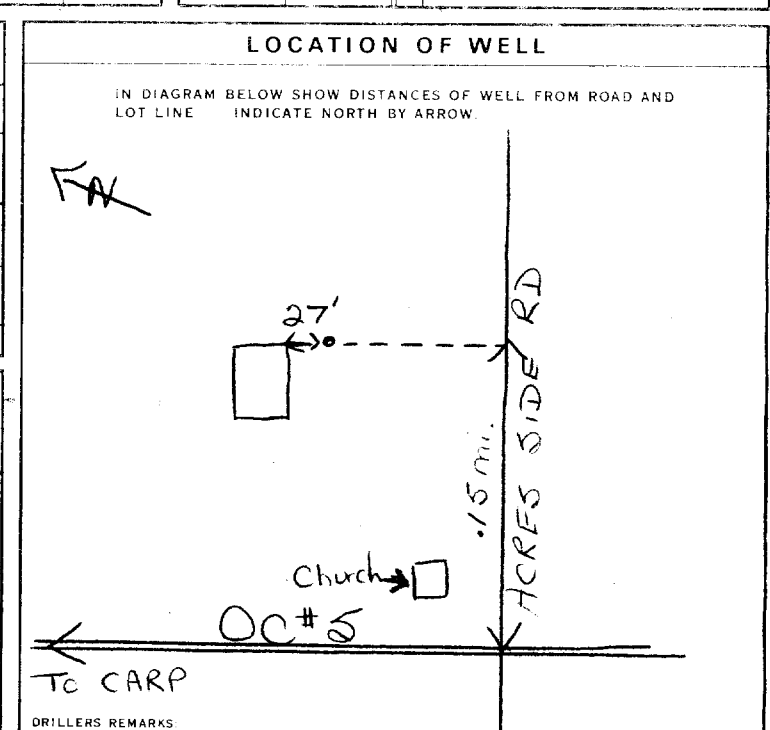

FINAL STATUS OF WELL 1	1 <input checked="" type="checkbox"/> WATER SUPPLY 2 <input type="checkbox"/> OBSERVATION WELL 3 <input type="checkbox"/> TEST HOLE 4 <input type="checkbox"/> RECHARGE WELL	5 <input type="checkbox"/> ABANDONED, INSUFFICIENT SUPPLY 6 <input type="checkbox"/> ABANDONED, POOR QUALITY 7 <input type="checkbox"/> UNFINISHED
WATER USE 01	1 <input checked="" type="checkbox"/> DOMESTIC 2 <input type="checkbox"/> STOCK 3 <input type="checkbox"/> IRRIGATION 4 <input type="checkbox"/> INDUSTRIAL 5 <input type="checkbox"/> OTHER	5 <input type="checkbox"/> COMMERCIAL 6 <input type="checkbox"/> MUNICIPAL 7 <input type="checkbox"/> PUBLIC SUPPLY 8 <input type="checkbox"/> COOLING OR AIR CONDITIONING 9 <input type="checkbox"/> NOT USED
METHOD OF DRILLING 5	1 <input type="checkbox"/> CABLE TOOL 2 <input type="checkbox"/> ROTARY (CONVENTIONAL) 3 <input type="checkbox"/> ROTARY (REVERSE) 4 <input type="checkbox"/> ROTARY (AIR) 5 <input checked="" type="checkbox"/> AIR PERCUSSION	6 <input type="checkbox"/> BORING 7 <input type="checkbox"/> DIAMOND 8 <input type="checkbox"/> JETTING 9 <input type="checkbox"/> DRIVING

NAME OF WELL CONTRACTOR Capital Water Supply Ltd.	LICENCE NUMBER 1558
ADDRESS Box 490, Stittsville, Ont. KOA 3G0	
NAME OF DRILLER OR BORER S. Miller	LICENCE NUMBER
SIGNATURE OF CONTRACTOR <i>S. Miller</i>	SUBMISSION DATE DAY 02 MO 10 YR 81

DATA SOURCE 1	CONTRACTOR 1558	DATE RECEIVED 03 03 82
DATE OF INSPECTION	INSPECTOR	
REMARKS:		





Ministry  
of the  
Environment  
Ontario

The Ontario Water Resources Act

3165d

# WATER WELL RECORD

1. PRINT ONLY IN SPACES PROVIDED  
2. CHECK  CORRECT BOX WHERE APPLICABLE

11

1519074

MUNICIPALITY 15005

CONTRACTOR ESN

02

COUNTY OR DISTRICT <b>Ottawa-Carleton</b>	TOWNSHIP, BOROUGH, CITY, TOWN, VILLAGE <b>West Carleton-Huntley</b>	CON. BLOCK, TRACT, SURVEY ETC. <b>Conc. 2 II</b>	LOT <b>011</b>
DATE COMPLETED <b>13090; Kanata, Ontario, K2K 1X3</b>			DATE COMPLETED 48-53 <b>DAY 05 MO 06 YR 84</b>
ELEVATION <b>18299</b>		ELEVATION <b>0365</b>	BASIN CODE <b>4 26</b>

## LOG OF OVERBURDEN AND BEDROCK MATERIALS (SEE INSTRUCTIONS)

GENERAL COLOUR	MOST COMMON MATERIAL	OTHER MATERIALS	GENERAL DESCRIPTION	DEPTH - FEET	
				FROM	TO
Brown	Sand		Packed	0	4
Gray	Sand	Gravel	Packed	4	8
Gray	Limestone		Soft	8	12
Gray	Limestone		Medium	12	260

MCE  
VF-18

31	000462879	00082281179	001221585	026021578
32				

### 41 WATER RECORD

WATER FOUND AT - FEET	KIND OF WATER
0155'	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input checked="" type="checkbox"/> MINERAL
0250'	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input checked="" type="checkbox"/> MINERAL
	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input checked="" type="checkbox"/> MINERAL
	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input checked="" type="checkbox"/> MINERAL
	1 <input type="checkbox"/> FRESH 3 <input type="checkbox"/> SULPHUR 2 <input type="checkbox"/> SALTY 4 <input checked="" type="checkbox"/> MINERAL

### 51 CASING & OPEN HOLE RECORD


DEPTH - FEET	MATERIAL	WALL THICKNESS INCHES	DEPTH - FEET	
			FROM	TO
10-11	1 <input checked="" type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE	188	0	22
17-18	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input checked="" type="checkbox"/> OPEN HOLE		22	260
24-25	1 <input type="checkbox"/> STEEL 2 <input type="checkbox"/> GALVANIZED 3 <input type="checkbox"/> CONCRETE 4 <input type="checkbox"/> OPEN HOLE			

### 61 PLUGGING & SEALING RECORD

DEPTH SET AT - FEET	MATERIAL AND TYPE	CEMENT GROUT LEAD PACKER, ETC.
10-13		
14-17		
18-21		
22-25		
26-29		
30-33		
34-40		

### 71 PUMPING TEST

PUMPING TEST METHOD 1 <input type="checkbox"/> PUMP 2 <input checked="" type="checkbox"/> BAILER	PUMPING RATE 0015 GPM	DURATION OF PUMPING 01 HOURS 00 MINS
STATIC LEVEL 020 FEET	WATER LEVEL END OF PUMPING 060 FEET	WATER LEVELS DURING
		15 MINUTES 26-28 060 FEET
		30 MINUTES 29-31 060 FEET
		45 MINUTES 32-34 060 FEET
		60 MINUTES 35-37 060 FEET
IF FLOWING, GIVE RATE	PUMP INTAKE SET AT	WATER AT END OF TEST
RECOMMENDED PUMP TYPE <input type="checkbox"/> SHALLOW <input checked="" type="checkbox"/> DEEP	RECOMMENDED PUMP SETTING 080 FEET	RECOMMENDED PUMPING RATE 0005 GPM

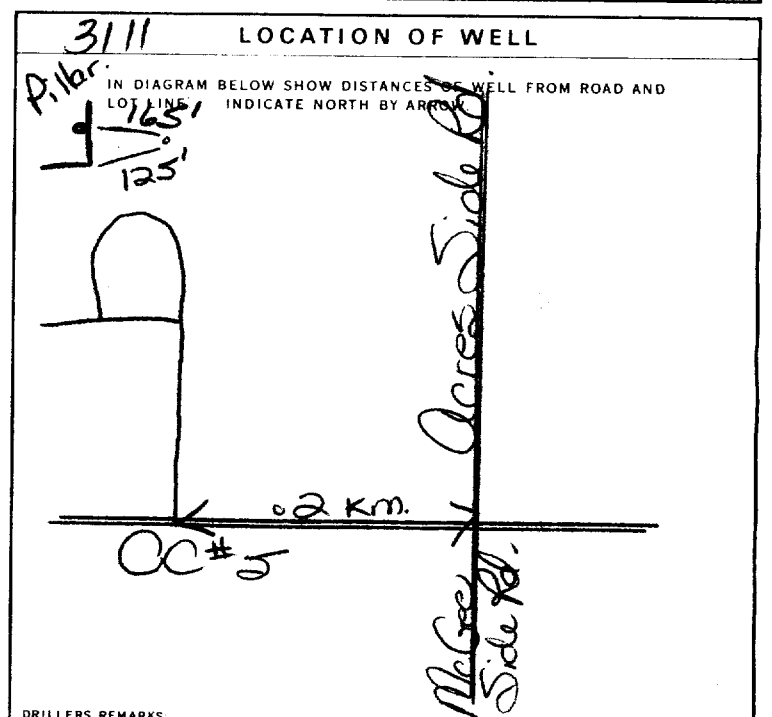

### FINAL STATUS OF WELL

1 <input checked="" type="checkbox"/> WATER SUPPLY	5 <input type="checkbox"/> ABANDONED, INSUFFICIENT SUPPLY
2 <input type="checkbox"/> OBSERVATION WELL	6 <input type="checkbox"/> ABANDONED, POOR QUALITY
3 <input type="checkbox"/> TEST HOLE	7 <input type="checkbox"/> UNFINISHED
4 <input type="checkbox"/> RECHARGE WELL	

### WATER USE

1 <input type="checkbox"/> DOMESTIC	5 <input type="checkbox"/> COMMERCIAL
2 <input checked="" type="checkbox"/> STOCK	6 <input type="checkbox"/> MUNICIPAL
3 <input type="checkbox"/> IRRIGATION	7 <input type="checkbox"/> PUBLIC SUPPLY
4 <input type="checkbox"/> INDUSTRIAL	8 <input type="checkbox"/> COOLING OR AIR CONDITIONING
<input type="checkbox"/> OTHER	9 <input type="checkbox"/> NOT USED

### METHOD OF DRILLING

1 <input type="checkbox"/> CABLE TOOL	5 <input type="checkbox"/> BORING
2 <input checked="" type="checkbox"/> ROTARY (CONVENTIONAL)	7 <input type="checkbox"/> DIAMOND
3 <input type="checkbox"/> ROTARY (REVERSE)	8 <input type="checkbox"/> JETTING
4 <input type="checkbox"/> ROTARY (AIR)	9 <input type="checkbox"/> DRIVING
5 <input checked="" type="checkbox"/> AIR PERCUSSION	

### CONTRACTOR

NAME OF WELL CONTRACTOR <b>Capital Water Supply Ltd.</b>	LICENCE NUMBER <b>1558</b>
ADDRESS <b>Box 400; Stittsville, Ontario, K0A 3G0</b>	
NAME OF DRILLER OR BORER <b>W. Kavanagh / J. Moore</b>	LICENCE NUMBER
SIGNATURE OF CONTRACTOR <i>W. Kavanagh</i>	SUBMISSION DATE <b>DAY 06 MO 06 YR 84</b>

### OFFICE USE ONLY

DATA SOURCE	CONTRACTOR <b>1558</b>	DATE <b>07 08 84</b>
DATE OF INSPECTION	INSPECTOR	
REMARKS		

**Well Owner's Information**

First Name: **Cantor Industries** Last Name: \_\_\_\_\_ E-mail Address: \_\_\_\_\_  Well Constructed by Well Owner

Mailing Address (Street Number/Name, RR): **2171 McGee Side Road Carp Ont K0A 1L0** Municipality: **Carp** Province: **Ont** Postal Code: **K0A 1L0** Telephone No. (inc. area code): \_\_\_\_\_

**Part A Construction and/or Major Alteration of a Well**

Address of Well Location (Street Number/Name, RR): **# 2171 McGee Side Road** Township: **Huntley** Lot: **11** Concession: **2**

County/District/Municipality: **Ottawa-Carleton** City/Town/Village: **Carp** Province: **Ontario** Postal Code: \_\_\_\_\_

UTM Coordinates: NAD 83 Zone Easting: **184219** Northing: **215018437** GPS Unit Make: **Magellan** Model: **200** Mode of Operation:  Undifferentiated  Averaged  Differentiated, specify \_\_\_\_\_

**Overburden and Bedrock Materials** (see instructions on the back of this form)

General Colour	Most Common Material	Other Materials	General Description	Depth (Metres) From	Depth (Metres) To
	<b>Sand Gravel</b>			<b>0</b>	<b>4.27</b>
	<b>Grey Limestone</b>			<b>4.27</b>	<b>152.3</b>

**\* Plan RPSR 12610 \***

**Annular Space/Abandonment Sealing Record**

Depth Set at (Metres) From	Depth Set at (Metres) To	Type of Sealant Used (Material and Type)	Volume Placed (Cubic Metres)
<b>6.10</b>	<b>0</b>	<b>Neat Cement Slurry</b>	<b>.2724</b>

**Results of Well Yield Testing**

Check box if after test of well yield, water was:  
 Clear and sand free  
 Cannot develop to sand-free state

If pumping discontinued, give reason: \_\_\_\_\_

Pumping test method: **Subpump**

Pump intake set at (Metres): **91.44**

Pumping rate (Litres/min): **26.5**

Duration of pumping: **1** hrs + **0** min

Final water level end of pumping (Metres): **34.90**

Recommended pump type:  Shallow  Deep

Recommended pump depth: **91.44** Metres

Recommended pump rate (Litres/min): **26.5**

If flowing give rate (Litres/min): \_\_\_\_\_

Draw Down		Recovery	
Time (Min)	Water Level (Metres)	Time (Min)	Water Level (Metres)
Static Level	<b>5.75</b>	Static Level	<b>31.90</b>
1	<b>7.08</b>	1	<b>32.36</b>
2	<b>8.20</b>	2	<b>31.30</b>
3	<b>9.30</b>	3	<b>30.22</b>
4	<b>10.30</b>	4	<b>29.18</b>
5	<b>11.20</b>	5	<b>28.20</b>
10	<b>15.26</b>	10	<b>23.70</b>
15	<b>18.60</b>	15	<b>20.</b>
20	<b>21.40</b>	20	<b>16.60</b>
25	<b>23.37</b>	25	<b>13.90</b>
30	<b>26.</b>	30	<b>11.58</b>
40	<b>29.66</b>	40	<b>9.90</b>
50	<b>32.60</b>	50	<b>7.80</b>
60	<b>34.90</b>	60	<b>6.30</b>

**Method of Construction**


Cable Tool  Diamond  Public  Commercial  Not used  
 Rotary (Conventional)  Jetting  Domestic  Municipal  Dewatering  
 Rotary (Reverse)  Driving  Livestock  Test Hole  Monitoring  
 Rotary (Air)  Digging  Irrigation  Cooling & Air Conditioning  
 Air percussion  Boring  Industrial  Other, specify \_\_\_\_\_  
 Other, specify \_\_\_\_\_

**Water Use**

Commercial  Not used  
 Domestic  Municipal  Dewatering  
 Livestock  Test Hole  Monitoring  
 Irrigation  Cooling & Air Conditioning  
 Industrial  Other, specify \_\_\_\_\_

**Status of Well**

Water Supply  Dewatering Well  Observation and/or Monitoring Hole  
 Replacement Well  Abandoned, Insufficient Supply  Alteration (Construction)  
 Test Hole  Abandoned, Poor Water Quality  Other, specify \_\_\_\_\_  
 Recharge Well  Abandoned, other, specify \_\_\_\_\_

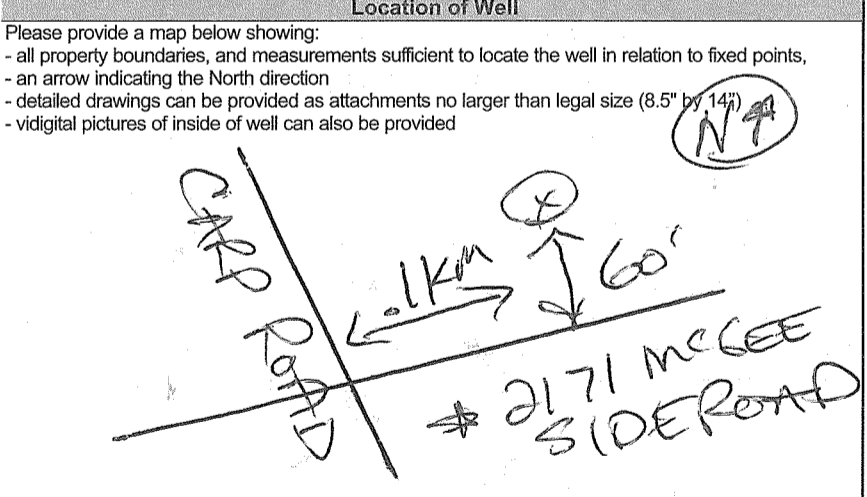

**Water Details**

Water found at Depth (Metres)	Kind of Water
<b>105.63</b>	<input type="checkbox"/> Gas <input type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals
<b>147.82</b>	<input type="checkbox"/> Gas <input type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals
_____	<input type="checkbox"/> Gas <input type="checkbox"/> Fresh <input type="checkbox"/> Salty <input type="checkbox"/> Sulphur <input type="checkbox"/> Minerals

**Casing and Screen Used**

Casing Used:  Galvanized  Steel  Fibreglass  Plastic  Concrete

Screen Used:  Galvanized  Steel  Fibreglass  Plastic  Concrete

**Casing and Well Details**

Diameter of the Hole (Centimetres): **14.28**

Depth of the Hole (Metres): **152.37**

Wall Thickness (Metres): **1.48cm**

Inside Diameter of the Casing (Metres): **1.588**

Depth of the Casing (Metres): **6.11**

No Casing and Screen Used:  Open Hole **6.10-152.37**

Disinfected?  Yes  No

Date Well Completed (yyyy/mm/dd): **2007-08-31** Was the well owner's information package delivered?  Yes  No Date the Well Record and Package Delivered to Well Owner (yyyy/mm/dd): **2007-08-31**

**Well Contractor and Well Technician Information**

Business Name of Well Contractor: **AIR ROCK DRILLING CO LTD** Well Contractor's Licence No.: **10119**

Business Address (Street No./Name, number, RR): **RR#1** Municipality: **RICHMOND**

Province: **ONT** Postal Code: **K9A 2R0** Business E-mail Address: \_\_\_\_\_

Bus. Telephone No. (inc. area code): **613-838-2170** Name of Well Technician (Last Name, First Name): **Desautels Ken**

Well Technician's Licence No.: **TA** Signature of Technician: **[Signature]** Date Submitted (yyyy/mm/dd): **2007-10-10**

**Ministry Use Only**

Audit No.: **z60149** Well Contractor No.: \_\_\_\_\_

Date Received (yyyy/mm/dd): **OCT 15 2007** Date of Inspection (yyyy/mm/dd): \_\_\_\_\_

Remarks: \_\_\_\_\_

Measurements recorded in:  Metric  Imperial

Page      of     

**A204317**

**Well Owner's Information**

First Name:      Last Name / Organization: Lorissa Const. Inc E-mail Address: elles@lorissa.ca  Well Constructed by Well Owner

Mailing Address (Street Number/Name): 3140 Camp Rd. Municipality: West Carleton Province: Ont Postal Code: K0A1K0 Telephone No. (inc. area code): 613 839 3784

**Well Location**

Address of Well Location (Street Number/Name): 139 John Cavanaugh Township: West Carleton Lot: 11 Concession: Concession 2

County/District/Municipality: Ottawa Carleton City/Town/Village: Camp Province: Ontario Postal Code: K0A1K0

UTM Coordinates: Zone: 18Q Easting: 421743 Northing: 5017692 Municipal Plan and Sublot Number:      Other:     

**Overburden and Bedrock Materials/Abandonment Sealing Record (see instructions on the back of this form)**

General Colour	Most Common Material	Other Materials	General Description	Depth (m/ft)	
				From	To
Brown	Hardpan	sand, gravel, stone		0	8
grey	Hardpan	sand, gravel, stone		8	20
grey	Rock			20	75

**Annular Space**

Depth Set at (m/ft)	Type of Sealant Used (Material and Type)	Volume Placed (m³/ft³)
0 to 20	cement grout	4 Bags

**Results of Well Yield Testing**

Time (min)	Draw Down (m/ft)		Recovery (m/ft)	
	Water Level (m/ft)	Time (min)	Water Level (m/ft)	Time (min)
1	9.02	1	11.28	
2	9.98	2	10.31	
3	10.27	3	10.09	
4	10.45	4	9.90	
5	10.55	5	9.81	
10	10.61	10	9.68	
15	10.78	15	9.47	
20	10.85	20	9.32	
25	10.92	25	9.12	
30	11.03	30	9.10	
40	11.10	40	8.97	
50	11.18	50	8.95	
60	11.24	60	8.95	
60	11.28	60	8.89	

After test of well yield, water was:  Clear and sand free  Other, specify     

If pumping discontinued, give reason:     

Pump intake set at (m/ft): 50

Pumping rate (l/min / GPM): 10

Duration of pumping: 1 hrs +      min

Final water level end of pumping (m/ft): 11.28

If flowing give rate (l/min / GPM):     

Recommended pump depth (m/ft): 65

Recommended pump rate (l/min / GPM): 10

Well production (l/min / GPM): 20

Disinfected?  Yes  No

**Method of Construction**

Cable Tool  Diamond  Public  Commercial  Not used

Rotary (Conventional)  Jetting  Domestic  Municipal  Dewatering

Rotary (Reverse)  Driving  Livestock  Test Hole  Monitoring

Boring  Digging  Irrigation  Cooling & Air Conditioning

Air percussion  Industrial  Other, specify     

**Construction Record - Casing**

Inside Diameter (cm/in)	Open Hole OR Material (Galvanized, Fibreglass, Concrete, Plastic, Steel)	Wall Thickness (cm/in)	Depth (m/ft)		Status of Well
			From	To	
6.4	steel	1.88	0	22	<input checked="" type="checkbox"/> Water Supply <input type="checkbox"/> Replacement Well <input type="checkbox"/> Test Hole <input type="checkbox"/> Recharge Well <input type="checkbox"/> Dewatering Well <input type="checkbox"/> Observation and/or Monitoring Hole <input type="checkbox"/> Alteration (Construction) <input type="checkbox"/> Abandoned, Insufficient Supply <input type="checkbox"/> Abandoned, Poor Water Quality <input type="checkbox"/> Abandoned, other, specify <u>    </u> <input type="checkbox"/> Other, specify <u>    </u>

**Construction Record - Screen**

Outside Diameter (cm/in)	Material (Plastic, Galvanized, Steel)	Slot No.	Depth (m/ft)	
			From	To

**Water Details**

Water found at Depth (m/ft)	Kind of Water: <input type="checkbox"/> Fresh <input checked="" type="checkbox"/> Untested
30	<input type="checkbox"/> Gas <input type="checkbox"/> Other, specify <u>    </u>
65	<input type="checkbox"/> Gas <input type="checkbox"/> Other, specify <u>    </u>
	<input type="checkbox"/> Gas <input type="checkbox"/> Other, specify <u>    </u>

**Hole Diameter**

Depth (m/ft)	Diameter (cm/in)
0 to 75	6 inch

**Well Contractor and Well Technician Information**


Business Name of Well Contractor: Harvick Cayan LTD Well Contractor's Licence No.: 115117

Business Address (Street Number/Name): 769 RT 700 St Casselman Municipality: Watson

Province: Ont Postal Code: K0M1M0 Business E-mail Address:     

Business Telephone No. (inc. area code): 613 876 4234 Name of Well Technician (Last Name, First Name): Wesley Cayan

Well Technician's Licence No.: 117117 Signature of Technician and/or Contractor: Wesley Cayan Date Submitted: 21st 6/10/2016

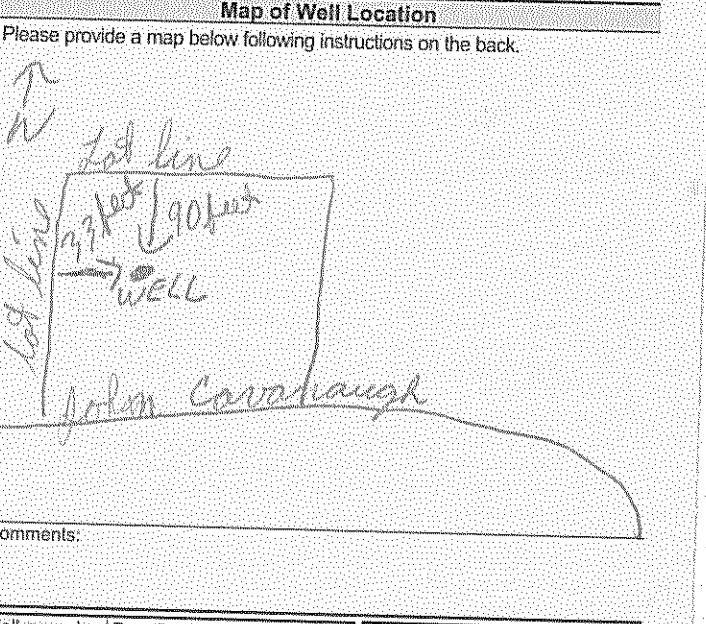

Well owner's information package delivered:  Yes  No

Date Package Delivered: 21st 6/10/2016

Date Work Completed: 21st 6/10/2016

**Ministry Use Only**

Audit No.: 2232515

Received: JUL 19 2016

Client: Paterson Group  
154 Colonnade Rd. South  
Nepean, ON  
K2E 7T7  
Attention: Mr. Erik Ardley  
PO#: 31705  
Invoice to: Paterson Group


Report Number: 1948880  
Date Submitted: 2021-03-05  
Date Reported: 2021-03-11  
Project: PH4146  
COC #: 870803

Page 1 of 7

**Dear Erik Ardley:**

**Please find attached the analytical results for your samples. If you have any questions regarding this report, please do not hesitate to call (613-727-5692).**

Report Comments:

  
Addrine  
Thomas  
2021.03.11  
15:49:43 -05'00'

APPROVAL: \_\_\_\_\_

Addrine Thomas, Inorganics Supervisor

All analysis is completed at Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) unless otherwise indicated.

Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) is accredited by CALA, Canadian Association for Laboratory Accreditation to ISO/IEC 17025 for tests which appear on the scope of accreditation. The scope is available at: <http://www.cala.ca/scopes/2602.pdf>.

Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) is licensed by the Ontario Ministry of the Environment, Conservation, and Parks (MECP) for specific tests in drinking water (license #2318). A copy of the license is available upon request.

Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) is accredited by the Ontario Ministry of Agriculture, Food, and Rural Affairs for specific tests in agricultural soils.

Please note: Field data, where presented on the report, has been provided by the client and is presented for informational purposes only. Guideline values listed on this report are provided for ease of use (informational purposes) only. Eurofins recommends consulting the official provincial or federal guideline as required. Unless otherwise stated, measurement uncertainty is not taken into account when determining guideline or regulatory exceedances.



Client: Paterson Group  
 154 Colonnade Rd. South  
 Nepean, ON  
 K2E 7T7  
 Attention: Mr. Erik Ardley  
 PO#: 31705  
 Invoice to: Paterson Group

Report Number: 1948880  
 Date Submitted: 2021-03-05  
 Date Reported: 2021-03-11  
 Project: PH4146  
 COC #: 870803

Group	Analyte	MRL	Units	Guideline	1544901 GW 2021-03-04 GW1	1544902 GW 2021-03-04 GW2
Anions	Cl	1	mg/L	AO 250	120	119
	F	0.10	mg/L	MAC 1.5	0.15	0.14
	N-NO2	0.10	mg/L	MAC 1.0	<0.10	<0.10
	N-NO3	0.10	mg/L	MAC 10.0	<0.10	<0.10
	SO4	1	mg/L	AO 500	83	79
General Chemistry	Alkalinity as CaCO3	5	mg/L	OG 500	346	344
	Colour	2	TCU		<2	<2
	Conductivity	5	uS/cm		1100	1100
	DOC	0.5	mg/L	AO 5	1.5	1.5
	pH	1.00		6.5-8.5	7.98	8.02
	S2-	0.01	mg/L	AO 0.05		0.03
		0.1	mg/L	AO 0.05	<0.1*	
	TDS	10	mg/L	AO 500	640*	640*
Turbidity	0.1	NTU	AO 5.0	>100	2.0	
Hardness	Hardness as CaCO3	1	mg/L	OG 100	382*	391*
Indices/Calc	Ion Balance	0.01			1.02	1.04
Metals	Ca	1	mg/L		115	117
	Fe	0.03	mg/L	AO 0.3	3.69*	0.09
	K	1	mg/L		5	4
	Mg	1	mg/L		23	24
	Mn	0.01	mg/L	AO 0.05	0.06*	<0.01
	Na	2	mg/L	AO 200	105	103
Nutrients	N-NH3	0.010	mg/L		0.023	0.021
	Total Kjeldahl Nitrogen	0.100	mg/L		0.197	0.104
Subcontract-Inorg	Phenols	0.001	mg/L		<0.001	<0.001

Guideline = ODWSOG

\* = Guideline Exceedence

Results relate only to the parameters tested on the samples submitted.  
 Methods references and/or additional QA/QC information available on request.

MRL = Method Reporting Limit, AO = Aesthetic Objective, OG = Operational Guideline, MAC = Maximum Acceptable Concentration, IMAC = Interim Maximum Acceptable Concentration, STD = Standard, PWQO = Provincial Water Quality Guideline, IPWQO = Interim Provincial Water Quality Objective, TDR = Typical Desired Range

**Certificate of Analysis**

Client: Paterson Group  
 154 Colonnade Rd. South  
 Nepean, ON  
 K2E 7T7  
 Attention: Mr. Erik Ardley  
 PO#: 31705  
 Invoice to: Paterson Group

Report Number: 1948880  
 Date Submitted: 2021-03-05  
 Date Reported: 2021-03-11  
 Project: PH4146  
 COC #: 870803

Group	Analyte	MRL	Units	Guideline	Lab I.D. Sample Matrix Sample Type Sampling Date Sample I.D.	1544901 GW 2021-03-04 GW1	1544902 GW 2021-03-04 GW2
Subcontract-Inorg	Tannin & Lignin	0.1	mg/L			<0.1	<0.1

**Guideline = ODWSOG**

**\* = Guideline Exceedence**

Results relate only to the parameters tested on the samples submitted.  
 Methods references and/or additional QA/QC information available on request.

MRL = Method Reporting Limit, AO = Aesthetic Objective, OG = Operational Guideline, MAC = Maximum Acceptable Concentration, IMAC = Interim Maximum Acceptable Concentration, STD = Standard, PWQO = Provincial Water Quality Guideline, IPWQO = Interim Provincial Water Quality Objective, TDR = Typical Desired Range

Client: Paterson Group  
 154 Colonnade Rd. South  
 Nepean, ON  
 K2E 7T7  
 Attention: Mr. Erik Ardley  
 PO#: 31705  
 Invoice to: Paterson Group

Report Number: 1948880  
 Date Submitted: 2021-03-05  
 Date Reported: 2021-03-11  
 Project: PH4146  
 COC #: 870803

**QC Summary**

Analyte	Blank	QC % Rec	QC Limits
<b>Run No</b> 396958 <b>Analysis/Extraction Date</b> 2021-03-05 <b>Analyst</b> AET <b>Method</b> C SM2130B			
Turbidity	<0.1 NTU	100	70-130
<b>Run No</b> 396999 <b>Analysis/Extraction Date</b> 2021-03-09 <b>Analyst</b> SKH <b>Method</b> C SM2540			
TDS	<10 mg/L	99	90-110
<b>Run No</b> 397023 <b>Analysis/Extraction Date</b> 2021-03-08 <b>Analyst</b> R_R <b>Method</b> SM 4110			
N-NO2	<0.10 mg/L	113	90-110
N-NO3	<0.10 mg/L	104	90-110
SO4	<1 mg/L	100	90-110
<b>Run No</b> 397049 <b>Analysis/Extraction Date</b> 2021-03-08 <b>Analyst</b> AET <b>Method</b> SM2320,2510,4500H/F			
Alkalinity (CaCO3)	<5 mg/L	106	90-110
Conductivity	<5 uS/cm	100	90-110
F	<0.10 mg/L	102	90-110
pH		100	90-110
<b>Run No</b> 397050 <b>Analysis/Extraction Date</b> 2021-03-09 <b>Analyst</b> AET <b>Method</b> EPA 351.2			

**Guideline = ODWSOG**

**\* = Guideline Exceedence**

Results relate only to the parameters tested on the samples submitted.  
 Methods references and/or additional QA/QC information available on request.

MRL = Method Reporting Limit, AO = Aesthetic Objective, OG = Operational Guideline, MAC = Maximum Acceptable Concentration, IMAC = Interim Maximum Acceptable Concentration, STD = Standard, PWQO = Provincial Water Quality Guideline, IPWQO = Interim Provincial Water Quality Objective, TDR = Typical Desired Range



Client: Paterson Group  
 154 Colonnade Rd. South  
 Nepean, ON  
 K2E 7T7  
 Attention: Mr. Erik Ardley  
 PO#: 31705  
 Invoice to: Paterson Group

Report Number: 1948880  
 Date Submitted: 2021-03-05  
 Date Reported: 2021-03-11  
 Project: PH4146  
 COC #: 870803

**QC Summary**

Analyte	Blank	QC % Rec	QC Limits
Total Kjeldahl Nitrogen	<0.100 mg/L	93	70-130
<b>Run No</b> 397051 <b>Analysis/Extraction Date</b> 2021-03-09 <b>Analyst</b> AET <b>Method</b> EPA 350.1			
N-NH3	<0.010 mg/L	114	80-120
<b>Run No</b> 397053 <b>Analysis/Extraction Date</b> 2021-03-09 <b>Analyst</b> SKH <b>Method</b> C SM2120C			
Colour	<2 TCU	98	90-110
<b>Run No</b> 397066 <b>Analysis/Extraction Date</b> 2021-03-09 <b>Analyst</b> Z_S <b>Method</b> M SM3120B-3500C			
Calcium	<1 mg/L	105	90-110
Potassium	<1 mg/L	105	87-113
Magnesium	<1 mg/L	103	76-124
Sodium	<2 mg/L	117	82-118
<b>Run No</b> 397091 <b>Analysis/Extraction Date</b> 2021-03-09 <b>Analyst</b> R_R <b>Method</b> SM 4110			
Chloride	<1 mg/L	100	90-110
<b>Run No</b> 397096 <b>Analysis/Extraction Date</b> 2021-03-10 <b>Analyst</b> AET <b>Method</b> SM 5310B			
DOC	<0.5 mg/L	97	80-120

**Guideline = ODWSOG**

**\* = Guideline Exceedence**

Results relate only to the parameters tested on the samples submitted.  
 Methods references and/or additional QA/QC information available on request.

MRL = Method Reporting Limit, AO = Aesthetic Objective, OG = Operational Guideline, MAC = Maximum Acceptable Concentration, IMAC = Interim Maximum Acceptable Concentration, STD = Standard, PWQO = Provincial Water Quality Guideline, IPWQO = Interim Provincial Water Quality Objective, TDR = Typical Desired Range

**Certificate of Analysis**

Client: Paterson Group  
 154 Colonnade Rd. South  
 Nepean, ON  
 K2E 7T7  
 Attention: Mr. Erik Ardley  
 PO#: 31705  
 Invoice to: Paterson Group

Report Number: 1948880  
 Date Submitted: 2021-03-05  
 Date Reported: 2021-03-11  
 Project: PH4146  
 COC #: 870803

**QC Summary**

Analyte	Blank	QC % Rec	QC Limits
<b>Run No</b> 397103 <b>Analysis/Extraction Date</b> 2021-03-10 <b>Analyst</b> AET <b>Method</b> C SM2340B			
Hardness as CaCO3			
Ion Balance			
<b>Run No</b> 397167 <b>Analysis/Extraction Date</b> 2021-03-11 <b>Analyst</b> H_D <b>Method</b> EPA 200.8			
Iron	<0.03 mg/L	92	80-120
Manganese	<0.01 mg/L	92	80-120
<b>Run No</b> 397168 <b>Analysis/Extraction Date</b> 2021-03-11 <b>Analyst</b> AET <b>Method</b> C SM4500-S2-D			
S2-	<0.01 mg/L	89	80-120
<b>Run No</b> 397177 <b>Analysis/Extraction Date</b> 2021-03-08 <b>Analyst</b> AET <b>Method</b> SUBCONTRACT P-INORG			
Phenols	<0.001 mg/L	88	69-132
Tannin & Lignin	<0.1 mg/L	110	

**Guideline = ODWSOG**

**\* = Guideline Exceedence**

Results relate only to the parameters tested on the samples submitted.  
 Methods references and/or additional QA/QC information available on request.

MRL = Method Reporting Limit, AO = Aesthetic Objective, OG = Operational Guideline, MAC = Maximum Acceptable Concentration, IMAC = Interim Maximum Acceptable Concentration, STD = Standard, PWQO = Provincial Water Quality Guideline, IPWQO = Interim Provincial Water Quality Objective, TDR = Typical Desired Range

**Certificate of Analysis**

Client: Paterson Group  
154 Colonnade Rd. South  
Nepean, ON  
K2E 7T7  
Attention: Mr. Erik Ardley  
PO#: 31705  
Invoice to: Paterson Group

Report Number: 1948880  
Date Submitted: 2021-03-05  
Date Reported: 2021-03-11  
Project: PH4146  
COC #: 870803

---

***Sample Comment Summary***

Sample ID: 1544901 GW1 Significant amount of solids in preserved bottle were not included in TKN analysis. S2- MRL elevated due to matrix interference (dilution was done).

**Guideline = ODWSOG**

**\* = Guideline Exceedence**

Results relate only to the parameters tested on the samples submitted.  
Methods references and/or additional QA/QC information available on request.

MRL = Method Reporting Limit, AO = Aesthetic Objective, OG = Operational Guideline, MAC = Maximum Acceptable Concentration, IMAC = Interim Maximum Acceptable Concentration, STD = Standard, PWQO = Provincial Water Quality Guideline, IPWQO = Interim Provincial Water Quality Objective, TDR = Typical Desired Range

Client: Paterson Group  
154 Colonnade Rd. South  
Nepean, ON  
K2E 7T7  
Attention: Mr. Erik Ardley  
PO#: 31705  
Invoice to: Paterson Group

Report Number: 1948884  
Date Submitted: 2021-03-05  
Date Reported: 2021-03-06  
Project: PH4146  
COC #: 870803

Page 1 of 2

---

**Dear Erik Ardley:**

**Please find attached the analytical results for your samples. If you have any questions regarding this report, please do not hesitate to call (613-727-5692).**

Report Comments:

*Dragana Dzeletovic*  
Dragana  
Dzeletovic  
2021.03.06  
13:30:34 -05'00'

APPROVAL: \_\_\_\_\_  
Dragana Dzeletovic-Andric, Microbiology Team Lead

All analysis is completed at Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) unless otherwise indicated.

Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) is accredited by CALA, Canadian Association for Laboratory Accreditation to ISO/IEC 17025 for tests which appear on the scope of accreditation. The scope is available at: <http://www.cala.ca/scopes/2602.pdf>.

Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) is licensed by the Ontario Ministry of the Environment, Conservation, and Parks (MECP) for specific tests in drinking water (license #2318). A copy of the license is available upon request.

Eurofins Environment Testing Canada Inc. (Ottawa, Ontario) is accredited by the Ontario Ministry of Agriculture, Food, and Rural Affairs for specific tests in agricultural soils.

Please note: Field data, where presented on the report, has been provided by the client and is presented for informational purposes only. Guideline values listed on this report are provided for ease of use (informational purposes) only. Eurofins recommends consulting the official provincial or federal guideline as required. Unless otherwise stated, measurement uncertainty is not taken into account when determining guideline or regulatory exceedances.

Client: Paterson Group  
 154 Colonnade Rd. South  
 Nepean, ON  
 K2E 7T7  
 Attention: Mr. Erik Ardley  
 PO#: 31705  
 Invoice to: Paterson Group

Report Number: 1948884  
 Date Submitted: 2021-03-05  
 Date Reported: 2021-03-06  
 Project: PH4146  
 COC #: 870803

Group	Analyte	MRL	Units	Guideline	Lab I.D. Sample Matrix Sample Type Sampling Date Sample I.D.	1544909 GW 2021-03-04 GW1	1544910 GW 2021-03-04 GW2
Microbiology	Escherichia Coli	0	ct/100mL	MAC 0		0	0
	Total Coliforms	0	ct/100mL	MAC 0		0	0

Guideline = ODWSOG

\* = Guideline Exceedence

Results relate only to the parameters tested on the samples submitted.

Analytical Method: AMBCOLM1

additional QA/QC information available on request.

MRL = Method Reporting Limit, AO = Aesthetic Objective, OG = Operational Guideline, MAC = Maximum Acceptable Concentration, IMAC = Interim Maximum Acceptable Concentration, STD = Standard, PWQO = Provincial Water Quality Guideline, IPWQO = Interim Provincial Water Quality Objective, TDR = Typical Desired Range

**Pumping Test Analysis Report**

Project: Proposed Commercial Building

Number: PH4146

Client: Stoked Industries Inc.

Location: 2167 McGee Side Rd.

Pumping Test: TW1 Pumping Test

Pumping Well: Well 1

Test Conducted by: EA

Test Date: 19/03/2021


Analysis Performed by: EA

Theis

Analysis Date: 19/03/2021

Aquifer Thickness:

Discharge: variable, average rate 0.2 [l/s]

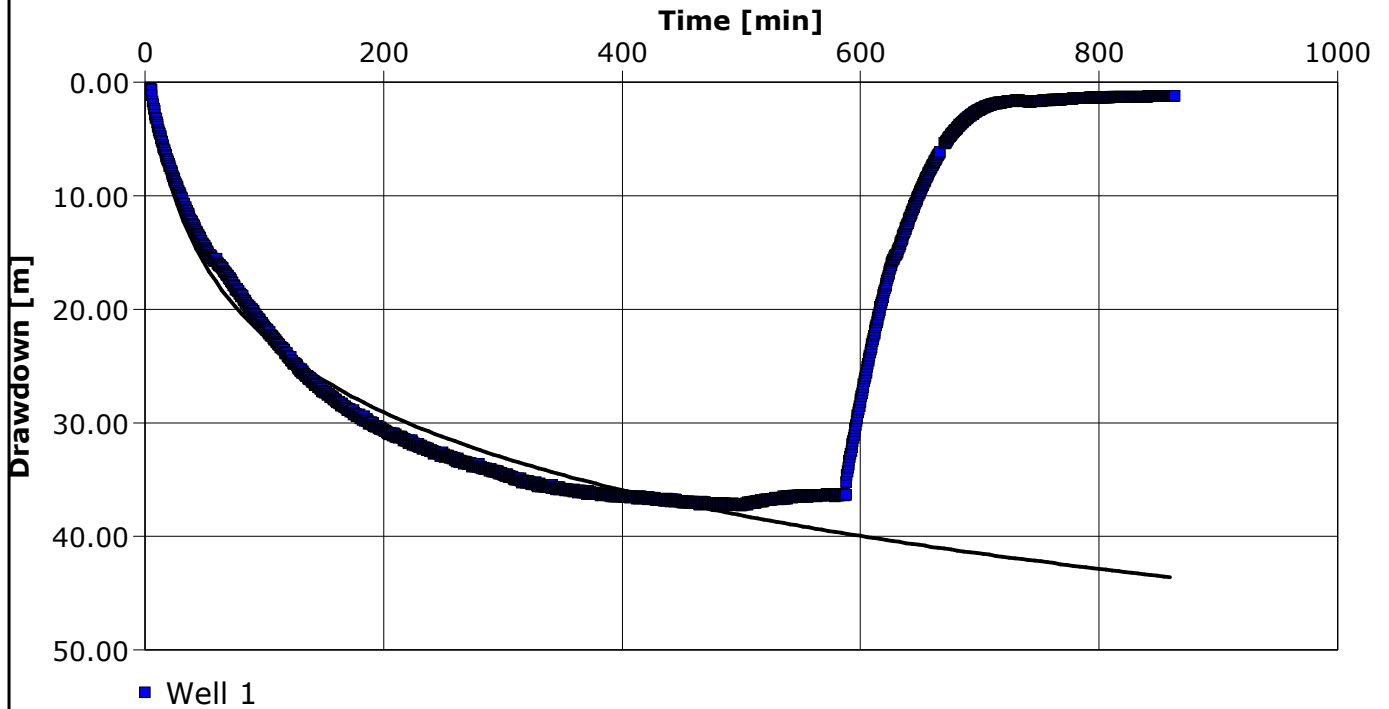

Calculation using Theis

Observation Well	Transmissivity [m <sup>2</sup> /d]	Storage coefficient	Radial Distance to PW [m]
Well 1	$9.23 \times 10^{-2}$		0.08

**Pumping Test Analysis Report**

Project: Proposed Commercial Building

Number: PH4146

Client: Stoked Industries Inc.

Location: 2167 McGee Side Rd.

Pumping Test: TW1 Pumping Test

Pumping Well: Well 1

Test Conducted by: EA

Test Date: 19/03/2021


Analysis Performed by: EA

Theis Recovery

Analysis Date: 19/03/2021

Aquifer Thickness:

Discharge: variable, average rate 0.2 [l/s]

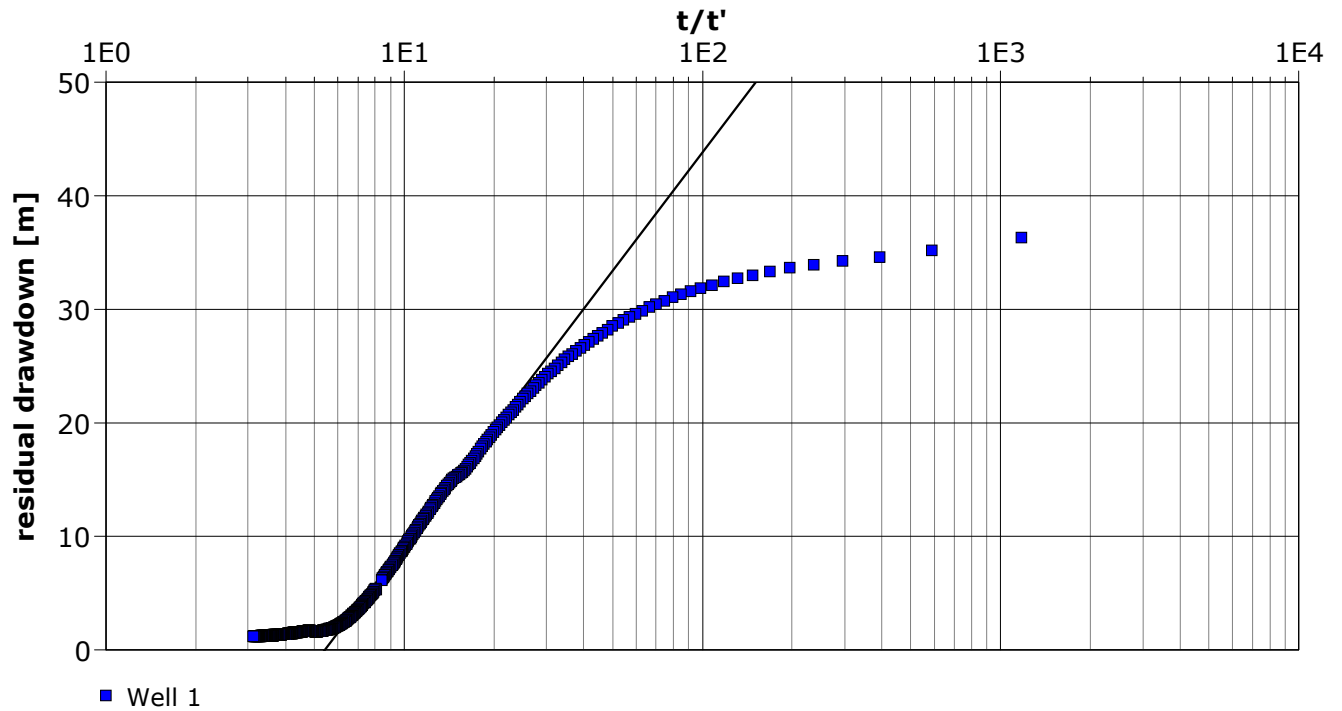

Calculation using THEIS & JACOB

Observation Well	Transmissivity [m <sup>2</sup> /d]	Radial Distance to PW [m]	
Well 1	$9.14 \times 10^{-2}$	0.08	



	<b>Pumping Test Analysis Report</b>	
	Project: Proposed Commercial Building	
	Number: PH4146	
	Client: Stoked Industries Inc.	

Location: 2167 McGee Side Rd.	Pumping Test: TW1 Pumping Test	Pumping Well: Well 1
Test Conducted by: EA		Test Date: 19/03/2021
Aquifer Thickness: NAN m	Discharge: variable, average rate 0.2 [l/s]	

	Analysis Name	Analysis Performed by	Method name	Well	T [m <sup>2</sup> /d]	S
1	Theis	EA	Theis	Well 1	9.23 × 10 <sup>-2</sup>	
2	Theis Recovery	EA	Theis Recovery	Well 1	9.14 × 10 <sup>-2</sup>	
Average					9.19 × 10 <sup>-2</sup>	

--	--	--	--	--	--	--

TW1 inputs			
pH	8.02	A	0.18
TDS	640	B	2.42
Hardness	391	C	2.19
Alkalinity	344	D	2.54
Temp.	8.1		
		pHs =	7.172828503

Langelier Saturation Index (LSI) Calculation		(Langelier, 1936)
LSI = pH - pHs	A = (Log10 [TDS] - 1) / 10	
pHs = (9.3 + A + B) - (C + D)	B = -13.12 x Log10 (oC + 273) + 34.55	
Where:	C = Log10 [Ca <sup>2+</sup> as CaCO <sub>3</sub> ] - 0.4	
	D = Log10 [alkalinity as CaCO <sub>3</sub> ]	
		LSI = <b>0.8</b>
LSI	Effect	
0.5 to 2	<b>Water is super saturated and tends to precipitate a scale layer of calcium carbonate (scale forming but non-corrosive)</b>	
0 to 0.5	Water is super saturated and tends to precipitate a scale layer of calcium carbonate (slightly scale forming and corrosive).	
0	Water is saturated (in equilibrium) with calcium carbonate. A scale layer of calcium carbonate is neither precipitated nor dissolved.	
0 to -0.5	Water is under saturated and tends to dissolve solid calcium carbonate (slightly corrosivebut non-scale forming).	
-0.5 to -2	Water is under saturated and tends to dissolve solid calcium carbonate (seriously corrosive).	

DATUM Geodetic


REMARKS

BORINGS BY CME-55 Low Clearance Drill

DATE November 20, 2020

FILE NO. **PG5602**

HOLE NO. **BH 1-20**

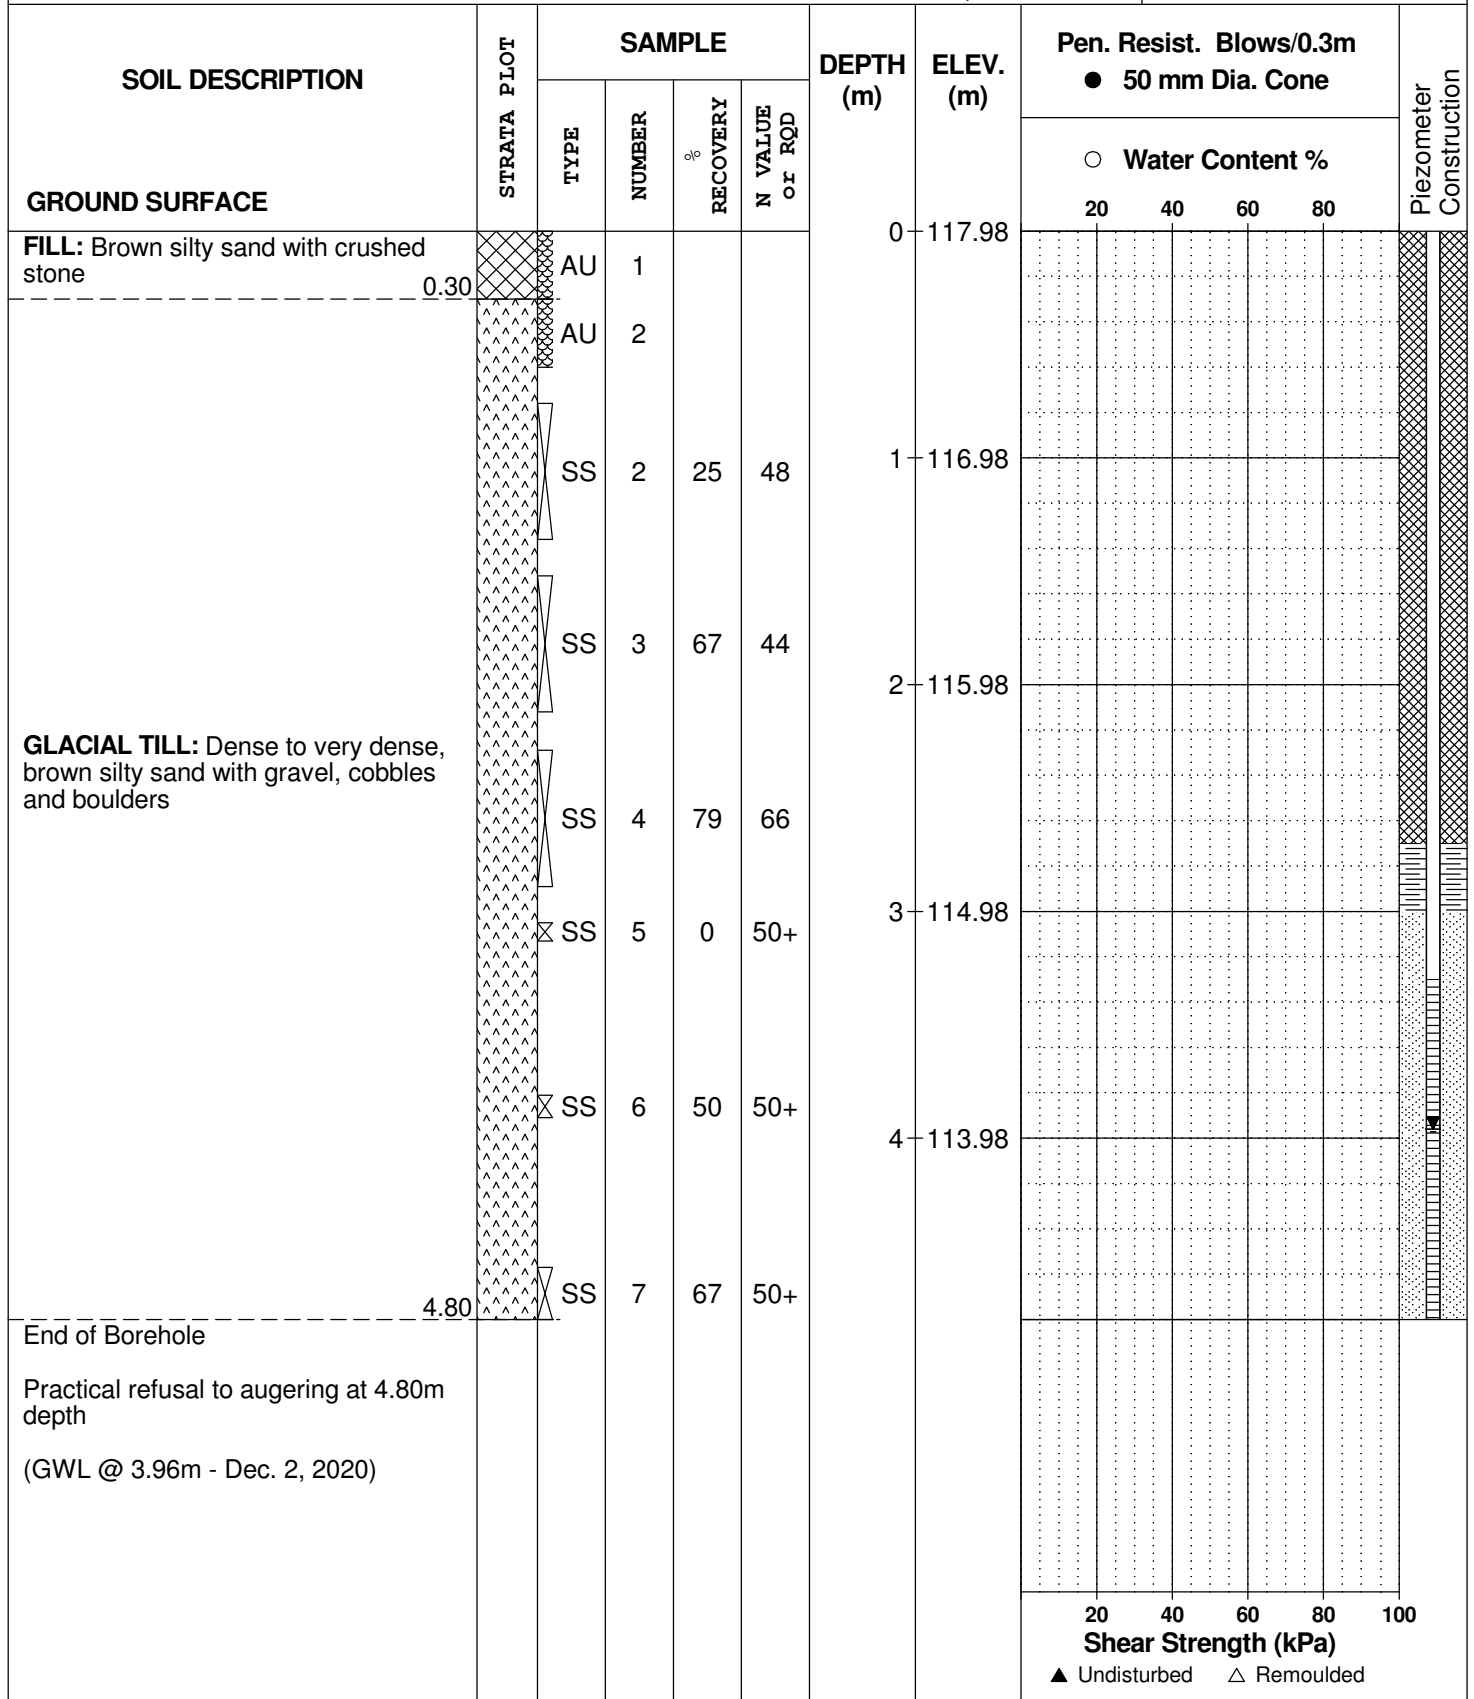

DATUM Geodetic



FILE NO. PG5602

REMARKS

HOLE NO. BH 2-20

BORINGS BY CME-55 Low Clearance Drill

DATE November 20, 2020

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction	
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %					
GROUND SURFACE								20	40	60	80		
<b>FILL:</b> Crushed stone with silty sand and gravel		AU	1			0	117.96						
	0.30	AU	2										
<b>GLACIAL TILL:</b> Compact to very dense, brown silty sand with gravel, cobbles and boulders		SS	3	75	28	1	116.96						
		SS	4	60	50+								
		SS	5	27	50+								
		SS	6		50+								
End of Borehole	2.82					2	115.96						
Practical refusal to augering at 2.82m depth  (Piezometer blocked and dry at 2.04m depth - Dec. 2, 2020)													

20 40 60 80 100  
**Shear Strength (kPa)**  
 ▲ Undisturbed    △ Remoulded

DATUM Geodetic

FILE NO. **PG5602**


REMARKS

HOLE NO. **BH 3-20**

BORINGS BY CME-55 Low Clearance Drill

DATE November 20, 2020

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction	
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			20	40	60	80		
<b>GROUND SURFACE</b>						0	117.39						
<b>FILL:</b> Brown silty sand, some gravel		AU	1										
	0.60												
<b>GLACIAL TILL:</b> Very dense, brown silty sand with gravel, cobbles and boulders		SS	2	60	50+	1	116.39						
		SS	3	22	50+								
		SS	4	100	50+	2	115.39						
End of Borehole	2.44												
Practical refusal to augering at 2.44m depth (GWL @ 2.26m - Dec. 2, 2020)													



DATUM Geodetic



REMARKS

BORINGS BY CME-55 Low Clearance Drill

DATE November 20, 2020

FILE NO. PG5602

HOLE NO. BH 4-20

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction	
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			○ Water Content %					
GROUND SURFACE								20	40	60	80		
<b>FILL:</b> Brown silty sand with crushed stone		AU	1			0	117.07						
	0.30	AU	2										
<b>GLACIAL TILL:</b> Compact to very dense, brown silty sand with gravel, cobbles and boulders		SS	3	50	28	1	116.07						
		SS	4	75	34								
		SS	5	50	50+	2	115.07						
	2.69												
End of Borehole													
Practical refusal to augering at 2.69m depth													
(GWL @ 0.94m - Dec. 2, 2020)													
								20	40	60	80	100	
								<b>Shear Strength (kPa)</b>					
								▲ Undisturbed    △ Remoulded					







DATUM Geodetic

REMARKS

BORINGS BY CME-55 Low Clearance Drill


DATE November 20, 2020

FILE NO. **PG5602**

HOLE NO. **BH 7-20**

SOIL DESCRIPTION	STRATA PLOT	SAMPLE				DEPTH (m)	ELEV. (m)	Pen. Resist. Blows/0.3m ● 50 mm Dia. Cone				Piezometer Construction		
		TYPE	NUMBER	RECOVERY %	N VALUE or RQD			20	40	60	80			
GROUND SURFACE						0	118.08							
<b>GLACIAL TILL:</b> Dense to very dense, brown silty sand with gravel, cobbles and boulders		AU	1											
		AU	2											
		SS	3	92	34	1	117.08							
		SS	4	75	50+									
End of Borehole	2.06					2	116.08							
Practical refusal to augering at 2.06m depth  (Piezometer blocked and dry at 1.38m depth - Dec. 2, 2020)														

20 40 60 80 100  
**Shear Strength (kPa)**  
 ▲ Undisturbed    △ Remoulded

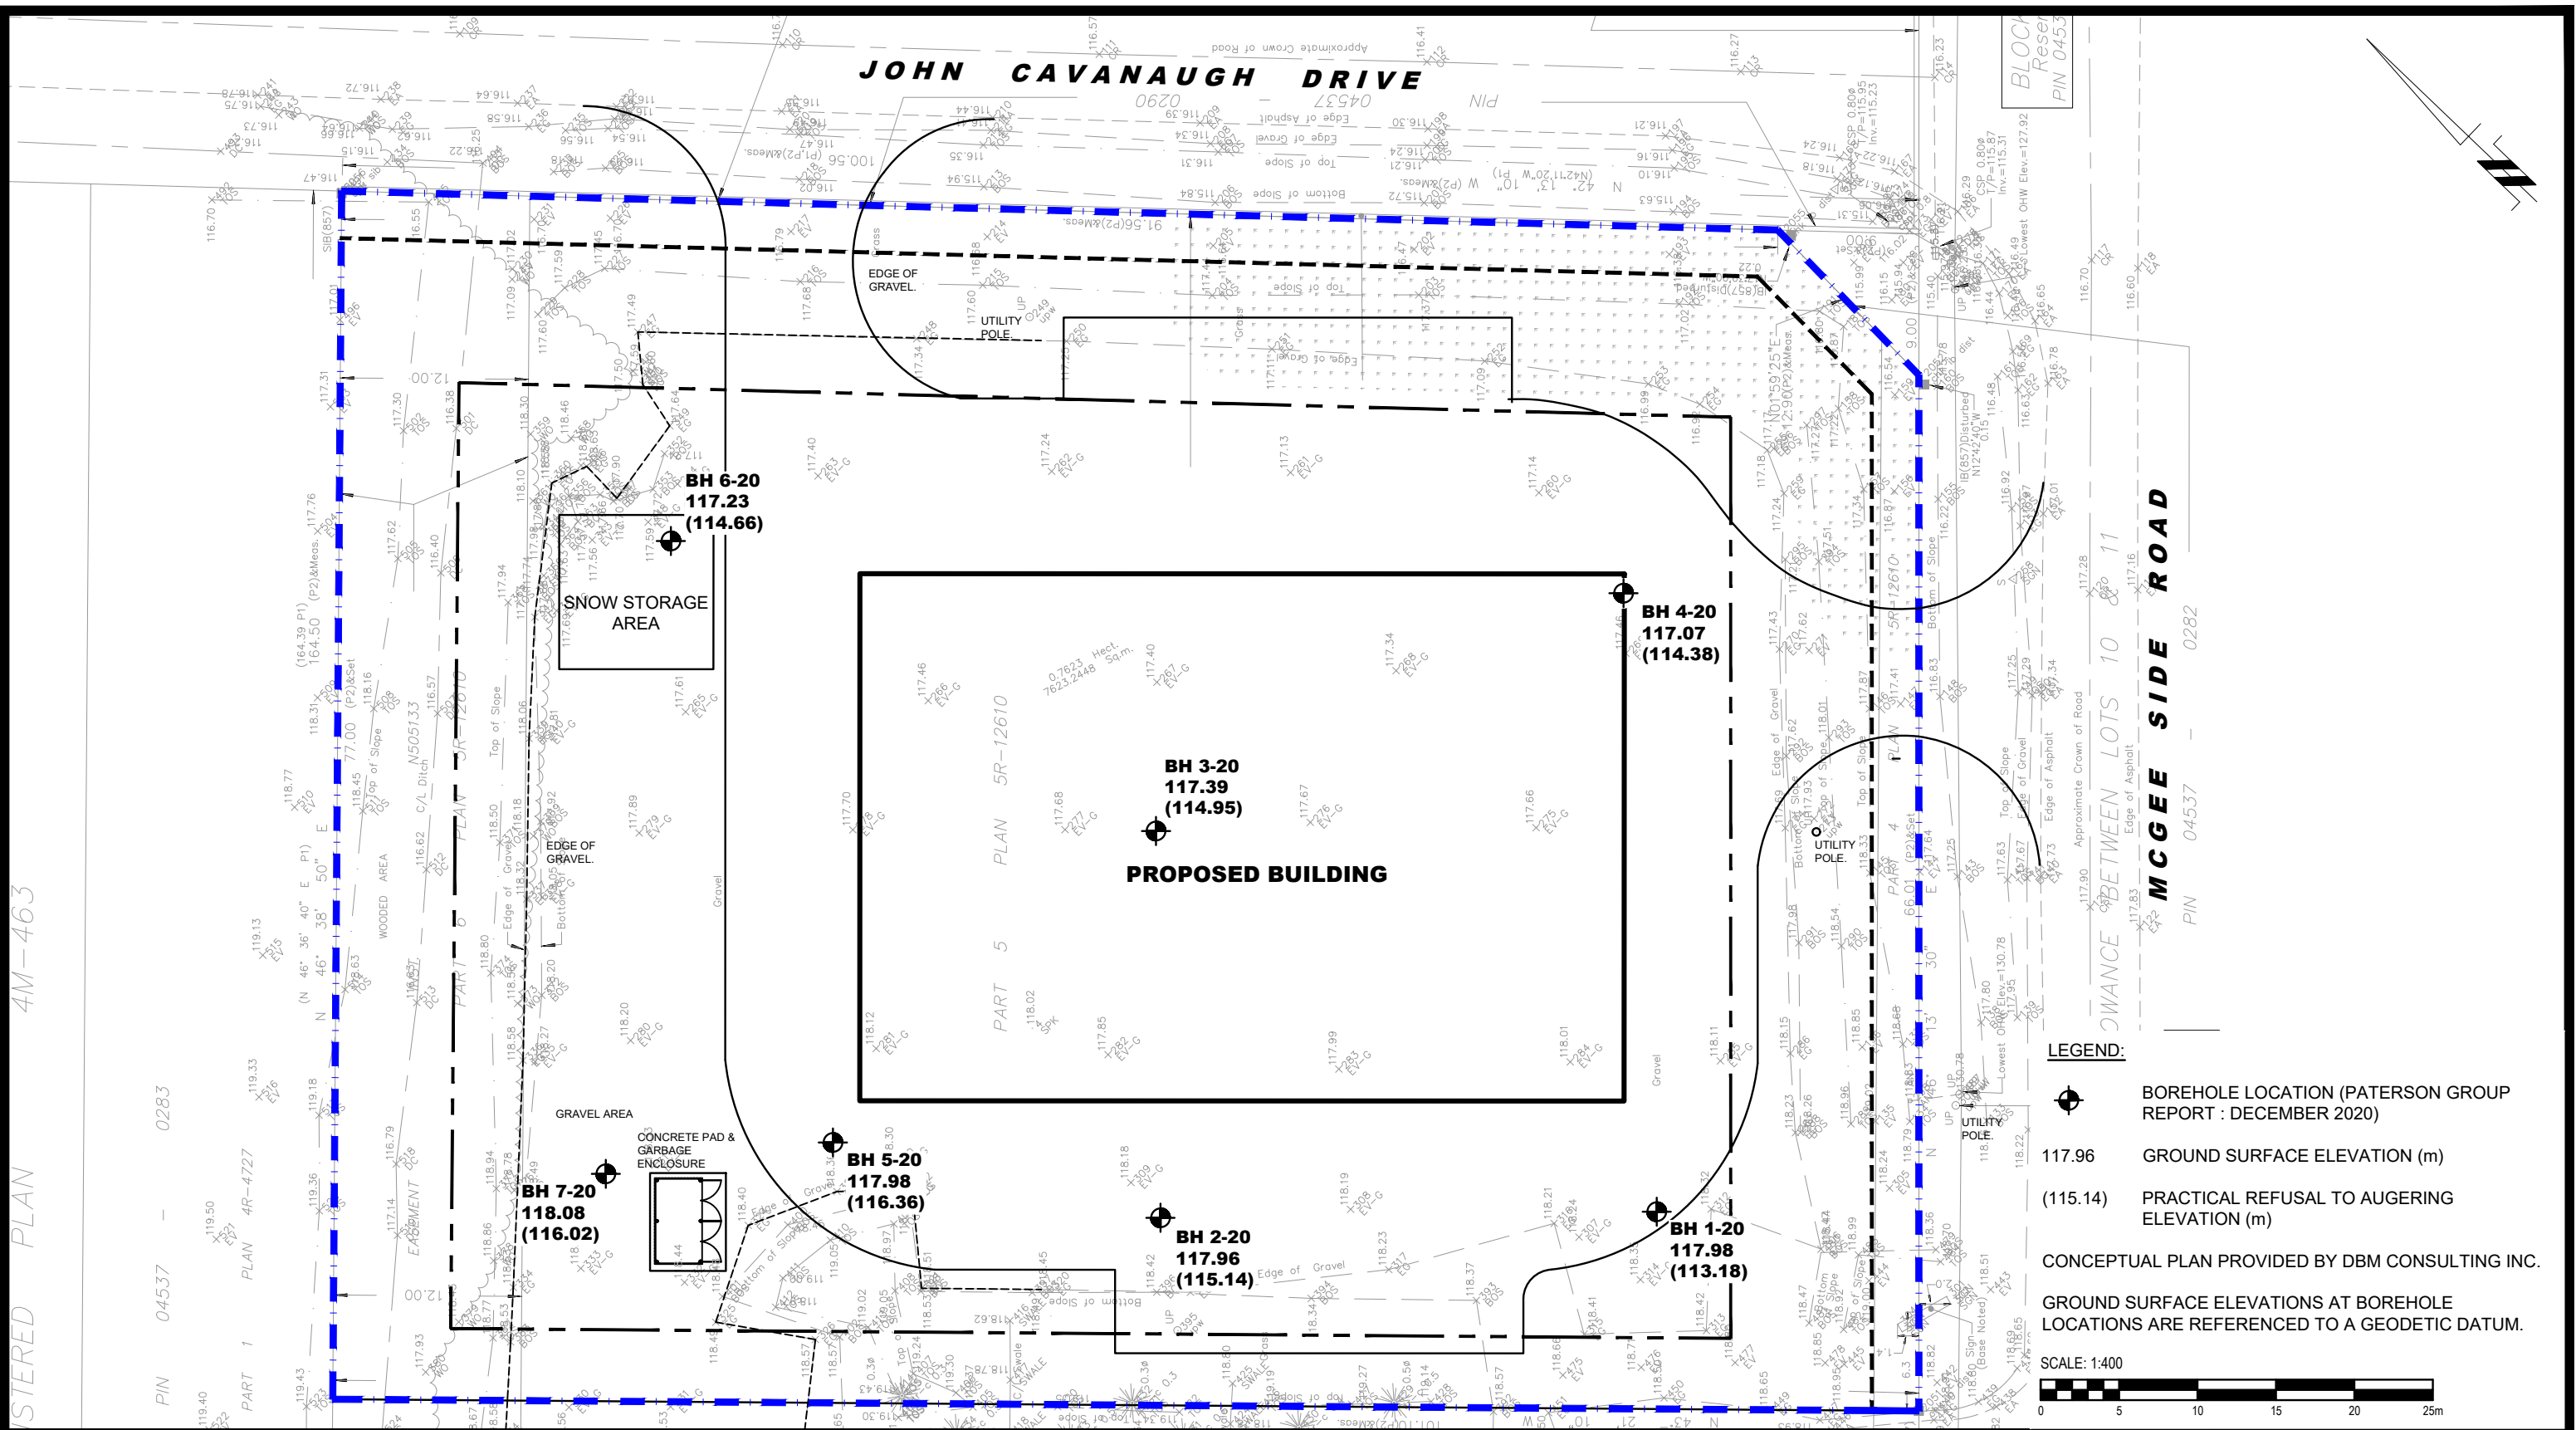

**LEGEND:**

- BOREHOLE LOCATION (PATERSON GROUP REPORT : DECEMBER 2020)
- 117.96 GROUND SURFACE ELEVATION (m)
- (115.14) PRACTICAL REFUSAL TO AUGERING ELEVATION (m)

CONCEPTUAL PLAN PROVIDED BY DBM CONSULTING INC.

GROUND SURFACE ELEVATIONS AT BOREHOLE LOCATIONS ARE REFERENCED TO A GEODETIC DATUM.

SCALE: 1:400


9 AURIGA DRIVE  
OTTAWA, ON  
K2E 7T9  
TEL: (613) 226-7381

NO.	REVISIONS	DATE	INITIAL

**STOKED INDUSTRIES INC.**  
**GEOTECHNICAL INVESTIGATION**  
**PROPOSED BUILDING**  
**2167 MCGEE SIDE ROAD**  
**ONTARIO**

**CARP,**  
**Title:**  
**TEST HOLE LOCATION PLAN**

Scale:	1:400	Date:	05/2023
Drawn by:	YA	Report No.:	PG6662-1
Checked by:	ZA	Dwg. No.:	<b>PG6662-1</b>
Approved by:	MAS	Revision No.:	

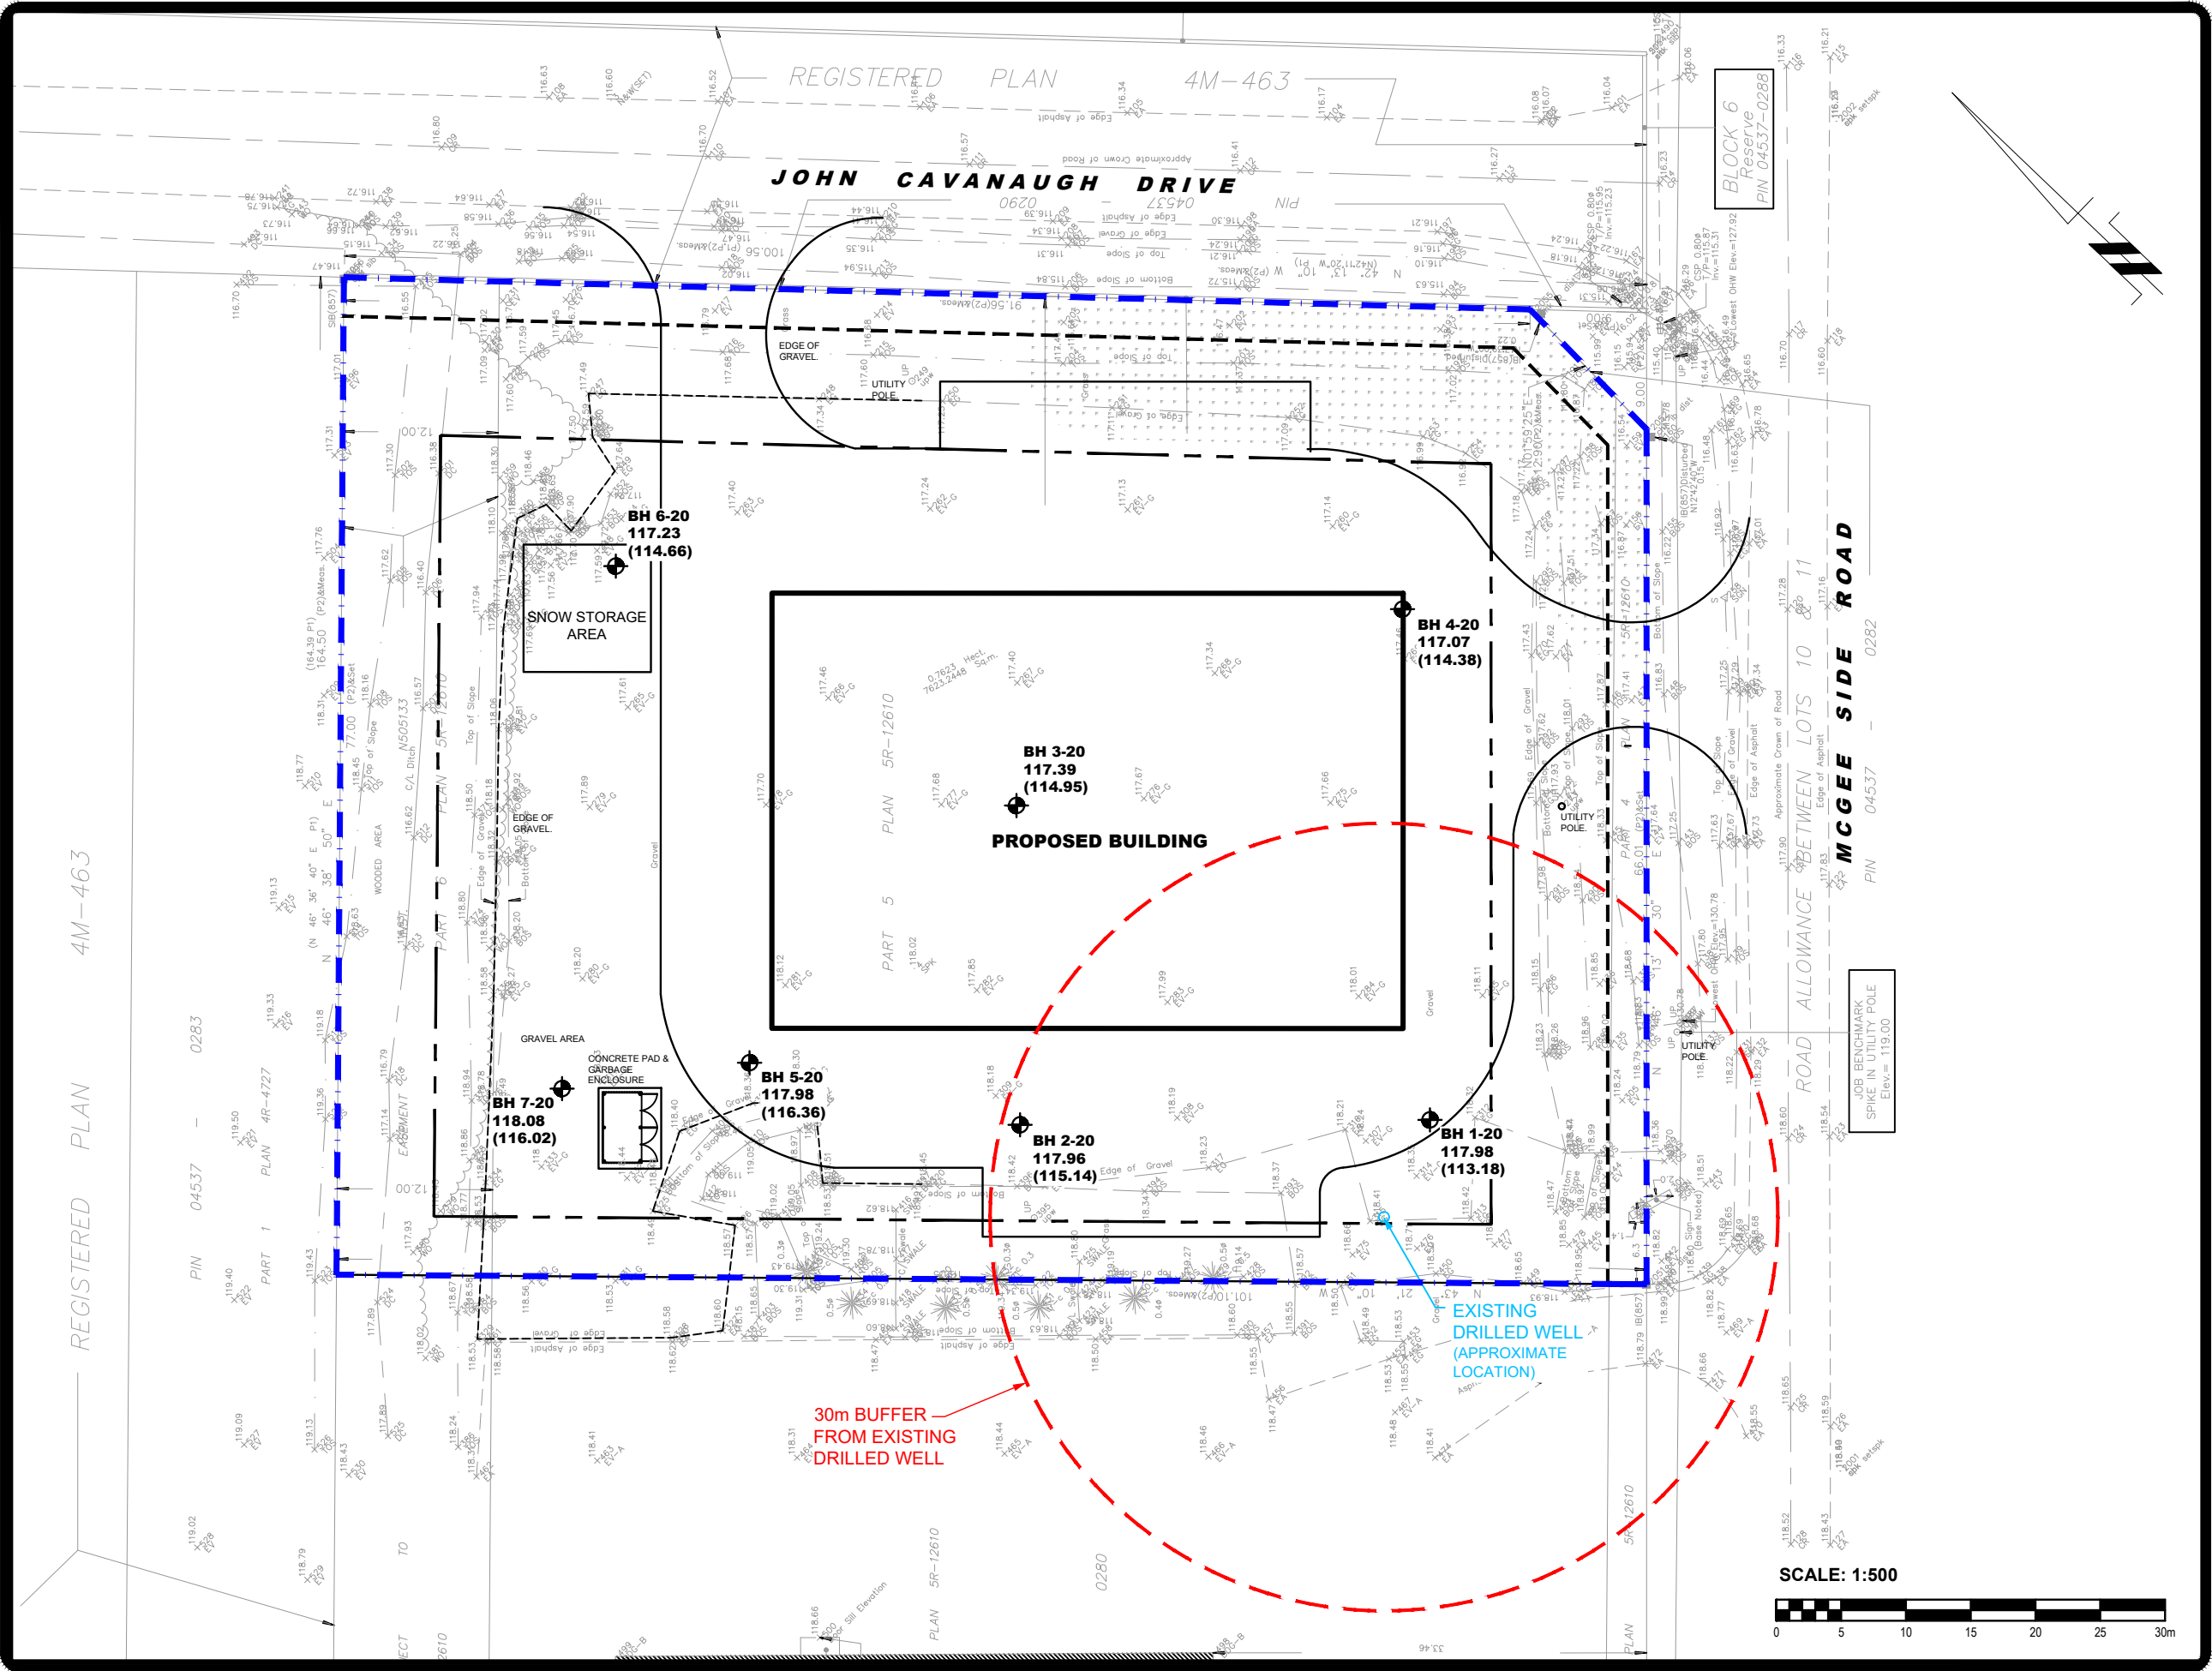

**LEGEND:**  
 [Symbol] BOREHOLE LOCATION  
 117.96 GROUND SURFACE ELEVATION (m)  
 (115.14) PRACTICAL REFUSAL TO AUGERING ELEVATION (m)

**BENCHMARK INFORMATION:**  
 All ground surface elevations reference a geodetic datum (NAD83 Zone 18T)

**REFERENCE:**  
 Survey Plan provided by D.B. Gray Engineering Inc.

Date	Description	Rev.
07/17/2023	UPDATE	1

Client:  
**Stoked Industries Inc.**


Consultant:  
**paterson group**  
 consulting engineers

Project:  
**PROPOSED WAREHOUSE & OFFICE**  
 2167 MCGEE SIDE ROAD  
 OTTAWA, ONTARIO


Drawing:  
**SITE PLAN**

Scale:	1:500	Seal:
Date:	03/2021	
Drawn by:	JM	
Checked by:	KP	
File:	PH4146	

Drawing No.:  
**PH4146-2**



CLIENT:	MB Ford Construction Ltd.	DESCRIPTION:	Fine Aggregate	FILE NO:	PH4146
CONTRACT NO.:	-	SPECIFICATION:	Soil	LAB NO:	23277
PROJECT:	2167 McGee Side	INTENDED USE:	-	DATE RECEIVED:	6-Jan-21
		PIT OR QUARRY:	-	DATE TESTED:	6-Jan-21
DATE SAMPLED:	20-Nov-21	SOURCE LOCATION:	BH7 - SS2	DATE REPORTED:	8-Jan-21
SAMPLED BY:	-	SAMPLE LOCATION:	2'6 - 4'6	TESTED BY:	D.K

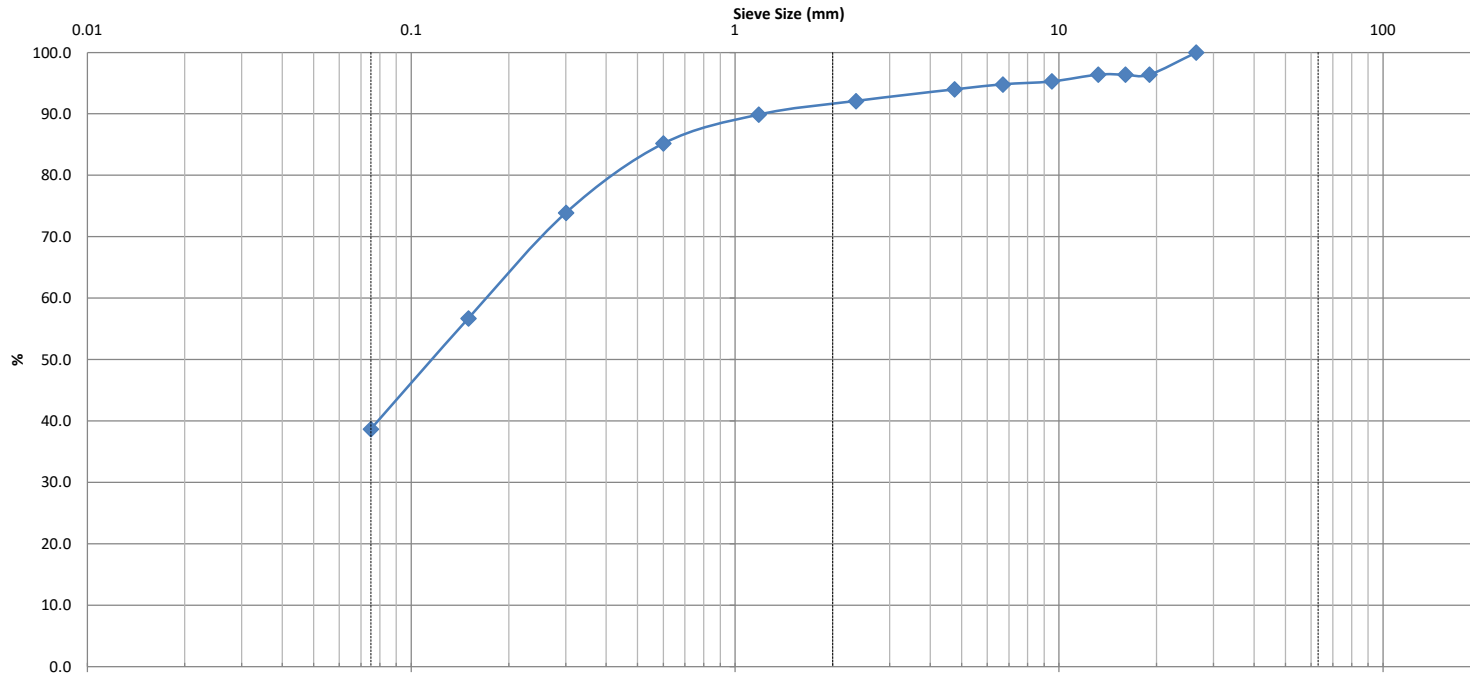

Silt and Clay	Sand			Gravel		Cobble
	Fine	Medium	Coarse	Fine	Coarse	

Identification	Soil Classification					MC(%)	LL	PL	PI	Cc	Cu
										0.89	8.5
	D100	D60	D30	D10	Gravel (%)	Sand (%)		Silt (%)		Clay (%)	
26.5	0.17	0.055	0.02	6.0	55.3		38.7				

Comments:

REVIEWED BY:	Curtis Beadow	Joe Fosyth, P. Eng.
	<i>[Signature]</i>	<i>[Signature]</i>

CLIENT: MB Ford Construction Ltd.	DESCRIPTION: Fine Aggregate	FILE NO.: PH4146
CONTRACT NO.: -	SPECIFICATION: Soil	LAB NO.: 23277
PROJECT: 2167 McGee Side	INTENDED USE: -	DATE REC'D: 6-Jan-21
	PIT OR QUARRY: -	DATE TESTED: 6-Jan-21
DATE SAMPLED: 20-Nov	SOURCE LOCATION: BH7 - SS2	DATE REP'D: 8-Jan-21
SAMPLED BY: -	SAMPLE LOCATION: 2'6 - 4'6	TESTED BY: D.K



<b>WEIGHT BEFORE WASH</b>	741.8
---------------------------	-------

<b>WEIGHT AFTER WASH</b>	469.3
--------------------------	-------

SIEVE SIZE (mm)	WEIGHT RETAINED	PERCENT RETAINED	PERCENT PASSING	LOWER SPEC	UPPER SPEC	REMARK
150						
106						
75						
63						
53						
37.5						
26.5	0.0	0.0	100.0			
19	26.8	3.6	96.4			
16	26.8	3.6	96.4			
13.2	26.8	3.6	96.4			
9.5	34.9	4.7	95.3			
6.7	38.3	5.2	94.8			
4.75	44.8	6.0	94.0			
2.36	58.4	7.9	92.1			
1.18	75.1	10.1	89.9			
0.6	109.7	14.8	85.2			
0.3	193.8	26.1	73.9			
0.15	321.5	43.3	56.7			
0.075	455.0	61.3	38.7			
PAN	468.5					

SIEVE CHECK FINE	0.17	0.3% max.	<b>REFERENCE MATERIAL</b>
------------------	------	-----------	---------------------------


OTHER TESTS	RESULT	LAB NO.	RESULT

<b>REVIEWED BY:</b>	<b>Curtis Beadow</b>	<b>Joe Forsyth, P. Eng.</b>
		

Predictive Nitrate Impact Assessment

PRE DEVELOPMENT CONDITIONS		POST DEVELOPMENT CONDITIONS	
<b>Groundwater Flow Through</b>		<b>Groundwater Flow Through</b>	
	NOT USED		NOT USED
Background Nitrate Concentration ( $C_b$ ) =	0 mg/L	Background Nitrate Concentration ( $C_b$ ) =	0 mg/L
Hydraulic Conductivity (k) =	0 m/s	Hydraulic Conductivity (k) =	0 m/s
Horizontal Gradient (i) =	0	Horizontal Gradient (i) =	0
Length (L) =	0 m	Length (L) =	0 m
Aquifer Thickness (t) =	0 m	Aquifer Thickness (t) =	0 m
Groundwater Flow ( $Q_b$ ) =	0 m <sup>3</sup> /day	Groundwater Flow ( $Q_b$ ) =	0 m <sup>3</sup> /day
<b>Infiltration Factors</b>		<b>Infiltration Factors</b>	
Topography	0	Topography	0.25
Soil	0.00	Soil	0.30
Cover	0.00	Cover	0.10
<b>Total</b>	<b>0</b>	<b>Total</b>	<b>0.65</b>
<b>Site Characteristics</b>		<b>Site Characteristics</b>	
Area of Site :	- m <sup>2</sup>	Area of Site :	7,621 m <sup>2</sup>
	0	Roof + driveway areas + gravel fill area	4,278 m <sup>2</sup>
	0	Length of roadways:	- m
	0	Width of roadways	- m <sup>2</sup>
		Total area of roadways:	-
		Impervious Area	4,278 m <sup>2</sup>
		Percent Impervious Area =	56.13 %
Infiltration Area =	- m <sup>2</sup>	Infiltration Area =	3,343 m <sup>2</sup>
<b>Septic Effluent</b>		<b>Septic Effluent</b>	
Concentration of Effluent ( $C_s$ ) =	0 mg/L	Concentration of Effluent ( $C_s$ ) =	4 mg/L
Daily Sewage Flow ( $Q_s$ ) =	0 m <sup>3</sup>	Daily Sewage Flow ( $Q_s$ ) =	4.327 m <sup>3</sup>
		See Note 1 below.	
<b>Infiltration Calculation</b>		<b>Infiltration Calculation</b>	
Nitrate concentration in precipitation ( $C_i$ ) =	0 mg/L	Nitrate concentration in precipitation ( $C_i$ ) =	0 mg/L
Surplus Water (Environment Canada)	mm/yr	Surplus Water (Environment Canada)	402 mm/yr
Factored Water Surplus =	0 mm/yr	Factored Water Surplus =	261 mm/yr
Total volume of Infiltration	- m <sup>3</sup> /yr	Infiltration % due to stormwater management measures	0%
		Infiltration rate from stormwater management measures =	0 mm/yr
Infiltration flow entering the system ( $Q_i$ ) =	0 m <sup>3</sup> /day	Infiltration Flow Entering the System ( $Q_i$ ) =	2 m <sup>3</sup> /day
<b>Mass Balance Model (MOEE, 1995)</b>		<b>Mass Balance Model (MOEE, 1995)</b>	
$C_T = (Q_b C_b + Q_s C_s + Q_i C_i) / (Q_b + Q_s + Q_i) =$ Cumulative Nitrate Concentration		$C_T = (Q_b C_b + Q_s C_s + Q_i C_i) / (Q_b + Q_s + Q_i) =$ Cumulative Nitrate Concentration	
$Q_b$ = flow entering the system across the upgradient area	0 m <sup>3</sup> /day	$Q_b$ = flow entering the system across the upgradient area	0 m <sup>3</sup> /day
$C_b$ = background nitrate concentration	0 mg/L	$C_b$ = background nitrate concentration	0 mg/L
$Q_s$ = flow entering the system from the septic drainfield	0 m <sup>3</sup> /day	$Q_s$ = flow entering the system from the septic drainfield	4.327 m <sup>3</sup> /day
$C_s$ = concentration of nitrates in the septic effluent	0 mg/L	$C_s$ = concentration of nitrates in the septic effluent	4 mg/L
$Q_i$ = flow entering the system from infiltration	0 m <sup>3</sup> /day	$Q_i$ = flow entering the system from infiltration	2 m <sup>3</sup> /day
$C_i$ = Concentration of nitrates in the infiltrate	0 mg/L	$C_i$ = Concentration of nitrates in the infiltrate	0 mg/L
<b><math>C_T</math> = #DIV/0! mg/L</b>		<b><math>C_T</math> = 2.58 mg/L</b>	
Estimate Number of Lots	<b>4 lots</b>	Estimate Number of Lots	<b>1 lots</b>
* = see separate weighted infiltration factor calculations			




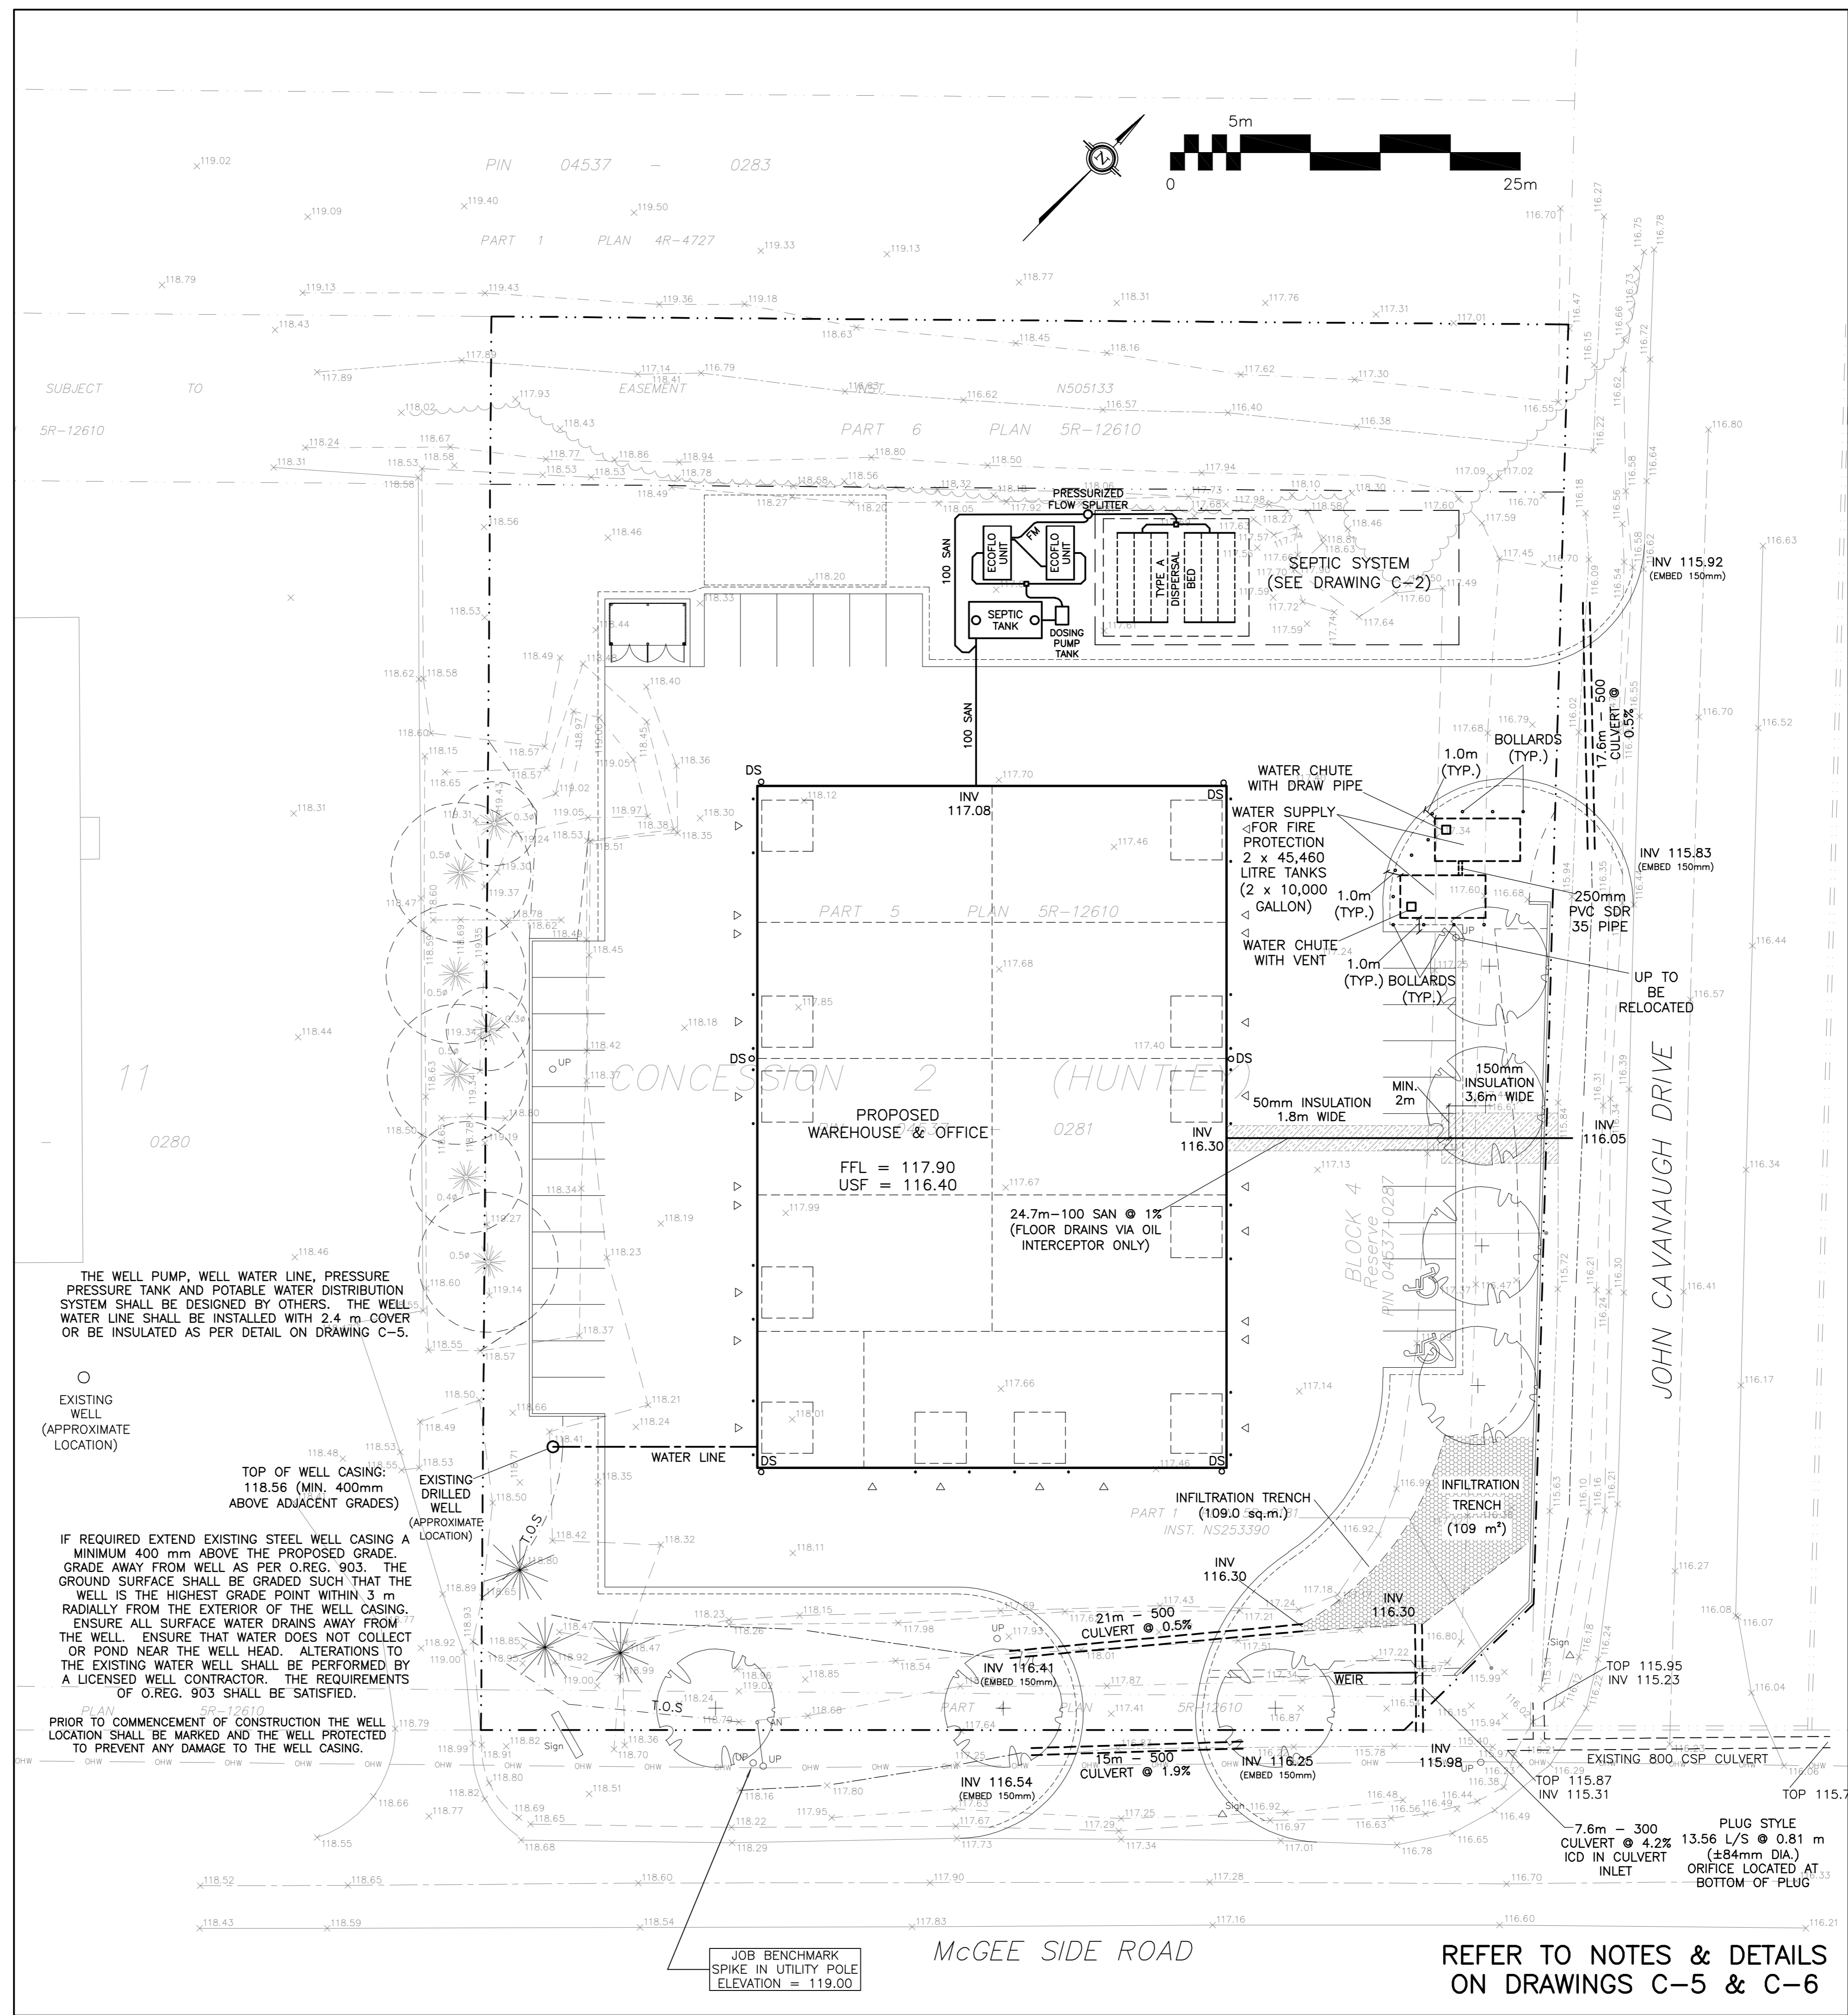

**DRAWING LEGEND**

- INV INVERT OF PIPE
- SAN SANITARY SEWER
- WL WATER LINE
- DS◦ EAVE TROUGH DOWNSPOUT
- +67.89 EXISTING GRADE ELEVATION
- +67.89 PROPOSED GRADE ELEVATION
- 2% EXISTING SLOPE OF GRADE
- 2% PROPOSED SLOPE OF GRADE
- T.O.S TOP OF SLOPE
- B.O.S BOTTOM OF SLOPE
- CENTERLINE OF SWALE
- ..... SILT BARRIER FENCE
- PROPERTY LINE
- D.C 150mm CURB/DEPRESSED CURB
- /// LIGHT-DUTY PAVEMENT
- /// HEAVY-DUTY PAVEMENT
- CONCRETE
- LANDSCAPE
- C.R.Z CRITICAL ROOT ZONE
- FFL FIRST FLOOR ELEVATION
- USF UNDERSIDE OF FOOTING
- ⇨ EMERGENCY OVERLAND FLOW

**KEY PLAN**

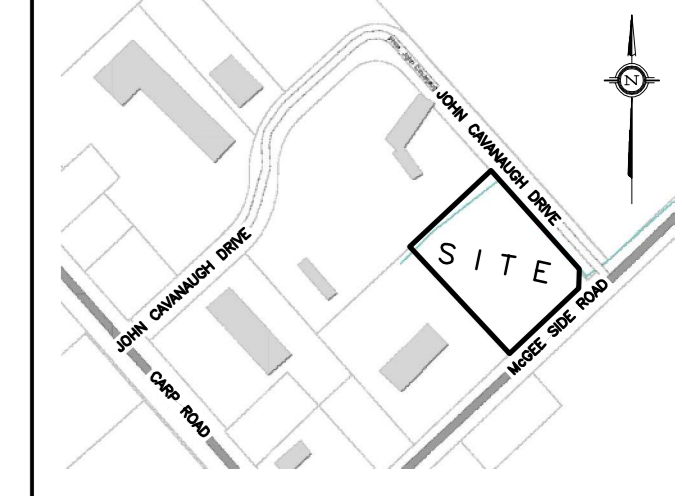

No.	DATE	REVISION
4	JUN 29-23	ISSUED FOR APPROVAL
3	JUN 23-23	RE-ISSUED FOR COORDINATION
2	JUN 8-23	ISSUED FOR COORDINATION
1	APR 19-23	ISSUED FOR CLIENT REVIEW

**D. B. GRAY ENGINEERING INC.**  
 Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Mainframes  
 700 Long Point Circle 613-425-8044  
 Ottawa, Ontario d.gray@dbgrayengineering.com

Project  
**OFFICE & WAREHOUSE**  
 2167 MCGEE SIDE ROAD  
 OTTAWA, ONTARIO

**SITE SERVICING PLAN**

Engineer's Seal  
  
 Drawn D.B.G.  
 Hor. Scale 1:250  
 Vert. Scale 1:250  
 Date APR 19-23  
 Job No. 23024  
 Drawing No.  
**C-1**  
 of 7  
 NOT VALID UNLESS SIGNED & DATED

THE WELL PUMP, WELL WATER LINE, PRESSURE TANK AND POTABLE WATER DISTRIBUTION SYSTEM SHALL BE DESIGNED BY OTHERS. THE WELL WATER LINE SHALL BE INSTALLED WITH 2.4 m COVER OR BE INSULATED AS PER DETAIL ON DRAWING C-5.

○ EXISTING WELL (APPROXIMATE LOCATION)

TOP OF WELL CASING: 118.56 (MIN. 400mm ABOVE ADJACENT GRADES)

IF REQUIRED EXTEND EXISTING STEEL WELL CASING A MINIMUM 400 mm ABOVE THE PROPOSED GRADE. GRADE AWAY FROM WELL AS PER O.REG. 903. THE GROUND SURFACE SHALL BE GRADED SUCH THAT THE WELL IS THE HIGHEST GRADE POINT WITHIN 3 m RADIALLY FROM THE EXTERIOR OF THE WELL CASING. ENSURE ALL SURFACE WATER DRAINS AWAY FROM THE WELL. ENSURE THAT WATER DOES NOT COLLECT OR POND NEAR THE WELL HEAD. ALTERATIONS TO THE EXISTING WATER WELL SHALL BE PERFORMED BY A LICENSED WELL CONTRACTOR. THE REQUIREMENTS OF O.REG. 903 SHALL BE SATISFIED.

PRIOR TO COMMENCEMENT OF CONSTRUCTION THE WELL LOCATION SHALL BE MARKED AND THE WELL PROTECTED TO PREVENT ANY DAMAGE TO THE WELL CASING.

JOB BENCHMARK SPIKE IN UTILITY POLE ELEVATION = 119.00

REFER TO NOTES & DETAILS ON DRAWINGS C-5 & C-6







# WaterNO<sub>x</sub>-S & WaterNO<sub>x</sub>-LS Nitrogen Removal


Removes up to 95% of total nitrogen from residential or commercial septic systems with a simple, passive, and cost-effective denitrification filter.

Available upgrade for *all* Waterloo Biofilter advanced wastewater treatment systems



Nitrogen is a nutrient naturally found in human wastewater. Excess nitrogen in groundwater is a public health concern, while excess nitrogen in surface waters can stimulate algae blooms and lake eutrophication. Not only can this be a nuisance and interfere with the enjoyment of water bodies - but serious health and ecosystem problems can result such as 'blue baby' syndrome, fish kills, and 'brown or red tide' algae toxins that accumulate in shellfish.

## Excess nitrogen in the environment can:




Contaminate Drinking Water Sources with High Levels of Nitrate



Limit Recreation Activities such as Swimming, Boating, and Fishing



Lower Property Values by Impairing Quality of Surface Water




Lower Dissolved Oxygen Levels and Reduce Fish Populations

## Multiple Levels of Removal

The Waterloo Biofilter system itself removes 25-35% of total nitrogen with a single-pass configuration, and 50-65% of total nitrogen with a double-pass configuration where treated effluent is recirculated back to the septic tank. With a WaterNOx-S or WaterNOx-LS denitrification filter installed after the Waterloo Biofilter treatment unit, up to 95% total nitrogen removal can be achieved.

### WaterNOx-S

The WaterNOx-S recirculates nitrified effluent up through a plastic filtration media with external carbon source added for denitrification.

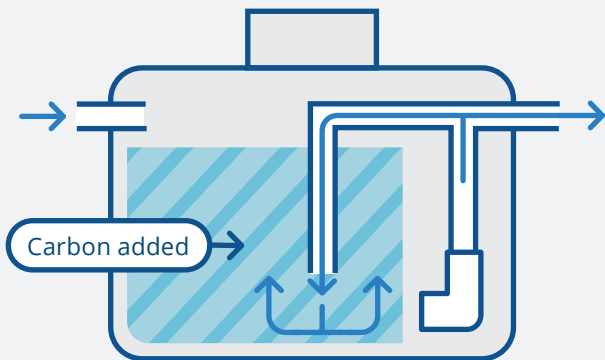


A pump re-circulates the water through the filtration media. External carbon is added.

### WaterNOx-S Benefits

- ▶ Permanent filtration medium
- ▶ Easy set-up and servicing
- ▶ No filter media backwashing
- ▶ Safe, non-toxic carbon source
- ▶ Low energy use
- ▶ New or retrofit applications

### WaterNOx-LS

The WaterNOx-LS uses autotrophic bacteria to denitrify nitrified effluent in a proprietary blend of agricultural minerals.

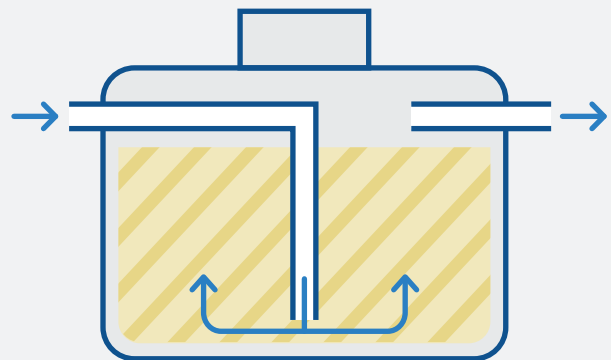

Water goes down to the bottom of the tank, then flows up through the media and out the outlet.

### WaterNOx-LS Benefits

- ▶ 100% passive, no energy used
- ▶ No extra pump necessary
- ▶ No chemical addition
- ▶ Long, 10+ year filter media lifespan
- ▶ Self-buffered to neutral pH
- ▶ Minimal increase to BOD and TSS


For more  
information:

[www.waterloo-biofilter.com](http://www.waterloo-biofilter.com)  
1-866-366-4329  
[info@waterloo-biofilter.com](mailto:info@waterloo-biofilter.com)





# Disinfection Instruction Sheet

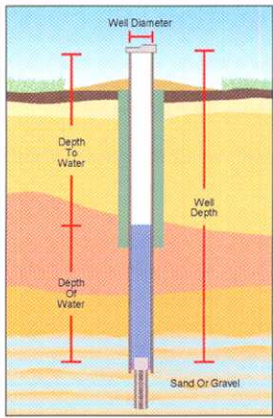

If your drinking water continues to test positive on repeated submissions, consult your local health unit, which can help you interpret the results of your tests and provide you with advice on what measures you can take to safeguard your drinking water.

The first step in identifying the reason for repeated adverse water quality is to conduct a visual inspection of your well. Start with a close look at your well. The area around it should be

clear of any potential contaminant sources, such as pets, lawn care products, and gardens. Once you're satisfied that the area around your well is okay, take a good, close look at the well itself. If you have an older well, make sure that the cap and the sealant around the well casing isn't cracked or damaged. If it is, you need to fix or replace it right away.

If the source of the problem can't be detected, consult a licensed well contractor right away to identify the source of the problem and eliminate it. You can save yourself a lot of money by doing this instead of rushing out to buy a home treatment device that may be expensive to install, operate, and maintain. And it may not eliminate the source of your trouble.

(If you have a cistern, please talk to your public health unit about disinfection requirements.)

1. Measure the diameter of the well.
2. Measure the well depth and the static or resting water level, then calculate the depth of water in the well.
3. Using the table on this sheet, measure out the amount of bleach needed. (The table gives the volume of bleach needed for different well sizes.) Then, pour the mixture into your well.
4. If possible, mix the water in the well. This can be accomplished by attaching a hose to a tap, running water from the well, through the hose and back into the well.
5. After adding chlorine to the well, remove or bypass any carbon filters that are in the system for water treatment. If you don't, these filters will remove the chlorine from the water, and any pipes beyond the filter will not get disinfected. Replace with new filters after chlorination to avoid reintroducing bacteria into the system.
6. Run water at every faucet in the house (and barn, if you have one) until a strong chlorine odour is detected. Be aware that your nose may lose its ability to detect chlorine.
7. If there is no chlorine smell or it is very weak, add more bleach to the well and repeat Step 6 above.
8. Drain the water heater and fill with chlorinated water.
9. Backflush the water softener and all water filters (except carbon filters).

10. Let the chlorinated water stand in the system for at least 12 hours.

11. Clear chlorine from the well by running an outside hose to the ground surface. Then, run clear water through the faucets until the water no longer smells of chlorine.

12. Avoid putting too much chlorine into the septic system because the bacteria needed for septic decomposition may be killed.

13. Do not drink the water without boiling it until test results show the water is safe to drink.

**Volume of Bleach to Add for Every 3 Metres (10 Feet) of Water in the Well\***

Casing Diameter		Volume of Unscented Bleach (5.25% solution)
Millimetres	Inches	Millilitres
50	2	6
100	4	30
150	6	60
200	8	100
250	10	200
300	12	250
400	16	400
500	20	650
600	24	900
900	36	2000 (2 litres)
1200	48	3600 (3.6 litres)

**For example:** If you have 6 metres (20 feet) of water in your well and it has a casing diameter of 100 mm or 4 inches, you would add 60 mm or 2 fluid ounces of bleach.

\* For questions or more information on how to disinfect your well, contact your local health unit.

## For more information

### Ontario Government Ministry Abbreviations

Ministry of Health and Long-Term Care  
MOHLTC (also MOH)

Ministry of the Environment  
MOE (also MOEE)

Ontario Ministry of Agriculture and Food  
OMAF (also OMAFRA)

### Ontario Government Information Lines

MOE Public Information Centre: 1-800-565-4923

MOE Water Well Records: 1-888-396-9355

MOHLTC INFOline: 1-800-268-1154

OMAF Agricultural Information Contact Centre: 1-877-424-1300

### Ontario Government Web Sites

MOE: [www.ene.gov.on.ca](http://www.ene.gov.on.ca)

MOHLTC: [www.health.gov.on.ca](http://www.health.gov.on.ca)

OMAF: [www.gov.on.ca/omaf](http://www.gov.on.ca/omaf)

### Publications available on-line

Health Canada: [www.hc-sc.gc.ca](http://www.hc-sc.gc.ca)

- *A Guide to Well Water Treatment and Maintenance*;
- *Water treatment devices for disinfection of drinking water*.

MOHLTC: [www.health.gov.on.ca](http://www.health.gov.on.ca)

- *How to use water safely during a "Boil Water Advisory"*;
- *E. coli Bacteria*;
- List of Public Health Units in Ontario.

OMAF: [www.gov.on.ca/omaf](http://www.gov.on.ca/omaf)

- *Assessing the Potential for Ground Water Contamination on Your Farm*, Publication 97-017;

- *Best Management Practices: Water Wells*, OMAFRA and Agriculture and Agri-Food Canada, 2003 (to order).

MOE: [www.ene.gov.on.ca](http://www.ene.gov.on.ca)

- *Important Facts About Water Well Construction*, Publication 3788;
- *Water Wells and Groundwater Supplies: The Protection of Water Quality in Bored and Dug Wells*, Information Sheet PIB 601b;
- *Water Wells and Groundwater Supplies: The Protection of Water Quality in Drilled Wells*, Information Sheet PIB 602b.