GENERAL NOTES AND SPECIFICATIONS

- 1. ALL MATERIALS AND CONSTRUCTION METHODS TO BE IN ACCORDANCE WITH OPS AND CITY OF OTTAWA STANDARD SPECIFICATIONS AND DRAWINGS AND OPSD SUPPLEMENT. ONTARIO PROVINCIAL STANDARDS WILL APPLY WHERE NO CITY STANDARDS ARE AVAILABLE.
- THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL PERMITS REQUIRED AND BEAR COST OF SAME INCLUDING WATER PERMIT AND ASSOCIATED COSTS.
- 3. SERVICE AND UTILITY LOCATIONS ARE APPROXIMATE, CONTRACTOR TO VERIFY LOCATION AND ELEVATION OF EXISTING SERVICES AND UTILITIES PRIOR TO CONSTRUCTION. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING LOCATES FROM ALL UTILITY COMPANIES TO LOCATE EXISTING UTILITIES PRIOR TO EXCAVATION. THE CONTRACTOR IS RESPONSIBLE FOR PROTECTION AND REINSTATEMENT.
- 4. ALL DISTURBED AREAS SHALL BE REINSTATED TO EQUAL OR BETTER CONDITION TO THE SATISFACTION OF THE ENGINEER & THE CITY. PAVEMENT REINSTATEMENT FOR SERVICE AND UTILITY CUTS SHALL BE IN ACCORDANCE WITH OPSD 509.010 , OPSS 310, AND CITY OF OTTAWA R10.
- 5. ALL WORK SHALL BE COMPLETED IN ACCORDANCE WITH THE "OCCUPATIONAL HEALTH AND SAFETY ACT AND REGULATION FOR CONSTRUCTION PROJECTS". THE GENERAL CONTRACTOR SHALL BE DEEMED TO BE THE CONSTRUCTOR AS DEFINED IN THE ACT.
- WHERE EC PLANS ARE NOT FOLLOWED, OR ARE FOUND TO PROVIDE INSUFFICIENT PROTECTION, THE CONTRACTOR SHALL SUBMIT AN EROSION AND SEDIMENTATION CONTROL PLAN THAT WILL IMPLEMENT BEST MANAGEMENT PRACTICES TO PROVIDE PROTECTION FOR RECEIVING STORM SEWERS OR DRAINAGE DURING CONSTRUCTION ACTIVITIES. THIS PLAN SHALL INCLUDE BUT NOT BE LIMITED TO CATCH BASINS INSERTS, STRAW BALE CHECK DAMS AND SEDIMENT CONTROLS AROUND ALL DISTURBED AREAS. DEWATERING SHALL BE PUMPED INTO SEDIMENT TRAPS.
- SITE PLAN PREPARED BY: MATAJ ARCHITECTS INC. DATED APRIL 5. 2022. DRAWING No: ASP-02
- 8. TOPOGRAPHIC SURVEY SUPPLIED BY ANNIS, O'SULLIVAN, VOLLEBEKK LTD, TOPOGRAPHIC PLAN OF SURVEY, BLOCK 10, REGISTERED PLAN 4M-1634, CITY OF OTTAWA.
- 9. REFER TO LANDSCAPE ARCHITECTURE PLAN FOR ALL LANDSCAPING FEATURES (ie. TREES, WALKWAYS, PARK DETAILS, NOISE BARRIERS, FENCES etc.)
- 10. GEOTECHNICAL INVESTIGATION PREPARED BY YURI MENDEZ ENGINEERING. DATED AUGUST 17, 2020, TITLED SUBSURFACE INVESTIGATION REPORT. REPORT No. 52-0136-R0. GEOTECHNICAL INFORMATION PRESENTED ON THESE DRAWINGS MAY BE INTERPOLATED FROM THE ORIGINAL REPORT. REFER TO ORIGINAL GEOTECHNICAL REPORT FOR ADDITIONAL DETAILS AND TO VERIFY ASSUMPTIONS MADE HEREIN.
- 11. STREET LIGHTING TO CITY OF OTTAWA STANDARDS.
- 12. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED. DIMENSIONS SHALL BE CHECKED AND VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION. ANY DISCREPANCIES TO BE REPORTED IMMEDIATELY TO ENGINEER.
- 13. THERE WILL BE NO SUBSTITUTION OF MATERIALS UNLESS PRIOR WRITTEN APPROVAL BY THE CONTRACT ADMINISTRATOR AND PROJECT ENGINEER HAS BEEN OBTAINED.
- 14. HERITAGE OPERATIONS UNIT OF THE ONTARIO MINISTRY OF CULTURE TO BE NOTIFIED IF DEEPLY BURRIED ARCHEOLOGICAL REMAINS ARE FOUND ON THE PROPERTY DURING CONSTRUCTION ACTIVITIES.

ROADWORKS

- ALL TOPSOIL AND ORGANIC MATERIAL TO BE STRIPPED FROM WITHIN THE FULL RIGHT OF WAY PRIOR TO CONSTRUCTION.
- 2. SUB-EXCAVATE SOFT AREAS & FILL WITH GRANULAR 'B' COMPACTED IN 0.30m LAYERS.
- 3. ALL GRANULAR FOR ROADS SHALL BE COMPACTED TO A MINIMUM OF 98% STANDARD PROCTOR MAXIMUM DRY DENSITY (SPMDD).
- 4. ROAD SUBDRAINS SHALL BE CONSTRUCTED AS PER CITY OF OTTAWA STANDARD R1.
- ASPHALT WEAR COURSE SHALL NOT BE PLACED UNTIL THE VIDEO INSPECTION OF SEWERS & NECESSARY REPAIRS HAVE BEEN CARRIED OUT TO THE SATISFACTION OF THE CONSULTANT.
- CONTRACTOR TO OBTAIN A ROAD OCCUPANCY PERMIT 48 HOURS PRIOR TO COMMENCING ANY WORK WITHIN THE MUNICIPAL ROAD ALLOWANCE IF REQUIRED BY THE MUNICIPALITY, ALL WORK ON THE MUNICIPAL RIGHT OF WAY AND EASEMENTS TO BE INSPECTED BY THE MUNICIPALITY PRIOR TO BACKFILLING.
- PAVEMENT REINSTATEMENT FOR SERVICE AND UTILITY CUTS SHALL BE IN ACCORDANCE WITH CITY OF OTTAWA STANDARD R10, AND OPSD 509.010, AND OPSS 310.
- 8. CONCRETE CURBS SHALL BE CONSTRUCTED AS PER CITY STANDARD SC1.1 AND SC1.3 (BARRIER OR MOUNTABLE CURB AS SHOWN ON DRAWINGS)
- 9. CONCRETE SIDEWALKS SHALL BE CONSTRUCTED AS PER CITY STANDARDS SC3 AND SC1.4.
- 10. PAVEMENT CONSTRUCTION AS PER GEOTECHNICAL INVESTIGATION BY YURI MENDEZ ENGINEERING. DATED AUGUST 17, 2020, TITLED SUBSURFACE INVESTIGATION REPORT. REPORT No. 52-0136-R0. ACCESS ROADS 76.2mm SURFACE COURSE - OPSS 1151 SUPERPAVE 12.5 152.4mm BASE - OPSS 1010 GRANULAR 'A' 406.4mm SUBBASE - OPSS 1010 GRANULAR 'B' TYPE II SUBGRADE - UNDISTURBED IN SITU SOIL
 - CAR PARKING AREAS 50.8mm SURFACE COURSE - OPSS 1151 SUPERPAVE 9.5 152.4mm BASE - OPSS 1010 GRANULAR 'A' 279.4mm SUBBASE - OPSS 1010 GRANULAR 'B' TYPE II SUBGRADE - UNDISTURBED IN SITU SOIL

WATER SUPPLY SERVICING

- THE CONTRACTOR SHALL CONSTRUCT WATERMAIN, WATER SERVICES, CONNECTIONS & APPURTENANCES AS PER CITY OF OTTAWA SPECIFICATIONS & SHALL CO-ORDINATE AND PAY ALL RELATED COSTS INCLUDING THE COST OF CONNECTION, INSPECTION & DISINFECTION BY CITY PERSONNEL.
- WATERMAIN PIPE MATERIAL SHALL BE PVC CL.150 DR18. DEFLECTION OF WATERMAIN PIPE IS NOT TO EXCEED 1/2 OF THAT SPECIFIED BY THE MANUFACTURER. PVC WATERMAINS TO BE INSTALLED WITH TRACER WIRE IN ACCORDANCE WITH CITY OF OTTAWA STANDARD W36
- WATER SERVICES ARE TO BE PEX TUBING AS PER CITY OF OTTAWA STANDARD W26 (UNLESS OTHERWISE NOTED), WATER SERVICE TO EXTEND 2.0M BEYOND PROPERTY LINE. STAND POST TO BE

- INSTALLED AT PROPERTY LINE. ROLL OF PEX MIN 8M LONG TO BE LEFT. NOTE : 20mm INSIDE DIAMETER REQUIRED
- 4. FIRE HYDRANTS TO BE INSTALLED AS PER CITY OF OTTAWA STANDARDS W18 AND W19.
- WATER VALVES TO BE INSTALLED AS PER CITY OF OTTAWA STANDARD W24
- 6. WATERMAIN TRENCH AND BEDDING SHALL BE IN ACCORDANCE WITH 10. FENCES OR RAILINGS ARE REQUIRED FOR RETAINING WALLS CITY OF OTTAWA STD. W17 UNLESS OTHERWISE SPECIFIED. BEDDING AND COVER MATERIAL TO BE SPECIFIED BY PROJECT GEOTECHNICAL CONSULTANT.
- SERVICE CONNECTIONS SHALL BE INSTALLED A MINIMUM OF 2400mm FROM ANY CATCHBASIN, MANHOLE, OR OBJECT THAT MAY CONTRIBUTE TO FREEZING. THERMAL INSULATION SHALL BE INSTALLED ON ALL PROPOSED CB'S ON THE W/M STREET SIDE WHERE 2400mm SEPARATION CANNOT BE ACHIEVED.(AS PER CITY OF 13. REFER TO DRAWING EC-1 FOR EROSION AND SEDIMENT CONTROL OTTAWA W22 & W23)
- 8. CATHODIC PROTECTION TO BE SUPPLIED ON METALLIC FITTINGS AS PER CITY OF OTTAWA W40 AND W42.
- 9. THRUST BLOCKS TO BE INSTALLED AS PER CITY OF OTTAWA STANDARDS W25.3 AND W25.4
- 10. WATERMAIN TO HAVE MIN. 2.4m COVER. WHERE WATERMAIN COVER IS LESS THAN 2.4m, INSULATION TO BE SUPPLIED IN ACCORDANCE WITH CITY STANDARD W22.
- 11. WATERMAIN CROSSINGS ABOVE AND BELOW SEWERS TO BE INSTALLED AS PER CITY OF OTTAWA STANDARD W25 AND W25.2.
- 12. PRESSURE REDUCING VALVES (PRV'S) ON ALL UNITS TO BE INSTALLED AS PER ONTARIO PLUMBING CODE.

STORM AND SANITARY SEWERS

- 1. STORM AND SANITARY SEWERS 375mm DIA. OR SMALLER SHALL BE PVC SDR35. SANITARY SEWERS LARGER THAN 375mm SHALL BE CONCRETE CSA A 257.2 CLASS 100D AS PER OPSD 807.010.
- ALL STORM AND SANITARY SEWER BEDDING SHALL BE INSTALLED AS PER CITY OF OTTAWA STANDARDS S6 AND S7, CLASS "B" BEDDING, UNLESS OTHERWISE NOTED. SUITABLE BEDDING AND COVER MATERIAL TO BE SPECIFIED BY GEOTECHNICAL CONSULTANT.
- 3. STORM AND SANITARY MANHOLES SHALL BE 1200mm DIAMETER IN ACCORDANCE WITH OPSD-701.01 (UNLESS OTHERWISE NOTED) c/w FRAME AND COVER AS PER CITY OF OTTAWA S24, S24.1, AND S25 WHERE APPLICABLE. CATCH BASIN MANHOLE FRAME AND COVERS PER S19, S28, AND S28.1 WHERE APPLICABLE. ALL STORM MANHOLES WITH SEWERS 900mm DIA SEWERS AND OVER IN SIZE SHALL BE BENCHED. ALL OTHER STORM MANHOLES SHALL BE COMPLETED WITH 300mm SUMPS AS PER CITY STANDARDS. SANITARY MANHOLES SHALL NOT HAVE SUMPS.
- 4. ALL SEWERS CONSTRUCTED WITH GRADES 0.50% OR LESS TO BE INSTALLED WITH LASER AND CHECKED WITH LEVEL INSTRUMENT PRIOR TO BACKFILLING.
- 5. FOR STORM SEWER INSTALLATION (EXCLUDING CB LEADS) THE MINIMUM DEPTH OF COVER OVER THE CROWN OF THE SEWER IS 2.0m. FOR SANITARY SEWERS THE MINIMUM DEPTH OF COVER IS 2.5m OVER PIPE OBVERT.
- 6. ALL STORM AND SANITARY SERVICES TO BE EQUIPPED WITH APPROVED BACKWATER VALVES AS PER CITY STANDARD (S14, S14.1, AND S14.2).
- 7. STORM AND SANITARY SERVICE LATERALS TO BE SDR 28 INSTALLED AT MIN. 1.0% SLOPE. SINGLE STORM SERVICES TO BE 100mmØ, SINGLE SANITARY SERVICES TO BE 135mmØ. (SERVICES TO EXTEND 2.0m BEYOND PROPERTY LINE)
- 8. CATCH BASINS SHALL BE INSTALLED IN ACCORDANCE WITH CITY TANDARDS S1, S2, S3 c/w FRAME AND GRATE AS PER S19, CURB INLET FRAME AND GRATE PER S22 AND S23. PROVIDE 150mm ADJUSTED SPACERS. ALL CATCH BASINS SHALL HAVE SUMPS (600mm DEEP), STREET CATCH BASIN LEADS SHALL BE 200mm DIA.(MIN) PVC SDR 35 AT 1.0% GRADE WHERE NOT OTHERWISE SHOWN ON PLAN. CATCH BASINS WILL BE INSTALLED WITH INLET CONTROL DEVICES (ICD) AS PER ICD SCHEDULE ON STORM DRAINAGE PLAN.
- 9. STREET CATCH BASINS TO BE INSTALLED c/w SUBDRAINS 3m LONG IN FOUR ORTHOGONAL DIRECTIONS OR LONGITUDINALLY WHEN PLACED ALONG A CURB, AND AT AN ELEVATION OF 300mm BELOW SUBGRADE LEVEL.
- 10. REAR LOT PERFORATED PIPE TO BE INSTALLED AS PER CITY OF OTTAWA STANDARDS S29. REAR LOT STRUCTURES TO BE INSTALLED AS PER CITY OF OTTAWA STANDARD W30 AND W31.
- 11. CLAY SEALS TO BE INSTALLED AS PER CITY STANDARD DRAWING S8. THE SEALS SHOULD BE AT LEAST 1.5m LONG (IN THE TRENCH DIRECTION) AND SHOULD EXTEND FROM TRENCH WALL TO TRENCH WALL. GENERALLY, THE SEALS SHOULD EXTEND FROM THE FROST LINE AND FULLY PENETRATE THE BEDDING, SUBBEDDING AND COVER MATERIAL. THE BARRIERS SHOULD CONSIST OF RELATIVELY DRY AND COMPACTABLE BROWN SILTY CLAY PLACED IN MAXIMUM 225mm THICK LOOSE LAYERS COMPACTED TO A MINIMUM OF 95% OF THE MATERIAL'S SPMDD. THE CLAY SEALS SHOULD BE PLACED AT THE SITE BOUNDARIES AND AT STRATEGIC LOCATIONS AT NO MORE THAN 60m INTERVALS IN THE SERVICE TRENCHES. FOR DETAILS REFER TO GEOTECHNICAL INVESTIGATION .
- 12. GRANULAR "A" SHALL BE PLACED TO A MINIMUM THICKNESS OF 300 mm AROUND ALL STRUCTURES WITHIN PAVEMENT AREA AND COMPACTED TO A MINIMUM OF 98% STANDARD PROCTOR DENSITY.
- 13. CONTRACTOR SHALL PERFORM LEAKAGE TESTING, IN THE PRESENCE OF THE CONSULTANT, FOR SANITARY SEWERS IN ACCORDANCE WITH OPSS 410 AND OPSS 407. CONTRACTOR SHALL PERFORM VIDEO INSPECTION OF ALL STORM AND SANITARY SEWERS. A COPY OF THE VIDEO AND INSPECTION REPORT SHALL BE SUBMITTED TO THE CONSULTANT FOR REVIEW.
- 14. ANY SEWER ABANDONMENT TO BE CONDUCTED ACCORDING TO CITY OF OTTAWA STANDARD S11.4

GRADING

- 1. ALL GRANULAR BASE & SUB BASE COURSE MATERIALS SHALL BE COMPACTED TO 98% STANDARD PROCTOR MAX. DRY DENSITY.
- 2. SUB-EXCAVATE SOFT AREAS & FILL WITH GRANULAR 'B' COMPACTED IN 0.30m LAYERS.
- 3. ALL DISTURBED GRASSED AREAS SHALL BE RESTORED TO ORIGINAL CONDITION OR BETTER, WITH SOD ON MIN. 100mm TOPSOIL. THE RELOCATION OF TREES AND SHRUBS SHALL BE SUBJECT TO APPROVAL BY THE PROJECT LANDSCAPE ARCHITECT OR ENGINEER.
- 4. 100 YEAR PONDING DEPTH TO BE 0.35m (MAXIMUM).
- 5. EMBANKMENTS TO BE SLOPED AT MIN. 3:1, UNLESS OTHERWISE SPECIFIED.
- 6. ALL SWALES TO BE CONSTRUCTED AS PER CITY STANDARD S29.
- 7. ALL ROOF DOWNSPOUTS TO DISCHARGE TO THE GROUND ONTO SPLASH PADS AND SHALL NOT BE DIRECTED TO THE STORM SEWER

OR THE BUILDING FOUNDATION DRAIN. 8. TOP OF GRATE (T/G) ELEVATIONS FOR ALL STREET CATCHBASINS

- PAVEMENT, OR GUTTERLINE WHERE APPLICABLE.
- DESIGNED, APPROVED, AND STAMPED BY STRUCTURAL ENGINEER.
- GREATER THAN 0.60m IN HEIGHT.
- 11. EXCESS EXCAVATED MATERIAL SHALL BE REMOVED FROM THE SITE.
- THE CONTRACTOR. REVIEW WITH CONTRACT ADMINISTRATOR AND THE CITY OF OTTAWA PRIOR TO TREE CUTTING.
 - DETAILS.

Best Management Practices APPROPRIATE EROSION AND SEDIMENT CONTROL MEASURES MAY BE SUBJECT TO PENALTIES IMPOSED BY ANY APPLICABLE REGULATORY AGENCY.

FOLLOWING TECHNIQUES:

- 1. LIMIT THE EXTENT OF EXPOSED SOILS AT ANY GIVEN TIME.
- REVEGETATE EXPOSED AREAS AND SLOPES AS SOON AS POSSIBLE
- 3. MINIMIZE AREA TO BE CLEARED AND GRUBBED.
- RECEIVE RUN-OFF FROM THE SITE.
- BE DETERMINED)
- DISPOSED OFF SITE AS PER THE REQUIREMENTS OF THE CONTRACT.
- 8. OR DOWNSTREAM WATERCOURSES.
- WATERWAY.
- WITHOUT PRIOR WRITTEN AUTHORIZATION FROM THE CONTRACT ADMINISTRATOR.
- REQUIRED.

THE SITE.

SHOWN ON PLANS. REFER TO THE ELEVATION AT EDGE OF

9. ALL RETAINING WALLS GREATER THAN 1.0m IN HEIGHT ARE TO BE

12. ALL NECESSARY CLEARING AND GRUBBING SHALL BE COMPLETED BY

CONTRACTOR TO PROVIDE EROSION AND SEDIMENT CONTROLS (BEST MANAGEMENT PRACTICES) DURING CONSTRUCTION OF THIS PROJECT. THE CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES, TO PROVIDE FOR PROTECTION OF THE AREA DRAINAGE SYSTEM AND THE RECEIVING WATERCOURSE, DURING CONSTRUCTION ACTIVITIES. THE CONTRACTOR ACKNOWLEDGES THAT FAILURE TO IMPLEMENT

EROSION MUST BE MINIMIZED AND SEDIMENTS MUST BE REMOVED FROM CONSTRUCTION SITE RUN-OFF IN ORDER TO PROTECT DOWNSTREAM AREAS DURING ALL CONSTRUCTION, EROSION AND SEDIMENTATION SHOULD BE CONTROLLED BY THE

4. PROTECT EXPOSED SLOPES WITH PLASTIC OR SYNTHETIC MULCHES. INSTALL CATCH BASIN INSERTS OR EQUIVALENT IN ALL PROPOSED CATCH BASINS AND CATCH BASIN MANHOLES AND IN ALL EXISTING CATCH BASINS THAT WILL

A SILT FENCE SHALL BE INSTALLED AROUND THE PERIMETER OF ALL AND ANY STOCKPILES OF MATERIAL TO BE USED OR REMOVED FROM SITE, (LOCATION TO

A VISUAL INSPECTION SHALL BE DONE DAILY ON SEDIMENT CONTROL MEASURES AND CLEANED OF ANY ACCUMULATED SILT AS REQUIRED. THE DEPOSITS WILL BE

SEDIMENT CONTROL BARRIERS MAY ONLY BE REMOVED TEMPORARILY WITH APPROVAL OF CONTRACT ADMINISTRATOR TO ACCOMMODATE CONSTRUCTION OPERATIONS, ALL AFFECTED BARRIERS MUST BE REINSTATED AT NIGHT WHEN CONSTRUCTION IS COMPLETED. NO REMOVAL WILL OCCUR IF THERE IS A SIGNIFICANT RAINFALL EVENT ANTICIPATED (>10mm) UNLESS A NEW DEVICE HAS BEEN INSTALLED TO PROTECT EXISTING STORM AND SANITARY SEWER SYSTEMS,

9. NO REFUELING OR CLEANING OF EQUIPMENT IS PERMITTED NEAR ANY EXISTING

10. CONTRACTOR SHALL REMOVE SEDIMENT CONTROL MEASURES WHEN, IN THE OPINION OF THE CONTRACT ADMINISTRATOR. THE MEASURE(S) IS NO LONGER REQUIRED. NO CONTROL MEASURES SHALL BE PERMANENTLEY REMOVED

THE CONTRACTOR SHALL PERIODICALLY, OR WHEN REQUESTED BY THE CONTRACT ADMINISTRATOR, CLEAN OUT ACCUMULATED SEDIMENTS AS

12. THE CONTRACTOR SHALL IMMEDIATELY REPORT TO THE ENGINEER ANY ACCIDENTAL DISCHARGES OF SEDIMENT MATERIAL INTO THE WATERCOURSE APPROPRIATE RESPONSE MEASURES, INCLUDING ANY REPAIRS TO EXISTING CONTROL MEASURES OR THE IMPLEMENTATION OF ADDITIONAL CONTROL MEASURES, SHALL BE CARRIED OUT BY THE CONTRACTOR WITHOUT DELAY.


13. CONTRACTOR SHALL INSTALL MUD MATS AT ALL CONSTRUCTION ENTRANCES TO

14. STORMWATER SWALES TO BE COVERED WITH HYDRO-SEED AND MULCH.

LEGEND

SERVICES

EXISTING CONDITIONS



EXISTING WATERMAIN EXISTING VALVE AND VALVE BOX EXISTING VALVE CHAMBER EXISTING REDUCER EXISTING FIRE HYDRANT EXISTING SANITARY SEWER EXISTING STORM SEWER EXISTING CATCHBASIN MANHOLE EXISTING CATCHBASIN EXISTING SUBDRAIN CATCHBASIN

EXISTING SWALE

PROPOSED WATERMAIN PROPOSED VALVE AND VALVE BOX PROPOSED VALVE CHAMBER PROPOSED REDUCER PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER PROPOSED STORM SEWER PROPOSED CATCHBASIN CIRCULAR ORIFICE (SEE ICD TABLE ON SSP-1 AND SD-1) EX/FUT. WATERMAIN EXISTING/FUTURE VALVE AND VALVE BOX EXISTING/FUTURE VALVE CHAMBER EXISTING/FUTURE REDUCER EXISTING/FUTURE FIRE HYDRANT EXISTING/FUTURE SANITARY SEWER EXISTING/FUTURE STORM SEWER EXISTING/FUTURE CATCHBASIN MANHOLE EXISTING/FUTURE CATCHBASIN PROPOSED DEPRESSED CURB LOCATIONS PROPOSED BARRIER CURB

THERMAL INSULATION ON STORM SEWER WHERE COVER IS LESS THAN 1.5m. THERMAL INSULATION ON WATERMAIN WHERE COVER IS LESS THAN 2.4m AS PER W22. WATER METER

REMOTE WATER METER

C100A - SANITARY DRAINAGE AREA ID#

 FLOW RATE IN (L/s) BASED ON MOTEL / HOTEL RATES USED FROM APPENDIX 4-A.4 OF THE OSDG. RESIDENTIAL PORTION WITH FULL HOUSEKEEPING FACILITIES @ 225L/day/p (ASSUMING DOUBLE OCCUPANCY PER ROOM) AND 125L/day/p FOR DINNING ROOM.


SANITARY DRAINAGE AREA ha.

ʹີີີ 100Δ ` – INFILTRATION RATE OF 0.28 L/s/Ha APPLIED 0.11 INFL

SANITARY DRAINAGE AREA ha.

SANITARY DRAINAGE AREA PROPOSED SANITARY SEWER

COMPOSITE UTILITY

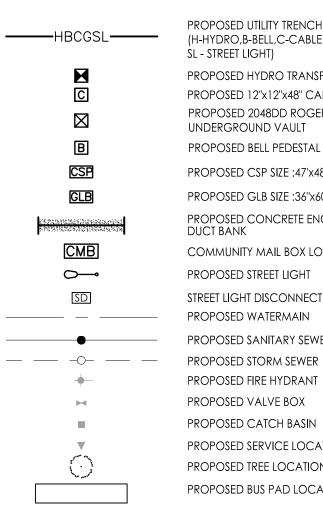


PROPOSED UTILITY TRENCH (H-HYDRO,B-BELL,C-CABLE,G-GAS

PROPOSED HYDRO TRANSFORMER PROPOSED 12"x12"x48" CABLE PEDESTAL PROPOSED 2048DD ROGERS UNDERGROUND VAULT PROPOSED BELL PEDESTAL PROPOSED CSP SIZE :47'x48''x20'' PROPOSED GLB SIZE :36"x60"x36" PROPOSED CONCRETE ENCASED DUCT BANK COMMUNITY MAIL BOX LOCATION PROPOSED STREET LIGHT STREET LIGHT DISCONNECT PROPOSED WATERMAIN PROPOSED SANITARY SEWER PROPOSED FIRE HYDRANT PROPOSED VALVE BOX PROPOSED CATCH BASIN


PROPOSED SERVICE LOCATION PROPOSED TREE LOCATION PROPOSED BUS PAD LOCATION


GRADING



_____ CMB

STORM DRAINAGE






· ____ · ___ · ___ · ___ · ___ · ___ · ___ · ___ · _ _ · ___ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ · _ _ _ / ······· _____ . . _____


EROSION CONTROL


 $(\bigcirc$





M	
Θ	
<	
-	
ė	





(M)

SANITARY DRAINAGE

0.31 COM

ORIGINAL GROUND ELEVATION PROPOSED ELEVATION PROPOSED LOT CORNER ELEVATION EXISTING ELEVATION AT LOT CORNER FLOW DIRECTION AND GRADE FINISHED FIRST FLOOR ELEVATION UNDERSIDE OF FOOTING ELEVATION ENGINEERED FILL REQUIRED TERRACING 3:1 SLOPE MAXIMUM (UNLESS OTHERWISE SHOWN) DIRECTION OF PROPOSED OVERLAND FLOW PROPOSED VALVE BOX

PROPOSED VALVE CHAMBER PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER MANHOLE PROPOSED STORM SEWER MANHOLE PROPOSED CATCHBASIN MANHOLE PROPOSED CATCHBASIN ______ PROPOSED DEPRESSED CURB LOCATION PROPOSED BARRIER CURB PROPOSED COMMUNITY MAILBOX LOCATIONS

TWSI LOCATION AS PER CITY STD CIRCULAR ORIFICE (SEE ICD TABLE ON SSP-1 AND SD-1)

– AREA II - RUNOFF COEFFICIENT

HEAVY DUTY ASPHALT

— STORM DRAINAGE AREA hc STORM DRAINAGE BOUNDARY DIRECTION OF OVERLAND FLOW DIRECTION OF EXISTING OVERLAND FLOW

PROPOSED STORM SEWER PROPOSED CATCHBASIN MANHOLE PROPOSED CATCHBASIN CIRCULAR ORIFICE (SEE ICD TABLE ON SSP-1 AND SD-1)

EXISTING CATCHBASIN THERMAL INSULATION ON STORM SEWER WHERE COVER IS LESS THAN 1.5m. THERMAL INSULATION ON WATERMAIN WHERE COVER IS LESS THAN 2.4m AS PER W22.

MAXIMUM STATIC PONDING LIMITS

100YR. STATIC PONDING LIMITS

EXISTING STORM SEWER

PROPOSED SILT FENCE BOUNDARY AS PER OPSD 219.110 PROPOSED CONSTRUCTIN FENCE AS PER DETAIL. PROPOSED STRAW BALE LOCATION AS PER OPSD 219.100 PROPOSED CATCH BASIN PROTECTION AS PER DETAIL

> PROPOSED CATCH BASIN MH PROTECTION AS PER FLEX STORM INLET FILTERS DETAIL.

PROPOSED MUD MAT LOCATION

PROPOSED VALVE BOX PROPOSED VALVE CHAMBER PROPOSED FIRE HYDRANT PROPOSED SANITARY SEWER MANHOLE PROPOSED STORM SEWER MANHOLE PROPOSED CATCHBASIN





LILY XU, MCIP, RPP MANAGER, DEVELOPMENT REVIEW SOUTH PLANNING, INFRASTRUCTURE & ECONOMIC DEVELOPMENT DEPARTMENT, CITY OF OTTAWA



Stantec Consulting Ltd 400 - 1331 Clyde Avenue Ottawa ON Tel. 613.722.4420 www.stantec.com

Copyright Reserved

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden.

Legend

Notes

REVISED AS PER CITY COMMENTS MJS KJK 22.08.30 REVISED AS PER CITY COMMENTS WAJ KJK 22.06.03 MJS TR 21.04.08 ISSUED FOR SPA By Appd. YY.MM.DD Revision

MJS KK MJS 21.01.15 Dwn. Chkd. Dsgn. YY.MM.DD File Name: 160401620 DB.dwg Permit-Seal

Client/Project 2441736 ONTARIO INC. 125 LUSK STREET, OTTAWA, ON, K2J 6S5 PHONE: 613-307-0412 BLOCK 10 HOME 2 - PROPOSED 6 STOREY

OTTAWA, ON, CANADA

Title

NOTES AND LEGEND PLAN

