



REVISED

Geotechnical Investigation – Proposed Residential Development

360 Kennedy Lane East, Ottawa, Ontario

Prepared for:

**United Property
Resource Corporation**

3250 Bloor Street West, Second Floor
Toronto, ON M8X 2Y4

October 26, 2022

Pinchin File: 296551.001



Issued to: United Property Resource Corporation
Issued on: October 26, 2022
Pinchin File: 296551.001
Issuing Office: Kanata, ON

Author: Wesley Tabaczuk, P.Eng.
Project Manager, Geotechnical Services
613.212.8487
wtabaczuk@pinchin.com

Reviewer: Vanessa Marshall, M.Eng., P.Eng.
National Practice Leader, Geotechnical Services
519.904.4660
vmarshall@pinchin.com





TABLE OF CONTENTS

1.0	INTRODUCTION AND SCOPE	1
2.0	SITE DESCRIPTION AND GEOLOGICAL SETTING	2
3.0	GEOTECHNICAL FIELD INVESTIGATION AND METHODOLOGY	2
4.0	SUBSURFACE CONDITIONS	4
4.1	Borehole Soil Stratigraphy	4
4.2	Groundwater Conditions	4
5.0	GEOTECHNICAL DESIGN RECOMMENDATIONS	5
5.1	General Information	5
5.2	Site Preparation	5
5.3	Open Cut Excavations	6
5.4	Anticipated Groundwater Management	7
5.5	Site Servicing	8
5.5.1	<i>Pipe Bedding and Cover Materials for Flexible and Rigid Pipes</i>	8
5.5.2	<i>Trench Backfill</i>	8
5.5.3	<i>Frost Protection</i>	10
5.6	Foundation Design	10
5.6.1	<i>Shallow Foundations Bearing on Natural Silty/Clayey Soil</i>	10
5.6.2	<i>Site Classification for Seismic Site Response & Soil Behaviour</i>	11
5.6.3	<i>Foundation Transition Zones</i>	12
5.6.4	<i>Estimated Settlement</i>	13
5.6.5	<i>Building Drainage</i>	13
5.6.6	<i>Shallow Foundations Frost Protection & Foundation Backfill</i>	13
5.7	Basement Design	13
5.8	Floor Slabs	14
5.9	Asphaltic Concrete Pavement Structure Design for Parking Lot and Driveways	15
5.9.1	<i>Discussion</i>	15
5.9.2	<i>Pavement Structure</i>	16
5.9.3	<i>Pavement Structure Subgrade Preparation and Granular up Fill</i>	16
5.9.4	<i>Drainage</i>	17
6.0	SITE SUPERVISION & QUALITY CONTROL	17
7.0	TERMS AND LIMITATIONS	18



FIGURES

Figure 1	Key Map
Figure 2	Borehole Location Plan

APPENDICES

APPENDIX I	Abbreviations, Terminology and Principle Symbols used in Report and Borehole Logs
APPENDIX II	Pinchin's Borehole Logs
APPENDIX III	Laboratory Testing Reports for Soil Samples
APPENDIX IV	Report Limitations and Guidelines for Use



1.0 INTRODUCTION AND SCOPE

Pinchin Ltd. (Pinchin) was retained by United Property Resource Corporation (Client) to conduct a Geotechnical Investigation and provide subsequent geotechnical design recommendations for the proposed residential development to be located at 360 Kennedy Lane East, Ottawa, Ontario (Site). The Site location is shown on Figure 1.

Based on information provided by the Client, it is Pinchin's understanding that the proposed development is to consist of eight separate blocks of two to three storey townhouse buildings, each constructed with a basement level. New site services and asphalt surfaced access roadways and parking areas will be constructed around the proposed buildings.

Pinchin's geotechnical comments and recommendations are based on the results of the Geotechnical Investigation and our understanding of the project scope.

The purpose of the Geotechnical Investigation was to delineate the subsurface conditions and soil engineering characteristics by advancing a total of seven (7) sampled boreholes (Boreholes MW1 to MW7) at the Site. The information gathered from the Geotechnical Investigation will allow Pinchin to provide geotechnical design recommendations for the proposed development.

Based on a desk top review and the results of the Geotechnical Investigation, the following geotechnical data and engineering design recommendations are provided herein:

- A detailed description of the soil and groundwater conditions;
- Site preparation recommendations;
- Open cut excavations;
- Anticipated groundwater management;
- Site service trench design;
- Foundation design recommendations including soil bearing resistances at Ultimate Limit States (ULS) and Serviceability Limit States (SLS) design;
- Potential total and differential settlements;
- Foundation frost protection and engineered fill specifications and installation;
- Seismic Site classification for seismic Site response;
- Concrete floor slab-on-grade support recommendations;
- Asphaltic concrete pavement structure design for parking areas and access roadways;
and
- Potential construction concerns.



Abbreviations, terminology, and principal symbols commonly used throughout the report, borehole logs and appendices are enclosed in Appendix I.

2.0 SITE DESCRIPTION AND GEOLOGICAL SETTING

The Site is located on the south side of Kennedy Lane East, approximately 600 m south of Highway 174 in Ottawa, Ontario. The Site is currently developed with a single storey church building and a single storey storage building as well as asphalt surfaced parking areas and an asphalt surfaced laneway. The remainder of the Site consists of a grass field with isolated areas of mature trees noted.

Data obtained from the Ontario Geological Survey Maps, as published by the Ontario Ministry of Natural Resources, indicates that the Site is located on a fine textured glaciomarine deposit consisting of massive to well laminated silt and clay with minor sand and gravel deposits (Ontario Geological Survey 2010. Surficial geology of Southern Ontario; Ontario Geological Survey, Miscellaneous Release--Data 128-REV). The underlying bedrock at this Site is of the Rockcliffe and Shadow Lake Formations consisting of limestone, dolostone, shale, arkose, and sandstone (Ontario Geological Survey 2011. 1:250 000 scale bedrock geology of Ontario; Ontario Geological Survey, Miscellaneous Release---Data 126-Revision 1).

3.0 GEOTECHNICAL FIELD INVESTIGATION AND METHODOLOGY

Pinchin completed a field investigation at the Site on September 8 and 9, 2021 by advancing a total of seven (7) sampled boreholes (Boreholes MW1 to MW7) throughout the Site. The boreholes were advanced to depths ranging from approximately 3.7 to 9.8 metres below existing ground surface (mbgs). The approximate spatial locations of the boreholes advanced at the Site are shown on Figure 2.

The boreholes were advanced with the use of a Diedrich D50 drill rig which was equipped with standard soil sampling equipment. Soil samples were collected at 0.76 and 1.52 m intervals using a 51 mm outside diameter (OD) split spoon barrel in conjunction with Standard Penetration Tests (SPT) "N" values (ASTM D1586). The SPT "N" values were used to assess the compactness condition of the non-cohesive soil.

Shear strengths of the cohesive soil were measured with a combination of using a handheld pocket penetrometer as well as using the field vane shear test, as per ASTM D2573. The shear strengths measured are plotted on the appended borehole logs.

Monitoring wells were installed within Boreholes MW1 and MW3 to MW7 to allow measurement of groundwater levels. The monitoring wells were constructed using flush-threaded 50 mm diameter Trilock pipe with 3.0 meter long 10-slot well screens, delivered to the Site in pre-cleaned individually sealed plastic bags. The screen and riser pipes were not allowed to come into contact with the ground or drilling equipment prior to installation.



A completed well record was submitted to the property owner and the Ministry of the Environment, Conservation and Parks for Ontario (MECP) as per Ontario Regulation 903, as amended. A licensed well technician must properly decommission the monitoring wells prior to construction according to Regulation 903 of the Ontario Water Resources Act.

Groundwater observations and measurements were obtained from the open boreholes during and upon completion of drilling. Groundwater levels were measured in the monitoring wells on September 20 and October 27, 2021. The groundwater observations and measurements recorded are included on the appended borehole logs.

The approximate ground surface elevations were obtained from a survey entitled “Topographic Plan of Survey of Part of Block 8, Registered Plan 50M-77, City of Ottawa”, completed by Farley, Smith & Denis Surveying Ltd. 2021, file number 446-21, dated Aug 25, 2021 (Site Topographic Survey).

The field investigation was monitored by experienced Pinchin personnel. Pinchin logged the drilling operations and identified the soil samples as they were retrieved. The recovered soil samples were sealed into plastic bags and carefully transported to an independent and accredited materials testing laboratory for detailed analysis and testing. All soil samples were classified according to visual and index properties by the project engineer.

The field logging of the soil and groundwater conditions was performed to collect geotechnical engineering design information. The borehole logs include textural descriptions of the subsoil in accordance with a modified Unified Soil Classification System (USCS) and indicate the soil boundaries inferred from non-continuous sampling and observations made during the borehole advancement. These boundaries reflect approximate transition zones for the purpose of geotechnical design and should not be interpreted as exact planes of geological change. The modified USCS classification is explained in further detail in Appendix I. Details of the soil and groundwater conditions encountered within the boreholes are included on the Borehole Logs within Appendix II.

Select soil samples collected from the boreholes were submitted to a material testing laboratory to determine the grain size distribution of the soil. A copy of the laboratory analytical reports is included in Appendix III. In addition, the collected samples were compared against previous geotechnical information from the area, for consistency and calibration of results.



4.0 SUBSURFACE CONDITIONS

4.1 Borehole Soil Stratigraphy

In general, the soil stratigraphy at the Site comprises approximately 100 mm of surficial organics overlying natural silty/clayey soil to the maximum borehole termination depth of approximately 9.8 mbgs. The appended borehole logs provide detailed soil descriptions and stratigraphies, results of SPT/shear vane/pocket penetrometer testing, details of monitoring well installations, and groundwater measurements.

The silty/clay material was encountered in all boreholes underlying the surficial organics and was noted to range in soil matrix from silt containing some clay and trace sand, to silt and clay containing trace sand. The silty/clayey material has a soft to very stiff consistency based on shear strengths measured with a field vane and pocket penetrometer of between 19 and 188 kPa. It is noted that the shear strength of the soil typically decreased with depth and is generally a function of the increasing water content. The remolded shear strength of the silty/clayey soil ranged from 3 to 22 kPa, resulting in a sensitivity of 0.9 to 12.3. Grain size distribution analyses indicates that the samples of the silty/clayey material tested contain 0 to 1.5% sand, 52.4 to 83.5% silt, and 15 to 47.5% clay sized particles.

The silty/clayey soil plots above the 'A' line on the plasticity chart, has high plasticity, and as Atterberg Limit testing indicates, has a liquid limit of between 68 and 83%, a plastic limit of between 29 and 34%, and a plasticity index of between 38 and 49%. The moisture content of the material tested ranged from 39.6 to 42.7%, indicating the material is wetter than the plastic limit (WTPL).

4.2 Groundwater Conditions

Groundwater observations and measurements were obtained in the open boreholes at the completion of drilling and are summarized on the appended borehole logs. Groundwater was measured within the monitoring wells installed in Boreholes MW1 and MW3 to MW7 at depths ranging from 1.5 to 4.1 mbgs on October 27, 2021.

Seasonal variations in the water table should be expected, with higher levels occurring during wet weather conditions in the spring and fall and lower levels occurring during dry weather conditions.



5.0 GEOTECHNICAL DESIGN RECOMMENDATIONS

5.1 General Information

The recommendations presented in the following sections of this report are based on the information available regarding the proposed construction, the results obtained from the geotechnical investigation, and Pinchin’s experience with similar projects. Since the investigation only represents a portion of the subsurface conditions, it is possible that conditions may be encountered during construction that are substantially different than those encountered during the investigation. If these situations are encountered, adjustments to the design may be necessary. A qualified geotechnical engineer should be on-Site during the foundation preparation to ensure the subsurface conditions are the same/similar to what was observed during the investigation.

Based on information provided by the Client, it is Pinchin’s understanding that the proposed development is consist of eight separate blocks of two to three storey townhouse buildings, each constructed with a basement level. New site services and asphalt surfaced access roadways and parking areas will be constructed around the proposed buildings.

5.2 Site Preparation

The existing organics are not considered suitable to remain below the proposed building, access roadways and parking areas and will need to be removed. In calculating the approximate quantity of topsoil to be stripped, we recommend that the topsoil thicknesses provided on the individual borehole logs be increased by 50 mm to account for variations and some stripping of the mineral soil below.

Pinchin recommends that any engineered fill required at the Site be compacted in accordance with the criteria stated in the following table:

Type of Engineered Fill	Maximum Loose Lift Thickness (mm)	Compaction Requirements	Moisture Content (Percent of Optimum)
Structural fill to support foundations and floor slabs	200	100% SPMDD	Plus 2 to minus 4
Subgrade fill beneath parking areas and access roadways	300	98% SPMDD	Plus 2 to minus 4

Prior to placing any fill material at the Site, the subgrade should be inspected by a qualified geotechnical engineer and loosened/soft pockets should be sub excavated and replaced with engineered fill. It is noted that grade raises are not recommended at this Site. In the event a grade raise is proposed across the Site, it should be reviewed by Pinchin to confirm it does not impact the geotechnical design recommendations provided in this report.



It is recommended that any fill required to raise grades below the proposed buildings comprise an imported Ontario Provincial Standard Specification (OPSS) 1010 Granular 'B' Type I material. If the work is carried out during very dry weather, water may have to be added to the material to improve compaction.

A qualified geotechnical engineering technician should be on site to observe fill placement operations and perform field density tests at random locations throughout each lift, to indicate the specified compaction is being achieved.

5.3 Open Cut Excavations

As the buildings will be constructed with one basement level, excavations will extend to 3.0 mbgs for the basement construction and between 2.0 and 4.0 mbgs for site service installations.

Based on the subsurface information obtained from within the boreholes, it is anticipated that the excavated material will predominately consist of silty/clayey material. Groundwater was measured within the monitoring wells installed in Boreholes MW1 and MW3 to MW7 at depths ranging from 1.5 to 4.1 mbgs on October 27, 2021. As such, groundwater is expected to be encountered during excavations for the proposed building basements and new Site services.

Where workers must enter trench excavations deeper than 1.2 m, the trench excavations should be suitably sloped and/or braced in accordance with the Occupational Health and Safety Act (OHSA), Ontario Regulation 213/91, Construction Projects, July 1, 2011, Part III - Excavations, Section 226. Alternatively, the excavation walls may be supported by either closed shoring, bracing, or trench boxes complying with sections 235 to 239 and 241 under O. Reg. 231/91, s. 234(1). The use of trench boxes can most likely be used for temporary support of vertical side walls. The appropriate trench should be designed/confirmed for use in this soil deposit.

Based on the OHSA, the natural silty/clayey soils would be classified as Type 3 soil and temporary excavations in these soils must be sloped at an inclination of 1 horizontal to 1 vertical (H to V) from the base of the excavation. Excavations extending below the groundwater table would be classified as a Type 4 soil and temporary excavations will have to be sloped back at 3 H to 1 V from the base of the excavation.

In addition to compliance with the OHSA, the excavation procedures must also comply to any potential other regulatory authorities, such as federal and municipal safety standards.

Alternatively, the excavation walls may be supported by either closed shoring, or bracing, complying with sections 235 to 239 and 241 under O. Reg. 231/91, s. 234(1). Pinchin would be pleased to provide further recommendations on shoring design once the building plans have been completed.



5.4 Anticipated Groundwater Management

As previously mentioned, groundwater was measured between approximately 1.5 and 4.1 mbgs on October 27, 2021.

Minor to moderate groundwater inflow through the silty/clayey material should be expected for excavations extending below the groundwater table. It is believed that this groundwater inflow can be controlled using a gravity dewatering system with perimeter interceptor ditches and high-capacity pumps.

The design of the dewatering system should be left to the contractor's discretion, and the system should meet a performance specification to maintain and control the groundwater at least 0.30 m below the excavation base.

Seasonal variations in the water table should be expected, with higher levels occurring during wet weather conditions in the spring and fall and lower levels occurring during dry weather conditions. If construction commences during wet periods (typically spring or fall), there is a greater potential that the groundwater elevation could be higher and/or perched groundwater may be present. Any potential precipitation of perched groundwater should be able to be controlled from pumping from filtered sumps.

Prior to commencing excavations, it is critical that all existing surface water and potential surface water is controlled and diverted away from the Site to prevent infiltration and subgrade softening. At no time should excavations be left open for a period of time that will expose them to precipitation and cause subgrade softening.

All collected water is to discharge a sufficient distance away from the excavation to prevent re-entry. Sediment control measures, such as a silt fence should be installed at the discharge point of the dewatering system. The utmost care should be taken to avoid any potential impacts on the environment

It is the responsibility of the contractor to propose a suitable dewatering system based on the groundwater elevation at the time of construction. The method used should not adversely impact any nearby structures. A Permit to Take Water (PTTW) or a submission to the Environmental Activity and Sector Registry (EASR) would be required if the daily water takings exceed 50,000 L/day. It is the responsibility of the contractor to make this application if required.

It is noted that Pinchin is in the process of completing a Hydrogeological Investigation for the proposed development, and these recommendations will be further expanded on, within the report.



5.5 Site Servicing

5.5.1 Pipe Bedding and Cover Materials for Flexible and Rigid Pipes

The subgrade soil conditions beneath the Site services will comprise natural silty/clayey soil. No support problems are anticipated for flexible or rigid pipes founded on the silty/clayey soil. Service pipes require an adequate base to ensure proper pipe connection and positive flow is maintained post construction. As such, pipe bedding should be placed to be of uniform thickness and compactness. The pipe bedding and cover material should conform to OPSD 802.010 and 802.013 specifications for flexible pipes and to OPSD 802.031 to 802.033 with Class “B” bedding for rigid pipes.

The pipe bedding material should consist of a minimum thickness of 150 mm Granular “A” (OPSS 1010) below the pipe and extend up the sides to the spring line. However, the bedding thickness may have to be increased depending on the pipe diameter or if wet or weak subgrade conditions are encountered. The pipe cover material from the spring line should consist of a Granular “B” Type I (OPSS 1010) and should extend to a minimum of 300 mm above the top of the pipe. All granular fill material is to be placed in maximum 200 mm thick loose lifts compacted to a minimum of 98% SPMDD.

The bedding material, pipe and cover material should be installed as soon as practically possible after the excavation subgrade is exposed. The longer the excavated subgrade soil remains open to weather conditions and groundwater seepage, the greater the chance for construction problems to occur.

Where it is difficult to stabilize the subgrade due to groundwater or the material is higher than the optimum moisture content, a Granular “B” Type II material may be required. Alternatively, if constant groundwater infiltration becomes an issue, then an approximate 150 mm granular pad consisting of 19 mm clear stone gravel (OPSS 1004) wrapped in a non-woven geotextile (Terrafix 270R or equivalent) should be considered to maintain the integrity of the natural subgrade soils. The clear stone should contain a minimum of 50% crushed particles. Water collected within the stone should be controlled through sumps and filtered pumps.

5.5.2 Trench Backfill

The trench backfill should be compacted in maximum 300 mm thick lifts to 98% SPMDD within 4% of the optimum moisture content. Based on the results of the in-situ moisture content tests carried out on the natural overburden deposits, it may be difficult to achieve the specified density on all of the trench backfill. Nevertheless, it is recommended that the natural soils be used as backfill in the trenches to prevent problems with differential frost heaving of imported subgrade material.

If necessary, compensation for wet trench backfill conditions can be made with additional Granular ‘B’ in the pavement structure. It should be noted, however, that the wet backfill material must be compacted to at least 90% SPMDD or post-construction settlements could occur.



The silty/clayey soil will have a blocky/lumpy texture. If the large interlump voids are not closed completely by thorough compaction, then long-term softening/settlement will occur. The trench backfill should be placed in thin lifts (less than 300 mm) and compacted with a sheepsfoot roller. Particular attention must be made to backfilling service connections where the trenches are narrow.

All stockpiled material should be protected from deleterious materials, additional moisture and be kept from freezing.

Quality control will be the utmost importance when selecting the material. The selection of the material should be done as early in the contract as possible to allow sufficient time for gradation and proctor testing on representative samples to ensure it meets the projects specifications.

Where the natural soil will be exposed, adequate compaction may prove difficult if the material becomes wet (i.e., above the optimum moisture content). Depending on the moisture content of the natural materials at the time of construction, they may either require moisture to be added or stockpiled and left to dry to achieve moisture content within plus 2% to minus 4% of optimum. The natural soil at this Site is subject to moisture content increase during wet weather. As such, stockpiles should be protected to help minimize moisture absorption during wet weather.

Alternatively, an imported drier material of similar gradation as the soil (i.e., silt) may be mixed to decrease the overall moisture content and bring it to within plus 2% to minus 4% of optimum. Depending on weather conditions at the time of construction, an imported material may be required regardless to achieve adequate compaction. If the imported material is not the same/similar to the soil observed on the side walls of the excavation, then a horizontal transition between the materials should be sloped as per frost heave taper OPSD 205.60. Any natural material is to be placed in maximum 300 mm thick lifts compacted to 95% SPMDD within plus 2% to minus 4% optimum moisture content. Imported material should consist of a Granular "A", Granular "B" Type I, or Select Subgrade Material (OPSS 1010). Heavy construction equipment and truck traffic should not cross any pipe until at least 1 m of compacted soil is placed above the top of the pipe.

Post compaction settlement of finer grained soil can be expected, even when placed to compaction specifications. As such, fill materials should be installed as far in advance as possible before finishing the roadway in order to mitigate post compaction settlements.



5.5.3 Frost Protection

The frost penetration depth in Ottawa, Ontario is estimated to extend to approximately 2.1 mbgs in open roadways cleared of snow. As such, it is recommended to place water services at a minimum depth of 300 mm below this elevation with the top of the pipe located at 2.4 mbgs or lower as dictated by municipal service requirements. If a minimum of 2.4 m of soil cover cannot be provided, then the pipe should be insulated with a rigid polystyrene insulation (DOW Styrofoam HI40, or equivalent) or a pre-insulated pipe be utilized.

The insulation design configuration may either consist of placing horizontal insulation to a specified design distance beyond the outside edge of the pipe or an inverted “U” surrounding the top and sides of the pipe. Any method chosen requires suitable design and installation in accordance with the manufacture’s recommendations. To accommodate the placement of horizontal insulation a wider excavation trench may be required.

5.6 Foundation Design

5.6.1 Shallow Foundations Bearing on Natural Silty/Clayey Soil

Conventional shallow strip footings established on the inorganic natural silty/clayey soil encountered at approximately 3.0 mbgs, may be designed using a bearing resistance for 25 mm of settlement at Serviceability Limit States of 50 kPa, and a factored geotechnical bearing resistance of 100 kPa at Ultimate Limit States (ULS). These bearing resistances are for a strip footing of with a maximum width of 1.0 metre. If larger foundations are required, Pinchin should be requested to review the foundation sizes and provide recommendations on alternative foundations.

As the actual service loads were not known at the time of this report, these should be reviewed by the project structural engineer to determine if SLS or ULS governs the footing design.

It is noted that there is a potential for weaker subgrade soil to be encountered between the investigation locations. Any soft/loose areas are to be removed and replaced with low strength concrete.

Pinchin notes that a qualified geotechnical engineering consultant should be on-Site during the proof roll and foundation preparation activities to verify the recommended level of compaction is achieved and to verify the design assumptions and recommendations. This is especially critical with respect to the recommended soil bearing pressures. If variations occur in the soil conditions between the borehole locations, site verification and site review by Pinchin is recommended to provide appropriate recommendations at that time.



The natural subgrade soil is sensitive to change in moisture content and can become loose/soft if subjected to additional water or precipitation. As well, it could be easily disturbed if travelled on during construction. Once it becomes disturbed it is no longer considered adequate to support the recommended design bearing pressures. **It is recommended that a working slab of lean concrete (mud slab) be placed in the footing areas immediately after excavation and inspection to protect the founding soils during placement of formwork and reinforcing steel.**

In addition, to ensure and protect the integrity of the subgrade soil during construction operations, the following is recommended:

- Prior to commencing excavations, it is critical that all existing surface water, potential surface water and perched groundwater are controlled and diverted away from the work Site to prevent infiltration and subgrade softening. At no time should excavations be left open for a period of time that will expose them to inclement weather conditions and cause subgrade softening;
- The subgrade should be sloped to a sump outside the excavation to promote surface drainage and the collected water pumped out of the excavation. Any potential precipitation or seepage entering the excavations should be pumped away immediately (not allowed to pond);
- The footing areas should be cleaned of all deleterious materials such as topsoil, organics, fill, disturbed, or caved materials;
- Any potential large cobbles or boulders (i.e. greater than 200 mm in diameter) within the subgrade material are to be removed and replaced with a similar soil type not containing particles greater than 200 mm in diameter. It is critical that particles greater than 200 mm in diameter are not in contact with the foundation to prevent point loading and overstressing; and
- If the excavated subgrade soil remains open to weather conditions and groundwater seepage, sidewall stability and suitability of the subgrade soil will need to be verified prior to construction.

If construction proceeds during freezing weather conditions, adequate temporary frost protection for the footing bases and concrete must be provided and maintained above freezing at all times.

5.6.2 Site Classification for Seismic Site Response & Soil Behaviour

The following information has been provided to assist the building designer from a geotechnical perspective only. These geotechnical seismic design parameters should be reviewed in detail by the structural engineer and be incorporated into the design as required.



The seismic site classification has been based on the 2012 OBC. The parameters for determination of Site Classification for Seismic Site Response are set out in Table 4.1.8.4.A of the OBC. The site classification is based on the average shear wave velocity in the top 30 m of the site stratigraphy. If the average shear wave velocity is not known, the site class can be estimated from energy corrected Standard Penetration Resistance (N60) and/or the average undrained shear strength of the soil in the top 30 m.

The boreholes advanced at this Site extended to a maximum depth of approximately 9.8 mbgs and were terminated in the silty/clayey soil deposit. SPT “N” values within the material ranged between 0 and 25 blows per 300 mm, with shear strengths measured between 25 and 188 kPa. As such, based on Table 4.1.8.4.A of the OBC, this Site has been classified as Class E. A Site Class E has an average shear wave velocity (V_s) of less than 180 m/s.

5.6.3 Foundation Transition Zones

Excessive differential settlements can occur where the subgrade support material types differ below the underside of continuous strip footings, (i.e., silty/clayey soil to engineered fill). As such, where strip footings transition from one material to another the transition between the materials should be suitably sloped or benched to mitigate differential settlements.

Pinchin also recommends the following transition precautions to mitigate/accommodate potential differential settlements:

- For strip footings, the transition zones should be adequately reinforced with additional reinforced steel lap lengths or widened footings;
- Steel reinforced poured concrete foundation walls; and
- Control joints throughout the transition zone(s).

The above recommendations should be reviewed by the structural engineer and incorporated into the design as necessary.

Where strip footings are founded at different elevations, the subgrade soil is to have a maximum slope of 2 H to 1 V, with the concrete footing having a maximum rise of 600 mm and a minimum run of 600 mm between each step, as detailed in the 2012 Ontario Building Code (OBC). The lower footing should be installed first to mitigate the risk of undermining the upper footing.

Individual spread footings are to be spaced a minimum distance of one and a half times the largest footing width apart from each other to avoid stress bulb interaction between footings. This assumes the footings are at the same elevation.



5.6.4 Estimated Settlement

All individual spread footings should be founded on uniform subgrade soils, reviewed, and approved by a licensed geotechnical engineer.

Foundations installed in accordance with the recommendations outlined in the preceding sections are not expected to exceed total settlements of 25 mm and differential settlements of 19 mm.

All foundations are to be designed and constructed to the minimum widths as detailed in the 2012 OBC.

5.6.5 Building Drainage

To assist in maintaining the building dry from surface water seepage, it is recommended that exterior grades around the buildings be sloped away at a 2% gradient or more, for a distance of at least 2.0 m. Roof drains should discharge a minimum of 1.5 m away from the structure to a drainage swale or appropriate storm drainage system.

5.6.6 Shallow Foundations Frost Protection & Foundation Backfill

In the Ottawa, Ontario area, exterior perimeter foundations for heated buildings require a minimum of 1.8 m of soil cover above the underside of the footing to provide soil cover for frost protection.

Where the foundations for heated buildings do not have the minimum 1.8 m of soil cover frost protection, they should be protected from frost with a combination of soil cover and rigid polystyrene insulation, such as Dow Styrofoam or equivalent product. If required, Pinchin can provide appropriate foundation frost protection recommendations as part of the design review.

To minimize potential frost movements from soil frost adhesion, the perimeter foundation backfill should consist of a free draining granular material, such as a Granular 'B' Type I (OPSS 1010) or an approved sand fill, extending a minimum lateral distance of 600 mm beyond the foundation. The existing native soils are too wet for reuse and not considered suitable for reuse as foundation wall backfill. The backfill material used against the foundation must be placed so that the allowable lateral capacity is achieved. All granular material is to be placed in maximum 300 mm thick lifts compacted to a minimum of 100% SPMDD in hard landscaping areas and 95% SPMDD in soft landscaping areas. It is recommended that inspection and testing be carried out during construction to confirm backfill quality, thickness and to ensure compaction requirements are achieved.

Any trees proposed to be planted at the Site are to be planted a minimum of 3 m from the foundation walls.

5.7 Basement Design

It is understood that the buildings will be constructed with one basement level, which will be approximately 3.0 mbgs. Groundwater was encountered between 1.5 and 4.5 mbgs.



As some of the basements will be constructed below the groundwater levels at the Site, the buildings should be constructed with exterior perimeter foundation drains. The foundation drains should consist of a minimum 150 mm diameter fabric wrapped perforated drainage tile surrounded by 19 mm diameter clear stone (OPSS 1004) with a minimum cover of 150 mm on top and sides and 50 mm below the drainage tile. Since the natural soil contains a significant amount of silt sized particles, the clear stone gravel should be wrapped in a non-woven geotextile (Terrafix 270R or equivalent). The water collected from the weeping tile should be directed away from the building to appropriate drainage areas; either through gravity flow or interior sump pump systems. All subsurface walls should be waterproofed.

As the basements will be constructed close to and below the stabilized groundwater level, an underfloor drainage system should be installed beneath the slab, in addition to the installation of perimeter weeping tiles at the footing level. The floor slab sub drains should be constructed in a similar fashion to the foundation drains and be connected to a suitable frost-free outlet or sump.

If the building is constructed below the groundwater table and subdrains and pumps are used to remove the groundwater from around the building footprint, there is the potential that a Permit to Take Water from the Ministry of the Environment, Conservation and Parks will be required for the long-term dewatering of the Site. Pinchin will provide additional information within the Hydrogeological Assessment being completed for the Site and once the final grades have been set for the Site.

The walls must also be designed to resist lateral earth pressure. Depending on the design of the building the earth pressure computations must take into account the groundwater level at the Site. For calculating the lateral earth pressure, the coefficient of at-rest earth pressure (K_0) may be assumed at 0.5 for non-cohesive sandy soil. The bulk unit weight of the retained backfill may be taken as 20 kN/m³ for well compacted soil. An appropriate factor of safety should be applied.

5.8 Floor Slabs

Prior to the installation of the engineered fill material, all organics and deleterious materials should be removed to the underlying organic free in-situ soil. The in-situ inorganic silty/clayey material encountered within the boreholes is considered adequate for the support of the concrete floor slabs following inspection by a geotechnical engineering consultant. Any soft area(s) encountered during proof rolling should be excavated and replaced with a similar soil type.

Once the subgrade soil is exposed it is to be inspected and approved by a qualified geotechnical engineering consultant to ensure that the material conforms to the soil type and consistency observed during the subsurface investigation work.



Based on the in-situ soil conditions, it is recommended to establish the concrete floor slabs on a minimum 300 mm thick layer of Granular “A” (OPSS 1010). Alternatively, consideration may also be given to using a 200 mm thick layer of uniformly compacted 19 mm clear stone placed over the approved subgrade. Due to the fines content of the native material, if clear stone is used it will need to be wrapped in a geotextile. Any required up-fill should consist of a Granular “B” Type I or Type II (OPSS 1010) or approved equivalent.

The installation of a vapour barrier may be required under the floor slab. If required, the vapour barrier should conform to the flooring manufacturer’s and designer’s requirements. Consideration may be given to carrying out moisture emission and/or relative humidity testing of the slab to determine the concrete condition prior to flooring installation. To minimize the potential for excess moisture in the floor slab, a concrete mixture with a low water-to-cement ratio (i.e. 0.5 to 0.55) should be used.

The following table provides the unfactored modulus of subgrade reaction values:

Material Type	Modulus of Subgrade Reaction (kN/m³)
Granular A (OPSS 1010)	85,000
Granular “B” Type I (OPSS 1010)	75,000
Granular “B” Type II (OPSS 1010)	85,000
Silty/Clayey Soil	10,000

5.9 Asphaltic Concrete Pavement Structure Design for Parking Lot and Driveways

5.9.1 Discussion

Parking areas and access roadways will be constructed around the Site. The in-situ natural silty/clayey soil is considered a sufficient bearing material for an asphaltic concrete pavement structure provided all organics and deleterious materials are removed prior to installing the engineered fill material.

At this time Pinchin is unaware of the proposed final grades for the parking lot and access roadways. As such, provided the pavement structure overlies the in-situ silty/clayey material, the following pavement structure is recommended.



5.9.2 Pavement Structure

The following table presents the minimum specifications for a flexible asphaltic concrete pavement structure:

Pavement Layer	Compaction Requirements	Parking Areas	Access Roadways
Surface Course Asphaltic Concrete HL-3 (OPSS 1150)	92% MRD as per OPSS 310	40 mm	40 mm
Binder Course Asphaltic Concrete HL-8 (OPSS 1150)	92 % MRD as per OPSS 310	50 mm	80 mm
Base Course: Granular “A” (OPSS 1010)	100% Standard Proctor Maximum Dry Density (ASTM-D698)	150 mm	150 mm
Subbase Course: Granular “B” Type I (OPSS 1010)	100% Standard Proctor Maximum Dry Density (ASTM D698)	300 mm	450 mm

Notes:

- I. Prior to placing the pavement structure, the subgrade soil is to be proof rolled with a smooth drum roller without vibration to observe weak spots and the deflection of the soil; and
- II. The recommended pavement structure may have to be adjusted according to the City of Ottawa standards. Also, if construction takes place during times of substantial precipitation and the subgrade soil becomes wet and disturbed, the granular thickness may have to be increased to compensate for the weaker subgrade soil. In addition, the granular fill material thickness may have to be temporarily increased to allow heavy construction equipment to access the Site, in order to avoid the subgrade from “pumping” up into the granular material.

Performance grade PG 58-34 asphaltic concrete should be specified for Marshall mixes.

5.9.3 Pavement Structure Subgrade Preparation and Granular up Fill

The proper placement of base and subbase fill materials becomes very important in addressing the proper load distribution to provide a durable pavement structure.

The pavement subgrade materials should be thoroughly proof-rolled prior to placement of the Granular ‘B’ subbase course. If any unstable areas are noted, then the Granular ‘B’ thickness may need to be increased to support pavement construction traffic. This should be left as a field decision by a qualified geotechnical engineer at the time of construction, but it is recommended that additional Granular ‘B’ be carried as a provisional item under the construction contract.

Where fill material is required to increase the grade to the underside of the pavement structure it should consist of Granular ‘B’ Type I (OPSS 1010). The up-fill material is to be placed in maximum 300 mm thick lifts compacted to 98% SPMDD within 4% of the optimum moisture content.

Samples of both the Granular ‘A’ and Granular ‘B’ Type I aggregates should be tested for conformance to OPSS 1010 prior to utilization on Site and during construction. All stockpiled material should be protected from deleterious materials, additional moisture and be kept from freezing.



Post compaction settlement of fine grained soil can be expected, even when placed to compaction specifications. As such, fill material should be installed as far in advance as possible before finishing the parking lot and access roadways for best grade integrity.

Where the subgrade material types differ below the underside of the pavement structure, the transition between the materials should be sloped as per frost heave taper OPSD 205.60.

5.9.4 Drainage

Control of surface water is a critical factor in achieving good pavement structure life. The pavement thickness designs are based on a drained pavement subgrade via sub-drains or ditches.

The silty/clayey soils have poor natural drainage and therefore it is recommended that pavement subdrains be installed in the lower areas and be connected to the catch basins.

The surface of the roadways should be free of depressions and be sloped at a minimum grade of 1% in order to drain to appropriate drainage areas. Subgrade soil should slope a minimum of 3% toward stormwater collection points. Positive slopes are very important for the proper performance of the drainage system. The granular base and subbase materials should extend horizontally to any potential ditches or swales.

In addition, routine maintenance of the drainage systems will assist with the longevity of the pavement structure. Ditches, culverts, sewers and catch basins should be regularly cleared of debris and vegetation.

6.0 SITE SUPERVISION & QUALITY CONTROL

It is recommended that all geotechnical aspects of the project be reviewed and confirmed under the appropriate geotechnical supervision, to routinely check such items. This includes but is not limited to inspection and confirmation of the undisturbed natural subgrade material prior to subgrade preparation, pouring any foundations or footings, backfilling, or engineered fill installation to ensure that the actual conditions are not markedly different than what was observed at the borehole locations and geotechnical components are constructed as per Pinchin's recommendations. Compaction quality control of engineered fill material (full-time monitoring) is recommended as standard practice, as well as regular sampling and testing of aggregates and concrete, to ensure that physical characteristics of materials for compliance during installation and satisfies all specifications presented within this report.



7.0 TERMS AND LIMITATIONS

This Geotechnical Investigation was performed for the exclusive use of United Property Resource Corporation (Client) in order to evaluate the subsurface conditions at 360 Kennedy Lane East, Ottawa, Ontario. Within the limitations of scope, schedule and budget, our services have been executed in accordance with generally accepted practises in the field of geotechnical engineering for the Site. Classification and identification of soil, and geologic units have been based upon commonly accepted methods employed in professional geotechnical practice. No warranty or other conditions, expressed or implied, should be understood. Conclusions derived are specific to the immediate area of study and cannot be extrapolated extensively away from sample locations.

Performance of this Geotechnical Investigation to the standards established by Pinchin is intended to reduce, but not eliminate, uncertainty regarding the subgrade soil at the Site, and recognizes reasonable limits on time and cost.

Regardless how exhaustive a Geotechnical Investigation is performed; the investigation cannot identify all the subsurface conditions. Therefore, no warranty is expressed or implied that the entire Site is representative of the subsurface information obtained at the specific locations of our investigation. If during construction, subsurface conditions differ from then what was encountered within our test location and the additional subsurface information provided to us, Pinchin should be contacted to review our recommendations. This report does not alleviate the contractor, owner, or any other parties of their respective responsibilities.

This report has been prepared for the exclusive use of the Client and their authorized agents. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of the third parties. If additional parties require reliance on this report, written authorization from Pinchin will be required. Pinchin disclaims responsibility of consequential financial effects on transactions or property values, or requirements for follow-up actions and costs. No other warranties are implied or expressed. Furthermore, this report should not be construed as legal advice.

Pinchin makes no other representations whatsoever, including those concerning the legal significance of its findings, or as to other legal matters touched on in this report, including, but not limited to, ownership of any property, or the application of any law to the facts set forth herein. With respect to regulatory compliance issues, regulatory statutes are subject to interpretation and these interpretations may change over time. Please refer to Appendix IV, Report Limitations and Guidelines for Use, which pertains to this report.


Specific limitations related to the legal and financial and limitations to the scope of the current work are outlined in our proposal, the attached Methodology, and the Authorization to Proceed, Limitation of Liability and Terms of Engagement which accompanied the proposal.





Information provided by Pinchin is intended for Client use only. Pinchin will not provide results or information to any party unless disclosure by Pinchin is required by law. Any use by a third party of reports or documents authored by Pinchin or any reliance by a third party on or decisions made by a third party based on the findings described in said documents, is the sole responsibility of such third parties. Pinchin accepts no responsibility for damages suffered by any third party as a result of decisions made or actions conducted. No other warranties are implied or expressed.

\\pinchin.com\Ott\Job\296000s\0296551.000 UPRC,VariousLocations,EDR,SA1\0296551.001 UPRC,360KennedyLaneE,GEO,FID\Deliverables\296551.001 REVISED Geo Inv Report 360 Kennedy Lane Ottawa, ON UPRC Oct 26 2022.docx
Template: Master Geotechnical Investigation Report – Ontario, GEO, September 2, 2021


FIGURES

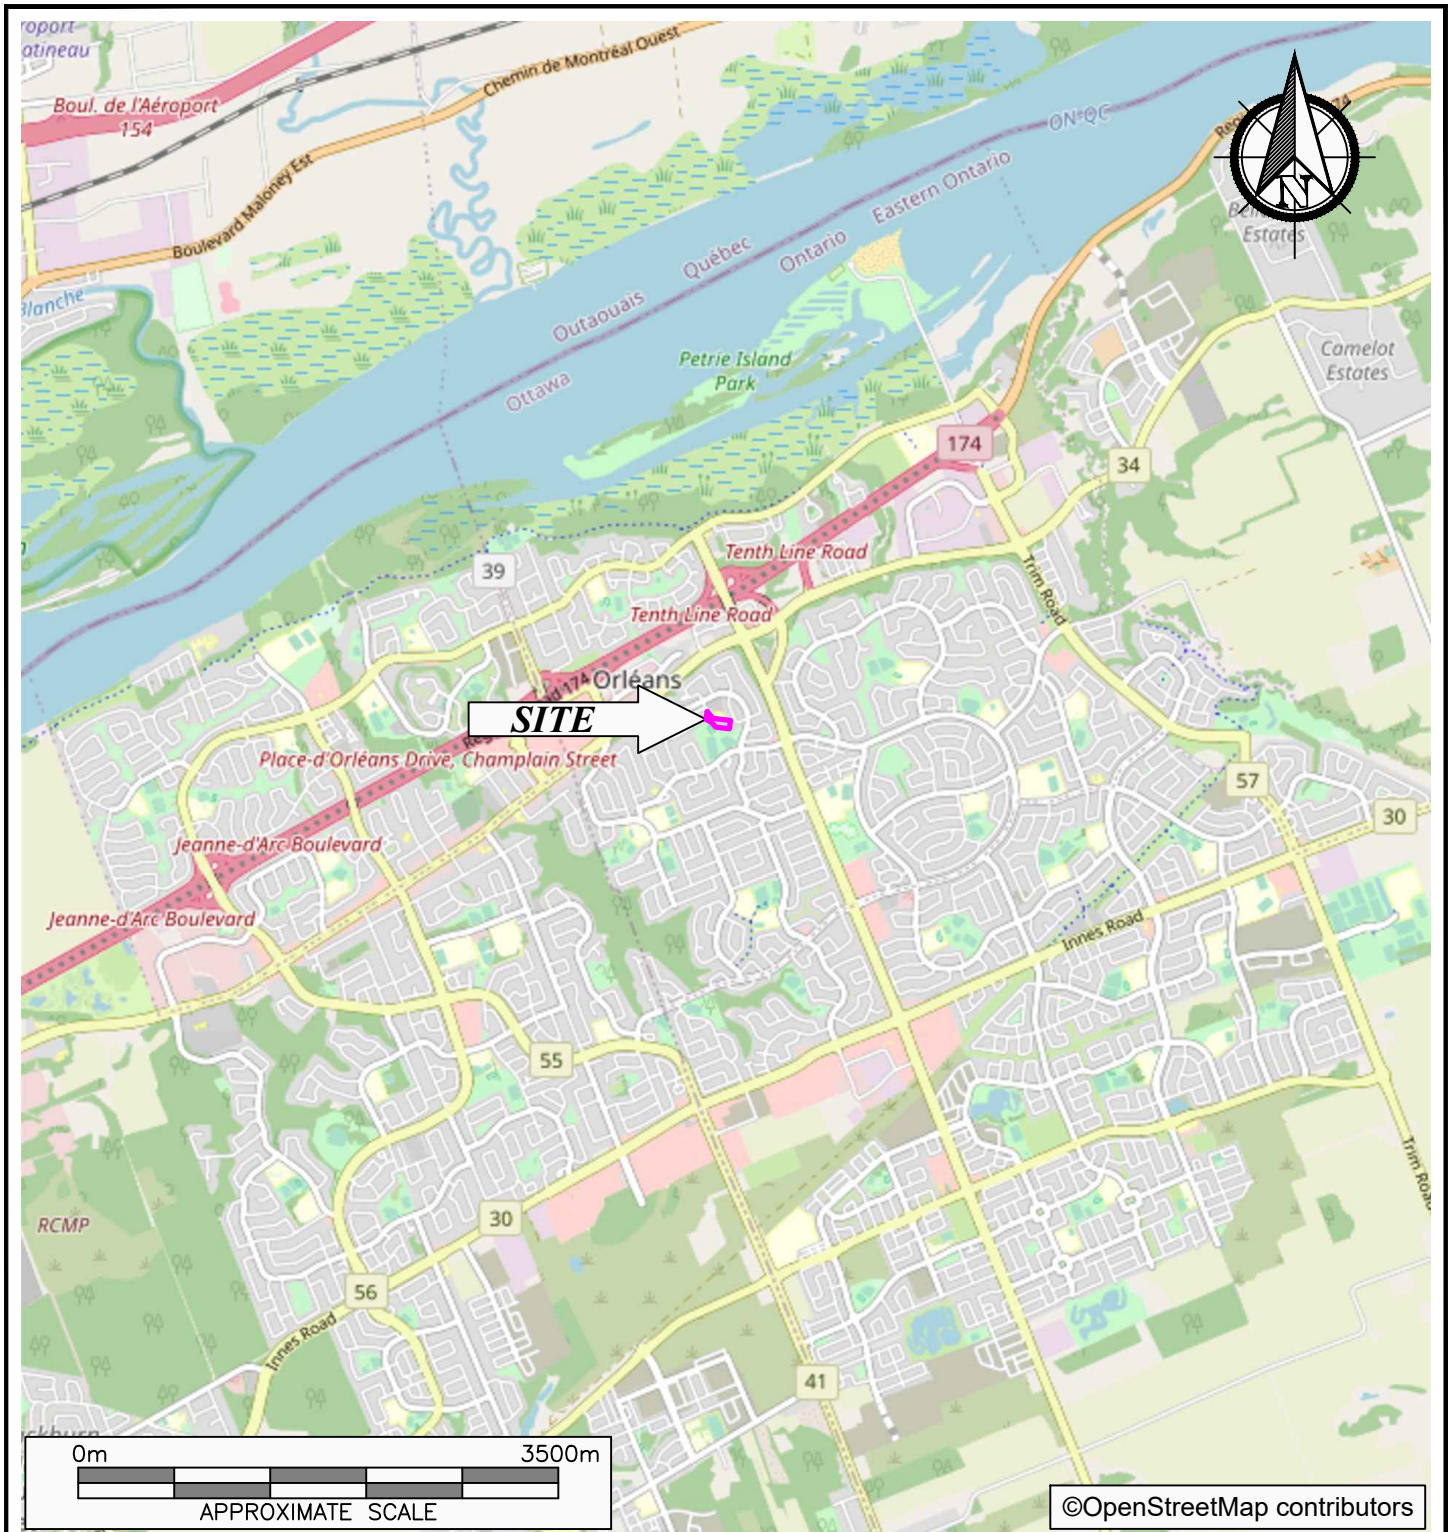

PROJECT NAME			GEOTECHNICAL INVESTIGATION		
CLIENT NAME			UNITED PROPERTY RESOURCE CORPORATION		
PROJECT LOCATION			360 KENNEDY LANE EAST, OTTAWA, ONTARIO		
FIGURE NAME			KEY MAP		FIGURE NO.
APPROXIMATE SCALE	PROJECT NO.	DATE	1		
AS SHOWN	296551.001	NOVEMBER 2021			

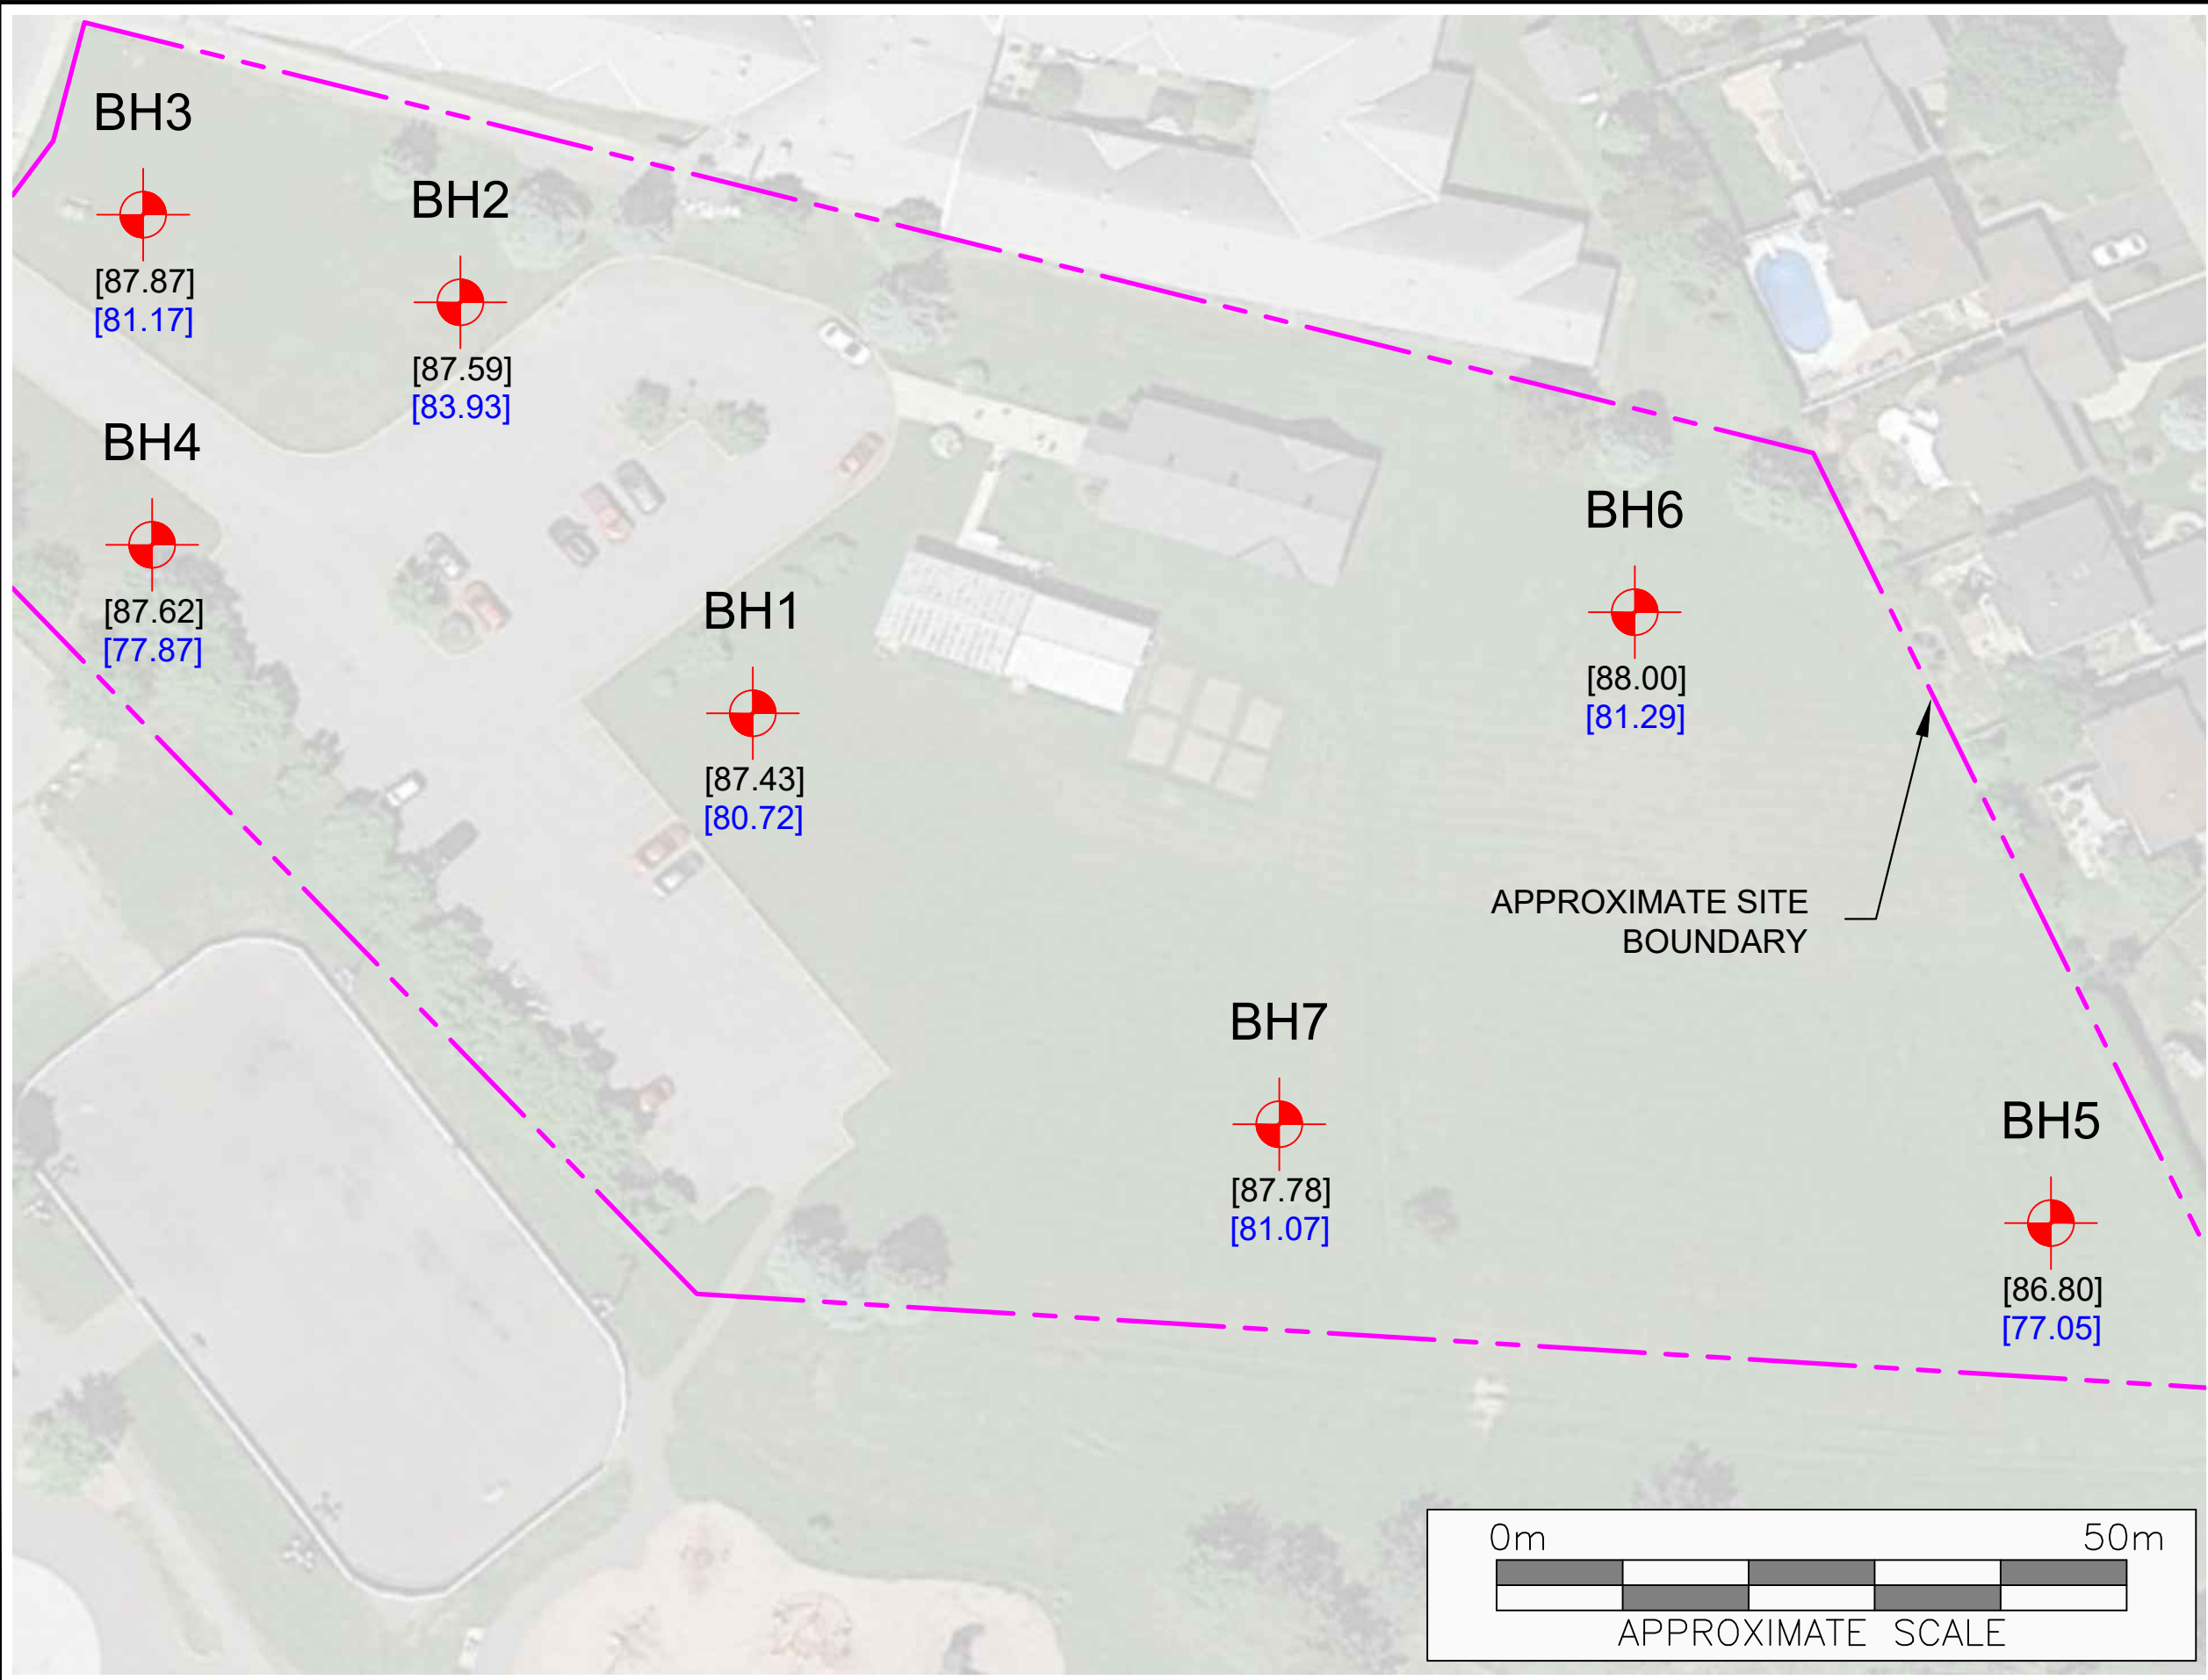

LEGEND

-  BOREHOLE / MONITORING WELL LOCATION
- [XX.XX] APPROXIMATE GROUND ELEVATION
- [XX.XX] APPROXIMATE TERMINATION ELEVATION



PROJECT NAME GEOTECHNICAL INVESTIGATION	
CLIENT NAME UNITED PROPERTY RESOURCE CORPORATION	
PROJECT LOCATION 360 KENNEDY LANE EAST, OTTAWA, ONTARIO	
FIGURE NAME BOREHOLE/MONITORING WELL LOCATION PLAN	
APPROXIMATE SCALE AS SHOWN	PROJECT NO. 296551.001
DATE NOVEMBER 2021	FIGURE NO. 2

APPENDIX I
Abbreviations, Terminology and Principal Symbols used in Report and
Borehole Logs

ABBREVIATIONS, TERMINOLOGY & PRINCIPAL SYMBOLS USED

Sampling Method

AS	Auger Sample	w	Washed Sample
SS	Split Spoon Sample	HQ	Rock Core (63.5 mm diam.)
ST	Thin Walled Shelby Tube	NQ	Rock Core (47.5 mm diam.)
BS	Block Sample	BQ	Rock Core (36.5 mm diam.)

In-Situ Soil Testing

Standard Penetration Test (SPT), “N” value is the number of blows required to drive a 51 mm outside diameter split barrel sampler into the soil a distance of 300 mm with a 63.5 kg weight free falling a distance of 760 mm after an initial penetration of 150 mm has been achieved. The SPT, “N” value is a qualitative term used to interpret the compactness condition of cohesionless soils and is used only as a very approximation to estimate the consistency and undrained shear strength of cohesive soils.

Dynamic Cone Penetration Test (DCPT) is the number of blows required to drive a cone with a 60 degree apex attached to “A” size drill rods continuously into the soil for each 300 mm penetration with a 63.5 kg weight free falling a distance of 760 mm.

Cone Penetration Test (CPT) is an electronic cone point with a 10 cm² base area with a 60 degree apex pushed through the soil at a penetration rate of 2 cm/s.

Field Vane Test (FVT) consists of a vane blade, a set of rods and torque measuring apparatus used to determine the undrained shear strength of cohesive soils.

Soil Descriptions

The soil descriptions and classifications are based on an expanded Unified Soil Classification System (USCS). The USCS classifies soils on the basis of engineering properties. The system divides soils into three major categories; coarse grained, fine grained and highly organic soils. The soil is then subdivided based on either gradation or plasticity characteristics. The classification excludes particles larger than 75 mm. To aid in quantifying material amounts by weight within the respective grain size fractions the following terms have been included to expand the USCS:

Soil Classification		Terminology	Proportion
Clay	< 0.002 mm		
Silt	0.002 to 0.06 mm	“trace”, trace sand, etc.	1 to 10%
Sand	0.075 to 4.75 mm	“some”, some sand, etc.	10 to 20%
Gravel	4.75 to 75 mm	Adjective, sandy, gravelly, etc.	20 to 35%
Cobbles	75 to 200 mm	And, and gravel, and silt, etc.	>35%
Boulders	>200 mm	Noun, Sand, Gravel, Silt, etc.	>35% and main fraction

Notes:

- Soil properties, such as strength, gradation, plasticity, structure, etcetera, dictate the soils engineering behaviour over grain size fractions; and
- With the exception of soil samples tested for grain size distribution or plasticity, all soil samples have been classified based on visual and tactile observations. The accuracy of visual and tactile observation is not sufficient to differentiate between changes in soil classification or precise grain size and is therefore an approximate description.

The following table outlines the qualitative terms used to describe the compactness condition of cohesionless soil:

Cohesionless Soil	
Compactness Condition	SPT N-Index (blows per 300 mm)
Very Loose	0 to 4
Loose	4 to 10
Compact	10 to 30
Dense	30 to 50
Very Dense	> 50

The following table outlines the qualitative terms used to describe the consistency of cohesive soils related to undrained shear strength and SPT, N-Index:

Cohesive Soil		
Consistency	Undrained Shear Strength (kPa)	SPT N-Index (blows per 300 mm)
Very Soft	<12	<2
Soft	12 to 25	2 to 4
Firm	25 to 50	4 to 8
Stiff	50 to 100	8 to 15
Very Stiff	100 to 200	15 to 30
Hard	>200	>30

Note: Utilizing the SPT, N-Index value to correlate the consistency and undrained shear strength of cohesive soils is only very approximate and needs to be used with caution.

Soil & Rock Physical Properties

General

W	Natural water content or moisture content within soil sample
γ	Unit weight
γ'	Effective unit weight
γ_d	Dry unit weight
γ_{sat}	Saturated unit weight
ρ	Density
ρ_s	Density of solid particles
ρ_w	Density of Water
ρ_d	Dry density
ρ_{sat}	Saturated density e Void ratio
n	Porosity
S_r	Degree of saturation
E_{50}	Strain at 50% maximum stress (cohesive soil)

Consistency

W_L	Liquid limit
W_P	Plastic Limit
I_P	Plasticity Index
W_S	Shrinkage Limit
I_L	Liquidity Index
I_C	Consistency Index
e_{max}	Void ratio in loosest state
e_{min}	Void ratio in densest state
I_D	Density Index (formerly relative density)

Shear Strength

C_u, S_u	Undrained shear strength parameter (total stress)
C'_d	Drained shear strength parameter (effective stress)
r	Remolded shear strength
τ_p	Peak residual shear strength
τ_r	Residual shear strength
ϕ'	Angle of interface friction, coefficient of friction = $\tan \phi'$

Consolidation (One Dimensional)

C_c	Compression index (normally consolidated range)
C_r	Recompression index (over consolidated range)
C_s	Swelling index
m_v	Coefficient of volume change
c_v	Coefficient of consolidation
T_v	Time factor (vertical direction)
U	Degree of consolidation
σ'_o	Overburden pressure
σ'_p	Preconsolidation pressure (most probable)
OCR	Overconsolidation ratio

Permeability

The following table outlines the terms used to describe the degree of permeability of soil and common soil types associated with the permeability rates:

Permeability (k cm/s)	Degree of Permeability	Common Associated Soil Type
$> 10^{-1}$	Very High	Clean gravel
10^{-1} to 10^{-3}	High	Clean sand, Clean sand and gravel
10^{-3} to 10^{-5}	Medium	Fine sand to silty sand
10^{-5} to 10^{-7}	Low	Silt and clayey silt (low plasticity)
$>10^{-7}$	Practically Impermeable	Silty clay (medium to high plasticity)

Rock Coring

Rock Quality Designation (RQD) is an indirect measure of the number of fractures within a rock mass, Deere et al. (1967). It is the sum of sound pieces of rock core equal to or greater than 100 mm recovered from the core run, divided by the total length of the core run, expressed as a percentage. If the core section is broken due to mechanical or handling, the pieces are fitted together and if 100 mm or greater included in the total sum.

RQD is calculated as follows:

$$\text{RQD (\%)} = \frac{\sum \text{Length of core pieces} > 100 \text{ mm} \times 100}{\text{Total length of core run}}$$

The following is the Classification of Rock with Respect to RQD Value:

RQD Classification	RQD Value (%)
Very poor quality	<25
Poor quality	25 to 50
Fair quality	50 to 75
Good quality	75 to 90
Excellent quality	90 to 100

APPENDIX II
Pinchin's Borehole Logs



Log of Borehole: MW1

Project #: 296551.001

Logged By: WT

Project: Geotechnical Investigation

Client: United Property Resource Corporation

Location: 360 Kennedy Line East, Orleans, Ontario

Drill Date: September 8, 2021

Project Manager: WT

SUBSURFACE PROFILE				SAMPLE										
Depth (m)	Symbol	Description	Elevation (m)	Monitoring Well Details	Sample Type	Sampler #	Recovery (%)	SPT N-values	SPT N-values	Shear Strength kPa	Lab Analysis	Moisture (%)	Plasticity Index	
0		Ground Surface	87.43											
0		Organics ~ 100 mm			SS	1	30	9	■					
1		Clayey Silt Grey clayey silt, trace sand, stiff, damp	86.67		SS	2	100	18	■					
1		Very stiff	85.90		SS	3	80	7	■					
2		Firm	85.14		SS	4	80	3	■					
3		Soft, moist			SS	5	100	3	■					
4			82.86											
5		Very soft, wet			SS	6	100	1	■	▲				
6					FV	1	N/A	N/A	■	▲				
7		End of Borehole Borehole terminated at 6.7 mbgs in very soft clayey silt.	80.72		SS	7	100	0	■	▲				
8														
9														

Contractor: Marathon Underground

Grade Elevation: 87.43 m

Drilling Method: Hollow Stem Augers / Split Spoon

Top of Casing Elevation: 88.32 m

Well Casing Size: 5.08 cm

Sheet: 1 of 1



Log of Borehole: BH2

Project #: 296551.001

Logged By: WT

Project: Geotechnical Investigation

Client: United Property Resource Corporation

Location: 360 Kennedy Line East, Orleans, Ontario

Drill Date: September 8, 2021

Project Manager: WT

SUBSURFACE PROFILE				SAMPLE										
Depth (m)	Symbol	Description	Elevation (m)	Monitoring Well Details	Sample Type	Sampler #	Recovery (%)	SPT N-values	SPT N-values	Shear Strength kPa	Lab Analysis	Moisture (%)	Plasticity Index	
0		Ground Surface	87.59	No Monitoring Well Installed										
0.1		Organics ~ 100 mm			SS	1	60	9	■					
0.5		Clayey Silt Grey clayey silt, very stiff, damp	86.83		SS	2	80	18	■					
1.0		Hard			SS	3	80	7	■					
2.5		Firm	85.30		SS	4	80	3	■					
3.0		Soft, moist	84.54		SS	5	100	3	■					
3.7		End of Borehole	83.93											
4.0		Borehole terminated at 3.7 mbgs in soft clayey silt. At drilling completion, no free groundwater was encountered.												
5.0														
6.0														
7.0														
8.0														
9.0														

Contractor: Marathon Underground

Grade Elevation: 87.59 m

Drilling Method: Hollow Stem Augers / Split Spoon

Top of Casing Elevation: N/A

Well Casing Size: N/A

Sheet: 1 of 1



Log of Borehole: MW3

Project #: 296551.001

Logged By: WT

Project: Geotechnical Investigation

Client: United Property Resource Corporation

Location: 360 Kennedy Line East, Orleans, Ontario

Drill Date: September 8, 2021

Project Manager: WT

SUBSURFACE PROFILE				SAMPLE										
Depth (m)	Symbol	Description	Elevation (m)	Monitoring Well Details	Sample Type	Sampler #	Recovery (%)	SPT N-values	SPT N-values		Lab Analysis	Moisture (%)	Plasticity Index	
									20	40				60
								50	100	150	200			
0		Ground Surface	87.87											
		Organics ~ 100 mm			SS	1	50	25						
		Clayey Silt Grey clayey silt, very stiff, damp Stiff	87.11		SS	2	100	13						
1					SS	3	100	12						
2					FV	1	N/A	N/A						
3					FV	2	N/A	N/A						
4														
5		Very soft, moist	83.30		SS	4	100	2						
6		Wet	81.77		FV	3	N/A	N/A						
6.7		81.17			SS	5	100	0						
7		End of Borehole Borehole terminated at 6.7 mbgs in very soft clayey silt.												
8														
9														

Contractor: Marathon Underground

Grade Elevation: 87.87 m

Drilling Method: Hollow Stem Augers / Split Spoon

Top of Casing Elevation: 88.75 m

Well Casing Size: 5.08 cm

Sheet: 1 of 1



Log of Borehole: MW4

Project #: 296551.001

Logged By: WT

Project: Geotechnical Investigation

Client: United Property Resource Corporation

Location: 360 Kennedy Line East, Orleans, Ontario

Drill Date: September 9, 2021

Project Manager: WT

SUBSURFACE PROFILE				SAMPLE											
Depth (m)	Symbol	Description	Elevation (m)	Monitoring Well Details	Sample Type	Sampler #	Recovery (%)	SPT N-values	SPT N-values			Lab Analysis	Moisture (%)	Plasticity Index	
									20	40	60				
									Shear Strength kPa						
									50	100	150	200			
0		Ground Surface	87.62												
		Organics ~ 100 mm	86.86		SS	1	60	20							
		Clayey Silt Grey clayey silt, trace gravel, trace sand, very stiff, damp	86.10		SS	2	80	15							
		Hard			SS	3	100	15							
		No sand or gravel	85.33		SS	4	100	16							
		Stiff	84.57		SS	5	100	6							
		Firm	83.81		SS	6	100	4							
		Soft	83.05		SS	7	N/A	0							
		Very soft			FV	2	N/A	N/A							
					FV	3	N/A	N/A							
				SS	8	100	0								
10		End of Borehole													
		Borehole terminated at 9.8 mbgs in very soft clayey silt.		Groundwater level = 4.09 mbgs, as measured on October 27, 2021.											

Contractor: Marathon Underground

Grade Elevation: 87.62 m

Drilling Method: Hollow Stem Augers / Split Spoon

Top of Casing Elevation: 88.48 m

Well Casing Size: 5.08 cm

Sheet: 1 of 1



Log of Borehole: MW5

Project #: 296551.001

Logged By: WT

Project: Geotechnical Investigation

Client: United Property Resource Corporation

Location: 360 Kennedy Line East, Orleans, Ontario

Drill Date: September 9, 2021

Project Manager: WT

SUBSURFACE PROFILE				SAMPLE											
Depth (m)	Symbol	Description	Elevation (m)	Monitoring Well Details	Sample Type	Sampler #	Recovery (%)	SPT N-values	SPT N-values			Lab Analysis	Moisture (%)	Plasticity Index	
									20	40	60				
									Shear Strength kPa						
									50	100	150	200			
0		Ground Surface	86.80												
		Organics ~ 100 mm	86.04		SS	1	80	11							
		Clayey Silt Grey clayey silt, stiff, damp Hard			SS	2	100	15							
1					SS	3	100	11							
2		Stiff, moist	84.51		SS	4	100	9							
3		Soft	83.75		SS	5	100	4							
4		Wet	82.99		SS	6	100	2							
5					FV	1	N/A	N/A							
6					FV	2	N/A	N/A							
7					FV	3	N/A	N/A							
8				FV	4	N/A	N/A								
9				FV	4	N/A	N/A								
10		End of Borehole Borehole terminated at 9.8 mbgs in very soft clayey silt.													
11															
12															

Contractor: Marathon Underground

Grade Elevation: 86.80 m

Drilling Method: Hollow Stem Augers / Split Spoon

Top of Casing Elevation: 87.55 m

Well Casing Size: 5.08 cm

Sheet: 1 of 1



Log of Borehole: MW6

Project #: 296551.001

Logged By: WT

Project: Geotechnical Investigation

Client: United Property Resource Corporation

Location: 360 Kennedy Line East, Orleans, Ontario

Drill Date: September 9, 2021

Project Manager: WT

SUBSURFACE PROFILE				SAMPLE											
Depth (m)	Symbol	Description	Elevation (m)	Monitoring Well Details	Sample Type	Sampler #	Recovery (%)	SPT N-values	SPT N-values			Lab Analysis	Moisture (%)	Plasticity Index	
									20	40	60				
									Shear Strength kPa						
									50	100	150	200			
0		Ground Surface	88.00												
		Organics ~ 100 mm			SS	1	60	11							
		Clayey Silt Grey clayey silt, stiff, damp	87.24		SS	2	80	17							
1		Hard			SS	3	100	17							
2		Stiff	85.71		SS	4	100	11							
3		Moist	84.95		SS	5	100	9							
4															
5						FV	1	N/A	N/A						
6		Very soft	81.90												
			81.29			SS	6	100	0						
7		End of Borehole Borehole terminated at 6.7 mbgs in very soft clayey silt.		Groundwater level = 1.54 mbgs, as measured on October 27, 2021.											
8															
9															

Contractor: Marathon Underground

Grade Elevation: 88.00 m

Drilling Method: Hollow Stem Augers / Split Spoon

Top of Casing Elevation: 88.72 m

Well Casing Size: 5.08 cm

Sheet: 1 of 1



Log of Borehole: MW7

Project #: 296551.001

Logged By: WT

Project: Geotechnical Investigation

Client: United Property Resource Corporation

Location: 360 Kennedy Line East, Orleans, Ontario

Drill Date: September 9, 2021

Project Manager: WT

SUBSURFACE PROFILE				SAMPLE											
Depth (m)	Symbol	Description	Elevation (m)	Monitoring Well Details	Sample Type	Sampler #	Recovery (%)	SPT N-values	SPT N-values		Lab Analysis	Moisture (%)	Plasticity Index		
									20	40				60	Shear Strength kPa
									50	100	150	200			
0		Ground Surface	87.78												
		Organics ~ 100 mm			SS	1	60	14							
		Clayey Silt Grey clayey silt, stiff, damp Hard	87.02		SS	2	80	15							
1					SS	3	100	21							
2		Stiff	85.49		SS	4	100	11							
3					SS	5	100	9							
4															
5				FV	1	N/A	N/A								
6															
7		End of Borehole Borehole terminated at 6.7 mbgs in very soft clayey silt.	81.07	FV	2	N/A	N/A								
8															
9															

Contractor: Marathon Underground

Grade Elevation: 87.78 m

Drilling Method: Hollow Stem Augers / Split Spoon


Top of Casing Elevation: 88.52 m

Well Casing Size: 5.08 cm

Sheet: 1 of 1

APPENDIX III
Laboratory Testing Reports for Soil Samples

CLIENT:	Pinchin	DEPTH:	5' - 7'	FILE NO:	PM4184
CONTRACT NO.:		BH OR TP No.:	BH1	LAB NO:	30235
PROJECT:	296551.001			DATE RECEIVED:	19-Oct-21
				DATE TESTED:	21-Oct-21
DATE SAMPLED:	18-Oct-21			DATE REPORTED:	26-Oct-21
SAMPLED BY:	Client			TESTED BY:	CS

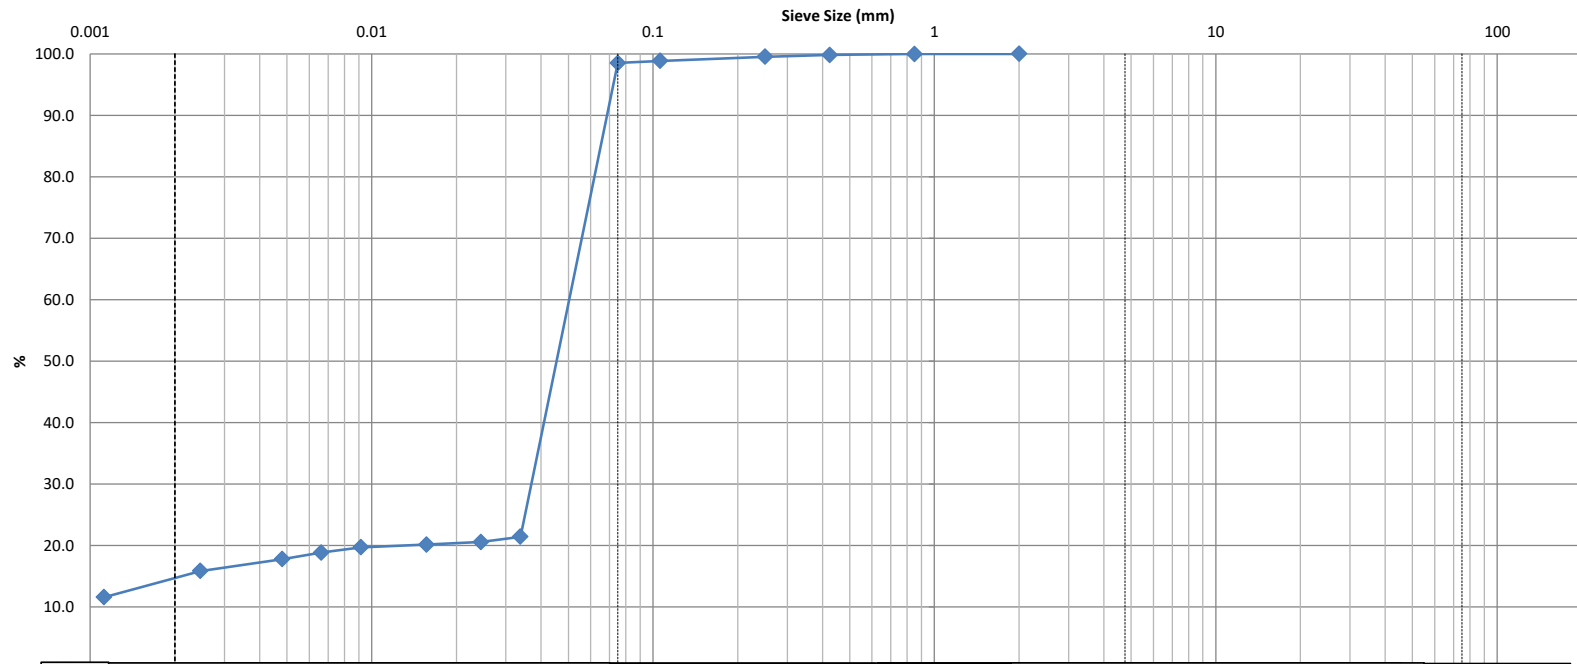

Clay	Silt			Sand			Gravel		Cobble
				Fine	Medium	Coarse	Fine	Coarse	

Identification	Soil Classification					MC(%)	LL	PL	PI	Cc	Cu
	D100	D60	D30	D10	Gravel (%)	Sand (%)	Silt (%)	Clay (%)			
					0.0	1.5	83.5	15.0			

Comments:

REVIEWED BY:	Curtis Beadow	Joe Forsyth, P. Eng.
	<i>Curtis Beadow</i>	<i>Joe Forsyth</i>

CLIENT:	Pinchin	FILE NO.:	PM41784
PROJECT:	296551.001	DATE SAMPLED:	18-Oct-21
LOCATION:	BH1 @ 5' - 7'	DATE REPORTED:	26-Oct-21

LIQUID LIMIT DETERMINATION


CAN NO.	2	3	4			
WT. OF CAN	8.67	8.67	8.68			
WT. OF SOIL & CAN	23.51	20.65	19.85			
WT. OF DRY SOIL & CAN	17.32	15.82	15.47			
WT. OF MOISTURE	6.19	4.83	4.38			
WT. OF DRY SOIL & CAN	8.65	7.15	6.79			
WATER CONTENT, w, %	71.56	67.55	64.51			
NO. OF BLOWS, N	16	26	35			

PLASTIC LIMIT DETERMINATION

CAN NO.	10	11
WT. OF CAN	19.81	20.01
WT. OF SOIL & CAN	26.75	27.01
WT. OF DRY SOIL & CAN	25.14	25.38
WT. OF MOISTURE	1.61	1.63
WT. OF DRY SOIL & CAN	5.33	5.37
WATER CONTENT, w, %	30.21	30.35

RESULTS

LIQUID LIMIT	68
PLASTIC LIMIT	30
PLASTICITY INDEX	38

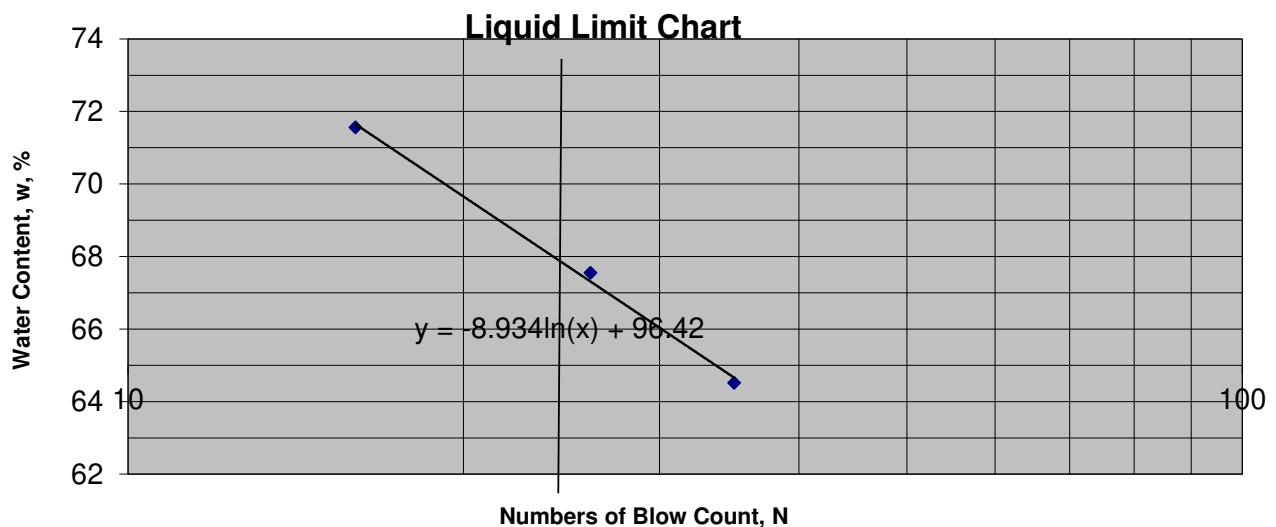


TECHNICIAN:CS		C. Beadow	J. Forsyth, P. Eng.
---------------	--	-----------	---------------------

REVIEWED BY:

[Signature]

[Signature]

CLIENT:	Pinchin	DEPTH:	20' - 22'	FILE NO:	PM4184
CONTRACT NO.:		BH OR TP No.:	BH3	LAB NO:	30236
PROJECT:	296551.001			DATE RECEIVED:	19-Oct-21
				DATE TESTED:	21-Oct-21
DATE SAMPLED:	18-Oct-21			DATE REPORTED:	26-Oct-21
SAMPLED BY:	Client			TESTED BY:	CS

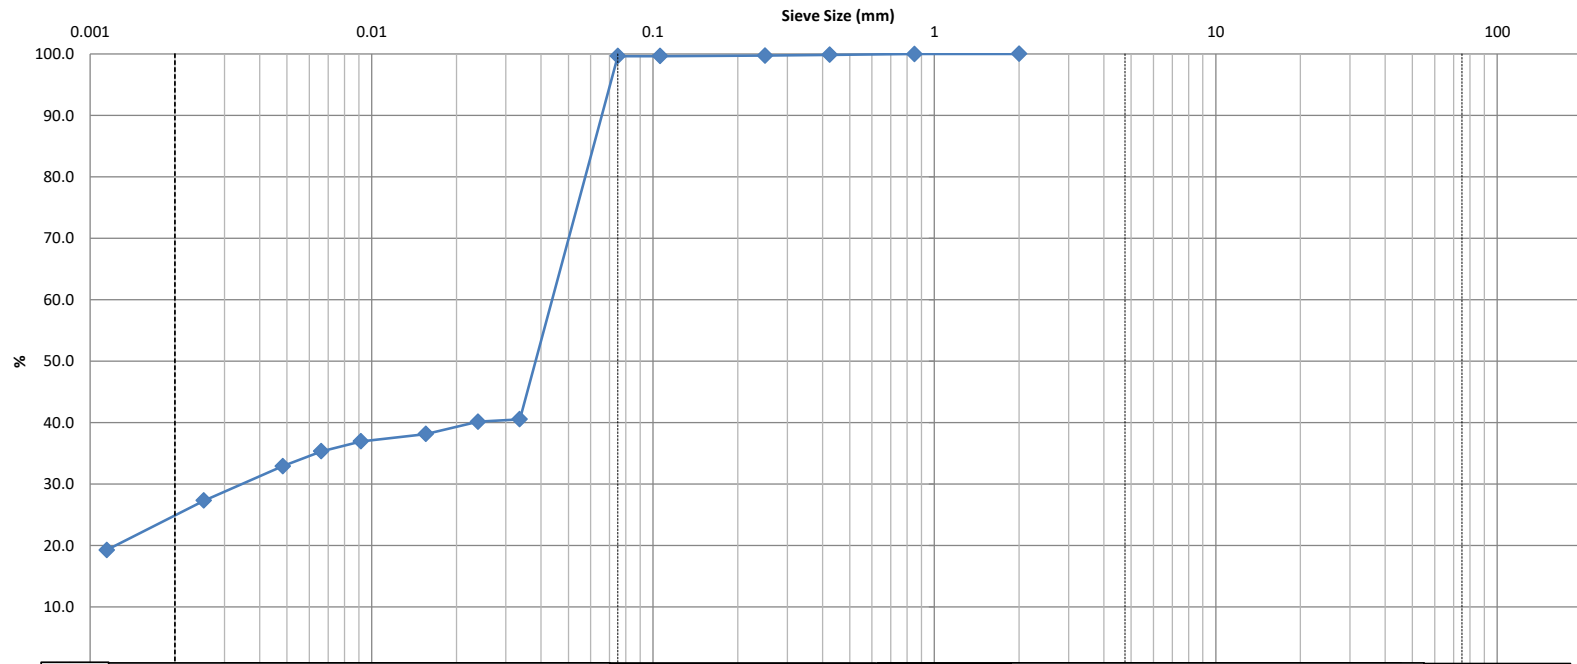

Clay	Silt			Sand			Gravel		Cobble
				Fine	Medium	Coarse	Fine	Coarse	

Identification	Soil Classification					MC(%)	LL	PL	PI	Cc	Cu
	D100	D60	D30	D10	Gravel (%)	Sand (%)	Silt (%)	Clay (%)			
					0.0	0.4	74.1	25.5			

Comments:

REVIEWED BY:	Curtis Beadow	Joe Forsyth, P. Eng.
	<i>Curtis Beadow</i>	<i>Joe Forsyth</i>

CLIENT:	Pinchin	FILE NO.:	PM4184
PROJECT:	296551.001	DATE SAMPLED:	18-Oct-21
LOCATION:	BH3 @ 20' - 22'	DATE REPORTED:	26-Oct-21

LIQUID LIMIT DETERMINATION

CAN NO.	33	34	35				
WT. OF CAN	4.36	4.36	4.42				
WT. OF SOIL & CAN	12.82	13.71	13.24				
WT. OF DRY SOIL & CAN	9.05	9.64	9.54				
WT. OF MOISTURE	3.77	4.07	3.70				
WT. OF DRY SOIL & CAN	4.69	5.28	5.12				
WATER CONTENT, w, %	80.38	77.08	72.27				
NO. OF BLOWS, N	17	23	35				


PLASTIC LIMIT DETERMINATION

CAN NO.	1	2
WT. OF CAN	19.86	19.96
WT. OF SOIL & CAN	26.59	26.78
WT. OF DRY SOIL & CAN	25.10	25.24
WT. OF MOISTURE	1.49	1.54
WT. OF DRY SOIL & CAN	5.24	5.28
WATER CONTENT, w, %	28.44	29.17

RESULTS


LIQUID LIMIT	77
PLASTIC LIMIT	29
PLASTICITY INDEX	48

Liquid Limit Chart

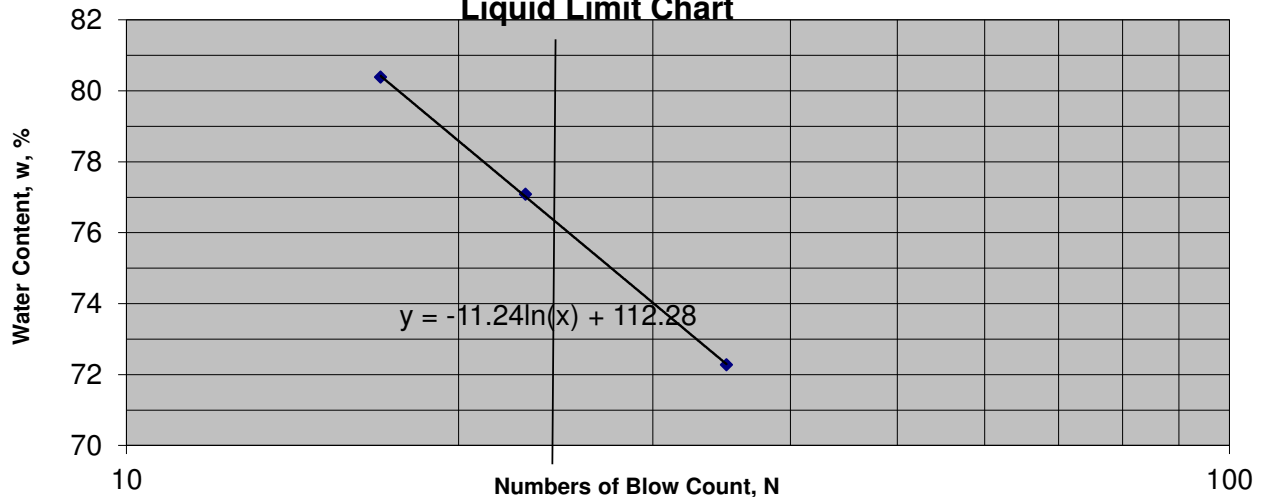

TECHNICIAN:CS	REVIEWED BY:	C. Beadow	J. Forsyth, P. Eng.
		<i>[Signature]</i>	<i>[Signature]</i>

CLIENT:	Pinchin	DEPTH:	12.5' - 14.5'	FILE NO:	PM4184
CONTRACT NO.:		BH OR TP No.:	BH5	LAB NO:	30238
PROJECT:	296551.001			DATE RECEIVED:	19-Oct-21
				DATE TESTED:	21-Oct-21
DATE SAMPLED:	18-Oct-21			DATE REPORTED:	26-Oct-21
SAMPLED BY:	Client			TESTED BY:	CS

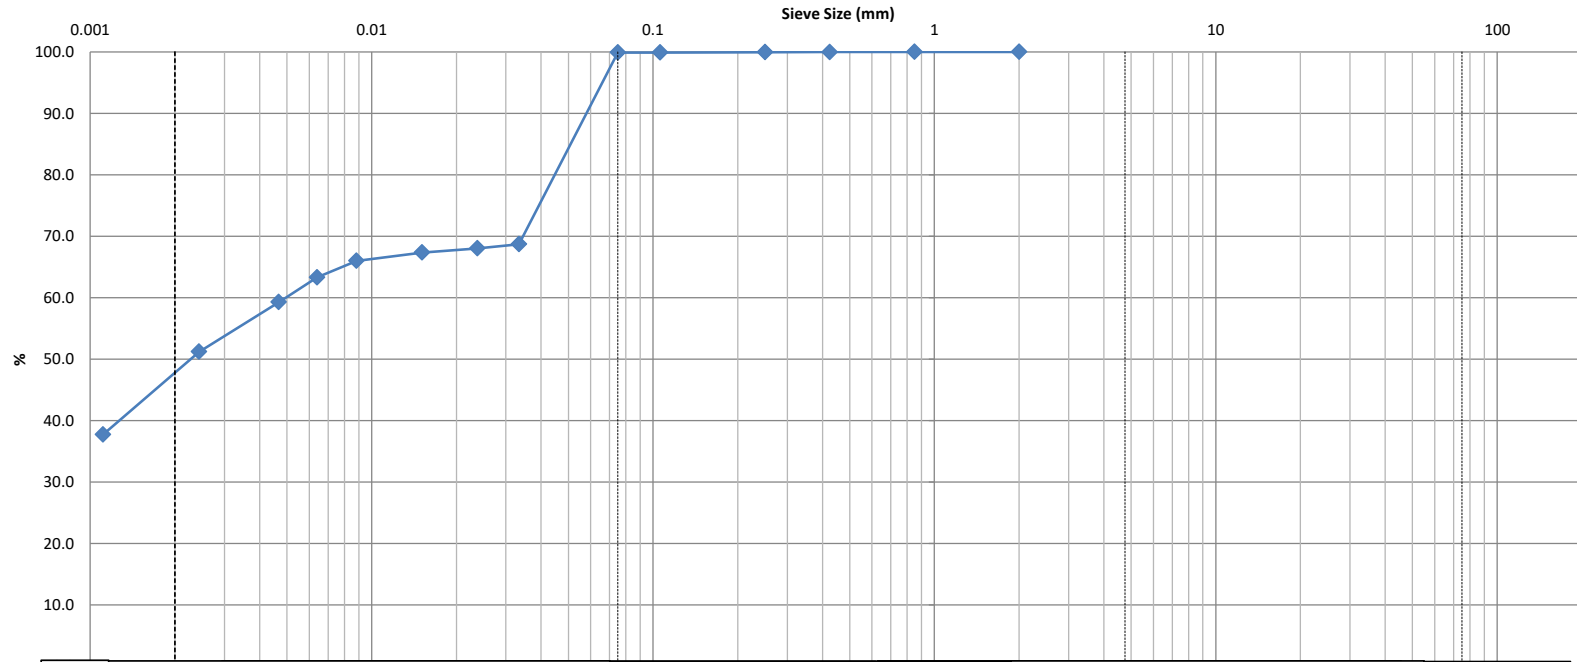

Clay	Silt			Sand			Gravel		Cobble
				Fine	Medium	Coarse	Fine	Coarse	

Identification	Soil Classification					MC(%)	LL	PL	PI	Cc	Cu
	D100	D60	D30	D10	Gravel (%)	42.7					
					0.0	0.1		52.4		47.5	

Comments:

REVIEWED BY:	Curtis Beadow	Joe Forsyth, P. Eng.
	<i>Curtis Beadow</i>	<i>Joe Forsyth</i>

CLIENT:	Pinchin	FILE NO.:	PM4184
PROJECT:	296551.001	DATE SAMPLED:	18-Oct-21
LOCATION:	BH5 @ 12.5' - 14.5'	DATE REPORTED:	16-Oct-21

LIQUID LIMIT DETERMINATION

CAN NO.	30	31	32				
WT. OF CAN	4.37	4.35	4.40				
WT. OF SOIL & CAN	15.61	14.66	14.61				
WT. OF DRY SOIL & CAN	10.44	10.00	10.06				
WT. OF MOISTURE	5.17	4.66	4.55				
WT. OF DRY SOIL & CAN	6.07	5.65	5.66				
WATER CONTENT, w, %	85.17	82.48	80.39				
NO. OF BLOWS, N	15	23	32				


PLASTIC LIMIT DETERMINATION

CAN NO.	14	15
WT. OF CAN	20.08	19.91
WT. OF SOIL & CAN	27.47	27.30
WT. OF DRY SOIL & CAN	25.62	25.43
WT. OF MOISTURE	1.85	1.87
WT. OF DRY SOIL & CAN	5.54	5.52
WATER CONTENT, w, %	33.39	33.88

RESULTS


LIQUID LIMIT	83
PLASTIC LIMIT	34
PLASTICITY INDEX	49

Liquid Limit Chart

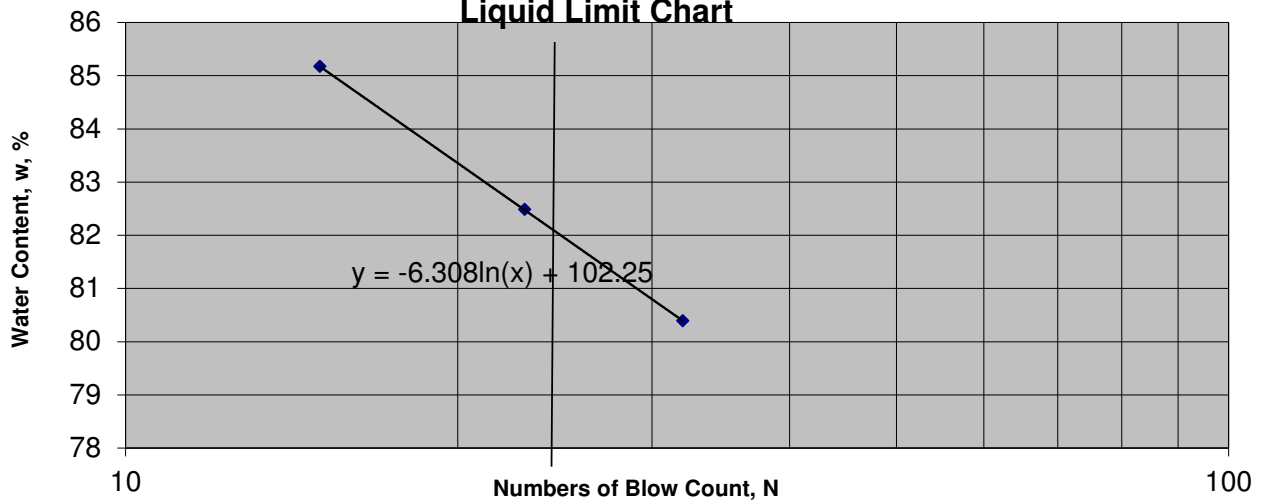

TECHNICIAN:CS		C. Beadow	J. Forsyth, P. Eng.
	REVIEWED BY:	<i>C. Beadow</i>	<i>J. Forsyth</i>

CLIENT:	Pinchin	DEPTH:	10' - 12'	FILE NO:	PM4184
CONTRACT NO.:		BH OR TP No.:	BH 7	LAB NO:	30237
PROJECT:	296551.001			DATE RECEIVED:	19-Oct-21
				DATE TESTED:	21-Oct-21
DATE SAMPLED:	18-Oct-21			DATE REPORTED:	26-Oct-21
SAMPLED BY:	Client			TESTED BY:	CS

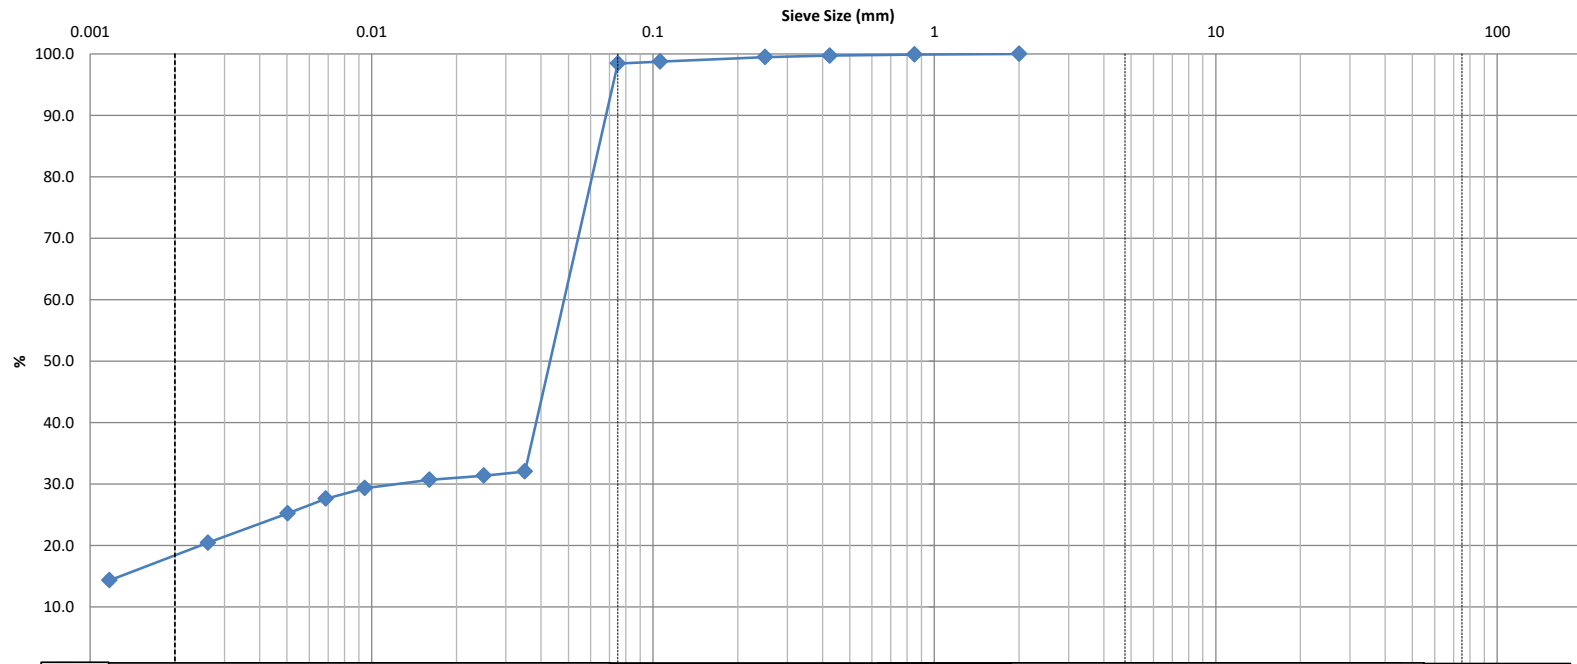

Clay	Silt			Sand			Gravel		Cobble
				Fine	Medium	Coarse	Fine	Coarse	

Identification	Soil Classification					MC(%)	LL	PL	PI	Cc	Cu
	D100	D60	D30	D10	Gravel (%)	42.7					
					0.0	1.5		80.5		18.0	

Comments:

REVIEWED BY:	Curtis Beadow	Joe Forsyth, P. Eng.
	<i>Curtis Beadow</i>	<i>Joe Forsyth</i>

CLIENT:	Pinchin	FILE NO.:	PM4184
PROJECT:	296551.001	DATE SAMPLED:	18-Oct-21
LOCATION:	BH7 @ 10' - 12'	DATE REPORTED:	26-Oct-21

LIQUID LIMIT DETERMINATION


CAN NO.	67	70	87				
WT. OF CAN	7.27	7.15	7.24				
WT. OF SOIL & CAN	17.7	17.54	17.34				
WT. OF DRY SOIL & CAN	13.14	13.06	13.07				
WT. OF MOISTURE	4.56	4.48	4.27				
WT. OF DRY SOIL & CAN	5.87	5.91	5.83				
WATER CONTENT, w, %	77.68	75.8	73.24				
NO. OF BLOWS, N	17	23	35				

PLASTIC LIMIT DETERMINATION

CAN NO.	9	18
WT. OF CAN	19.35	20.01
WT. OF SOIL & CAN	26.59	26.88
WT. OF DRY SOIL & CAN	24.90	25.32
WT. OF MOISTURE	1.69	1.56
WT. OF DRY SOIL & CAN	5.55	5.31
WATER CONTENT, w, %	30.45	29.38

RESULTS

LIQUID LIMIT	76
PLASTIC LIMIT	30
PLASTICITY INDEX	46

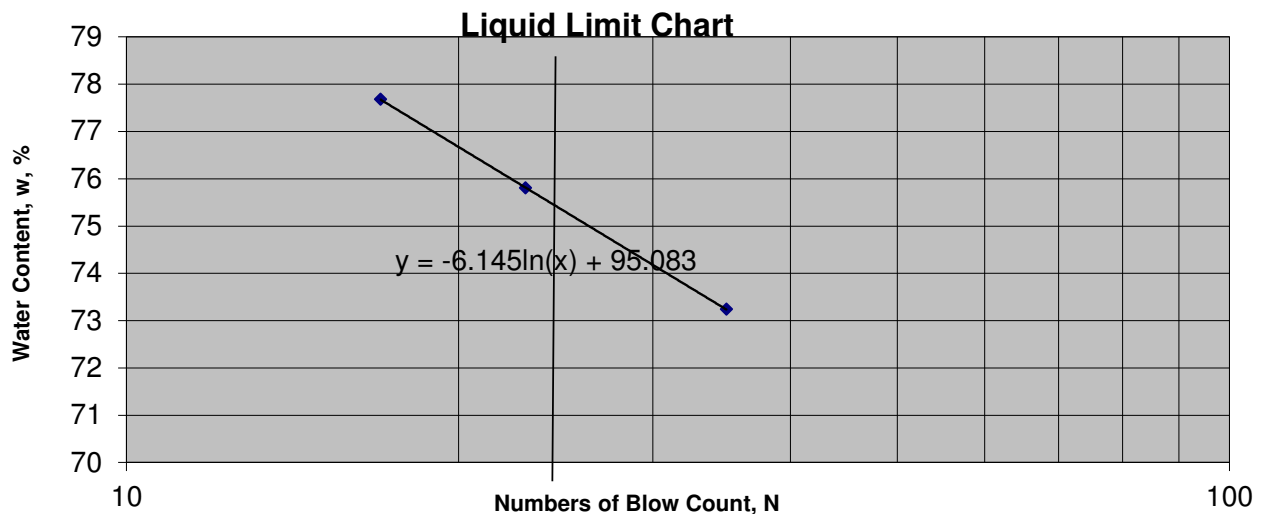

TECHNICIAN:CS		C. Beadow	J. Forsyth, P. Eng.
	REVIEWED BY:	<i>C. Beadow</i>	<i>J. Forsyth</i>

APPENDIX IV
Report Limitations and Guidelines for Use

REPORT LIMITATIONS & GUIDELINES FOR USE

This information has been provided to help manage risks with respect to the use of this report.

GEOTECHNICAL SERVICES ARE PERFORMED FOR SPECIFIC PURPOSES, PERSONS AND PROJECTS

This report was prepared for the exclusive use of the Client and their authorized agents, subject to the conditions and limitations contained within the duly authorized work plan. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of the third parties. If additional parties require reliance on this report, written authorization from Pinchin will be required. Pinchin disclaims responsibility of consequential financial effects on transactions or property values, or requirements for follow-up actions and costs. No other warranties are implied or expressed. Furthermore, this report should not be construed as legal advice.

SUBSURFACE CONDITIONS CAN CHANGE

This geotechnical report is based on the existing conditions at the time the study was performed, and Pinchin's opinion of soil conditions are strictly based on soil samples collected at specific test hole locations. The findings and conclusions of Pinchin's reports may be affected by the passage of time, by manmade events such as construction on or adjacent to the Site, or by natural events such as floods, earthquakes, slope instability or groundwater fluctuations.

LIMITATIONS TO PROFESSIONAL OPINIONS

Interpretations of subsurface conditions are based on field observations from test holes that were spaced to capture a 'representative' snap shot of subsurface conditions. Site exploration identifies subsurface conditions only at points of sampling. Pinchin reviews field and laboratory data and then applies professional judgment to formulate an opinion of subsurface conditions throughout the Site. Actual subsurface conditions may differ, between sampling locations, from those indicated in this report.

LIMITATIONS OF RECOMMENDATIONS

Subsurface soil conditions should be verified by a qualified geotechnical engineer during construction. Pinchin should be notified if any discrepancies to this report or unusual conditions are found during construction.

Sufficient monitoring, testing and consultation should be provided by Pinchin during construction and/or excavation activities, to confirm that the conditions encountered are consistent with those indicated by the test hole investigation, and to provide recommendations for design changes should the conditions revealed during the work differ from those anticipated. In addition, monitoring, testing and consultation by Pinchin should be completed to evaluate whether or not earthwork activities are completed in

accordance with our recommendations. Retaining Pinchin for construction observation for this project is the most effective method of managing the risks associated with unanticipated conditions. However, please be advised that any construction/excavation observations by Pinchin is over and above the mandate of this geotechnical evaluation and therefore, additional fees would apply.

MISINTERPRETATION OF GEOTECHNICAL ENGINEERING REPORT

Misinterpretation of this report by other design team members can result in costly problems. You could lower that risk by having Pinchin confer with appropriate members of the design team after submitting the report. Also retain Pinchin to review pertinent elements of the design team's plans and specifications. Contractors can also misinterpret a geotechnical engineering or geologic report. Reduce that risk by having Pinchin participate in pre-bid and preconstruction conferences, and by providing construction observation. Please be advised that retaining Pinchin to participation in any 'other' activities associated with this project is over and above the mandate of this geotechnical investigation and therefore, additional fees would apply.

CONTRACTORS RESPONSIBILITY FOR SITE SAFETY

This geotechnical report is not intended to direct the contractor's procedures, methods, schedule or management of the work Site. The contractor is solely responsible for job Site safety and for managing construction operations to minimize risks to on-Site personnel and to adjacent properties. It is ultimately the contractor's responsibility that the Ontario Occupational Health and Safety Act is adhered to, and Site conditions satisfy all 'other' acts, regulations and/or legislation that may be mandated by federal, provincial and/or municipal authorities.

SUBSURFACE SOIL AND/OR GROUNDWATER CONTAMINATION

This report is geotechnical in nature and was not performed in accordance with any environmental guidelines. As such, any environmental comments are very preliminary in nature and based solely on field observations. Accordingly, the scope of services do not include any interpretations, recommendations, findings, or conclusions regarding the, assessment, prevention or abatement of contaminants, and no conclusions or inferences should be drawn regarding contamination, as they may relate to this project. The term "contamination" includes, but is not limited to, molds, fungi, spores, bacteria, viruses, PCBs, petroleum hydrocarbons, inorganics, pesticides/insecticides, volatile organic compounds, polycyclic aromatic hydrocarbons and/or any of their by-products.

Pinchin will not be responsible for any consequential or indirect damages. Pinchin will only be held liable for damages resulting from the negligence of Pinchin. Pinchin will not be liable for any losses or damage if the Client has failed, within a period of two years following the date upon which the claim is discovered within the meaning of the Limitations Act, 2002 (Ontario), to commence legal proceedings against Pinchin to recover such losses or damage.