
SUBSURFACE INVESTIGATION REPORT

1000 AND 1050 TAWADINA RD, OTTAWA, ON, K2S 1V4

Abstract

This report presents the findings at 4 borehole locations compiled from field sampling and testing for a proposed three 9 storey buildings development. Bedrock was proved by extracting rock cores at three borehole locations and auger refusals suggest shallow bedrock conditions at additional locations. The majority of the overburden soils consist on dense till. The borehole locations are shown in figure 1 in page 9. The information reviewed also includes boreholes and testpits by others, readily available geologic information from the Geological Survey of Canada (GSC) and local climate data from Environment Canada. Additional assessments for the implementation of the *soil amendments* measure in the context of the low impact developments measures for the Wateridge Village Phase 2B required by Canada Lands Company are discussed in a section within the recommendations part of this report..

YURI MENDEZ M. ENG., P. ENG.



Report number: 55-BWI-R1¹
November 04, 2023



Yuri Mendez
Engineering

196 BRITANNIA ROAD
OTTAWA, ON. K2B 5W9

Phone: 613-899-0834
e-mail: yuri@ymendez.ca

PO Box 74087
RPO BEECHWOOD
OTTAWA, ON, K1M 2H9

¹For the account of Bayview Waterridge Inc. (BWI) as per proposal in email dated March 20, 2022 and subject to the user agreement in page 20 .

Report 55-BWI-R1
This page is intentionally left blank

Contents

1	Introduction	7
2	Report Organization	7
I	Investigation	8
3	Sampling and Testing	8
II	Findings	8
	Test Hole Locations Plan View	9
4	Physical Settings, Strata and Topography	10
	4.1 Groundwater and Moisture	10
	4.2 Freezing Index, Frost Depth and Frost Susceptibility	10
III	Recommendations	11
5	Foundations General	11
	5.1 Load and Resistance Factors	12
	5.2 Bearing Capacity of Strip and/or Pad Footings	12
	5.3 Friction δ	12
	5.4 Restrictions for Grading/Terracing/Grade Raises	13
	5.5 Settlements	13
	5.6 Basement Waterproofing	13
6	Rates of Infiltration, Percolation and Permeability	14
7	Site Class for Seismic Design	14
8	Roadbed Soils and Pavement Structure	14
9	Excavations, Open Cuts, Trenches and Safety	15
	9.1 Conditions Requiring Engineered Shoring	15
	9.2 Dewatering of Excavations	16
10	Reinstatement of Excavated Soils	16
11	Implementation of the CLC LID Soil Amendments Measure (SAM)	16
12	Water Inflow Within Excavations and Water Takings	17
	12.0.1 Water Takings and Permits	18

13 Underground Corrosion	18
14 Potential of Sulphate Attack to Concrete	19
15 Stripping, Excavation to Undisturbed Soils and rock, Earth and Rock Fill Placement. Asphalt Placement and Compaction	19
15.1 Winter Construction	19
16 Responses to Requests from the City of Ottawa	19
Disclaimer	20
User Agreement	20
IV Appendices	23
A Borehole Logs	25
B Laboratory Tests	37
B.1 Grain Size Distribution	38
C Soil Amendment Facilities Areas	39
C.1 Soil Amendment Facilities Highlighted	40
D Resistivity, PH and Soluble Salts Test	43
D.1 Resistivity Tests Results	44
E Pavement	45
E.1 Traffic Classes and Pavement Catalog	45
E.2 Frost Heave in Pavements	45
E.3 Frost Protection for Manholes, Catch Basins and Others	47
F Construction Recommendations for Stripping, Earth and Rock Excavation to Undisturbed Soils, Earth and Rock Fill Placement, Asphalt Placement and Compaction	49
F.1 Field Briefings	49
F.2 Removal of Water	49
F.3 Earth Excavation	49
F.3.1 Suitability of Earth Materials	49
F.3.2 Stockpiling and Sorting	50
F.3.3 Striping	50
F.3.4 Excavation to Undisturbed Soil Surface	50
F.4 Foundations Placement	50
F.5 Imported Materials	50
F.6 Overexcavation	50
F.7 Earthfill	50

F.7.1	Granular Earthfill Placement	50
F.7.1.1	Moisture for Granular Earthfill	50
F.7.1.2	Compacted Lifts Thicknesses Equipment and Passes for Granular Earthfill	51
F.7.2	Select Earthfill Placement	51
F.7.2.1	Moisture for Select Earthfill	51
F.7.2.2	Compacted Lifts Thicknesses Equipment and Passes for Select Earthfill	51
F.7.3	Compaction Guide for Passes and Level of Compaction	51
F.8	Compaction General	52
F.9	Compaction Specific	52
F.9.1	Compaction Along Basement Walls, Retaining Walls and Structures	52
F.9.2	Self Compacting Materials	52
F.9.3	Settlement Allowance and Overfill	52
F.9.4	Compaction Quality Control	52
F.10	Asphalt Pavement	52
F.10.1	Surface Preparation for Asphalt Pavement	54
F.10.2	Proof Rolling Prior to Asphalt Pavement	54
F.10.3	Asphalt compaction	54

Report 55-BWI-R1
This page is intentionally left blank

1 Introduction

The development proposed at this site is to take place within the framework of the Low Impact Development (LID) measures of Canada Lands Company (CLC) Wateridge Village Phase 2B and whose testing requirements in section 3 of Aquafor Beech's developer's checklist (ABDC) No. 65578.1 dated May 01, 2018 for CLC have been addressed under Alston Associates's geotechnical investigation report No. CO682.00 dated February 5, 2019.

This document reports the findings of a subsurface investigation completed at 1000 and 1050 Tawadina Rd, in the City of Ottawa, ON, K2S 1V4, having extents and geometry shown in figure 1 in page 9 for the purpose of development. It is also concerned with the findings of the above referenced # 65578 report at this site for the purpose of implementation of the *soil amendments* LID measure outlined in section 4 of the ABDC and discussed in a section within the recommendations part of this report.

The geotechnical materials in Ottawa and the surrounding areas are largely influenced by a history of glaciation, glacio-fluvial activity and the Champlain Sea. Common overburden materials include clay, very sensitive silty clay, till, boulder till, clean sand and silty sand overlying sedimentary rocks. Igneous and metamorphic rocks are also present. Organic materials have also influenced numerous soil deposits.

The investigation was carried out by advancing 4 boreholes through overburden soils and by proving bedrock depth by available exploration techniques for engineering purposes. The information compiled from the exploration and sampling and testing completed in the boreholes and a subsequent laboratory testing program of soils is to assist in the design and construction of a proposed three 9 storey buildings development.

The information reviewed also includes boreholes by others, readily available geologic information from the Geological Survey of Canada (GSC), and local climate data from Environment Canada.

2 Report Organization

The body of this report and its appendices constitute the entire report. The discussion presented under sections in the body may refer to further information and/or background and/or details in the appendices. The reader is responsible of reviewing the information in the appendices. Other references may be presented as footnotes.

Future revisions to this report will be referred to as "55-BWI-R#", where # is the consecutive number of the revision. Additions and/or alterations and/or inclusions to the information provided in this report at the request of any institution and/or body with authority to request the additions and/or alterations and/or inclusion will be provided in a separate "Response to " (RT) section at the end of the report, before the appendices. The RT section shall state the section that is added and/or altered, the name of the person making the request

and the reason. The section altered and or portions added will be provided in full as a subsection of the RT section. Any subsection added under the RT section will be considered a replacement to the original section.

Part I

Investigation

3 Sampling and Testing

The field and laboratory program set out in our proposal is guided by the following standards:

- ASTM D 420-98 Standard Guide to Site Characterization for Engineering Design and Construction Purposes,
- ASTM D5434 - 12 Standard Guide for Field Logging of Subsurface Explorations of Soil and Rock,
- ASTM D1586 - 11 Standard Test Method for Standard Penetration Test (SPT) and Split-Barrel Sampling of Soils,
- ASTM D2113 - 14 Standard Practice for Rock Core Drilling and Sampling of Rock for Site Exploration;

The ASTM D1586 tests were completed using an “auto safety” hammer rated at 60% energy.

The field program consisted in sampling the subsurface profile using boreholes located as shown in fig. 1 in page 9 along with field review, assessments and classification of samples.

The program also included an elevation survey referenced to the top of the catch basin which is understood to have a 88.64 m geodetic elevation. The program included in addition a laboratory review of samples recovered from the field and one sample submitted to a local laboratory to investigate soluble ions concentration, PH and resistivity.

Sampling and testing completed under the # 65578.1 report referenced in section 1 is also conveyed in this report.

The laboratory testing, soil sampling and field testing at each location are shown in the soil profile testing and sampling logs (BH) in the appendices.

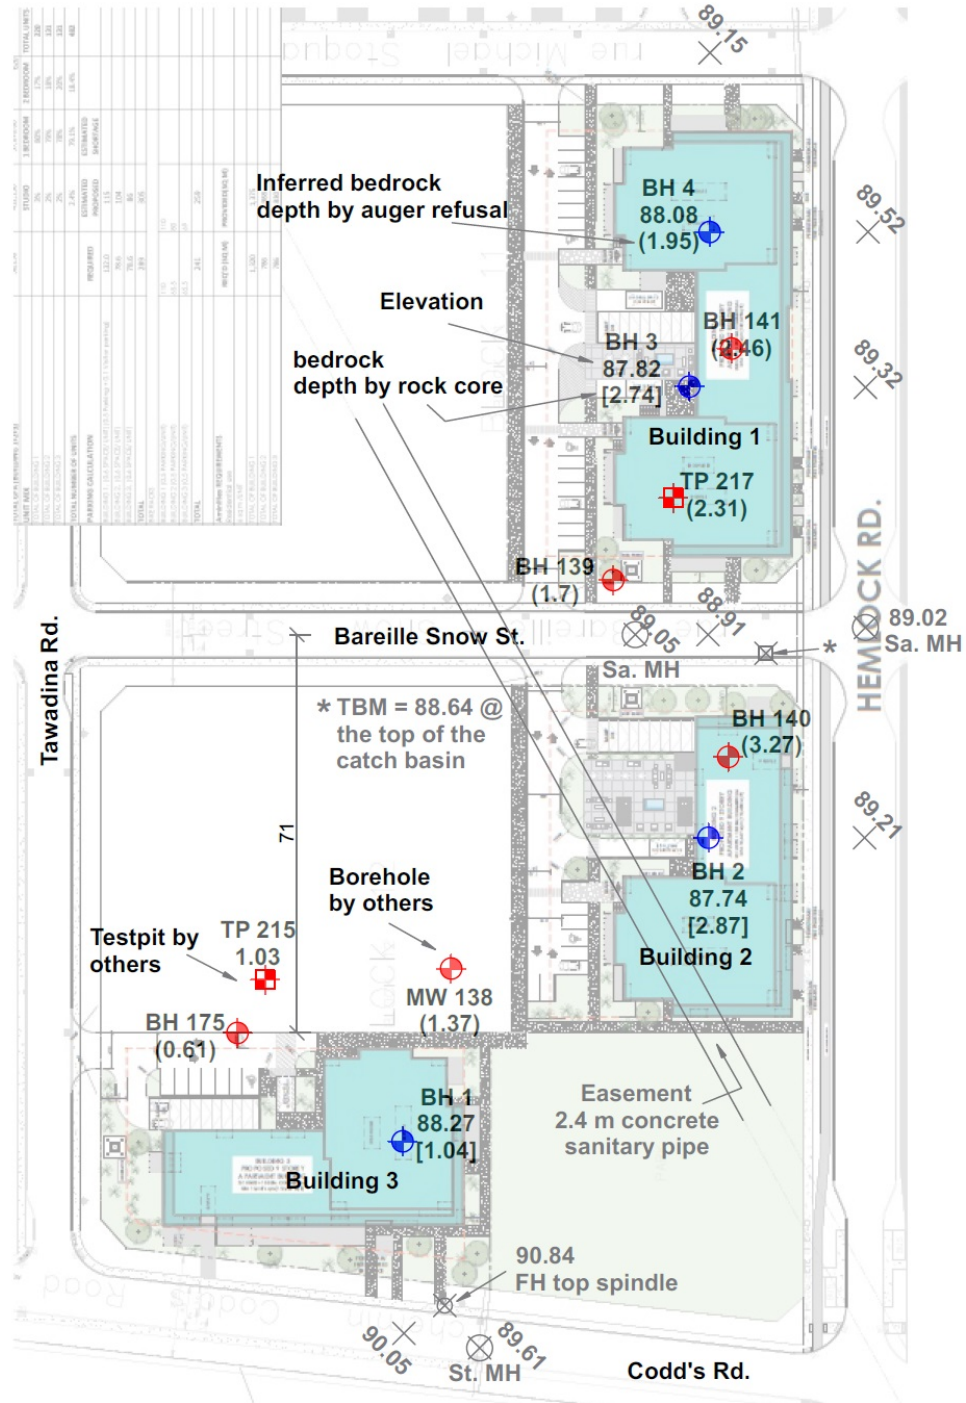


Figure 1: Test hole Locations Plan

Part II

Findings

4 Physical Settings, Strata and Topography

The sites are within undeveloped blocks divided by the existing streets as shown in fig. 1 in page 9. The ground surfaces slope slightly upward to the north and are presently stripped off of vegetation and organic topsoil. The streets' asphalt surface along the perimeter of the sites lay on embankments that exceed the elevation of the sites by roughly 1 to 1.5 m. The materials on the surface of the site are generally a thin layer brown in colour disturbed soils. Figure 1 in page 9 shows a plan view of the site displaying the approximate test hole locations, elevations and depth.

The depth of the bedrock was proved at BHs 1, 2 and 3 via 1.5 m length rock cores. Auger refusals suggest that the bedrock is as shallow as found by rock cores at all hole locations.

The overburden materials were found to consist of non-plastic sandy brownish dense till with gravel. A brown 8 cm thin near surface layer of disturbed soils cover the site.

The geology data base by Belanger J. R. 1998 suggests 1 to 10 m of overburden soils underlain by interbedded limestone and dolomite bedrock at this site.

4.1 Groundwater and Moisture

The water level was measured on May 24, 2022 in a stand pipe installed in BH3 at 2.46 m depth and shown in the borehole logs. Rainy conditions were present within a few days prior to the measurements. On the date of measurement water was ponded along the perimeter of BH2 preventing a measurement in a stand pipe installed in BH2. Ground water measurements in stand pipe installations often require numerous assessments in combination with borehole data.

Field observations of soils as extracted in the field in the sampler, measurements, coloration and stiffness suggest that the permanent water is at approximately 2.4 m depth.

The geometry of the soil profile is understood to consist of a thin layer of overburden soils sitting on relatively impervious rock with ground water perched above the bedrock.

Moisture contents vary above the ground water table. BH140 provides some information of soils water content above the water table.

4.2 Freezing Index, Frost Depth and Frost Susceptibility

It is generally assumed that the frost depth for the 1,000 degree Celsius-days freezing index applicable to Ottawa will reach no deeper than 1.8 m on bare

ground (snow free) or pavement. It is also assumed that frost depth will reach no deeper than 1.5 m on snow covered ground.

The overburden materials encountered at this site are frost susceptible. The bedrock is considered at this time not frost susceptible.

Part III

Recommendations

The following set of the recommendations result from sampling and testing outlined in section 3 and from geotechnical engineering evaluation and assessments.

It is understood that the proposed development will consist of three 9 storey buildings, namely, buildings 1, 2 and 3 as enumerated in the Test Hole Locations Plan in fig. 1 in page 9.

5 Foundations General

Generally speaking, code compliant Part 9 and Part 4 residential buildings founded on spread footings can be considered for the proposed three 9 storey buildings.

For the purpose of footings placements on bedrock, the following bedrock elevations can be considered:

- The surface of the bedrock elevation at the location of building 1 is ± 85.08 m as indicated by BH3.
 - At this time the proposed USF elevation for building 1 is ± 82.21 m.
- The surface of the bedrock elevation at the location of building 2 is ± 84.87 m as indicated by BH2.
 - At this time the proposed USF elevation for building 2 is ± 81.92 m.
- The surface of the bedrock elevation at the location of building 3 is ± 87.23 m as indicated by BH1. Clayey in-filling in joints found at elevation 86.6.
 - At this time the proposed USF elevation for building 3 is ± 83.3 m.

As it stands at this time 2.8, 2.9 and 3.9 m of bedrock will be removed from within the perimeters of buildings 1, 2 and 3 respectively.

Adequate founding surfaces are expected to be found as shallow as ± 84.7 , ± 84.5 and ± 86.6 at the locations of buildings 1 to 3 respectively according to as-is borehole data at each location.

5.1 Load and Resistance Factors

For the purpose of computations related to the service (SLS) and strength limits (ULS) note:

- A resistance factor is applied to the computed or estimated (nominal) bearing resistance from field or lab tests to obtain the strength limit for factored loads (ULS). The value of the resistance factor is stated for each option.
- An average load factor of 1.5 is assumed to compute the service limit (SLS).

5.2 Bearing Capacity of Strip and/or Pad Footings

Based on the findings of this investigation and geotechnical assessments, the following bearing capacity can be used *for strip footings up to 1 m wide and pad footings up to 2 m wide placed on undisturbed native dense till encountered in the testholes:*

- 200 kPa at service limit (SLS).
- 300 kPa for factored loads (ULS).

After Peck, Ralph B. & Hanson, Walter Edmund. & Thornburn, Thomas Hampton. (1974)² for the unweathered jointed bedrock sampled having $\pm 90\%$ RQD and wherein discontinuities that are “tight or are not open wider than a fraction of an inch” the SLS bearing capacity below represent a 0.09 factor of the *allowable* bearing capacity for spread footings.

- 2 MPa at service limit (SLS).
- 3 MPa for factored loads (ULS).

5.3 Friction δ

Friction will be a consideration for retaining walls. Most native soils in Ottawa have a significant amount of plastic fines which reduce the friction substantially. Construction practices are such that there is always a degree of near surface disturbance that reduces friction further. Retaining wall foundations placed on 150 mm or more of compacted granular B type 2 underlain by native undisturbed soils at this site can be design using a friction factor of 0.6. Where footings are placed directly on native soils, friction of 0.4 could be used. Friction of 0.7 could be used for footings on rock at this site which could be increased to 0.75 if a leveling pad of granular B type 2 is provided over the bedrock.

²Foundation engineering. New York : Wiley

5.4 Restrictions for Grading/Terracing/Grade Raises

The conditions at this site *are not* such to limit (restrict) grade raises.

Significant earthfill will be required to build up the subgrade to acceptable grades.

The type of Earthfill materials will be as indicated in plans and specifications. Suitability of earth materials will be determined by the geotechnical engineer.

For the purpose of this section all earthfill materials will belong to one of the following two classes: *granular earthfill* and *select earthfill*. Granular earthfill will be any natural or crushed earth materials containing 12% or less passing the #200 sieve (70 μm). Select earthfill will be materials for which more than 12% passes the #200 sieve *and* has water content close to the optimum *and* has been rendered as suitable by the geotechnical engineer. Select earthfill under this report is not OPSS 1010.MUNI select subgrade material. OPSS 1010.MUNI select subgrade material can be select earthfill under this report if it is rendered as suitable by the geotechnical engineer.

Granular earthfill, including OPSS 1010.MUNI granular A, B(1, 2 and 3), M and O and rockfill are suitable to buildup the subgrade at this site under parking lots and/or slabs on grade. Other earth materials may be suitable.

Granular earthfill, rockfill and select fill are subject to the provisions in section 15.

5.5 Settlements

For the footing loads provided in section 5.2 building settlements for foundations on undisturbed brownish dense till are not to exceed service limit values (SLS) of 25 mm and 20 mm total and differential settlements respectively at this site.

For the bearing capacities provided above settlement of foundations on bedrock will be negligible.

5.6 Basement Waterproofing

Waterproofing is required to enable effective implementation of the CLC LID measures outlined in the introduction of this report.

The waterproofing system should be such to seal the building envelope by:

- where applicable, grouting bedrock joints along the perimeter of the building to a height 2 m above the ground water table;
- where applicable, providing a blind side waterproofing (or tanking) system such as Preprufe Plus[®] or similar as specified by the manufacturer;
- providing waterproof concrete;
- a redundant system providing one or more sealed sumps and pumps inside the building and drainage to catch any water which may breach the waterproofing system.

6 Rates of Infiltration, Percolation and Permeability

By correlation with soil properties, values of permeability, infiltration and percolation which could be associated³ to the brownish dense till encountered at this site are the following:

- Permeability of 1×10^{-5} cms/sec
- Percolation of 40 min/cm
- Infiltration of 3 cm/hr

7 Site Class for Seismic Design

The Shear Wave Velocity ($V_{s(30)}$) 30 m beneath the proposed founding depth will exceed 360 m/s. As such, site class C is assigned under the provisions in section 4.1.8.4 of the Ontario Building Code 2012 (OBC 2012) for seismic design.

Site classes A or B will be applicable for buildings founded on the rock encountered, however OBC 2012 requires confirmation of the seismic velocity via a seismic test for assignment of classes A or B. The site class along with the natural period of buildings will define the magnitude of the sideways acceleration induced by earthquakes and it varies substantially in different regions of Canada. This confirmation is recommended before structural design.

8 Roadbed Soils and Pavement Structure

The flexible pavement structures supplied in this report follow the guidelines set out in AASHTO 1993 Guide for Design of Pavement Structures (AASHTO) for climatic Region III. Under AASHTO pavements are designed to withstand 20 year accumulated design Equivalent Single Axle 80 kN (18,000 pounds) load applications (ESALs). ESALs are a measure of mix traffic loads including vehicle loads and truck loads. The number of ESALs applications depend on traffic class and use.

Roadbed denotes the materials beneath pavement structures. The term pavement is used to denote the layered structure that forms a road carriageway or vehicle parking. *The general quality of the near surface undisturbed soil to serve as foundation for pavement structure (Roadbed soil) are assumed to be fair* as defined in the AASHTO guide. It is hence recommended to refer to the following information in appendix E:

³MMAH Supplementary Standard SB-6 and approximate relationship between the permeability and infiltration rate

- *Yuri Mendez Engineering's pavement catalog in appendix E.1 to select pavement structures for traffic classes on the fair roadbed soils encountered at this site.*
- Appendix E.2 for guidelines regarding frost heave.
- Appendix E.3 for frost protection recommendations for manholes and catch basin construction.

9 Excavations, Open Cuts, Trenches and Safety

Typically, the main concern when excavating soils or rock is the stability of the sides of excavations. The stability of the sides is achieved by either cutting the sides to safe slopes or by providing shoring. It is also an issue of safety because of imminent hazards to the safety of workers and to property. As such, excavations are governed by the provisions in the Occupational Health and Safety Act of Ontario (O. Reg. 213/91). The application of O. Reg. 213/91 requires a classification of soils in one or several of four types (type I to type IV).

At this site for soils can be considered type II under O. Reg. 213/91. As such, the following key aspects of O. Reg. 213/91 are applicable to excavations:

- Safe open cut is 1 vertical to 1 horizontal.
- Within 1.2 m of the bottom of open cut areas or trenches, the soil can be cut vertical.

Where the safe open cut is not provided, either the shoring systems described in O. Reg. 213/91 or engineered shoring systems need be used. Information regarding physical and mechanical properties of subsurface materials which will be required for shoring design are provided in this report.

9.1 Conditions Requiring Engineered Shoring

O. Reg. 213/91 describe the conditions in which engineered shoring systems are required. Some key aspects of O.Reg. 213/91 regarding the conditions in which an engineered shoring system is required are:

- Where soils are type I to III and the prescribed safe open cuts are not provided and
 - The excavation is not a trench or
 - The excavation is a trench either deeper than 6 m or wider than 3.6 m or both
- For trench excavations or open cut, where soils are type IV and the safe open cuts are not provided.

Note that along with the descriptions in O. Reg. 213/91 for soils type IV, any difficult soil having significant seepage and/or strength loss upon excavation such as caving soils can be rendered as type IV.

Note also that since excavation and safety are usually in control of the contractor, *shoring design and construction is done by the contractor.*

9.2 Dewatering of Excavations

In view of the discussion in section 4.1 water inflow within excavations will be controllable from open sumps.

10 Reinstatement of Excavated Soils

Soils consisting of brownish dense till with gravel encountered at this site could be reinstated and compacted provided:

- Materials are sort out to ensure that only the brownish dense till with gravel is stock piled for re-use;
- Develop Proctor moisture density curves for compaction;
- Where the latter requirement is not completed the expected proctor density could also be estimated;
- the recommendations in appendix F are followed;
- Use accepted placement procedures, standards and passes of equipment.

To the extent they are needed, suitable material from the excavations that are not frozen can be used in the construction of required permanent earthfill.

11 Implementation of the CLC LID Soil Amendments Measure (SAM)

For the purpose of the discussion below topsoil is defined as the near surface dark colored layer where vegetation is rooted and mixed with native soils and organic compost from plants decay. It is assumed to actively be formed with the growth of vegetation and their changes during seasons.

At this time the SAM facilities at these sites are proposed per the green highlighted landscaped areas in WSP proposed grading plans shown in appendix C.1.

The ABDC provides 2 options for implementation of SAM facilities on landscaped areas. For implementation of either of these 2 options at these sites it is important to note that the final grade elevation of the surface of the facilities will be perched on 1 to 1.5 m of fill as to reach elevations proposed on the grading plans. In their elevated condition the facilities will not be subject to

the limitations set under the second item list in subsection 3.1 of the ABDC. The entirety of the soil amendment proposal by either option is to enable a 30 cm topsoil layer with either of imported amendment A soils or imported amendment B soils. Where amendment A is used 1/4 of the material by volume is amendment A and 3/4 of the material is native organic top soil; where amendment B is used, the entirety of the 30 cm topsoil layer is material B.

Either of the amended topsoil options are to lay on ripped native subsoils. Because the facility lays at elevation higher than any native soils the implementation of the facility at this site relies on the selection of fill materials (FM) in between the ripped native soils and the facility that enable the goals of the facility.

Enable option 1 in the ABDC, namely “On-Site Soil Amendment - Default Ratio 3:1” by:

- stripping topsoil throughout the entire site and stock pile it for the topsoil needed in the facilities areas. It is expected that topsoil ripped off from the entirety of the site at the time of construction will be enough to provide the 3/4 portion of the facilities areas;
- follow all the instructions for option 1;
- conduct lightly compacted backfill with FM consisting of excavated native soils as provided in the recommendations in this report. Backfill above the ripped native surface with FM consisting on native lightly compacted till preserve the intent envisioned in the option.

Or enable option 1 in the ABDC, namely “On-Site Soil Amendment - Default Ratio 3:1” by:

- stripping topsoil throughout the entire site and stock pile it for the topsoil needed in the facilities areas. It is expected that topsoil ripped off from the entirety of the site at the time of construction will be enough to provide the 3/4 portion of the facilities areas;
- follow all the instructions for option 1;
- conduct lightly compacted backfill with FM consisting of permeable clean granular materials. Backfill above the ripped native surface with FM consisting of native lightly compacted permeable clean granular materials increase the storage and recharge capacity envisioned in the original option 1.

ABDC option 2 could also be enabled using FM as in option 1.

12 Water Inflow Within Excavations and Water Takings

Water inflow within excavations in soils is influenced by the depth of excavations relative to the water table and flow behavior of water in soils as controlled by

the permeability of soils. Because of the assessments under section 4.1 and information seen in the borehole logs, water inflow is expected to be low and controllable by pumping from open sumps.

12.0.1 Water Takings and Permits

Water takings from the environment, including groundwater in excavations, are regulated under Ontario Water Resources Act, R.S.O. 1990, c. O.40. (OWRA). The OWRA is enforced by the Ministry of Environment (MOE). Under the OWRA, a Permit to Take Water (PTTW) is required for pumping from excavations exceeding 400 cubic meters per day. Along with the consideration of ground water from excavations, PTTW applications require in addition the consideration of precipitation. The excavations at this site are subject to OWRA and this section is intended to provide criteria indicative of whether a PTTW may be required or not.

Given the size (area) of the proposed excavations, precipitation data in Ottawa and the soil conditions assessed under 4.1 pumping from excavations is not expected to exceed the threshold of 400 cubic meters per day so that *the requirement of a PTTW may not apply to the proposed development*.

Metered outlets must be maintained and recorded as proof for confirmation in case that OWRA requires it. Note that PTTWs are issued after months of the first filing of documents.

13 Underground Corrosion

For the resistivity, PH and soluble ions concentrations found at this site and shown in the Paracel Laboratories certificate of analysis in appendix D.1, the soils are mildly corrosive. Resistivity, PH and soluble ions testing was completed in a representative sample at 1.1 m depth in BH 2. After Romanoff (1957)⁴, the following corrosion rates can be used:

1. For carbon steel:
 - 16 $\mu\text{m}/\text{year}$ for the first 2 years,
 - 12 $\mu\text{m}/\text{year}$, thereafter.

2. For galvanized metal:
 - 4.6 $\mu\text{m}/\text{year}$ for the first 2 years,
 - 3.2 $\mu\text{m}/\text{year}$ until depletion of zinc,
 - 12 $\mu\text{m}/\text{year}$ for carbon steel.

⁴Romanoff's work for the U. S. National Bureau of Standards is authoritative in underground corrosion

14 Potential of Sulphate Attack to Concrete

For the sulphate content less than 0.1% in soil encountered at this site, there are no restrictions to the cement type which can be used for underground structures. This refers to restrictions associated with sulphate attack only.

15 Stripping, Excavation to Undisturbed Soils and rock, Earth and Rock Fill Placement. Asphalt Placement and Compaction

Appendix F presents recommended geotechnical specifications and guidelines for stripping, earth excavation to undisturbed surfaces, earth and rock fill placement, asphalt placement, compacted lifts thicknesses for equipment type and compaction for different placements.

15.1 Winter Construction

In situ overburden soil materials encountered at this site are frost susceptible. Frost will render soils disturbed. Winter construction is not recommended. Limited control of contractor operations and the fact that many construction practices are inadequate to provide protection for all the details and geometries which could allow exposure of frost susceptible soils to freezing temperatures are some of the challenges in connection with winter construction. Concrete placement on frozen soils is not acceptable.

16 Responses to Requests from the City of Ottawa

This section provides information to amend this report in response to requests and comments made by the City of Ottawa (C of O).

The current comments are described within items 4 to 7 in missive under File Numbers: D07-12-22-0127 & D07-12-22-0122 from the Planning, Infrastructure and Economic Development Department (PIEDD) dated October 19, 2023 “Re: Site Plan Control Applications 1345 Hemlock Road/ 375 Codd’s Road and 1375 Hemlock Road”

The items are pasted below along with the responses as represented by this version of this report and other documents:

- “4. Memo does not provide construction methodology that needs to demonstrate that no negative impact is expected on the collector. It needs to talk about impact of vibration, drilling, blasting if any on the collector sewer. The updated memo is not required now but will be required as a condition of Site plan approval before the start of any construction work. Prepared by Yuri Mendez Engineering dated June 06, 2022”

- The memorandum in question is a version of the 1000-Tawadina-YME-L2 circulated by error without having the comments regarding the influence of vibrations. The corrected letter L2 having comments regarding vibrations has at this time been made available to the PIEDD.
- “5. BH1,2,3 and 4 shows bed rock elevation at 98.8,96.2,96.4 and 97.9 meters. BH138, BH139 shows the surface elevation of 88.5m and 89.5m respectively. Grading plan shows existing ground elevation of roughly 89.00 meter. Please make required corrections”
 - The report R0 version of this report was referenced to an elevation of 100 assigned arbitrarily. The shift to a geodetic elevation has been made and presented in this report.
- “6. What is the Underside of footing for the proposed buildings? Please provide discussions on foundation design at the USF for all three buildings.”
 - This report has comments in the foundation section to meet this requirement.
- “7. Are there any grade raise restrictions on this site, please provide discussions in the report?”
 - Our August 08, 2022 letter 1000-Tawadina-YME-L1 responds to this requirement. In addition, this report has a grading section to meet this requirement.

Disclaimer

Bayview Waterridge Inc. BWI and other professionals understand that soils and groundwater information in this report has been collected in boreholes guided by standards and practice guidelines generally accepted for engineering characterization of ground conditions in Ontario and in no case borehole data and their interpretation warrant understanding of conditions away from the borehole locations. BWI accepts that as development will have spread away from the boreholes other designers will need the best opinion from the geotechnical consultant based on the findings of the investigation so that any statements which could be implicitly or explicitly depart from the conditions at borehole may be given to fulfill this need in good faith as best available opinion with the information available at the time without any warranties.

User Agreement

Acknowledgment of Duties

In this 55-BWI-R1 report, Yuri Mendez Engineering (YME) has pursued to fulfill every aspect of the obligations of professional engineers. As a part of those duties, from field work,

operations, testing, analyses, application of knowledge and report, YME has ensured that it meets a high standard of Geotechnical engineering practice and care in the province of Ontario. Obligations under R.R.O. 1990, Reg. 941: Professional Engineers Act, R.S.O. 1990, c. P.28, further referred to as Reg. 941 which are of immediate interest to this service are:

- “77. 7. A practitioner shall,
- i. act towards other practitioners with courtesy and good faith,
 - ii. not accept an engagement to review the work of another practitioner for the same employer except with the knowledge of the other practitioner or except where the connection of the other practitioner with the work has been terminated,
 - iii. not maliciously injure the reputation or business of another practitioner,
8. A practitioner shall maintain the honour and integrity of the practitioner’s profession and without fear or favour expose before the proper tribunals unprofessional, dishonest or unethical conduct by any other practitioner.”

Communications

55-BWI-R1 is to be used solely in connection with the three 9 storey buildings by Bayview Waterridge Inc. (BWI) and thus subject of communications amongst other professionals (OP), government bodies and authorities, and BWI for that purpose. YME demands great care in precluding damage to the integrity of this professional work which may arise from careless communications from engineers of Canada. OP and BWI acknowledge understanding that where any such communication occur in connection with this report, they are bound by this agreement as an extension to the standard of care embodied in R.R.O. 1990, Reg. 941 and thus accept that any correspondence from OP or the public seen to add any bad connotations to the breadth, depth, typesetting, typography, formal semantics and scope of this report or otherwise diminish the breadth of services and knowledge delivered in this report which in any way raise concerns or insecurities to the qualities and/or the *reasonable completeness* delivered to BWI in this report will be forwarded to YME.

Reasonable Completeness

OP and Bayview Waterridge Inc. acknowledge understanding that said care and said standard has been applied equality to the reasonable completeness of this report relative to the information available from the field program and acknowledge understanding that is neither feasible nor possible to convey geotechnical information in this report that would cover for every possible consideration by OP and/or BWI and that upon issuance it will be subject to reviews which may trigger the need to add information which at the discretion of YME will be added when considered within the practice obligations under Reg. 941. The geotechnical information here provided is thus envisioned as to cover for the scope and breadth of design figures and assessments generally foreseeable as needed by other designers at the time of issuance and which could be amended as needed within the context of services provided by other designers. YME agrees to issue revised versions of this 55-BWI-R1 report by adding R# to each revision where # is the number of the revision. OP covenant to conduct all communications in connection with these reviews following great care to preclude the suggestion of a breach to the reasonable completeness acknowledged herein. Written communications which may trigger reviews under this agreement will be acknowledged as requests for “review under the 55-BWI-R1 report user agreement”. This reasonable completeness is also relative to the scope of services generally accepted in geotechnical engineering work in Ontario

Errors


Where errors are found during reviews under the 55-BWI-R1 report user agreement, OP covenant great care in communications to preclude the suggestion of a breach to the duties acknowledge herein which could induce damages to YME. Communications triggered by errors or any such communication which would render the person doing the request in a position of technical authority above the author implies an unauthorized review and constitute a serious breach of the code of ethics under Reg. 941 and damages to YME and so subject to disciplinary

measures and/or liability for damages to YME. BWI is thus acquainted that correction of errors will be made and acknowledged by YME as they may arise in any professional work but in no way OP will purport or render such corrections as omissions departing away from the correction of errors set forth in this agreement. Where communications in connection with the correction of errors process set forth in this agreement raise concerns or insecurities to the qualities and/or the reasonable completeness delivered to BWI in this report occur, BWI covenants to inform YME. BWI is acquainted that such corrections are part of the natural processes associated with the applied sciences nature of this report and so typified explicitly in this agreement to protect YME from inappropriate manipulation of those processes by OP and others.

Part IV
Appendices
A Borehole Logs





Report 55-BWI-R1
This page is intentionally left blank

Project: Proposed 9 Storey Buildings		YME Yuri Mendez Engineering.
Location: 1000 and 1050 Tawadina Rd.	Client: Bayview Waterridge Inc.	Test Hole No.: BH1 of 4
Job No.: 55-BWI	Test Hole Type: 7" OD Auger.	Date: May 12, 2022
"7" OD Auger."	SPT Hammer Type: Safety auto hammer	Logged By: Yuri Mendez

Depth (m)	Elevation (m)	Lithology and color	 Yuri Mendez Engineering Material Description	Samples or Blows/Ft	Water	Elevation (m)	Depth (m)	Shear Strength (kPa)	Laboratory Tests			
									Moisture Content (%)	Rock Quality RQD %	Other Lab Tests	
0	88.27		Disturbed surface soils	12		88.27	0					
0.25	88.1		Dark brown sandy silt with trace clay and trace organic.			88.1	0.25					
0.5							0.5					
0.75	87.6		Till: Brown silty sand gravel cobbles			87.6	0.75					
1							1					
1.25	87.1		Limestone bedrock of good quality. Unweathered and jointed at 60 cm spacing. Clayey infilling in joint at 60 cm depth			87.1	1.25					
1.5							1.5					
1.75	86.6						86.6	1.75				92
2							2					
2.25	86.1						86.1	2.25				
2.5			End of rock core.			2.5						

S = Sample for lab review and moisture content


▼ Interpreted water level

Project: Proposed 9 Storey Buildings		YME Yuri Mendez Engineering.									
Location: 1000 and 1050 Tawadina Rd.		Client: Bayview Waterridge Inc.									
Job No.: 55-BWI		Test Hole Type: 7" OD Auger.									
"7" OD Auger."		SPT Hammer Type: Safety auto hammer									
		Date: May 12, 2022									
		Logged By: Yuri Mendez									
Depth (m)	Elevation (m)	Lithology and color	 Yuri Mendez Engineering Material Description	Samples or Blows/Ft	Water	Elevation (m)	Depth (m)	Shear Strength (kPa)	Laboratory Tests		
									Moisture Content (%)	Rock Quality RQD %	Other Lab Tests
0	87.74		Disturbed surface soils			87.74	0				
0.25	87.4		Till: Brown silty sand gravel cobbles. Wet at about 2.29 m depth. Water ponded on the surface on May 24. Rainy conditions a few days before.	24		87.4	0.25				
0.5							0.5				
0.75	86.9						0.75				
1							1				
1.25	86.4						1.25				
1.5							1.5				
1.75	85.9			40		85.9	1.75				
2							2				
2.25	85.4						2.25				
2.5							2.5				
2.75	84.9						2.75				
3							3				
3.25	84.4		Limestone bedrock of good quality. Unweathered and jointed at 20 to 50 cm spacing.	61		84.4	3.25				
3.5							3.5				97
3.75	83.9						83.9	3.75			
4							4				
			End of rock core.								

S = Sample for lab review and moisture content

▼ Interpreted water level


Project: Proposed 9 Storey Buildings		YME Yuri Mendez Engineering.
Location: 1000 and 1050 Tawadina Rd.	Client: Bayview Waterridge Inc.	Test Hole No.: BH3 of 4
Job No.: 55-BWI	Test Hole Type: 7" OD Auger.	Date: May 12, 2022
"7" OD Auger."	SPT Hammer Type: Safety auto hammer	Logged By: Yuri Mendez

Depth (m)	Elevation (m)	Lithology and color	 Yuri Mendez Engineering Material Description	Samples or Blows/Ft	Water	Elevation (m)	Depth (m)	Shear Strength (kPa)	Laboratory Tests		
									Moisture Content (%)	Rock Quality RQD %	Other Lab Tests
0	87.82		Disturbed surface soils			87.82	0				
0.25			Till: Brown silty sand gravel cobbles. Wet at about 2.29 m depth.				0.25				
0.5	87.4		Water level measured at 2.46 m depth on May 24.			87.4	0.5				
0.75			Rainy conditions a few days before.				0.75				
1	86.9			29		86.9	1				
1.25							1.25				
1.5	86.4					86.4	1.5				
1.75				39			1.75				
2	85.9					85.9	2				
2.25							2.25				
2.5	85.4			10	▼	85.4	2.5				
2.75							2.75				
3	84.9		Limestone bedrock of good quality.			84.9	3				
3.25			Unweathered and jointed at 20 to 50 cm spacing.				3.25				
3.5	84.4					84.4	3.5				97
3.75							3.75				
4	83.9					83.9	4				
4.25							4.25				
End of rock core.											

S = Sample for lab review and moisture content


▼ Interpreted water level


Project: Proposed 9 Storey Buildings		YME Yuri Mendez Engineering.
Location: 1000 and 1050 Tawadina Rd.	Client: Bayview Waterridge Inc.	Test Hole No.: BH4 of 4
Job No.: 55-BWI	Test Hole Type: 7" OD Auger.	Date: May 12, 2022
"7" OD Auger."	SPT Hammer Type: Safety auto hammer	Logged By: Yuri Mendez

Depth (m)	Elevation (m)	Lithology and color	 Yuri Mendez Engineering Material Description	Samples or Blows/Ft	Water	Elevation (m)	Depth (m)	Shear Strength (kPa)	Laboratory Tests		
									Moisture Content (%)	Rock Quality RQD %	Other Lab Tests
0	88.08		Disturbed surface soils			88.08	0				
0.25			Fill: silty and clayey sand and gravel.				0.25				
0.5	87.6					87.6	0.5				
0.75							0.75				
1	87.1			10		87.1	1				
1.25			Brown very stiff silty clay				1.25				
1.5	86.6					86.6	1.5				
1.75			Till: Brown silty sand gravel cobbles.	12			1.75				
			Auger refusal on inferred bedrock								


S = Sample for lab review and moisture content



▼ Interpreted water level

CLIENT: Canada Lands Company CLC Limited		METHOD: Hollow Stem Auger & Split Spoon		BH No.: 138									
PROJECT: Wateridge Village		PROJECT ENGINEER: VN	ELEV. (m) 88.510										
LOCATION: Rockcliffe, Ottawa		NORTHING: 5033554	EASTING: 450509	PROJECT NO.: CO682.00									
SAMPLE TYPE <input type="checkbox"/> AUGER <input checked="" type="checkbox"/> DRIVEN <input checked="" type="checkbox"/> CORING <input type="checkbox"/> DYNAMIC CONE <input type="checkbox"/> SHELBY <input type="checkbox"/> SPLIT SPOON													
GWL (m)	SOIL SYMBOL	SOIL DESCRIPTION	DEPTH (m)	ELEVATION (m)	Shear Strength (kPa)	Water Content (%)			SAMPLE NO.	SAMPLE TYPE	SPT(N)	Well Construction	REMARKS
					40 80 120 160	PL	W.C.	LL					
		ASPHALTIC CONCRETE (75 mm)	0	88.5									
		damp, brown gravelly sand (FILL)	0.25	88.25									
			0.5	88					1		50		
		hard, moist, brown CLAYEY SILT, some sand, some gravel	0.75	87.75									
			1	87.5					2		53/254		
			1.25	87.25									Auger refusal at 1.37 m bgs.
		END OF BOREHOLE											
					LOGGED BY: RH		DRILLING DATE: November 16, 2018						
					REVIEWED BY: VN		Page 1 of 1						

CLIENT: Canada Lands Company CLC Limited		METHOD: Hollow Stem Auger & Split Spoon		BH No.: 139									
PROJECT: Wateridge Village		PROJECT ENGINEER: VN	ELEV. (m) 89.520										
LOCATION: Rockcliffe, Ottawa		NORTHING: 5033537	EASTING: 450577	PROJECT NO.: CO682.00									
SAMPLE TYPE <input type="checkbox"/> AUGER <input checked="" type="checkbox"/> DRIVEN <input checked="" type="checkbox"/> CORING <input type="checkbox"/> DYNAMIC CONE <input type="checkbox"/> SHELBY <input type="checkbox"/> SPLIT SPOON													
GWL (m)	SOIL SYMBOL	SOIL DESCRIPTION	DEPTH (m)	ELEVATION (m)	Shear Strength (kPa)	Water Content (%)			SAMPLE NO.	SAMPLE TYPE	SPT (N)	Well Construction	REMARKS
					40 80 120 160	PL	W.C.	LL					
					N-Value (Blows/300mm)	20	40	60	80				
			0	89.5									
			0.25	89.25	30					1	30		Borehole caved-in at 1.10 m bgs and dry on completion.
		compact to dense, damp, brown/grey gravelly sand, traces of brick and concrete (FILL)	0.5	89									
			0.75	88.75									
			1	88.5	15					2	15		
		metal fragments	1.25	88.25									
		no recovery	1.5	88	50/25					3	50/25		Auger refusal at 1.70 m bgs.
		END OF BOREHOLE											
					LOGGED BY: RH		DRILLING DATE: November 15, 2018						
					REVIEWED BY: VN		Page 1 of 1						

CLIENT: Canada Lands Company CLC Limited		METHOD: Hollow Stem Auger & Split Spoon		BH No.: 140						
PROJECT: Wateridge Village		PROJECT ENGINEER: VN	ELEV. (m) 88.144							
LOCATION: Rockcliffe, Ottawa		NORTHING: 5033503	EASTING: 450549	PROJECT NO.: CO682.00						
SAMPLE TYPE <input type="checkbox"/> AUGER <input checked="" type="checkbox"/> DRIVEN <input checked="" type="checkbox"/> CORING <input type="checkbox"/> DYNAMIC CONE <input type="checkbox"/> SHELBY <input type="checkbox"/> SPLIT SPOON										
GWL (m)	SOIL SYMBOL	SOIL DESCRIPTION	DEPTH (m)	ELEVATION (m)	Shear Strength (kPa)	Water Content (%)	SAMPLE NO.	SAMPLE TYPE	Well Construction	REMARKS
					N-Value (Blows/300mm)	PL W.C. LL				
		compact, damp, brown/grey gravelly sand, trace organics (FILL)	0	88	3		1A			Borehole caved-in at 2.85 m bgs and dry on completion.
		stiff, moist, brown clayey silt, some sand, trace gravel (FILL)	0.25	87.75	19		1B		15	
		stiff, moist, greyish brown clayey silt, some sand, trace large gravel	0.75	87.5						
		stiff, moist, greyish brown clayey silt, some sand, trace large gravel	1	87.25	18		2		18	
		compact	1.5	87						
		compact	1.75	86.75	15		3		15	
		brown	2	86.5						Difficult augering at 2.13 m bgs due to large gravel.
		SAND trace gravel trace silt occasional oxidized pockets	2.25	86						
		dense some gravel	2.5	85.75	36		4		36	
		greyish brown	2.75	85.5						
		greyish brown	3	85.25						
		greyish brown	3.25	85	50/75		5		50/75	Auger refusal at 3.27 m bgs.
END OF BOREHOLE										
					LOGGED BY: RH		DRILLING DATE: November 16, 2018			
					REVIEWED BY: VN		Page 1 of 1			

CLIENT: Canada Lands Company CLC Limited		METHOD: Hollow Stem Auger & Split Spoon		BH No.: 141									
PROJECT: Wateridge Village		PROJECT ENGINEER: VN	ELEV. (m) 88.613										
LOCATION: Rockcliffe, Ottawa		NORTHING: 5033512	EASTING: 450627	PROJECT NO.: CO682.00									
SAMPLE TYPE <input type="checkbox"/> AUGER <input checked="" type="checkbox"/> DRIVEN <input checked="" type="checkbox"/> CORING <input type="checkbox"/> DYNAMIC CONE <input type="checkbox"/> SHELBY <input type="checkbox"/> SPLIT SPOON													
GWL (m)	SOIL SYMBOL	SOIL DESCRIPTION	DEPTH (m)	ELEVATION (m)	Shear Strength (kPa)	Water Content (%)			SAMPLE NO.	SAMPLE TYPE	SPT(N)	Well Construction	REMARKS
					40 80 120 160	PL	W.C.	LL					
		ASPHALTIC CONCRETE (75 mm)	0	88.5									Borehole open and dry on completion.
		stiff, damp, dark brown/grey/black clayey silt, some sand, some gravel, trace construction debris, trace rock fragments (FILL)	0.25	88.25	14				1		14		
			0.5	88									
			0.75	87.75									
			1	87.5	13				2		13		
			1.25	87.25									
			1.5	87									
		very stiff, moist, greyish brown CLAYEY SILT some sand, trace gravel	1.75	86.75	28				3		28		
			2	86.5									
			2.25	86.25	50/50				4		50/50		Auger refusal at 2.46 m bgs.
		no recovery											
		END OF BOREHOLE											
					LOGGED BY: RH		DRILLING DATE: November 15, 2018						
					REVIEWED BY: VN		Page 1 of 1						

CLIENT: Canada Lands Company CLC Limited		METHOD: Hollow Stem Auger & Split Spoon		BH No.: BH175									
PROJECT: Wateridge Village		PROJECT ENGINEER: VN	ELEV. (m) 88.961										
LOCATION: Rockcliffe, Ottawa		NORTHING: 5033593	EASTING: 450502	PROJECT NO.: CO682.00									
SAMPLE TYPE <input type="checkbox"/> AUGER <input checked="" type="checkbox"/> DRIVEN <input checked="" type="checkbox"/> CORING <input type="checkbox"/> DYNAMIC CONE <input type="checkbox"/> SHELBY <input type="checkbox"/> SPLIT SPOON													
GWL (m)	SOIL SYMBOL	SOIL DESCRIPTION	DEPTH (m)	ELEVATION (m)	Shear Strength (kPa)	Water Content (%)			SAMPLE NO.	SAMPLE TYPE	SPT(N)	Well Construction	REMARKS
					40 80 120 160	PL	W.C.	LL					
					N-Value (Blows/300mm)	20	40	60	80				
			0										
			0.25	88.75		20				1	20		Borehole open and dry on completion.
		compact, moist, brown/grey sandy gravel (FILL)	0.5	88.5									Auger refusal at 0.61 m bgs.
		END OF BOREHOLE											
 alston associates geotechnical division of  TERRAPEX					LOGGED BY: RH	DRILLING DATE: November 16, 2018							
					REVIEWED BY: VN	Page 1 of 1							

CLIENT: Canada Lands Company CLC Limited			METHOD: Excavator			TP No.: 217											
PROJECT: Wateridge Village			PROJECT ENGINEER: VN		ELEV. (m) 88.84												
LOCATION: Rockcliffe, Ottawa			NORTHING: 5033511		EASTING: 450595		PROJECT NO.: CO682.00										
SAMPLE TYPE <input type="checkbox"/> AUGER <input checked="" type="checkbox"/> DRIVEN <input checked="" type="checkbox"/> CORING <input type="checkbox"/>			DYNAMIC CONE <input type="checkbox"/> SHELBY <input type="checkbox"/>			SPLIT SPOON											
DEPTH (m)	INSTRUMENTATION DATA	REMARKS	Shear Strength (kPa)				Tip Resistance (kg/cm ²)				SOIL SYMBOL	SOIL DESCRIPTION	SAMPLE TYPE	SAMPLE NO.	SPT(N)	ELEVATION (m)	
			40	80	120	160	50	100	150	200							PL
0		On completion the test pit was open and dry.											asphaltic concrete damp, brown sand and gravel (FILL) moist, dark brown organic layer (FILL)				88.75
0.25																	88.5
0.5																	88.25
0.75																	88
1													moist, brownish orange sandy silt trace to some boulders (FILL)				87.75
1.25																	87.5
1.5																	87.25
1.75																	87
2													moist, greyish brown SANDY SILT some gravel trace clay				86.75
2.25		Refusal @ 2.31 m bgs on Limestone Bedrock															
END OF TEST PIT																	
											LOGGED BY: RH			DRILLING DATE: December 14,			
											REVIEWED BY: VN			Page 1 of 1			

Report 55-BWI-R1
This page is intentionally left blank

Appendix

B Laboratory Tests

Grain Size Distribution Report



% +3"	% Gravel		% Sand			% Fines	
	Coarse	Fine	Coarse	Medium	Fine	Silt	Clay
0	0	5	6	20	66	3	

LL	PL	D85	D60	D50	D30	D15	D10	Cc	Cu
		1.1403	0.3184	0.2444	0.1486	0.1014	0.0890	0.78	3.58

Material Description	USCS	AASHTO
○ SAND, trace gravel, trace silt	SP	

<p>Project No. CO682.00 Client: Canada Lands Company CLC Limited</p> <p>Project: Wateridge Village</p> <p>○ Sample Number: BH140/S3</p>	<p>Remarks:</p> <p>○ Tested on November 28, 2018</p>
--	---


<p>Alston Associates</p> <p>Geotechnical Division of Terrapex</p>	<p>Figure E-3</p>
---	--------------------------


Tested By: RH _____

Appendix

C Soil Amendment Facilities Areas

Proposed Location for Soil Amendments as per LID checklist
 Water
 Storm
 Sanitary

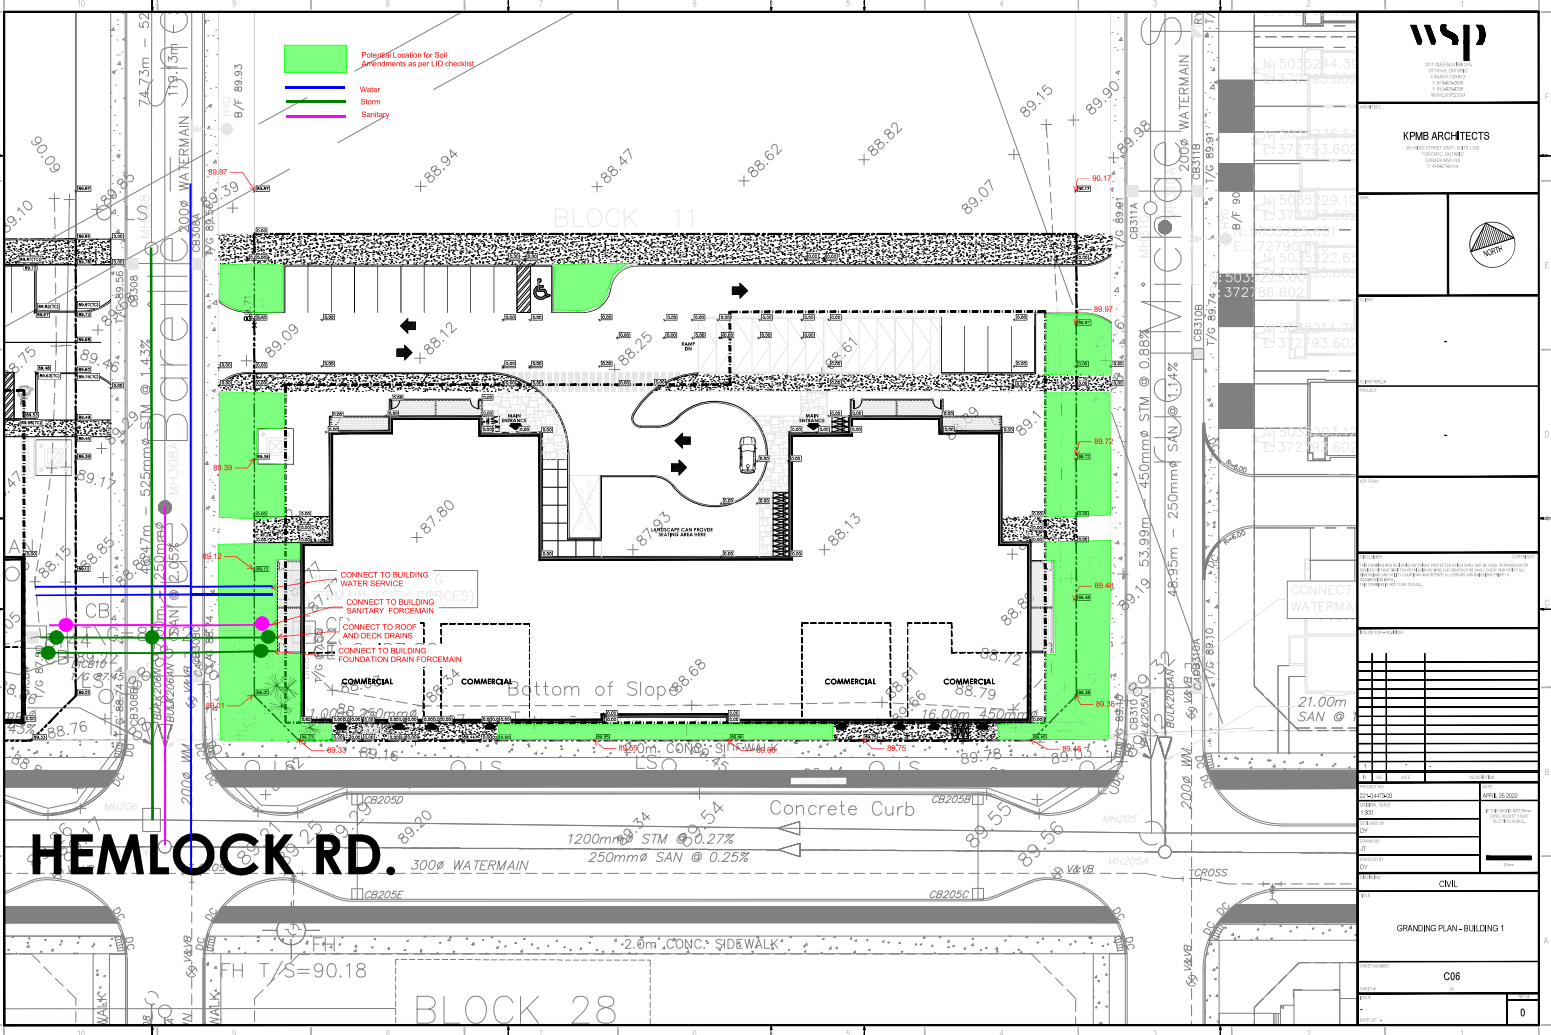



KPMB ARCHITECTS

ARCHITECTS

10000 160th Avenue, Suite 100
 Richmond, BC V6V 2G9
 Tel: 604.273.8888
 Fax: 604.273.8889
 Email: info@kpmb.ca

<p>PROJECT: GRANDING PLAN - BUILDING 1</p> <p>DATE: 06/20/2023</p> <p>SCALE: AS SHOWN</p> <p>DESIGNED BY: [REDACTED]</p> <p>CHECKED BY: [REDACTED]</p> <p>DATE: 06/20/2023</p>	<p>DATE: 06/20/2023</p> <p>SCALE: AS SHOWN</p> <p>DESIGNED BY: [REDACTED]</p> <p>CHECKED BY: [REDACTED]</p> <p>DATE: 06/20/2023</p>
--	---

HEMLOCK RD.

BLOCK 28


BLOCK 11

COMMERCIAL

COMMERCIAL

COMMERCIAL

COMMERCIAL

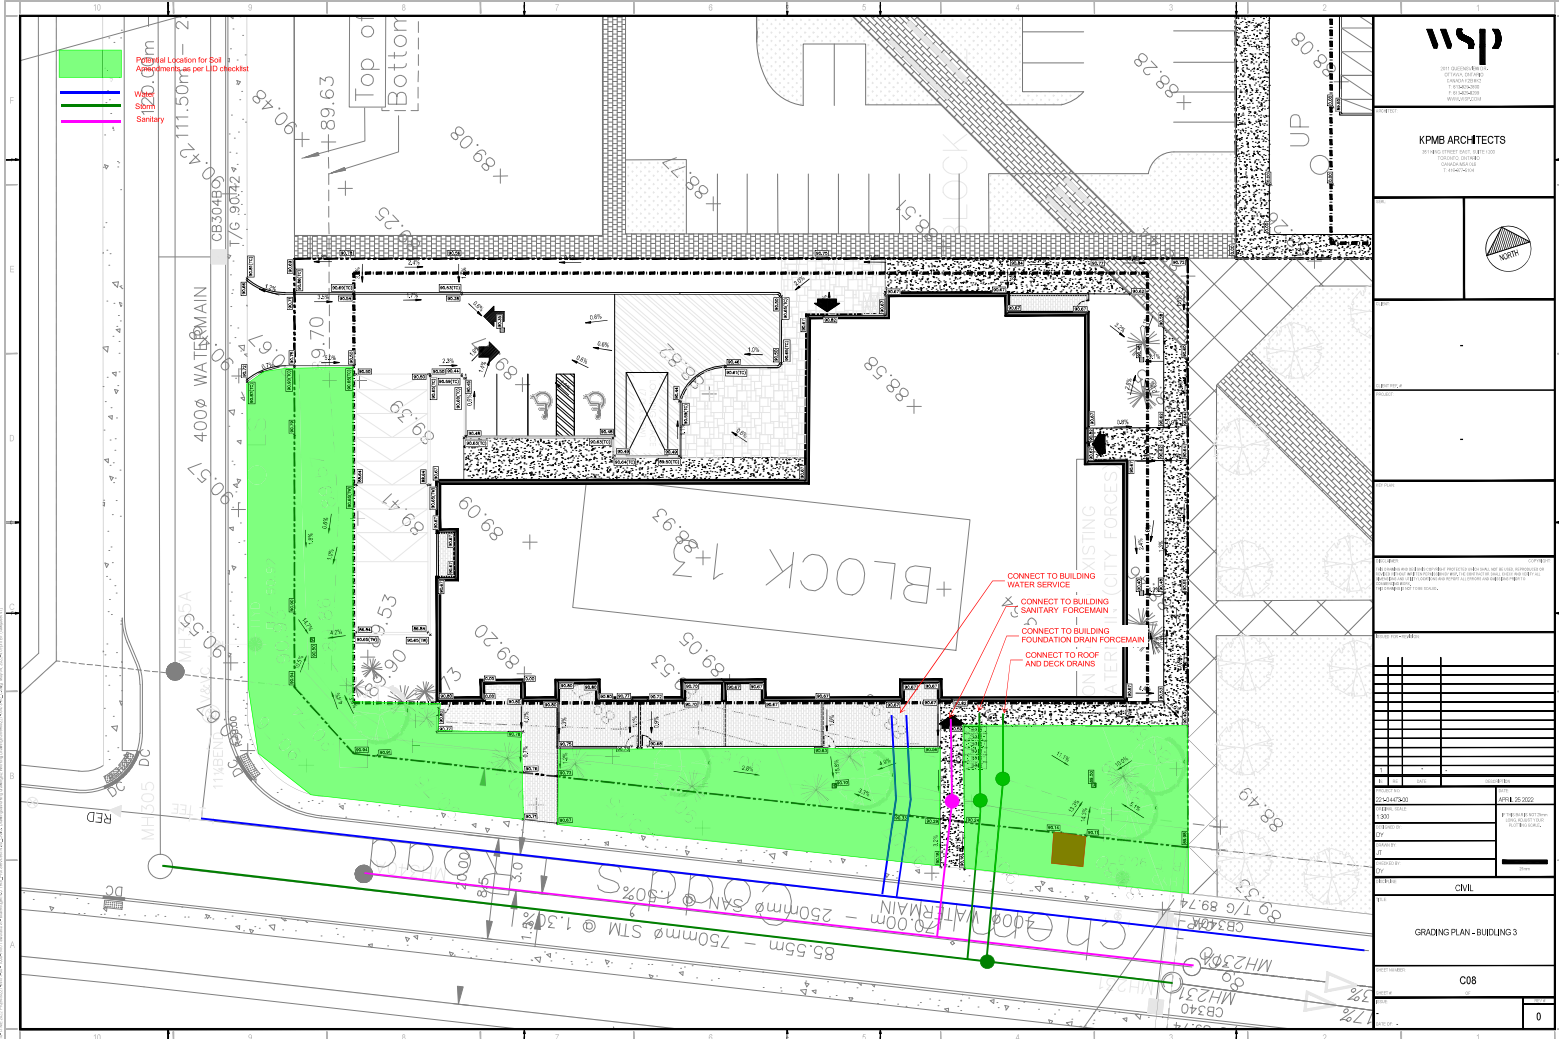

KPMB ARCHITECTS



PROJECT NO.	1000000000
DATE	2023-08-01
SCALE	AS SHOWN
DRAWN BY	CB
CHECKED BY	CB
DATE	2023-08-01
PROJECT	1000000000
DATE	2023-08-01
SCALE	AS SHOWN
DRAWN BY	CB
CHECKED BY	CB
DATE	2023-08-01

DATE	2023-08-01
SCALE	AS SHOWN
DRAWN BY	CB
CHECKED BY	CB
DATE	2023-08-01

PROJECT	1000000000
DATE	2023-08-01
SCALE	AS SHOWN
DRAWN BY	CB
CHECKED BY	CB
DATE	2023-08-01

#XXXXXX

Appendix

D Resistivity, PH and Soluble Salts Test

Certificate of Analysis

Report Date: 30-May-2022

Client: Geoseismic

Order Date: 24-May-2022

Client PO:

Project Description: 1000 TAWADINA

Client ID:	BH2 SS2	-	-	-
Sample Date:	12-May-22 09:00	-	-	-
Sample ID:	2222071-01	-	-	-
MDL/Units	Soil	-	-	-

Physical Characteristics

% Solids	0.1 % by Wt.	91.9	-	-	-
----------	--------------	------	---	---	---

General Inorganics

pH	0.05 pH Units	7.48	-	-	-
Resistivity	0.10 Ohm.m	97.4	-	-	-

Anions

Chloride	5 ug/g dry	11	-	-	-
Sulphate	5 ug/g dry	17	-	-	-

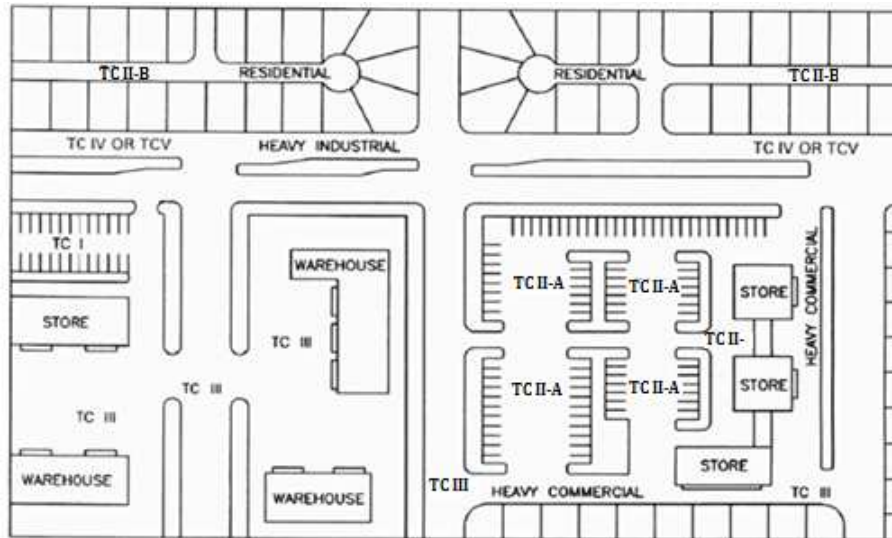


Figure 2: Traffic Classes

Appendix

E Pavement

E.1 Traffic Classes and Pavement Catalog

Figure 2 in page 45 presents a schematic site plan differentiating example uses for five traffic classes developed by the Wisconsin Asphalt Pavement Association and presented in their Design Guide May, 2001.

1. Refer to figure 2 in page 45 to differentiate pavement classes for the proposed three 9 storey buildings.
2. Refer to table 1 in page 46 for additional information and design ESALs.
3. Refer to Tables 2, 3 and 4 in page 46 to select pavement structures for each traffic class on fair soils encountered at this site.

Consult Yuri Mendez Engineering for pavement structures on roadbed consisting of newly placed engineered fill, underground parking or as required, where the roadbed is not the near surface fair soil encountered at this site.

E.2 Frost Heave in Pavements

Frost heave of founding materials for pavement induces reduction (serviceability losses) of the performance period (along with traffic ESALs) for which the structure was designed. Generally speaking, AASHTO 1993 does not provide for an increase in thicknesses (structural number) for reduction of losses, as such increase has very small influence in the detrimental effects of frost heave. Frost heave affects pavements by roughness induced by differential frost heave, i.e., if the longitudinal vertical alignment is all equally frost susceptible, there is negligible detrimental effect. This is difficult to achieve in urban developments in which services trenches are backfilled with non frost susceptible materials. For long lasting pavements

Ontario Category	Classes	ESALs	Uses
A	I	50,000	Residential dead end and parking lots 50 stalls or less.
A	II-A	100,000	Parking lots 51 to 500 stalls.
A	II-B	200,000	Residential streets, parking lots more than 500 stalls.
B	III	600,000	Minor collectors, local streets and light industrial lots.
B	IV	900,000	Collector Streets and heavy industrial parking lots.
B	V	2,200,000	Minor Arterial.

Table 1: Design ESALs (20 years) and uses for traffic classes

Material Class	Specification	Thicknesses			
		Class I		Class II-A	
		mm	in	mm	in
Surface course	OPSS 1151 Superpave 9.5	50.8	2	50.8	2
Surface course	OPSS 1151 Superpave 12.5				
Binder course	OPSS 1151 Superpave 19.0				
Base	OPSS 1010 Granular A	152.4	6	152.4	6
Subbase	OPSS 1010 Granular B Type II	127.0	5	203.2	8
Subgrade	Undisturbed In situ Soil				

Table 2: Flexible Pavement Structure Classes I and II-A

Material Class	Specification	Thicknesses			
		Class II-B		Class III	
		mm	in	mm	in
Surface course	OPSS 1151 Superpave 9.5				
Surface course	OPSS 1151 Superpave 12.5	63.5	2.5	76.2	3
Binder course	OPSS 1151 Superpave 19.0				
Base	OPSS 1010 Granular A	152.4	6	152.4	6
Subbase	OPSS 1010 Granular B Type II	228.6	9	304.8	12
Subgrade	Undisturbed In situ Soil				

Table 3: Flexible Pavement Structure Classes II-B and III

Material Class	Specification	Thicknesses			
		Class IV		Class V	
		mm	in	mm	in
Surface course	OPSS 1151 Superpave 9.5	31.8	1.25		
Surface course	OPSS 1151 Superpave 12.5				
Binder course	OPSS 1151 Superpave 19.0	57.2	2.25		
Base	OPSS 1010 Granular A	152.4	6		
Subbase	OPSS 1010 Granular B Type II	330.2	13		
Subgrade	Undisturbed In situ Soil				

Table 4: Flexible Pavement Structure Classes IV and V

on frost susceptible soils, the general guideline is, where possible; ensure that all soils serving as pavement foundation are equally frost susceptible. This could be achieved by providing frost susceptible backfill within 1.4 m of the pavement foundation in service trenches. Where measures to mitigate the effect of frost heave are not undertaken, decrease of the performance period is accepted to occur.

E.3 Frost Protection for Manholes, Catch Basins and Others

Manholes and catch basin type structures provide a cold bridge to a deeper portion of the soil profile and create localized areas prompt to pavement failure by excessive frost heave roughness in frost susceptible soils. This can be prevented by providing insulation extending downward around the structure and horizontally outward to create a transition from the varying pavement elevation to the more stable catch basin elevation. On the alternative, non frost susceptible backfill can be provided tapered outward from the structure to the surrounding pavement.

Report 55-BWI-R1
This page is intentionally left blank

Appendix

F Construction Recommendations for Stripping, Earth and Rock Excavation to Undisturbed Soils, Earth and Rock Fill Placement, Asphalt Placement and Compaction

In the event that any of the following recommendations conflict with municipal and or provincial specifications, the most restrictive applies. For the case when products involving ground conditions are used, the manufacturer's specifications take precedence.

The contractor shall be prepared to proceed as directed by the geotechnical consultant within the framework of these recommendations. Construction methods will abide to these recommendations and/or be discussed and agreed upon with the consultant on site in real time or as expressed in writing.

F.1 Field Briefings

At any time in which the geotechnical consultant is required in the field for inspections, the contractor shall brief the consultant in real time about any work in progress or work to proceed at the time requiring excavation, rock excavation, placement, hauling in or out, re-working, compaction equipment weight and nature, equipment passes, moisture, stock piling, sorting of materials, stock piling, etc. of geotechnical materials. The briefing will seek approval of the methods and materials and will involve discussions regarding the source, nature and/or specifications of any source of materials brought or removed, and/or placed and/or stock piled and/or excavated from the site and discussions to meet geotechnical requirements. The consultant may choose to instate a log book in the field which may include the persons having authority to log as representative of the contractor.

F.2 Removal of Water

Removal and diversion of surface water and ground water will be planned prior to all earthwork within the scope of these recommendations. All surfaces in which to commence construction will be maintained dry and free of muddy conditions.

F.3 Earth Excavation

Earth excavations are subject to the provisions in O. Reg. 213/91: Construction Projects under Occupational Health and Safety Act. Refer to section 9 for key aspect of O. Reg. 213/91 applicable to the findings in testholes at this site.

For the purpose of these recommendations earth materials will be referred to as one or more of the general material classes: topsoil and organic soils, non engineered fill, granular fill, native soils and rock. Topsoil and organic soils and non engineered fill are the subject of stripping in subsection F.3.3.

F.3.1 Suitability of Earth Materials

The suitability of material for specific purposes is determined by the geotechnical engineer. To the extent they are needed, suitable material from the excavations can be used in the construction of required permanent earthfill or rockfill.

F.3.2 Stockpiling and Sorting

Stockpiling is not an acceptable mean to build up the subgrade beneath the perimeter of structures of any kind. For stock piling, with the exception of native soils, material will be sorted in piles belonging exclusively to each material class. For native soils, sorting will be as determined by the geotechnical engineer. Mixed materials will be rendered unusable for uses other than the buildup of the subgrade in landscaped areas.

F.3.3 Striping

Topsoil and/or organic soils and/or existing fill must be removed from the perimeter of all proposed structures, including retaining wall, buildings, pavement, parking areas and earth or fill banks for grading.

F.3.4 Excavation to Undisturbed Soil Surface

All soil surfaces in which to commence construction for all structures are to be preserved in undisturbed condition (Undisturbed Soil Surface (USS)).

F.4 Foundations Placement

Place foundations on undisturbed brownish dense till with gravel that is not frozen.

F.5 Imported Materials

Materials to be imported are subject to prior approval by the geotechnical engineer. The exceptions are granular materials having 12 % or less fines including clean sands. Fines are materials passing the # 200 sieve (70 μ m).

F.6 Overexcavation

Excavation in earth beyond the specified lines and grades shall be corrected by filling the resulting voids with approved, compacted earthfill.

F.7 Earthfill

The type of Earthfill materials will be as indicated in plans and specifications. Suitability of earth materials will be determined by the geotechnical engineer.

Earthfill materials shall contain no frozen soil, sod, brush, roots, or other perishable material. Rock particles larger than 2/3 of the maximum approved lift thickness shall be removed prior to compaction of the fill.

For the purpose of this subsection all suitable materials will belong to one of the following two classes: *granular earthfill* and *select earthfill*. Granular earthfill will be any natural or crushed earth materials containing 12% or less passing the #200 sieve (70 μ m). Select earthfill will be materials for which more than 12% passes the #200 sieve *and* have water content close to the optimum *and* have been rendered as suitable by the geotechnical engineer.

F.7.1 Granular Earthfill Placement

F.7.1.1 Moisture for Granular Earthfill

For granular earthfill it is to be assumed that moisture will be added for placement. Compaction in wet of optimum condition is preferred for granulars.

F.7.1.2 Compacted Lifts Thicknesses Equipment and Passes for Granular Earthfill

Compacted lifts will not exceed 250 mm. Subject to test trials a maximum compacted lift of 300 mm may be accepted provided vibratory compaction equipment rated at 60,000 lb-f (27,300 kg-f) of dynamic force is used.

For road construction passes are to overlap by 300 mm for full coverage.

Where non vibratory pneumatic compactors with ballast an tire pressure of 100 psi (7 kg/cm²) are used (9 or 13 ply) the compacted lift thicknesses will not exceed 150 mm for granular.

For services and culvert trenches, when using rammers and light vibratory plates weighing less than 115 kg (250 lbs) the compacted lift thicknesses will not exceed 100 and 125 mm respectively. For heavier trench equipment the compacted lifts will not exceed 250 mm.

No heavy equipment will be operated above the crown of pipes or culverts unless 1.2 m of fill has been placed or the subgrade elevation has been reached.

For all trenches below the water table, trench foundation not less than 200 mm will be provided as per materials and specification in Table 5 in page 53.

Materials lift placement beneath foundations, slabs or any placement not specified above must abide to the above specifications as they relate to the equipment being used.

F.7.2 Select Earthfill Placement

It is to be assumed that suitable select fill will be materials that will be excavated from the bank to be put directly on hauling equipment transported and dumped directly for spreading in lifts by push tractors, be added water and compacted. Stockpiling at the source or on site is not acceptable.

F.7.2.1 Moisture for Select Earthfill

It is to be assumed that moisture will be added for placement.

F.7.2.2 Compacted Lifts Thicknesses Equipment and Passes for Select Earthfill

Compacted lifts will not exceed 200 mm for heavy sheep foot rollers. Suitability of smooth vibratory rollers for the materials will be determined by the geotechnical engineer.

For road construction passes are to overlap by 300 mm for full coverage.

Where non vibratory pneumatic compactors with ballast an tire pressure of 100 psi (7 kg/cm²) are used (9 or 13 ply) the compacted lift thicknesses will not exceed 150 mm.

For services and culvert trenches, when using rammers and light vibratory plates weighing less than 115 kg (250 lbs) the compacted lift thicknesses will not exceed 100 and 125 mm respectively. For heavier trench equipment the compacted lifts will not exceed 200 mm.

No heavy equipment will be operated above the crown of pipes or culverts unless 1.2 m of fill has been placed or the subgrade elevation has been reached.

For all trenches below the water table, trench foundation not less than 200 mm will be provided as per materials and specification in Table 5 in page 53.

Materials lift placement beneath foundations, slabs or any placement not specified above must abide to the above specifications as they relate to the equipment being used.

F.7.3 Compaction Guide for Passes and Level of Compaction

The contents of this section are provided as guidelines for construction. The resulting compaction densities and compacted lift thicknesses can only be verified by actual testing and field trials respectively.

For equipment passes the contractor may consider not less than 4, 5 or 6 passes for 95, 98 or 100 % Proctor Standard compaction.

For granular materials loose lifts may be approximately 150, 175 and 235 mm for compacted lift thicknesses 125, 150 and 200 mm respectively.

For select earthfill materials loose lifts may be approximately 125 and 190 mm for compacted lift thicknesses 100 and 150 mm respectively.

F.8 Compaction General

It is to be assumed that water will be added for compaction and that the required maximum grain size shall be 3/4 of the compacted lift thickness.

Obtain the approximate loose lift thickness by dividing the compacted lift by 0.88. Compacted lifts are approximately 12% less than the loose lift thickness.

Each lift shall be compacted by the specified number of passes of the approved type and weight of roller or other equipment.

Table 5 in page 53 presents Proctor Standard (PS) compaction requirements for specified placement and materials.

F.9 Compaction Specific

F.9.1 Compaction Along Basement Walls, Retaining Walls and Structures

No heavy compaction equipment is to be operated within 0.9 m of any structure. The consolidation zone is defined as the zone within 0.9 m of the exterior edge of basements or the interior edge of retaining walls or any structure. Only light to very light compaction is to be applied along the consolidation zone with no more than 2 passes of light vibratory equipment.

F.9.2 Self Compacting Materials

There are no self compacting materials. Total fill thickness of 200 mm of granular materials consisting of more than 90% of one nominal size referred to as crushed stone are acceptable without compaction under concrete slabs.

F.9.3 Settlement Allowance and Overfill

The settlement (consolidation) of lightly compacted earthfill can be excessive. Overfill to compensate for settlement allowance will be discussed with the geotechnical engineer.

F.9.4 Compaction Quality Control

Provide moisture density relationships for Standard Proctor compaction for the proposed materials and source. Conduct one in situ test at randomly selected locations per 60 m³ of fill. This is approximately one test, each 300 m² of lift in place. Nuclear or non-nuclear density probes testing can be used. Density probes will only measure the density within 0.12 m depth at the point of the measurement.

F.10 Asphalt Pavement

Place asphalt mix only when base course, or previous course is dry and air temperature is 7 degrees C and increasing.

Asphalt pavement mix temperatures at the time of placement will be within the range of 120 to 160 degrees C.

Do not place asphalt on a surface which is wet or covered by snow or ice or if the ground is frozen.

Material Placement	Material Description	% PS
Base	OPSS.MUNI 1010 Granular A	100
Subbase	OPSS.MUNI 1010 Granular B Type II	100
Subgrade	Granular earthfill (with 12 % or less fines) and 100% passing 106 mm sieve Select earthfill	95 95
Backfill for trenches under pavement	Granular earthfill (with 12 % or less fines) and 100% passing 106 mm sieve. Select earthfill	95 95
Under sidewalks top 200 mm	Any OPSS.MUNI 1010 Granular specification for which 100% passes the 26.5 mm sieve	95
Under foundations	OPSS.MUNI 1010 Granular B type 2 with 12% or less fines and for which 100% passes the 106 mm sieve	98
Backfill under slabs on grade	Cohesionless (with 12 % or less fines) and 100% passing 106 mm sieve. Select earthfill	100 100
Top 100 mm under slabs	Crushed stone 9.5 to 19 mm (use one or several sizes).	90
Pipe bedding and cover (150 mm for bedding to 150 mm above the crown)	Any OPSS.MUNI 1010 Granular specification for which 100% passes the 26.5 mm sieve	95
Trench foundation (stabilization minimum 200 mm)	Any OPSS 1010.MUNI Granular specification for which 100% passes the 106 mm sieve except Granular B Type I	95
Backfill for non building, non traffic and/or non parking areas	Granular (with 12 % or less fines) and 100% passing 106 mm sieve Select earthfill	90 90
Placement not specified above	Granular (with 12% or less fines) and 100% passing 106 mm sieve Select earthfill	95 95

Table 5: Proctor Standard (PS) compaction requirements for specified placement and materials.

F.10.1 Surface Preparation for Asphalt Pavement

It is to be assumed that rough grading and fine grading shall take place before asphalt placement. Rough grading will be completed to within ± 25 mm of the underside of asphalt and tested to meet the specified density. Fine grading and rolling will be completed by the paving contractor. The granular material for fine grading will meet OPSS.MUNI 1010 Granular M.

F.10.2 Proof Rolling Prior to Asphalt Pavement

Conduct proof rolling using a single pass of a tandem-axle dump truck or a tri-axle dump truck with the third axle raised loaded to a minimum gross vehicle weight of 26 metric tons at walking speed. Rutting in excess of 25 mm is considered failure. Where proof rolling reveals areas of defective subgrade, Remove base, Sub-base and subgrade material to depth and extent and width that will allow reconstruction using the available equipment or as directed by the Consultant.

F.10.3 Asphalt compaction

The compacted lifts are accepted to be 80% of the loose lift thickness (the loose lift reduces thickness by 20% when compacted). Divide the compacted lift thickness by 0.8 to obtain the thickness of the loose lift.

Compaction will consist on at least three passes at approximately walking speed (5.4 km/hr) as follows: *break down rolling* using a vibratory steel drum roller, *intermediate rolling* with a static (non-vibrating) roller or a pneumatic roller and *finish rolling* with a smooth static roller.