

PROP STM STRUCTURE TABLE							
NAME	RIM ELEV.	INVERT IN	INVERT OUT	DESCRIPTION			
CB3	89.00		NW87.572	STRUC: OPSD 705.010 FRAME: CITY S19 COVER: CITY S19			
CB4	88.82		NE87.447	STRUC: OPSD 705.010 FRAME: CITY S19 COVER: CITY S19 TEMPEST LMF85 ICD AT OUTLET			
CB6	88.70		N87.605	STRUC: OPSD 705.010 FRAME: CITY S19 COVER: CITY S19			
CBMH2	88.85	SE87.450 SW87.450	NW87.418	STRUC: OPSD 701.011 FRAME: CITY S25 COVER: CITY S28.1 600mm SUMP 74mm ORIFICE AT OUTLET			
СВМН5	88.85	S87.520	NE87.491	STRUC: OPSD 701.011 FRAME: CITY S25 COVER: CITY S28.1 600mm SUMP			
OGS1	89.13	SE87.340 SW87.340	NE87.308	OGS UNIT 80% TSS REMOVAL			

	CROSSING CONFLICT TABLE	
LOCATION	DESCRIPTION	SEPARATION
1	50mmØ WTR SERVICE TOP 86.56 300mmØ STM SERVICE INV 87.56	1.00
2	50mmØ WTR SERVICE TOP 86.51 300mmØ STM SERVICE INV 87.41	0.90
3	50mmØ WTR SERVICE TOP 86.65 500mmØ CULVERT INV ± 87.66	1.01

GENERAL NOTES

- 1 THE ORIGINAL TOPOGRAPHY GROUND ELEVATION AND SURVEY DATA SHOWN ARE SUPPLIED FOR INFORMATION PURPOSES ONLY, AND IMPLY NO GUARANTEE OF ACCURACY. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY ALL INFORMATION
- 2. THIS PLAN IS NOT A CADASTRAL SURVEY SHOWING LEGAL PROPERTY BOUNDARIES AND FASEMENTS. THE PROPERTY BOUNDARIES SHOWN HEREON HAVE BEEN DERIVED INFORMATION SUPPLIED BY (OR SHOWN ON) MPSI DRAWING 22-3130. DATED MAY 20, 2022, AND CANNOT BE RELIED UPON TO BE ACCURATE OR COMPLETE. THE PRECISE LOCATION OF THE CURRENT PROPERTY BOUNDARIES AND FASEMENTS CAN ONLY BE DETERMINED BY AN UP-TO-DATE LAND TITLES SEARCH AND A SUBSEQUENT CADASTRAL SURVEY PERFORMED AND CERTIFIED BY AN ONTARIO LAND
- 3. THE CONTRACTOR IS TO OBTAIN AND PAY FOR ALL NECESSARY PERMITS AND APPROVALS FROM THE CITY BEFORE COMMENCING CONSTRUCTION.
- 4. THE CONTRACTOR IS RESPONSIBLE FOR ALL LAYOUT.
- 5. THE CONTRACTOR IS TO DETERMINE THE EXACT LOCATION, SIZE, MATERIAL AND ELEVATION OF ALL EXISTING UTILITIES PRIOR TO COMMENCING CONSTRUCTION. PROTECT AND ASSUME ALL RESPONSIBILITY FOR EXISTING UTILITIES WHETHER OR NOT SHOWN ON THESE DRAWINGS, IF THERE IS ANY DISCREPANCY THE CONTRACTOR IS TO NOTIFY THE ENGINEER PROMPTLY.
- 6. RESTORE ALL TRENCHES AND SURFACES OF PUBLIC ROAD ALLOWANCES TO CONDITION EQUAL OR BETTER THAN ORIGINAL CONDITION AND TO THE SATISFACTION OF THE CITY AUTHORITIES.
- 7. EXCAVATE AND DISPOSE OF ALL EXCESS EXCAVATED MATERIAL, SUCH AS ASPHALT, CURBING AND DEBRIS, OFF SITE AS DIRECTED BY THE ENGINEER AND THE CITY.
- CLEAN FILL TO BE PLACED IN FILL AREAS AND COMPACTED TO 95% STANDARD PROCTOR DENSITY.
- 9. ALL DISTURBED AREAS TO BE RESTORED TO ORIGINAL CONDITION

WATERMAIN NOTES

- ACCORDANCE WITH OPSD STANDARDS AND SPECIFICATIONS, AS
- WELL AS CITY STANDARDS.
- COVER OF 2.4m. OTHERWISE THERMAL INSULATION IS REQUIRED
- AS PER CITY STANDARDS (IF AVAILABLE) OR OPSD 1109.030. 3. IF THE WATERMAIN MUST BE DEFLECTED TO MEET ALIGNMENT,
- 4. THERMAL INSULATION OF WATERMAINS AT OPEN STRUCTURES AS
- 5. VALVES TO BE OPERATED BY CITY STAFF ONLY.
- ANY WATERMAIN CONNECTION(S) REQUIRED. THIS SHALL BE COMPLETED IN THE PRESENCE OF A DESIGNATED MUNICIPAL
- EQUIVALENT.
- 10. ALL WATERMAIN TO BE EQUIPPED WITH TRACER WIRE.

- OR BETTER UNLESS OTHERWISE SPECIFIED. 10. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TRAFFIC CONTROL AND SAFETY MEASURES DURING THE CONSTRUCTION PERIOD, INCLUDING THE SUPPLY, INSTALLATION, AND REMOVAL OF ALL NECESSARY SIGNAGE, DELINEATORS, MARKERS AND BARRIERS
- 11. DO NOT ALTER GRADING OF THE SITE WITHOUT PRIOR APPROVAL OF THE ENGINEER/CITY.
- 12. ALL ROADWAY, PARKING LOT, AND GRADING WORKS TO BE INDERTAKEN IN ACCORDANCE WITH CITY STANDARDS AN SPECIFICATIONS. THE CONTRACTOR IS TO PROVIDE POSITIVE DRAINAGE AWAY FROM THE BUILDING.
- 13. CONTACT THE CITY FOR INSPECTION OF ROUGH GRADING OF PARKING LOTS, ROADWAYS AND LANDSCAPED AREAS PRIOR TO PLACEMENT OF ASPHALT AND TOPSOIL. ALL DEFICIENCIES NOTED SHALL BE RECTIFIED TO THE CITY'S SATISFACTION PRIOR TO PLACEMENT OF ANY ASPHALT, TOPSOIL, SEED & MULCH AND/OR
- 14. ALL DIMENSIONS AND INVERTS MUST BE VERIFIED PRIOR TO CONSTRUCTION, IF THERE IS ANY DISCREPANCY THE CONTRACTOR IS TO NOTIFY THE ENGINEER PROMPTLY.
- 15. ELECTRICAL, GAS, TELEPHONE AND TELEVISION SERVICE LOCATIONS ARE SUBJECT TO THE INDIVIDUAL AGENCY: • ELECTRICAL SERVICE - HYDRO ONE, • GAS SERVICE - ENBRIDGE, • TELEPHONE SERVICE - BELL CANADA, • TELEVISION SERVICE - ROGERS.
- 16. INSTALLATION TO BE IN ACCORDANCE WITH CURRENT CODES AND STANDARDS OF APPROVAL AGENCIES HYDRO ONE, BELL AND THE
- 17. CONTRACTOR TO ENSURE ALL APPLICABLE OPS SPECIFICATIONS ARE FOLLOWED DURING CONSTRUCTION
- 18. ALL PROPOSED CURB TO BE CONCRETE BARRIER CURB UNLESS
- 19. THIS PLAN MUST BE READ IN CONJUNCTION WITH THE GEOTECHNICAL INVESTIGATION COMPLETED BY TERRAPEX ENVIRONMENTAL LTD.

SEWER NOTES:

- 1. CONSTRUCT ALL WATERMAINS AND APPURTENANCES IN
- 2. WATERMAINS AND/OR WATER SERVICES ARE TO HAVE A MINIMUM
- ENSURE THAT THE AMOUNT OF DEFLECTION USED IS EQUAL TO OR LESS THAN THAT WHICH IS RECOMMENDED BY THE MANUFACTURER.
- PER CITY STANDARDS (IF AVAILABLE) OR OPSD 1109.030.
- 6. NO CONNECTION TO EXISTING WATER NETWORK SHALL BE COMPLETED UNTIL A WATER PERMIT IS OBTAINED FROM THE CITY. CITY TO BE PRESENT FOR WATERMAIN CONNECTION. CONNECTION, EXCAVATION, BACKFILLING AND REINSTATEMENT TO BE COMPLETED BY CONTRACTOR.
- 7. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PERFORM WATER OPERATOR AND THE SELECTED CONTRACTOR SHALL PROVE TO THE SATISFACTION OF THE CITY THAT THEY ARE COMPETENT TO PERFORM THE WORKS PRIOR TO INITIATING CONSTRUCTION.
- 8. CONCRETE THRUST BLOCKS TO CONFORM TO OPSD 1103.010 AND OPSD 1103.020.
- 9. ALL WATERMAIN TO BE CLASS 150 DR-18 OR APPROVED


- 1. CONSTRUCT ALL SEWERS, CATCH BASINS, MANHOLES AND APPURTENANCES IN ACCORDANCE WITH OPSD STANDARDS AND
- SPECIFICATIONS, AS WELL AS CITY.
- 2. SEWER TRENCHING AND BEDDING SHALL CONFORM TO OPSD 802.010 AND 802.013 UNLESS NOTED OTHERWISE. 2.1. BEDDING SHALL BE A MINIMUM 150mm OF GRANULAR "A", COMPACTED TO MINIMUM 98% STANDARD PROCTOR DRY DENSITY. CLEAR STONE BEDDING SHALL NOT BE PERMITTED.
- 2.2. SUB-BEDDING, IF REQUIRED SHALL CONSIST OF 450mm OF COMPACTED GRANULAR "B" TYPE 1. 2.3. BACKFILL TO AT LEAST 300mm ABOVE TOP OF PIPE WITH GRANULAR "A" OR GRANULAR "B" TYPE 1. 2.4. TO MINIMIZE DIFFERENTIAL FROST HEAVING, TRENCH BACKFILL

(FROM PAVEMENT SUBGRADE TO 2.0 METRES BELOW FINISHED

SANITARY SEWERS AND CONNECTIONS 150mmØ AND SMALLER TO BE PVC

GRADE) SHALL MATCH EXISTING SOIL CONDITIONS.

- SEWERS AND CONNECTIONS 200mmØ AND LARGER TO BE PVC SDR-35. BEDDING TO BE TYPE "B" EXCEPT AT RISERS, UNLESS NOTED OTHERWISE.
- 5. INSULATE ALL STORM AND SANITARY SEWERS/SERVICES THAT HAVE LESS THAN 2.0m OF COVER WITH THERMAL INSULATION AS PER OPSD 1109.030. 6. SEWER CONNECTIONS ARE TO BE MADE ABOVE THE SPRINGLINE OF THE SEWERMAIN AS PER CITY OF OTTAWA STANDARD DRAWING S11, S11.1 &
- SUPPLY AND INSTALL ALL PIPING AND APPURTENANCES AS SHOWN AND DETAILED TO WITHIN 1.0m OF BUILDING. ALL ENDS OF SERVICES TO BE PROPERLY CAPPED AND LOCATED WITH 2"x4"X8' LONG MARKER.
- 8. CONTRACTOR TO TELEVISE (CCTV) ALL PROPOSED SEWERS ON SITE, OUTLET CONNECTION TO THE MAIN AND PIPES 150mmØ OR GREATER PRIOR TO BASE COURSE ASPHALT. UPON COMPLETION OF CONTRACT, THE CONTRACTOR IS RESPONSIBLE TO FLUSH AND CLEAN ALL SEWERS & APPURTENANCES.
- 9. DYE TESTING IS TO BE COMPLETED ON SANITARY SERVICE TO CONFIRM PROPER CONNECTION TO SANITARY SEWER MAIN.
- 10. THE SEPTIC SYSTEM LAYOUT IS SHOWN FOR INFORMATION PURPOSES ONLY AND DOES NOT INCLUDE ALL APPLICABLE DESIGN DETAILS. INSTALLATION TO BE IN ACCORDANCE WITH APPROVED SEPTIC PERMIT AND DRAWING "CCO-22-2383 - SSD01 - SEWAGE SYSTEM DESIGN".

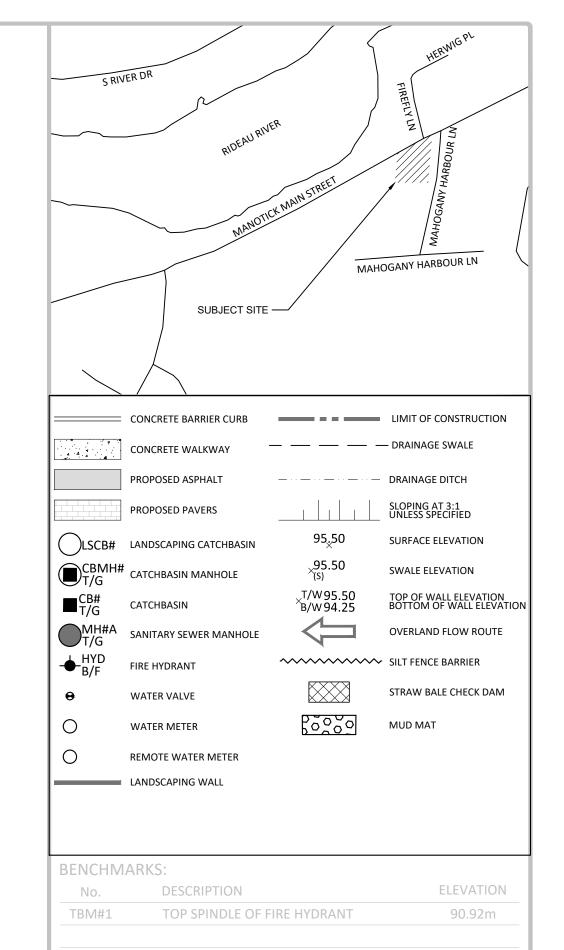

Ö	10	20 Metres
07	REISSUED FOR SITE PLAN CONTROL	JULY 12, 2024
06	ISSUED FOR CONSTRUCTION	JUNE 25, 2024
05	REVISED MECHANICAL ROOM SIZE	MAY 01, 2024
04	REISSUED FOR SITE PLAN CONTROL	APR. 19, 2024
03	REISSUED FOR SITE PLAN CONTROL	MAR. 01, 2024
02	REISSUED FOR SITE PLAN CONTROL	NOV. 24, 2023
01	ISSUED FOR SITE PLAN CONTROL	JUNE 6, 2023
		_

Revision/Issue

Check and verify all dimensions Do not scale drawings before proceeding with the work

Date

McINTOSH PERRY 115 Walgreen Road, RR3, Carp, ON KOA 1LO Tel: 613-836-2184 Fax: 613-836-3742 www.mcintoshperry.com



HAWKINS PROPERTIES 650a EAGLESON ROAD, OTTAWA, ONTARIO, K2M 1H4

5646 - 5650 MANOTICK MAIN STREET MANOTICK MAIN STREET

OTTAWA

SITE SERVICING PLAN

Project Number: 1:200 CCO-22-2383 Drawn by M.D. Checked By: Drawing Number: C.H. Designed By:

ONTARIO