GWildman

GERALDINE WILDMAN
MANAGER, DEVELOPMENT REVIEW SOUTH
PLANNING, DEVELOPMENT AND BUILDING SERVICES
DEPARTMENT, CITY OF OTTAWA

APPROVED
By Geraldine Wildman at 8:41 pm, Dec 18, 2025

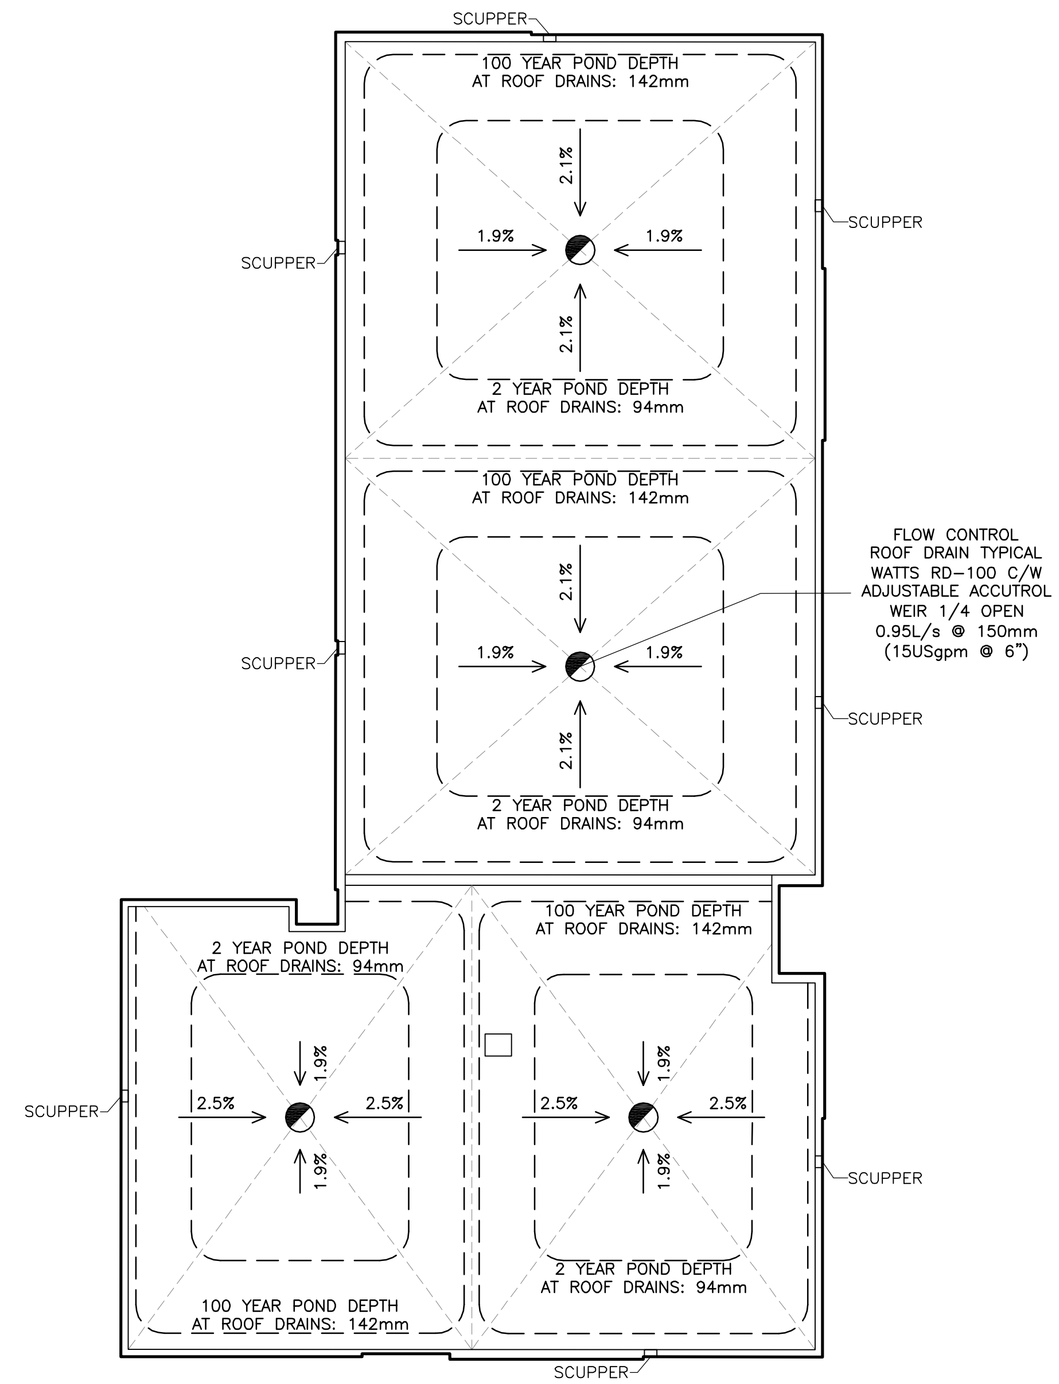

INSTALL A MINIMUM OF 8 SCUPPERS EACH A MINIMUM 320mm WIDE. BOTTOM OF SCUPPERS SHALL BE 150mm ABOVE THE ROOF DRAINS. REFER TO ARCHITECTURAL FOR EXACT LOCATIONS AND DETAILS. ROOF SHALL BE DESIGNED TO CARRY THE LOAD OF WATER HAVING A 50mm DEPTH AT SCUPPERS (i.e. 200mm DEPTH AT THE ROOF DRAINS). REFER TO STRUCTURAL.

RAINWATER LEADERS INSIDE BUILDING SHALL BE CONSTRUCTED TO WITHSTAND THE PRESSURE FROM A WATER COLUMN THE HEIGHT OF THE RAINWATER LEADER. PERFORM PRESSURE TESTS ON THE SYSTEMS IN ACCORDANCE WITH THE MECHANICAL ENGINEER'S INSTRUCTIONS.

REFER TO NOTES & DETAILS
ON DRAWINGS C-5 & C-6

KEY PLAN

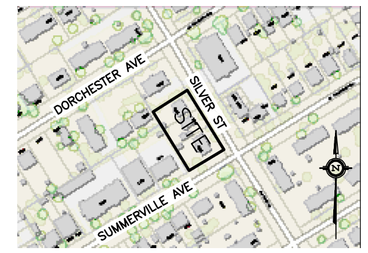

No.	DATE	REVISION
4	APR 22-25	RE-ISSUED FOR APPROVAL
3	DEC 12-24	RE-ISSUED FOR APPROVAL
2	MAY 7-24	RE-ISSUED FOR APPROVAL
1	FEB 27-24	ISSUED FOR APPROVAL

D. B. GRAY ENGINEERING INC.
Stormwater Management - Grading & Drainage - Storm & Sanitary Sewers - Watermains
700 Long Point Circle 613-425-8044
Ottawa, Ontario d.gray@dbgrayengineering.com

Project
PROPOSED 4-STOREY
APARTMENT BUILDING
1066 SILVER STREET
OTTAWA, ONTARIO

Drawing Title
ROOF DRAINAGE PLAN

Engineer's Seal
LICENSED PROFESSIONAL ENGINEER
D.B. GRAY
17016502
APR 22-25
PROVINCE OF ONTARIO
NOT VALID UNLESS
SIGNED & DATED

Drawn	D.B.G
H. Scale	1:150
V. Scale	
Date	JAN 23-24
Job No.	23056

Drawing No.
C-4
of 7

D07-12-24-0037

#19250