

Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, ON

Client:

PulseSocieties Ltd. 135 Laurier Avenue West Suite 100, Ottawa, Ontario K1P 5J2

Type of Document:

FINAL REPORT, Revision 3

Project Number:

OTT-23014181-E0

EXP Services Inc. 100-2650 Queensview Drive Ottawa, Ontario K2B 8H6 t: +1.613.688.1899 f: +1.613.225.7337

Date Submitted: February 21, 2025

Table of Contents

Execu	itive Sun	nmary					
1.		duction					
2.		Description					
3.	Geology of the Site						
	3.1	Surficial Geology					
	3.2	Bedrock Geology	ε				
4.	Proce	edure	7				
	4.1	Fieldwork	7				
	4.2	Laboratory Testing Program	7				
5.	Subsu	urface Conditions and Groundwater Levels	g				
	5.1	Topsoil	g				
	5.2	Fill	g				
	5.3	Silty Clay	g				
	5.4	Glacial Till	10				
	5.5	Auger Refusal and Bedrock	10				
	5.6	Groundwater Level Measurements	11				
6.	Site Classification for Seismic Site Response and Liquefaction Potential of Soils						
	6.1	Site Classification for Seismic Site Response	12				
	6.2	Liquefaction Potential of Soils	12				
7.	Grade	e Raise Restrictions	13				
8.	Site G	Grading	14				
9.	Found	dation Considerations	15				
10.	Retaiı	ning Walls	17				
11.	Floor	Slab and Drainage Requirements	19				
12.	Latera	al Earth Pressures Against Basement Walls	20				
13.		ration and De-Watering Requirements					
	13.1	Excess Soil Management	21				
	13.2	Excavation	21				
	13.3	De-Watering Requirements	22				
14.	Pipe E	Bedding Requirements	23				
15.	Parkir	ng Lots and Laneways	24				



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0

February 21, 2025 Final Report, Rev. 3

16.	Backfilling Requirements and Suitability of On-Site Soils for Backfilling Purposes	26
17.	Corrosion Potential	27
18.	Tree Planting Restrictions	28
19.	Earthworks Quality Control During Construction	29
20.	General Comments	30
List o	of Tables	
Table I:	Summary of Laboratory Testing Program	8
Table II:	Summary of Results from Grain-Size Analysis - Fill Samples	9
Table III	: Summary of Results from Grain-Size Analysis and Atterberg Limit Determination - Silty Clay Samples	10
	: Summary of Groundwater Level Measurements	
Table VI	: Lateral Earth Pressure Retaining Walls	18
		2.4
	Recommended Pavement Structure Thicknesses: Corrosion Test Results on Soil Samples	

List of Figures

Figure 1 – Site Location Plan

Figure 2 – Borehole Location Plan

Figures 3 to 5 – Borehole Logs

Figures 6 to 8 — Grain Size Analysis

Figures 7a and 8a – Atterberg Limit Charts

Appendices

Appendix A: AGAT Laboratory Certificate of Analysis



Executive Summary

EXP Services Inc. (EXP) is pleased to present the results of the geotechnical investigation completed at 1132 St. Pierre Street, Ottawa, Ontario, completed in support of site plan approval for a proposed residential development. Terms and conditions of this assignment were outlined in EXP Services Inc. (EXP) proposal OTT-23014181-E0 dated May 28, 2024. Authorization to proceed with this work was provided on June 7, 2024, by Pulse Societies Ltd via Po Number PRR-PO-100205-212. This report supersedes the geotechnical report issued on December 19,2024.

It is our understanding that the existing residence at the site is to be demolished to allow for the construction of a new apartment building. The architectural drawing set for the proposed development, dated August 27, 2024, and prepared by Lalande and Doyle Architects Inc. (L+D), indicates that the residence will be a four (4) storey structure with one basement level and will have an approximate footprint area of 284 m². The finished floor elevation (FFE) of the basement is indicated as Elevation 63.83 m. The building will also include an elevator shaft and a mechanical room with FFEs of Elevation 62.17 m. No underside of footing (USF) elevations were available at the time of this report and it has been assumed that footings will be approximately at 0.6 m below the FFE elevations. Therefore, the USF elevation of footings below the basement slab are assumed to be at Elevation 63.2 m and the USF elevations of footings below the mechanical room/elevator shaft are assumed to be at Elevation 61.6 m. The development will also include new surface parking spaces and an access laneway to the south and to the west of the proposed building, respectively.

The EXP grading plan, drawing C200, dated October 11, 2024, indicates a proposed grade raise of up to 0.57 m. The drawing also indicates that a retaining wall is being proposed inside the western and southern property line as well as the southern half of the eastern property line. The retaining wall is proposed to extend approximately 0.15 m above the grade of the surrounding properties.

The EXP site servicing plan, drawing C100, dated October 11, 2024, indicates that a new watermain and sanitary sewer will run from the existing services running along St. Pierre Street to the northern extent of the proposed building. The drawing indicates that the invert elevations of the underground services will be as deep as Elevation 62.76 m.

A Phase One Environmental Site Assessment (ESA) was also completed by EXP concurrently with the geotechnical investigation and the result of this assessment is reported in a separate document.

The fieldwork for this investigation was undertaken on July 3 and July 12, 2024, and consists of the drilling of three (3) boreholes (Borehole Nos. 1 to 3) advanced to auger refusal and termination depths ranging from 4.9 m to 9.6 m below the existing ground surface. The fieldwork was supervised on a full-time basis by a representative from EXP.

The borehole information indicates that the subsurface conditions within the site consist of surficial topsoil and fill underlain by a very stiff to hard brown silty clay crust extending to depths of 3.7 m to 4.0 m (Elevation 61.7 m to Elevation 61.2 m) underlain by a stiff to very stiff unweathered silty clay extending to 8.8 m depth (Elevation 56.6 m to Elevation 56.4 m). The clay is underlain by glacial till. Auger refusal was met in Borehole Nos. 1 and 2 at 9.6 m and 9.5 m depths (Elevation 55.6 m to Elevation 55.9 m), respectively, and may indicate cobbles or boulders within the glacial till or the bedrock surface. The groundwater level was found to be at 4.5 m depth (Elevation 60.9 m) below the existing ground surface 7 days following completion of drilling.

Provided that the footings are placed on the native silty clay then Table 4.1.8.4.A of the 2012 Ontario Building Code (OBC) as amended January 1, 2022, indicates that the site classification for seismic response is estimated to be **Class C**. A review of the subsurface soils encountered at the boreholes indicates that there is no liquefaction potential of the soils at the site during a seismic event.

The EXP grading plan, drawing C200, dated October 11, 2024, indicates a proposed grade raise of up to 0.56 m is proposed. A grade raise of up to 0.6 m is considered to be acceptable.

Footings founded at elevation 63.2 m on the brown very stiff to hard silty clay may be designed for a bearing capacity at serviceability limit state (SLS) of 120 kPa and factored geotechnical resistance at ultimate limit state (ULS) of 200 kPa. For footings founded as deep at Elevation 61.6 m for the mechanical room and elevator pit founded on the grey stiff to very stiff silty clay



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

may be designed for a bearing capacity at serviceability limit state (SLS) of 75 kPa and factored geotechnical resistance at ultimate limit state (ULS) of 150 kPa. The factored geotechnical resistance value at ULS includes a resistance factor of 0.5. The total and differential settlements of well designed and constructed footings placed in accordance with the above recommendations are expected to be less than 25 mm and 19 mm respectively. The SLS and factored ULS values are valid provided the site grade raise discussed in Section 7 is respected.

Footings founded in soils at different elevations should be located such that the higher footings are set below a line drawn up at 10 horizontal to 7 vertical (10H:7V) from the near edge of the lower footing, as shown below. This concept should also be applied to service excavation, etc. to ensure that undermining is not a problem.

It is understood that a retaining wall is to be constructed along the western and southern boundary of the site as well as the southern portion of the eastern boundary. The retaining wall may be supported by strip footings up to 3.0 m width founded on the native very stiff to hard brown silty clay or on an engineered fill pad founded on the very stiff to hard brown silty clay may be designed for a bearing capacity at serviceability limit state (SLS) of 120 kPa and factored geotechnical resistance at ultimate limit state (ULS) of 200 kPa.

Excavation for the construction of footings and the installation of underground services are anticipated to extend to a maximum depth of Elevation 61.6 m. The excavations will extend through the topsoil, fill and silt into the native silty clay. The excavations are anticipated to be above the groundwater level.

The excavation within the subsurface soils should comply with the most recent Occupational Health and Safety Act (OHSA), Ontario Regulations 213/91 (August 1, 1991).

It is anticipated that the majority of the material required for backfilling purposes for the proposed building would have to be imported and should preferably conform OPSS 1010 Granular B Type II. Trench backfill and parking lot/laneway subgrade fill should consist of OPSS 1010 Granular B Type I or OPSS 1010 Select Subgrade Material (SSM).

The results of the resistivity tests indicate that silty clay is mildly corrosive to corrosive to bare steel as per the National Association of Corrosion Engineers (NACE). Appropriate measures should be taken to protect the buried bare steel from corrosion.

Pavement structure for the proposed parking lot and laneway should consist of 65 mm thick asphaltic concrete, 150 mm thick OPSS Granular A base and 450 mm thick OPSS Granular B Type II subbase.

The silty clay is considered to have a medium to high potential for soil volume change based on the modified plasticity index values ranging from 25 percent to 42 percent. Therefore, a reduced setback for tree planting is not applicable at this site.

The above and other related considerations are discussed in greater detail in the main body of this report.



1. Introduction

EXP Services Inc. (EXP) is pleased to present the results of the geotechnical investigation completed at 1132 St. Pierre Street, Ottawa, Ontario, completed in support of site plan approval for a proposed residential development. Terms and conditions of this assignment were outlined in EXP Services Inc. (EXP) proposal OTT-23014181-E0 dated May 28, 2024. Authorization to proceed with this work was provided on June 7, 2024, by Pulse Societies Ltd via Po Number PRR-PO-100205-212. This report supersedes the geotechnical report issued on December 19,2024.

It is our understanding that the existing residence at the site is to be demolished to allow for the construction of a new apartment building. The architectural drawing set for the proposed development, dated August 27, 2024, and prepared by Lalande and Doyle Architects Inc. (L+D), indicates that the residence will be a four (4) storey structure with one basement level and will have an approximate footprint area of 284 m². The finished floor elevation (FFE) of the basement is indicated as Elevation 63.83 m. The building will also include an elevator shaft and a mechanical room with FFEs of Elevation 62.17 m. No underside of footing (USF) elevations were available at the time of this report and it has been assumed that footings will be approximately at 0.6 m below the FFE elevations. Therefore, the USF elevation of footings below the basement slab are assumed to be at Elevation 63.2 m and the USF elevations of footings below the mechanical room/elevator shaft are assumed to be at Elevation 61.6 m. The development will also include new surface parking spaces and an access laneway to the south and to the west of the proposed building, respectively.

The EXP grading plan, drawing C200, dated October 11, 2024, indicates a proposed grade raise of up to 0.57 m. The drawing also indicates that a retaining wall is being proposed inside the western and southern property line as well as the southern half of the eastern property line. The retaining wall is proposed to extend approximately 0.15 m above the grade of the surrounding properties.

The EXP site servicing plan, drawing C100, dated October 11, 2024, indicates that a new watermain and sanitary sewer will run from the existing services running along St. Pierre Street to the northern extent of the proposed building. The drawing indicates that the invert elevations of the underground services will be as deep as Elevation 62.76 m.

A Phase One Environmental Site Assessment (ESA) was also completed by EXP concurrently with the geotechnical investigation and the result of this assessment is reported in a separate document.

The geotechnical investigation was undertaken to:

- a) Establish the subsurface soil and groundwater conditions at three (3) borehole locations;
- b) Classify the site for seismic site response in accordance with the requirements of the 2012 Ontario Building Code (as amended January 1, 2022) and assess the potential for liquefaction of the subsurface soils during a seismic event;
- c) Comment on grade-raise restrictions;
- d) Make recommendations regarding the most suitable type of foundations, founding depth and bearing pressure at serviceability limit state (SLS) and factored geotechnical resistance at ultimate limit state (ULS) of the founding strata and comment on the anticipated total and differential settlements of the recommended foundation type;
- e) Discuss slab on grade construction and drainage;
- f) Provide lateral earth pressure parameters (for static and seismic conditions) for the subsurface (basement) walls;
- g) Discuss backfilling requirements and assessment of the suitability of on-site soils for backfilling purposes;
- h) Pipe bedding requirements for the proposed underground services
- Comment on excavation conditions and de-watering requirements during construction; and
- Comment on the corrosion potential of subsurface soils buried concrete and steel structures/members.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025

Final Report, Rev. 3

The comments and recommendations given in this report are based on the assumption that the above-described design concepts will proceed into construction. If changes are made either in the design phase or during construction, this office must be retained to review these modifications. The result of this review may be a modification of our recommendations, or it may require additional field or laboratory work to check whether the changes are acceptable from a geotechnical viewpoint.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

2. Site Description

The site is located at 1132 St. Pierre Street and is located between St. Joseph Boulevard and Rocque Street. The site is rectangular in shape and has a total area of approximately 800 m². A site location plan is provided as Figure 1.

The site is currently occupied by a two-storey, multi-tenant (duplex) building with an associated asphaltic concrete driveway and a grass covered backyard. The building has a concrete block foundation and a partially finished basement. A small, detached storage shed is located on the southwestern portion of the site.

The ground surface generally flat with elevations at the borehole locations ranging from Elevation 65.38 m to Elevation 65.16 m.



3. Geology of the Site

3.1 Surficial Geology

The surficial geology was reviewed via the Google Earth applications published by the Ontario Ministry of Energy, Northern Development and Mines available via www.mndm.gov.on.ca/en/mines-and-minerals/applications/ogsearth/surficial-geology and was last modified on May 23, 2017. The map indicates that beneath any fill the site is underlain by fine-textured glaciolacustrine deposits consisting of silt and silty clay and minor sand and gravel. The surficial deposits are shown in Image 1 below.

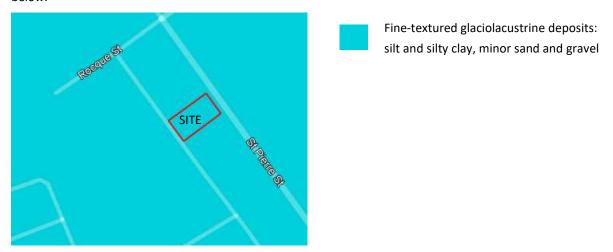


Image 1 - Surficial Geology

3.2 Bedrock Geology

The bedrock geology was reviewed via the Google Earth applications published by the Ontario Ministry of Energy, Northern Development and Mines available via http://www.geologyontario.mndm.gov.on.ca/mines/data/google/MRD219/geology/doc.kml and publish in 2007. The map indicates dolostone and minor shale and sandstone of the Oxford Formation.

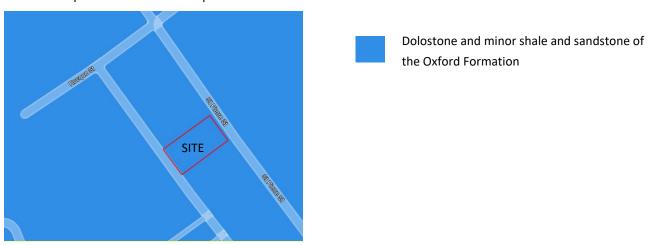


Image 2 - Bedrock Geology



4. Procedure

4.1 Fieldwork

The fieldwork for this investigation was undertaken on July 3 and July 12, 2024, and consists of the drilling of three (3) boreholes (Borehole Nos. 1 to 3) advanced to auger refusal and termination depths ranging from 4.9 m to 9.6 m below the existing ground surface. The fieldwork was supervised on a full-time basis by a representative from EXP.

The locations and geodetic elevations of the boreholes were established by a survey crew from EXP and are shown on the borehole location plan, Figure 2. Prior to drilling, the locations of the boreholes were cleared of any public and private underground services by a subcontractor retained by EXP.

The boreholes at the front of the existing residence (Borehole Nos. 1 and 2) were drilled using a CME-55 track mounted drill rig equipped with continuous flight hollow stem augers and the borehole in the backyard of the existing residence (Borehole No. 3) was drilled using hand portable equipment. Standard penetration tests (SPTs) were performed in the boreholes at 0.6 m to 1.5 m depth intervals with soil samples retrieved by the split-barrel sampler. The undrained shear strengths of the cohesive soils were measured by conducting penetrometer and in-situ shear vane tests. The subsurface soil conditions in each borehole were logged with each soil sample placed in a labelled plastic bag.

A nineteen (19) mm piezometer with a screened section was installed in Boreholes No. 2 for long-term monitoring of the groundwater. The piezometer was installed in accordance with EXP standard practice, and the installation configuration is documented on the respective borehole log. The boreholes were backfilled upon completion of the field work and the installation of the monitoring wells.

4.2 Laboratory Testing Program

Upon completion of the borehole fieldwork, the soil samples were transported to the EXP Ottawa laboratory. The soil samples were visually examined in the laboratory by a geotechnical engineer. The soil samples were classified in accordance with the Unified Soil Classification System (USCS) and the modified Burmister System (as per the 2006 Fourth Edition Canadian Foundation Engineering Manual (CFEM)).

A summary of the soil sample laboratory testing program is shown in Table I.



Final Report, Rev. 3

Table I: Summary of Laboratory Testing Program						
Type of Test	Number of Tests Completed					
Moisture Content Determination	24					
Unit Weight Determination	4					
Grain Size Analysis	3					
Atterberg Limits	2					
Corrosion Analysis (pH, sulphate, chloride and resistivity)	2					



5. Subsurface Conditions and Groundwater Levels

A detailed description of the subsurface conditions and groundwater levels from this geotechnical investigation are given on the attached Borehole Logs, Figure Nos. 3 to 5 inclusive. The borehole logs and related information depict subsurface conditions only at the specific locations and times indicated. Subsurface conditions and water levels at other locations may differ from conditions at the locations where sampling was conducted. The passage of time also may result in changes in the conditions interpreted to exist at the locations where sampling was conducted.

Boreholes were drilled to provide representation of subsurface conditions as part of a geotechnical exploration program. Reference should be made to the Phase I ESA for the environmental aspects of the project.

It should be noted that the soil boundaries indicated on the borehole logs are inferred from non-continuous sampling and observations during drilling operations. These boundaries are intended to reflect approximate transition zones for the purpose of geotechnical design and should not be interpreted as exact planes of geological change. The "Note on Sample Descriptions" preceding the borehole logs form an integral part of this report and should be read in conjunction with this report.

A review of the borehole logs indicates the following subsurface conditions with depth and groundwater levels.

5.1 Topsoil

A 150 mm thick surficial topsoil layer was encountered in Borehole Nos. 2 and 3.

5.2 Fill

A layer of fill was surficially encountered in Borehole No. 1 and encountered underlying the topsoil in Borehole No. 2 and ranges in consistency from a silty sand with gravel to a silty clay with gravel. The fill extends to a 1.1 m depth (Elevation 64.3 m to Elevation 64.1 m). The standard penetration test (SPT) N-values of the fill range from 6 to 13 indicating a loose to compact state. The natural moisture content of the fill ranges from 21 percent to 26 percent.

The results from the grain-size analysis conducted on one (1) selected sample of the fill is summarized in Table II. The grain-size distribution curve is shown in Figure 6.

	Table I	I: Summary of Re	esults from Gra	ain-Size Analysis - Fill	Samples	
Porobolo No. (PU)		Grain-Size Analysis (%)				
Borehole No. (BH) – Sample No. (SS)	Depth (m)	Gravel	Sand	Fines (Silt and Clay)	Soil Classification (USCS)	
BH1 SS1	0 – 0.6	23	49	23	Silty Sand with Gravel (SM)	

Based on a review of the results of the grain-size analysis, the soil may be classified as a silty sand with gravel (SM) in accordance with the Unified Soil Classification System (USCS).

5.3 Silty Clay

The topsoil and fill are underlain by a native undisturbed silty clay in all of the boreholes. The silty clay extends to the depth of sampling, 4.9 m depth (Elevation 60.3 m) in Borehole No. 3. In Borehole Nos. 1 and 2, the silty clay was fully penetrated and extends to 8.8 m depth (Elevation 56.6 m to Elevation 56.4 m).

The silty clay consists of an upper weathered desiccated brown silty clay crust underlain by a weaker unweathered grey silty clay. The upper crust extends from 3.7 m to 4.0 m depth (Elevation 61.7 m to Elevation 61.2 m). The undrained shear strength of the upper crust ranges from 120 kPa to 204 kPa indicating a very stiff to hard consistency. The unit weights and natural moisture contents of the weathered crust ranges 18.0 kN/m³ to 19.9 kN/m³ and from 28 percent to 50 percent, respectively.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0

February 21, 2025 Final Report, Rev. 3

The lower unweathered grey silty clay's undrained shear strength ranged from 53 kPa to 140 kPa indicating a stiff to very stiff consistency. The natural moisture contents of the unweathered grey silty clay ranges from 41 percent to 59 percent.

The results from the grain-size analysis and Atterberg limit determination conducted on two (2) selected samples of the silty clay are summarized in Table III. The grain-size distribution curves are shown in Figures 7 and 8. The Atterberg Limit determination charts is shown in Figures 7a and 8a.

Table III: Summary of Results from Grain-Size Analysis and Atterberg Limit Determination Silty Clay Samples									
Borehole No.	Danath	Gr	ain-Size <i>i</i>	Analysis (%	6)	At	terberg Limits (%)	
(BH) — Sample No. (SS)	Depth (m)	Gravel	Sand	Silt	Clay	Liquid Limit	Plastic Limit	Plasticity Index	Soil Classification (USCS)
BH 24-1 SS4	2.3 - 2.9	0	2	24	74	66	23	43	Silty Clay of High Plasticity (CH) - Trace sand
BH 24-1 SS7	4.6 - 5.2	1	3	40	56	46	20	26	Silty Clay of Low Plasticity (CL) - Trace sand

Based on a review of the results of the grain-size analysis and Atterberg limits, the soil may be classified as ranging from a silty clay of high plasticity (CH) with trace sand to a silty clay of low plasticity (CL) with trace sand in accordance with the Unified Soil Classification System (USCS).

5.4 Glacial Till

The silty clay in Borehole Nos. 1 and 2, where the silty clay was fully penetrated, is underlain by glacial till encountered at 8.8 m depth (Elevation 56.6 m and Elevation 56.4 m) in Borehole Nos. 1 and 2, respectively. The glacial till contains varying amounts of gravel, sand, silt, clay and shale within the soil matrix as well as cobbles and boulders. It is in a very loose state as indicated by the standard penetration test (SPT) N-value of 2. The moisture content of the glacial till is 12 percent.

5.5 Auger Refusal and Bedrock

Refusal to augers was met in Borehole Nos. 1 and 2 at 9.6 m and 9.5 m depths (Elevation 55.6 m and Elevation 55.9 m), respectively. The auger refusal may indicate the bedrock surface or cobbles or boulders within the glacial till.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0

February 21, 2025 Final Report, Rev. 3

5.6 Groundwater Level Measurements

The groundwater level measurement taken in the piezometer is shown in Table IV.

	Table	Measurements		
Borehole (BH)	Ground Surface Elevation (m)	Date of Measurement (Elapsed Time in Days from Date of Installation)	Screened Material	Groundwater Depth Below Ground Surface (Elevation), m
BH-2	65.38	July 10, 2024 (7 Days)	Silty Clay	4.5 (60.9)

The groundwater level was found to be at 4.5 depth (Elevation 60.9 m) below the existing ground surface in the piezometer installed in Borehole No. 2.

Water levels were determined in the boreholes and in the piezometer at the times and under the conditions noted above. Note that fluctuations in the level of groundwater may occur due to a seasonal variation such as precipitation, snowmelt, rainfall activities, and other factors not evident at the time of measurement and therefore may be at a higher level during wet weather periods.



6. Site Classification for Seismic Site Response and Liquefaction Potential of Soils

6.1 Site Classification for Seismic Site Response

The borehole information indicates that the subsurface conditions within the site consist of surficial topsoil and fill underlain by native silty clay and glacial till. Refusal to augers was met in Borehole Nos. 1 and 2 at 9.6 m and 9.5 m depths (Elevation 55.6 m and Elevation 55.9 m), respectively. The auger refusal may indicate the bedrock surface or cobbles or boulders within the glacial till.

Provided that the footings are placed on the native silty clay then Table 4.1.8.4.A of the 2012 Ontario Building Code (OBC) as amended January 1, 2022, indicates that the site classification for seismic response is estimated to be **Class C**.

6.2 Liquefaction Potential of Soils

A review of the subsurface soils encountered at the boreholes indicates that there is no liquefaction potential of the soils at the site during a seismic event.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025

Final Report, Rev. 3

7. Grade Raise Restrictions

The EXP grading plan, drawing C200, dated October 11, 2024, indicates a proposed grade raise of up to 0.56 m is proposed. A grade raise of up to 0.6 m is considered to be acceptable.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

8. Site Grading

It is understood that the existing structures along with all existing installations will be demolished and removed off site to allow the construction of the new building.

Site grading within the **proposed building footprint** area should consist of the removal of all existing fill, topsoil and organic stained soils down to the native undisturbed silty clay and should be examined by a geotechnician. Any loose/soft areas identified during the overburden subgrade examination should be excavated, removed and replaced with Ontario Provincial Standard Specification (OPSS) Granular B Type II material compacted to 98 percent standard Proctor maximum dry density (SPMDD). Once the subgrade has been approved, the grades may be raised to the design underside footing and floor slab elevation by the construction of an engineered fill pad constructed in accordance with Section 9 of this report.

Site grading within the footprint of the **new parking lot and laneway** areas should consist of the removal of the surficial topsoil and organic stained soils and proofrolling the exposed soil with a heavy vibratory roller the presence of a geotechnician. Any loose/soft areas identified during the proofrolling process should be excavated, removed and replaced with Ontario Provincial Standard Specification (OPSS) Granular B Type II or OPSS Select Subgrade Material (SSM) compacted to 95 percent standard Proctor maximum dry density (SPMDD).




9. Foundation Considerations

Based on the FFE provided L+D in the architectural drawings, the USF elevation of footings below the basement slab have been assumed to be at Elevation 63.2 m and the USF elevation of footings below the mechanical room/elevator shaft have been assumed to be Elevation 61.6 m.

Based on a review of the borehole logs, at Elevation 63.2 m, a very stiff to hard consistency brown silty clay is present and is underlain by a stiff to very stiff grey silty clay encountered from Elevation 61.7 m to Elevation 61.2 m. The existing topsoil and fill are not considered as a suitable founding medium for the footings and where present should be removed with footing founded on either the brown or grey silty clay.

Footings founded at elevation 63.2 m on the brown very stiff to hard silty clay may be designed for a bearing capacity at serviceability limit state (SLS) of 120 kPa and factored geotechnical resistance at ultimate limit state (ULS) of 200 kPa. For footings founded as deep at Elevation 61.6 m for the mechanical room and elevator pit founded on the grey stiff to very stiff silty clay may be designed for a bearing capacity at serviceability limit state (SLS) of 75 kPa and factored geotechnical resistance at ultimate limit state (ULS) of 150 kPa. The factored geotechnical resistance value at ULS includes a resistance factor of 0.5. The total and differential settlements of well designed and constructed footings placed in accordance with the above recommendations are expected to be less than 25 mm and 19 mm respectively. The SLS and factored ULS values are valid provided the site grade raise discussed in Section 7 is respected.

Footings founded in soils at different elevations should be located such that the higher footings are set below a line drawn up at 10 horizontal to 7 vertical (10H:7V) from the near edge of the lower footing, as shown below. This concept should also be applied to service excavation, etc. to ensure that undermining is not a problem.

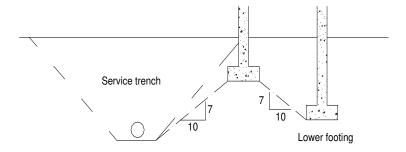

FOOTINGS NEAR SERVICE TRENCHES OR AT DIFFERENT ELEVATIONS

All footing beds should be examined by a geotechnical engineer to ensure that the founding surfaces are capable of supporting the design bearing pressure at SLS and that the footing beds have been properly prepared.

Since the native silty clay is susceptible to disturbance due to the effects of weather and construction traffic, it is recommended that the approved native subgrade be covered within the same day of approval with 50 mm thick concrete mud slab.

Once the native subgrade has been approved, if required, the grade may be raised to the design underside footing and floor slab elevation by the construction of an engineered fill pad. The excavation for the removal of fill and topsoil layers should extend to a sufficient distance beyond the limits of the proposed structure to accommodate a 1.0 m wide horizontal bench of engineered fill that extends beyond the perimeter of the proposed building on all sides, which should thereafter be sloped at an inclination of 1H to 1V down to the approved subgrade. The engineered fill should consist of OPSS Granular B Type II that is placed in 300 mm thick lifts and each lift compacted to 100 percent SPMDD. The placement and compaction of the engineered fill can in this way be undertaken to the founding level of the footings. From the footing level to the underside of the floor slab, each lift should consist of Granular B Type II or an approved material and should be compacted to 98 percent of SPMDD. The engineered fill should be placed under the full-time supervision of a geotechnician working under the direction of a geotechnical engineer.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

In-place density tests should be undertaken on each lift of the engineered fill to ensure that it is properly compacted prior to placement of subsequent lift.

A minimum of 1.5 m of earth cover should be provided to the footings to protect them from damage due to frost penetration. The frost cover should be increased to 2.1 m for unheated structures if snow will not be removed from their vicinity. If snow will be removed from the vicinity of the unheated structures, the frost cover should be increased to 2.4 m. Rigid insulation thermally equivalent to the required soil cover may be used instead of the soil cover. Alternatively, a combination of rigid insulation and soil cover may be used to achieve the required frost protection for the footings.

The recommended factored geotechnical resistance at ULS and bearing pressure at SLS have been calculated by EXP from the borehole information for the design stage only. The investigation and comments are necessarily on-going as new information of underground conditions becomes available. For example, more specific information is available with respect to conditions between boreholes when foundation construction is underway. The interpretation between boreholes and the recommendations of this report must therefore be checked through field monitoring provided by an experienced geotechnical engineer to validate the information for use during the construction stage.



Final Report, Rev. 3

Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025

10. Retaining Walls

It is understood that a retaining wall is to be constructed along the western and southern boundary of the site as well as the southern portion of the eastern boundary.

The retaining wall may be supported by strip footings up to 3.0 m width founded on the native very stiff to hard brown silty clay or on an engineered fill pad founded on the very stiff to hard brown silty clay may be designed for a bearing capacity at serviceability limit state (SLS) of 120 kPa and factored geotechnical resistance at ultimate limit state (ULS) of 200 kPa. The retaining wall is considered to be an unheated structure, and foundations should be placed at 2.1 m for unheated structures if snow will not be removed from their vicinity and to 2.4 m if snow will be removed from the vicinity of the structure. When earth cover is less than the minimum required, an equivalent thermal combination of earth cover and rigid insulation or rigid insulation alone should be provided.

The backfill behind retaining walls should consist of free-draining material, such as OPSS Granular B Type II material, and should be equipped with a permanent drainage system to prevent the build-up of hydrostatic pressure behind the wall. The drainage system should be positively (suitably) outletted away from the retaining wall.

The proposed retaining wall will be subjected to lateral static earth as well as lateral dynamic earth forces during a seismic event. Seismic loading will result in an increase in active lateral earth pressure on the wall. The seismic lateral earth pressure coefficient given below have been derived based on the peak horizontal ground acceleration (PGA) provided by Earthquakes Canada.

The expression below assumes the retaining wall is backfilled with free draining material, such as Ontario Provincial Standard Specification (OPSS) Granular B Type II and equipped with a permanent drainage system to prevent the buildup of hydrostatic pressure behind the wall.

The total lateral active pressure distribution can be separated into a static component and a dynamic component and may be determined as follows (Mononobe and Matsuo, 1929):

 $\sigma_{AE}(z) = K_A \gamma z + (K_{AE} - K_A) \gamma (H - z) + q$ (i)

Where

 $\sigma_{AE}(z)$ = the total combined lateral active earth pressure (dynamic and static) at depth z, (kPa)

z = depth below the top of the retaining wall (m)

K_A = static lateral active earth pressure coefficient

K_{AE} = combined (static and dynamic) lateral active earth pressure coefficient

 γ = unit weight of the backfill soil (kN/m³)

H = total height of the wall (m)

q = surcharge such as traffic and compaction pressure, where applicable (kPa)

For the total lateral active earth pressure, the seismic (dynamic) pressure distribution is an inverted triangle with maximum pressure at the top of the wall and a minimum at the bottom of the wall. Therefore, the resultant of the static and seismic (dynamic) pressures on the retaining wall is assumed to be applied at depths ranging between 0.67z from the top of the backfill behind the wall and 0.67 (H-z) from the bottom of the wall, respectively.

The lateral earth pressure parameters are summarized in Table VI. The estimated lateral earth pressure parameters assume the back face of the wall is vertical, there is no friction between the concrete of the wall and the backfill soil behind the wall, no hydrostatic build-up behind the wall, the ground surface of the backfill behind the wall is level or flat and the ground surface of the backfill behind the wall is at the same level as the top of the retaining wall.

The following design parameters may be used in the design for the retaining wall:



Table VI: Lateral Earth Pressure Retaining W	/alls
Soil Type	Glacial Till/OPSS Granular B Type II
Unit Weight of Soil (γ); kN/m3	22
Angle of Internal Friction (ϕ'); degrees	30°
Coefficient of Static Active Lateral Earth Pressure, KA	0.33
Combined Coefficient (Static and Dynamic) Active Lateral Earth Pressure, KAE	0.46

For soil above the frost depth, the Coefficient of Static Passive Lateral Earth Pressure Coefficient, K_p should be considered to be equal to 1.0.

A global stability check will be required should the height of the wall exceed 1.0 m above the final grade.

For the calculation of the active dynamic (seismic) lateral earth pressure coefficients for retaining walls, the seismic coefficient in the horizontal direction, k_h , was taken as 0.5 times the PGA value of 0.379g. The PGA value was obtained from the 2020 National Building Code of Canada Seismic Hazard Tool. The calculated active dynamic (seismic) lateral earth pressure coefficients in the vertical direction, k_v , was assumed to be zero.

The K_{AE} value calculations assume the back face of the wall is vertical, there is no friction between the concrete of the wall and the backfill soil (behind the wall) and the ground surface of the backfill (behind the wall) is level or flat and the ground surface of the backfill behind the wall is at the same level as the top of the retaining wall.



11. Floor Slab and Drainage Requirements

The floor slab for the proposed residence may be designed as a slab-on-grade set on a bed of well compacted 19 mm sized clear stone at least 200 mm thick placed on a minimum 300 mm thick engineered fill pad placed on the approved silty clay subgrade. The engineered fill pad should consist of Ontario Provincial Standard Specification (OPSS) Granular B Type II material compacted to a minimum of 98 percent standard Proctor maximum dry density (SPMDD). The clear stone would minimize the capillary rise of moisture from the sub-soil to the floor slab. As an alternative for the clear stone layer only, the floor slab may be cast on a 200 mm thick bed of Ontario Provincial Standard Specification (OPSS) Granular A compacted to 98 percent SPMDD and placed on the engineered fill pad and overlain by a vapour barrier. Adequate saw cuts should be provided in the floor slab to control cracking.

It is recommended that a perimeter drainage system should be provided around the proposed residential foundation. An underfloor drain is only required at the proposed mechanical room and elevator pit.

The floor slab should be set at a minimum of 150 mm higher than the surrounding final exterior grade.

The final exterior grade surrounding the proposed building should be sloped away from the proposed building to prevent ponding of surface water close to the exterior walls of the proposed building.



Final Report, Rev. 3

Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025

12. Lateral Earth Pressures Against Basement Walls

Subsurface basement walls for the proposed building are typically not designed to support hydrostatic pressure behind the wall. In this case, the subsurface basement walls should be backfilled with free draining material, such as OPSS Granular B Type II compacted to 95 percent SPMDD and equipped with a perimeter drainage system to prevent the buildup of hydrostatic pressure behind the walls. The walls will be subjected to lateral static and dynamic (seismic) earth forces. The expressions below assume free draining backfill material, a perimeter drainage system, level backfill surface behind the wall and vertical face on the back side of the wall.

For design purposes, the lateral static earth thrust against the subsurface walls may be computed from the following equation:

P = $K_0 h (\frac{1}{2} \gamma h + q)$ (ii)

Where P = lateral earth pressure acting on the subsurface wall; kN/m²

K₀ = lateral earth pressure coefficient for 'at rest' condition for Granular B Type II backfill material = 0.50

 γ = unit weight of free draining granular backfill; OPSS Granular B Type II = 22 kN/m³

h = depth of point of interest below top of backfill, m

q = surcharge load stress, kPa

The lateral dynamic (seismic) thrust may be computed from the equation given below:

 $\Delta_{\text{Pe}} = \gamma_{\text{H}^2} \frac{a_h}{a} F_b.....(\text{Iii})$

Where Δ_{Pe} = dynamic thrust in kN/m of wall

H = height of wall, m

 γ = unit weight of free draining granular backfill; OPSS Granular B Type II = 22 kN/m³

 $\frac{a_h}{g}$ = seismic coefficient = 0.379 (Based on the PGA value provided by Earthquakes Canada)

 F_b = thrust factor = 1.0

The dynamic thrust does not take into account the surcharge load. The resultant force acts approximately at 0.63H above the base of the wall.

All subsurface walls should be properly waterproofed.



Final Report, Rev. 3

Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025

13. Excavation and De-Watering Requirements

13.1 Excess Soil Management

Ontario Regulation 406/19 specifies protocols that are required for the management and disposal of excess soils. As set forth in the regulation, specific analytical testing protocols need to be implemented and followed based on the volume of soil to be managed and the requirements of the receiving site. The testing protocols are specific as to whether the soils are stockpiled or in situ. In either scenario, the testing protocols are far more onerous than have been historically carried out as part of standard industry practices. These decisions should be factored in and accounted for prior to the initiation of the project-defined scope of work. EXP would be pleased to assist with the implementation of a soil management and testing program that would satisfy the requirements of Ontario Regulation 406/19.

13.2 Excavation

Excavation for the construction of footings and the installation of underground services are anticipated to extend to a maximum depth of Elevation 61.6 m. The excavations will extend through the topsoil, fill and silt into the native silty clay. The excavations are anticipated to be above the groundwater level.

Excavations may be undertaken by conventional heavy equipment.

The excavation within the subsurface soils should comply with the most recent Occupational Health and Safety Act (OHSA), Ontario Regulations 213/91 (August 1, 1991). Based on the definitions contained in OHSA, the subsurface soils at the site are classified as Type 3 soil and sidewalls of open cut excavations must be cut back at 1H:1V from the bottom of the excavation. Below the groundwater table, the excavation side slopes are expected to slough and will eventually stabilize at a slope of 2H:1V to 3H:1V.

If side slopes noted above for the construction of the proposed building cannot be achieved due to space restrictions on site, such as the proximity of open cut excavations to the property limits or existing infrastructure, the excavation for the new building construction would have to be undertaken within the confines of an engineered support system (shoring system). If space restrictions prevent open cut excavations, the underground services may be installed within the confines of a prefabricated support system (trench box) which is designed and installed in accordance with the above-noted regulations.

The need for a shoring system, the most appropriate type of shoring system and the design and installation of the shoring system should be determined by the contractors bidding on this project. The design of the shoring system should be undertaken by a professional engineer experienced in shoring design and the installation of the shoring system should be undertaken by a contractor experienced in the installation of shoring systems. The shoring system should be designed and installed in accordance with latest edition of Ontario Regulation 213/91 under the OHSA and the 2006 Fourth Edition of the Canadian Foundation Engineering Manual (CFEM). The shoring system as well as adjacent settlement sensitive structures (buildings) and infrastructure should be monitored for movement (deflection) on a periodic basis during construction operations.

Excavations that terminate within the native silty clay near or above the groundwater table are not expected to experience a base-heave type of failure.

The native soils are susceptible to disturbance due to movement of construction equipment and personnel on its surface. It is therefore recommended that the excavation at the site should be undertaken by construction equipment that does not travel on the excavated surface, such as a gradall or mechanical shovel.

Many geologic materials deteriorate rapidly upon exposure to meteorological elements. Unless otherwise specifically indicated in this report, walls and floors of excavations must be protected from moisture, desiccation, and frost action throughout the course of construction.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

13.3 De-Watering Requirements

Seepage of the surface and subsurface water into excavations is anticipated and it should be possible to collect water entering the excavations at low points and to remove it by conventional pumping techniques. In areas of high infiltration and below the groundwater level, a higher seepage rate should be anticipated and may require high-capacity pumps to keep the excavation dry.

If less than 50 m³ of water are to be pumped per day, no permits are required. If between 50 m³ and 400 m³ of water is to be pumped per day, then the activity should be registered on the Environmental Activity and Sector Registry (EASR), an online registry maintained by the Ministry of the Environment, Conservation and Parks (MECP). If more than 400 m³ of water is to be pumped per day, then a Category 3 Permit to Take Water (PTTW) is required.

Since water taking can be groundwater, storm water, or a combination of both, the most likely potential for significant volumes of water requiring removal from an excavation at the site is storm water. If a major rain event occurs while a large excavation is open, then it is possible that the total accumulation of water within the excavation will exceed 50 m³. If that occurs, then it may be removed without a permit by pumping over several days during which no single-day water-taking is more than 50 m³. Alternatively, a maximum of 400 m³ of water may be pumped per day once the online EASR application form is filled out and the fee is paid. The EASR application may be completed by the property owner or their delegate. EXP would be pleased to assist with the EASR, should it be deemed necessary. Per the terms of the EASR, the total quantities of water actually removed from the excavation must be reported to the MECP.

Although this investigation has estimated the groundwater levels at the time of the fieldwork, and commented on dewatering and general construction problems, conditions may be present which are difficult to establish from standard boring and excavating techniques and which may affect the type and nature of dewatering procedures used by the contractor in practice. These conditions include local and seasonal fluctuations in the groundwater table, erratic changes in the soil profile, thin layers of soil with large or small permeabilities compared with the soil mass, etc. Only carefully controlled tests using pumped wells and observation wells will yield the quantitative data on groundwater volumes and pressures that are necessary to adequately engineer construction dewatering systems.



14. Pipe Bedding Requirements

For site servicing, it is anticipated that the subgrade for the proposed underground services will consist of silty clay.

It is recommended that the bedding for the underground services including material specifications, thickness of cover material and compaction requirements conform to municipal requirements and/or Ontario Provincial Standard Specification and Drawings (OPSS and OPSD).

The bedding thickness may be further increased in areas where the silty clay subgrade becomes disturbed. Trench base stabilization techniques, such as removal of loose/soft material, placement of crushed stone sub-bedding (OPSS Granular B Type II), completely wrapped in a non-woven geotextile, may also be used if trench base disturbance becomes a problem in wet or soft areas.

For paved surfaces that will be located over service trenches, it is recommended that the trench backfill material within the 1.8 m frost zone, should match the existing material exposed along the trench walls to minimize differential frost heaving of the subgrade. The trench backfill should be placed in 300 mm thick lifts and each lift should be compacted to 95 percent SPMDD. Alternatively, frost tapers may be used.

If the backfill for the service trenches will consist of granular fill, clay seals should be installed in the service trenches at select intervals (spacing) as per City of Ottawa Drawing No. S8. The seals should be 1.0 m wide, extend over the entire trench width and from the bottom of the trench to the underside of the pavement structure. The clay should be compacted to 95 percent SPMDD. The purpose of the clay seals is to prevent the permanent lowering of the groundwater level.

The underground services should be installed in short open trench sections that are excavated and backfilled the same day.



February 21, 2025 Final Report, Rev. 3

15. Parking Lots and Laneways

Pavement structures for the proposed parking lot and laneway is given on Table V below for the anticipated silty clay subgrade. The pavement structure is based upon the assumption that the subgrade will be properly prepared and assumes a functional design life of 15 to 18 years. The proposed functional design life represents the number of years to the first rehabilitation, assuming regular maintenance is carried out.

Table V: Recommended Pavement Structure Thicknesses						
Pavement Layer	Compaction Requirements	Computed Pavement Structure				
raveillelit Layei	Compaction Requirements	Light Duty Traffic (Cars Only)				
Asphaltic Concrete (PG 58-34)	92-97% MRD	65 mm HL3/SP12.5 mm/ Cat. B				
OPSS 1010 Granular A Base (crushed limestone)	100% SPMDD	150 mm				
OPSS 1010 Granular B Type II Sub-base	100% SPMDD	450 mm				

Notes:

- 1. SPMDD denotes standard Proctor maximum dry density, ASTM, D-698-12e2.
- 2. MRD denotes Maximum Relative Density, ASTM D2041.

The upper 300 mm of the subgrade fill must be compacted to 98% SPMDD.

Additional comments on the construction of the parking lot and laneway are as follows:

- 1. As part of the subgrade preparation, the proposed parking lot and laneway should be stripped of topsoil and other obviously unsuitable material. The subgrade should be properly shaped, crowned, then proofrolled with a heavy vibratory roller in the full-time presence of a representative of this office. Any soft or spongy subgrade areas detected should be sub excavated and properly replaced with suitable approved backfill compacted to 95 percent SPMDD (ASTM D698-12e2). The subgrade should be covered with geotextile prior to placing granular materials.
- 2. The long-term performance of the pavement structure is highly dependent upon the subgrade support conditions. Stringent construction control procedures should be maintained to ensure that uniform subgrade moisture and density conditions are achieved. The need for adequate drainage cannot be over-emphasized. Subdrains should be installed on both sides of the laneway(s). Subdrains must be installed in the proposed parking area at low points and should be continuous between catchbasins or open drainage ditches to intercept excess surface and subsurface moisture and to prevent subgrade softening. This will ensure no water collects in the granular course, which could result in pavement failure during the spring thaw. The location and extent of subdrains required within the paved areas should be reviewed by this office in conjunction with the proposed site grading.
- 3. The finished pavement surface should be free of depressions and should be sloped (preferably at a minimum cross fall of 2 percent) to provide effective surface drainage towards catch basins. Surface water should not be allowed to pond adjacent to the outside edges of paved areas.
- 4. Relatively weaker subgrade may develop over service trenches at subgrade level. These areas may require the use of thicker/coarser sub-base material and the use of a geotextile at the subgrade level. If this is the case, it is recommended that additional 150 mm of granular sub-base, OPSS Granular B Type II, should be provided in these areas, in addition to the use of a geotextile at the subgrade level.
- 5. The granular materials used for pavement construction should conform to Ontario Provincial Standard Specifications (OPSS 1010) for Granular A and Granular B Type II and should be compacted to 100 percent of the SPMDD.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

The asphaltic concrete use and placement should meet OPSS 1150 or 1151 requirements. It should be compacted from 92 percent to 97 percent of the MRD (ASTM D2041). Asphalt placement should be in accordance with OPSS 310 and OPSS 313.

It is recommended that EXP be retained to review the final pavement structure design and drainage plans prior to construction to ensure they are consistent with the recommendations of this report.



16. Backfilling Requirements and Suitability of On-Site Soils for Backfilling Purposes

It is anticipated that the majority of the material required for backfilling purposes for the proposed development would have to be imported and should preferably conform to the following specifications:

- Engineered fill under footings for the proposed building OPSS 1010 Granular B Type II placed in 300 mm thick lifts and each lift compacted to 100 percent SPMDD,
- Engineered fill under the floor slab OPSS 1010 Granular B Type II placed in 300 mm thick lifts and each lift compacted to 98 percent SPMDD,
- Backfill in footing trenches and against foundation walls OPSS 1010 Granular B Type II placed in 300 mm thick lifts
 and each lift compacted to 98 percent of the SPMDD inside the building and 95 percent SPMDD outside the building
 respectively.
- Backfill in services trenches inside building OPSS 1010 Granular B Type II placed in 300 mm thick lifts and each lift compacted to 98 percent of the SPMDD.
- Backfill in exterior services trenches (above the bedding and cover) On site desiccated silty clay, if compactable, placed in 300 mm thick lifts and each lift compacted to 95 percent of the SPMDD. The compactability of the clay should be determined prior to its use. It the clay is not suitable for compaction purposes; exterior service trenches should be backfilled with OPSS 1010 Granular B Type I or OPSS 1010 Select Subgrade Material (SSM) placed in 300 mm thick lifts and each lift compacted to 95 percent of the SPMDD.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0

February 21, 2025 Final Report, Rev. 3

17. Corrosion Potential

Chemical tests limited to pH, sulphate, chloride and resistivity were undertaken on two (2) soil sample. A summary of the results is shown in Table VI. The laboratory certificate of analysis is shown in Appendix A.

Table VI: Corrosion Test Results on Soil Samples						
Borehole – Sample No.	Depth (m)	Soil Type	pН	Sulphate (%)	Chloride (%)	Resistivity (ohm- cm)
BH1 SS4	2.3 - 2.9	Silty Clay	6.93	0.012	0.0415	1190
BH1 SS7	4.6 - 5.2	Silty Clay	6.96	0.009	0.0075	3530

The results indicate the silty clay has a negligible potential for sulphate attack on subsurface concrete. The concrete should be designed in accordance with CSA A.23.1-14.

The results of the resistivity tests indicate that soil is mildly corrosive to corrosive to bare steel as per the National Association of Corrosion Engineers (NACE) guidelines. Appropriate measures should be taken to protect the buried bare steel from corrosion.



18. Tree Planting Restrictions

The 2017 City of Ottawa Tree Planting Guidelines should be consulted for the complete tree planting restrictions and setbacks and the tree planting plans for the proposed development should be completed in consultation with a landscape architect.

The guidelines indicate that for trees in the road right-of-way, where sensitive marine clays have been identified, the trees are to have a setback equal to or greater than the full mature height of the tree. This setback can be reduced to 4.5 m for small (mature tree height up to 7.5m) and medium (mature tree of heights between 7.5 m to 14.0 m) sized trees if a total of six conditions are met. Two of the six requirements, listed below, require comment from a geotechnical perspective.

- The modified plasticity index of the soil between the underside of footing (USF) and a depth of 3.5m generally does not exceed 40%. This corresponds to soils with low/medium potential for soil volume change.
- The foundation walls are to be reinforced at least nominally (minimum of two upper and two lower 15M bars in the foundation wall) to provide ductility as described in the Geotechnical Report.

The silty clay, where fully penetrated, extends to 8.8 m depths (Elevation 56.6 m to Elevation 56.4 m) and based on a design underside of footing elevation of Elevation 63.2 m for footings and 61.6 m for the elevator pit and mechanical room, the silty clay extends up to 6.6 m below the USF elevation. The silty clay across the entirely of the site is considered to have a medium to high potential for soil volume change based on the modified plasticity index values ranging from 25 percent to 42 percent.

It should be noted that the following conditions below must also be met in order for the reduced setback to apply:

- The USF is 2.1 m or greater below the lowest finished grade. Note: this footing level must be satisfied for footings within 10m of the tree, as measured from the centre of the tree trunk, and verified by means of the Grading Plan as indicated in the Procedural Changes below.
- A small size tree must be provided with a minimum of 25 m³ of available soil volume, as determined by a Landscape Architect. A medium size tree must be provided with a minimum of 30 m³ of available soil volume, as determined by a Landscape Architect. The developer will ensure the soil is generally uncompacted when backfilling in street tree planting locations.
- The tree species must be small to medium size, as confirmed by a Landscape Architect in the Landscape Plan
- Grading surrounding the tree must promote draining to the tree root zone (in such a manner as not to be detrimental to the tree), as noted on the subdivision Grading Plan.

As the modified plasticity index exceeds 40% in one sample, the reduced setback is not applicable at this site. The setback for small trees (mature tree height up to 7.5m) and medium (mature tree of heights between 7.5 m to 14.0 m) should be equal to or greater than the full mature height of the tree.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre Street, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

19. Earthworks Quality Control During Construction

All earthworks activities from construction of footing foundations to subgrade preparation to the placement and compaction of fill soils should be inspected by geotechnical personnel to ensure that construction proceeds in accordance with the project specifications.



February 21, 2025 Final Report, Rev. 3

20. General Comments

The comments given in this report are intended only for the guidance of design engineers. The number of boreholes required to determine the localized underground conditions between boreholes affecting construction costs, techniques, sequencing, equipment, scheduling, etc., would be much greater than has been carried out for the design purposes. Contractors bidding on or undertaking the works should, in this light, decide on their own investigations, as well as their own interpretations of the factual borehole results, so that they may draw their own conclusions as to how the subsurface conditions may affect them.

We trust that the information contained in this report will be satisfactory for your purposes. Should you have any questions, please do not hesitate to contact this office.

Daniel Wall, M. Eng., P.Eng. Geotechnical Engineer Earth and Environment



Ismail M. Taki, M.Eng., P.Eng. Senior Manager, Eastern Region


Earth and Environment



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

Figures



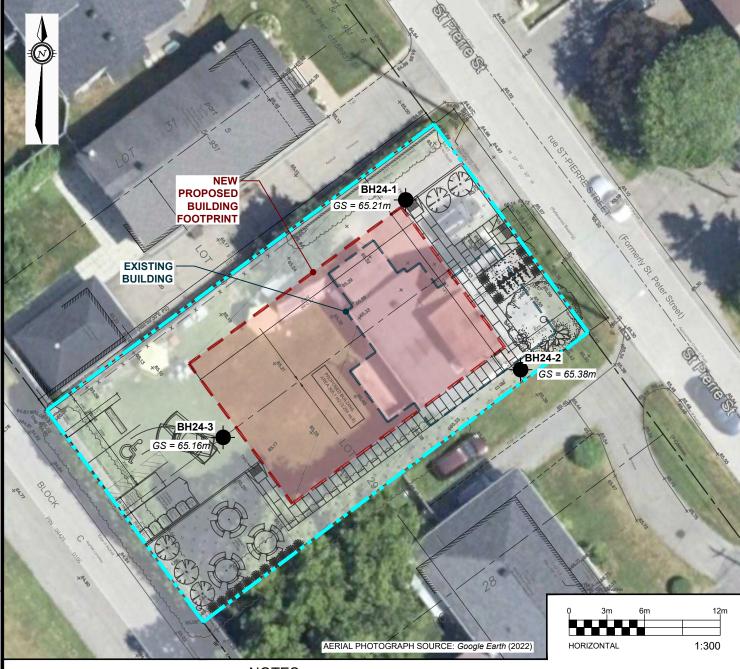

LEGEND



 $GS = 65.2 \, m$

PROPERTY BOUNDARY

BOREHOLE NUMBER AND LOCATION

APPROX. GROUND SURFACE ELEVATION (m)

NOTES:

- THE BOUNDARIES AND SOIL TYPES HAVE BEEN ESTABLISHED ONLY AT BOREHOLE LOCATIONS. BETWEEN BOREHOLES THEY ARE ASSUMED AND MAY BE SUBJECT TO CONSIDERABLE ERROR.
 SOIL SAMPLES WILL BE RETAINED IN STORAGE FOR THREE MONTHS AND THEN DESTROYED UNLESS THE CLIENT
- ADVISES THAT AN EXTENDED TIME PERIOD IS REQUIRED.
- BOREHOLE ELEVATIONS SHOULD NOT BE USED TO DESIGN BUILDING(S) OR FLOOR SLABS OR PARKING LOT(S) GRADES.
- ASPHALT AND TOPSOIL QUANTITIES SHOULD NOT BE ESTABLISHED FROM THE INFORMATION AT THE TEST HOLE LOCATIONS.
- THIS DRAWING FORMS PART OF THE REPORT PROJECT NUMBER AS REFERENCED AND SHOULD BE USED ONLY IN CONJUNCTION WITH THIS REPORT.
- 6. BASE PLAN INFORMATION OBTAINED FROM LALANDE + DOYLE ARCHITECTS INC.., PROJECT NO.: 24-002, DWG NO.: A-100, DATED 19.04.2024.



EXP Services Inc. www.exp.com

t: +1.613.688.1899 | f: +1.613.225.7337 2650 Queensview Drive, Suite 100 Ottawa, ON K2B 8H6, Canada

JULY 2024		PULSESOCIETIES LTD. PROPERTY ADDRESS: 1132 ST. PIERRE STREET. OTTAWA. ONTARIO	OTT-23014181-E0
DESIGN DW	CHECKED	PROPOSED RESIDENTIAL DEVELOPMENT	1:300
DRAWN BY AS		BOREHOLE LOCATION PLAN	FIG 2

Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

Notes On Sample Descriptions

SILT (NONPLASTIC)

1. All sample descriptions included in this report follow the Canadian Foundations Engineering Manual soil classification system. This system follows the standard proposed by the International Society for Soil Mechanics and Foundation Engineering. Laboratory grain size analyses provided by exp Services Inc. also follow the same system. Different classification systems may be used by others; one such system is the Unified Soil Classification. Please note that, with the exception of those samples where a grain size analysis has been made, all samples are classified visually. Visual classification is not sufficiently accurate to provide exact grain sizing or precise differentiation between size classification systems.

CLAY	FINE	SILT MEDIUM	COARSE	FINE	SAND MEDIUM	COARSE	FINE	GRAVEL MEDIUM	COARSE	COBBLES	BOULDERS
C	0,002 	0.006	0.02 0.	06 	0.2 I	0.6 I	2.0 	6.0 	20 60 	20	00
			EQ	UIVALE	ENT GRAIN	DIAMETER	IN MILLI	METRES			
CLAY (PL	ASTIC) TO			FINE		MEDIUM	CRS.	FINE	COARSE	7	

UNIFIED SOIL CLASSIFICATION


- 2. Fill: Where fill is designated on the borehole log it is defined as indicated by the sample recovered during the boring process. The reader is cautioned that fills are heterogeneous in nature and variable in density or degree of compaction. The borehole description may therefore not be applicable as a general description of site fill materials. All fills should be expected to contain obstruction such as wood, large concrete pieces or subsurface basements, floors, tanks, etc., none of these may have been encountered in the boreholes. Since boreholes cannot accurately define the contents of the fill, test pits are recommended to provide supplementary information. Despite the use of test pits, the heterogeneous nature of fill will leave some ambiguity as to the exact composition of the fill. Most fills contain pockets, seams, or layers of organically contaminated soil. This organic material can result in the generation of methane gas and/or significant ongoing and future settlements. Fill at this site may have been monitored for the presence of methane gas and, if so, the results are given on the borehole logs. The monitoring process does not indicate the volume of gas that can be potentially generated nor does it pinpoint the source of the gas. These readings are to advise of the presence of gas only, and a detailed study is recommended for sites where any explosive gas/methane is detected. Some fill material may be contaminated by toxic/hazardous waste that renders it unacceptable for deposition in any but designated land fill sites; unless specifically stated the fill on this site has not been tested for contaminants that may be considered toxic or hazardous. This testing and a potential hazard study can be undertaken if requested. In most residential/commercial areas undergoing reconstruction, buried oil tanks are common and are generally not detected in a conventional geotechnical site investigation.
- 3. Till: The term till on the borehole logs indicates that the material originates from a geological process associated with glaciation. Because of this geological process the till must be considered heterogeneous in composition and as such may contain pockets and/or seams of material such as sand, gravel, silt or clay. Till often contains cobbles (60 to 200 mm) or boulders (over 200 mm). Contractors may therefore encounter cobbles and boulders during excavation, even if they are not indicated by the borings. It should be appreciated that normal sampling equipment cannot differentiate the size or type of any obstruction. Because of the horizontal and vertical variability of till, the sample description may be applicable to a very limited zone; caution is therefore essential when dealing with sensitive excavations or dewatering programs in till materials.



-	t No:	OTT-23014181-E0								F	igure	No	3	_		``
Project		Proposed Residential Development								-	Pa	age	1_ of	2	-	
ocatio		1132 St. Pierre Street, Ottawa, Onta	rio							-						
	rilled:			-	Split Spoon S Auger Samp			_	⊠				apour Rea	-		□ X
rill Ty _l	pe:	CME-55 Track Mounted Drill Rig		-	SPT (N) Valu	е)			erg Limits			_	$\stackrel{\frown}{\multimap}$
atum:	:	Geodetic Elevation		_	Dynamic Cor Shelby Tube	e Test		_	-			ned Triax in at Fail				\oplus
ogged	d by:	AN Checked by: DW			Shear Streng Vane Test	th by			+			Strength ometer T				A
SYMBOL		SOIL DESCRIPTION	Geodetic Elevation m		20 Shear Stren	d Penetra 40 gth 100	ation To	0	80 200	kPa		250	sture Contits (% Dry \)	750	I A	Natura Unit W
	FILL Silty	sand with gravel, grey, moist, (compac	65.21 et) 64.6	C		· · · · · · · · · · · · · · · · · · ·			200	(20	- 10 			SS1
	_(com	clay with gravel, brown, moist, pact)	64.1	1	10	*! † * *! † * *! † * *! † * *! † *				1:3 0:1: 1:3 0:1: 1:3 0:1: 1:3 0:1:		×				SS2
		Y CLAY n, moist, (stiff to hard)			16										\ \ \ \	19.8
	_			2	(P)							*			X	SS3
	_				8							•	×	0		SS4 18.6
	_			3	7	Pa							×			SS5
		Y CLAY , moist, (stiff to very stiff)	61.5	4	2 :								×			SS6
	_		_		1	110 k	Pa						-0 X)] / SS7
	_			5		96 kPa : -∰: ∴s=7:						. 1.: .: :				337
	_			6	1 0 0 1 0 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0											7
	_				10010414	6 kPa∵							×			SSE
	_		-	7	, <u> </u>	s=7			***							
	_	Canting of Mark P			2. O.								*		X	SSS
OTES:		Continued Next Page	WATE	ER	LEVEL RECO	RDS			Γ		C	ORE DF	RILLING F	ECOF	D.	
l.Boreho use by		requires interpretation by EXP before	Date		Water Level (m)	Hol	e Ope	n	\vdash	Run No.	De		% Re			RQD %
3. Field w	vork was	ras backfilled upon completion. supervised by an EXP representative. Sample Descriptions			25101 (111)	1	<u>~ (111)</u>			140.	ĮI)	,				

Log of Borehole BH-1

Project No: OTT-23014181-E0 Figure No. Project: Proposed Residential Development

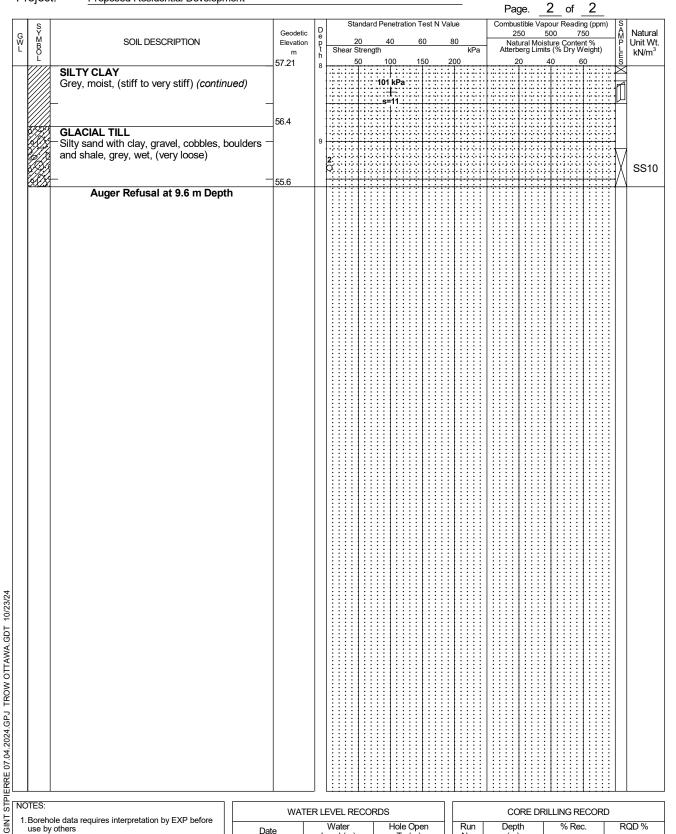

LOG OF BOREHOLE

- Borehole data requires interpretation by EXP before use by others
- 2. The borehole was backfilled upon completion.
- 3. Field work was supervised by an EXP representative.
- 4. See Notes on Sample Descriptions
- 5. Log to be read with EXP Report OTT-23014181-E0

WA	TER LEVEL RECO	RDS				
Date	Water Level (m)	Hole Open To (m)				

	CORE DRILLING RECORD													
Run No.	Depth (m)	% Rec.	RQD %											
	,													

Log of Borehole BH-2

Proje	ect No:	OTT-23014181-E0	og or b		и Сп	JIE !	<u>рп.</u>	<u>'</u>				E	X
Proje	ect:	Proposed Residential Developm	nent						Figure No.		_		ı
Loca	tion:	1132 St. Pierre Street, Ottawa,	Ontario						Page	. <u>1</u> of			
Date	Drilled:	'July 3, 2024		_	Split Spoon S	Sample	×]	Combustibl	e Vapour Rea	ding		
Drill T	уре:	CME-55 Track Mounted Drill Ri	g	_	Auger Sampl				Natural Mo	isture Content			×
Datur	m:	Geodetic Elevation		_	Dynamic Cor	ne Test		• •	Undrained %	Triaxial at			⊕
Logg	ed by:	AN Checked by:	DW		Shelby Tube Shear Streng Vane Test		+ s	<u>-</u>	Shear Strer Penetrome	ngth by			A
s Y			Geodetic	р)	d Penetratio	n Test N Va	ılue	Combustib 250	le Vapour Readi 500 7	ng (ppm) S A	Natura
G M W B O L		SOIL DESCRIPTION	Elevation m	e p t h		40 gth 100		80 kPa 200	Natura	I Moisture Conte Limits (% Dry V	ent %	SAMPLES	Unit Wt
	TOP	SOIL ~ 150mm thick	65.38 65.2	0	:6:	100		200					<u> </u>
	Silty	clay with gravel, brown, moist,			0				*			░Ĭ	SS1
	(011)	pacty]
	QII T	Y CLAY	64.3	1	11					×			SS2
		n, moist, (very stiff)										# <u>/</u> /	19.9
					13								
	_		_	2	O					X		<u> </u>	SS3
													1
			-		7		192	kPa		×		$\exists $	SS4
				3									18.0
					4	120 kP	a			· · · · · · · · · · · · · · · · · · ·		\mathbb{N}	SS5
	_		61.7			· · T ·							1 000
		Y CLAY , moist, (stiff)	01.7										1
	_Gley	, moist, (stin)	-	4	2					3	k	: ::: }	SS6
			60.88	3	53 kPa								1
					2								1
			-	5	1					X		<u> </u>	SS7
					62 kF	a : : : : :							j
	_		_	6								<u>:</u>	
					3							$\overline{\cdot \cdot}$	
M M			-		0					× .		$\frac{1}{2}$	SS8
				7		96 kPa ∷ s=10]
				'									
	_		_										
					3					X			SS9
NOTES USE	S:	Continued Next Page		_ 8			<u></u>	-1.:.:.					<u> </u>
1.Bore	ehole data r by others	requires interpretation by EXP before	Date		LEVEL RECO	Hole C		Run	Depth	E DRILLING R			RQD %
	9 mm slotte	d standpipe was installed in the completion	'July 10, 2024		Level (m) 4.5	To (m)	No.	(m)				
3. Field	•	supervised by an EXP representative.											
)		Sample Descriptions											
5. Log	to be read	with EXP Report OTT-23014181-E0											

Log of Borehole BH-2

Project No: OTT-23014181-E0 Figure No.

Project: Proposed Residential Development of 2 Page. Combustible Vapour Reading (ppm)
250 500 750 Standard Penetration Test N Value SYMBOL Natural Geodetic G W L SOIL DESCRIPTION 57.38 SILTY CLAY Grey, moist, (stiff) (continued)


kN/m³ 56.6 **GLACIAL TILL** Silty sand with clay, gravel, cobbles, boulders and shale, grey, wet, (very loose) SS10 55.9 Auger Refusal at 9.5 m Depth GINT STPIERRE 07.04.2024.GPJ TROW OTTAWA.GDT 10/23/24

- Borehole data requires interpretation by EXP before use by others
- 2. A 19 mm slotted standpipe was installed in the borehole upon completion
- 3. Field work was supervised by an EXP representative.
- 4. See Notes on Sample Descriptions
- 5. Log to be read with EXP Report OTT-23014181-E0

WA ⁻	WATER LEVEL RECORDS											
Date	Water Level (m)	Hole Open To (m)										
'July 10, 2024	4.5											

	CORE DRILLING RECORD													
Run No.	Depth (m)	% Rec.	RQD %											
	,													

	Log 01	1 B(orenole Br	1-3		~	Υ
Project No:	OTT-23014181-E0				Figure No. 5		//\
Project:	Proposed Residential Development				Figure No. 5		
Location:	1132 St. Pierre Street, Ottawa, Ontario				Page1_ of _1_	_	
Date Drilled:	'July 12, 2024		Split Spoon Sample	\boxtimes	Combustible Vapour Reading		
Drill Type:	Hand Portable Equipment		Auger Sample		Natural Moisture Content		×
Dim Typo.	Tiana i Ortabie Equipment		SPT (N) Value	0	Atterberg Limits	-	\multimap
Datum:	Geodetic Elevation		Dynamic Cone Test —— Shelby Tube	_	Undrained Triaxial at % Strain at Failure		\oplus
Logged by:	AN Checked by: DW	-	Shear Strength by Vane Test	+ s	Shear Strength by Penetrometer Test		•
S Y M B			Standard Penetration Test I e p 20 40 60	N Value 80	Combustible Vapour Reading (pp 250 500 750 Natural Moisture Content %	om) S A M P	Natur Unit V

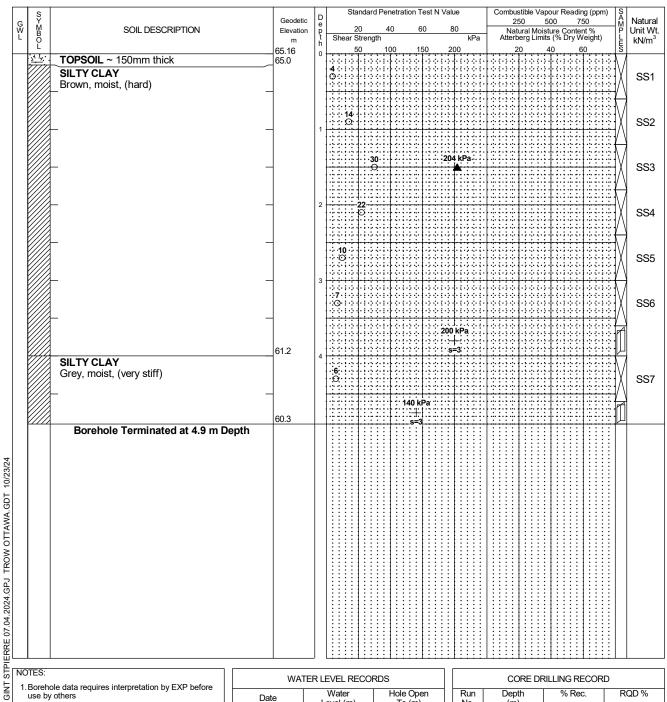

LOG OF BOREHOLE

- 1. Borehole data requires interpretation by EXP before
- $2. The \ borehole \ was \ backfilled \ upon \ completion.$
- 3. Field work was supervised by an EXP representative.
- 4. See Notes on Sample Descriptions
- 5. Log to be read with EXP Report OTT-23014181-E0


WATER LEVEL RECORDS											
Date	Water Level (m)	Hole Open To (m)									

	CORE DRILLING RECORD													
Run No.	Depth (m)	% Rec.	RQD %											
	()													

Grain-Size Distribution Curve Method of Test For Sieve Analysis of Aggregate ASTM C-136

100-2650 Queensview Drive Ottawa, ON K2B 8H6

Unified Soil Classification System

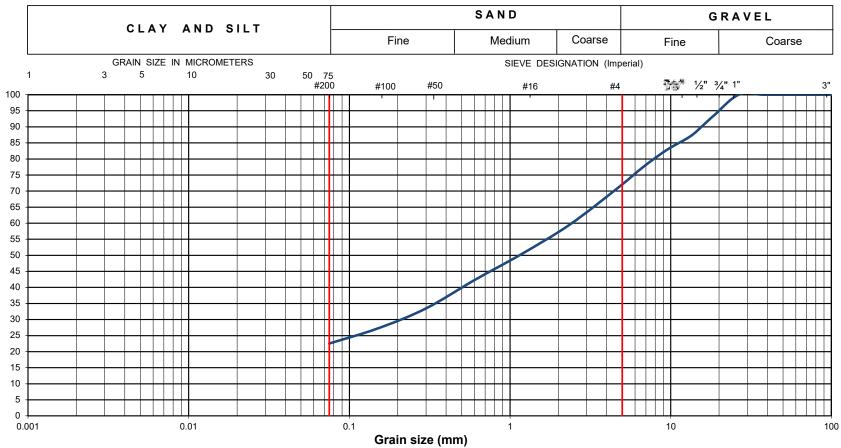

EXP Project No.:	OTT-23014181-A0	Project Name :	oject Name : Geotechnical Investigation - Proposed Residential Development.							
Client :	PulseSocieties Ltd.	Project Location	oject Location : 1132 St. Pierre Street, Ottawa							
Date Sampled :	July 3, 2024	Borehole No:	orehole No:		Sample	: S	S1	Depth (m) :	0 - 0.6	
Sample Composition :		Gravel (%)	29	Sand (%)	48	Silt & Clay (%)	23	Figure :	-	
Sample Description :	nple Description : Silty Sand with Gravel (SM)									




Percent Passing

Grain-Size Distribution Curve Method of Test For Particle Size Analysis of Soil ASTM C-136/ASTM D422

100-2650 Queensview Drive Ottawa, ON K2B 8H6

Unified Soil Classification System

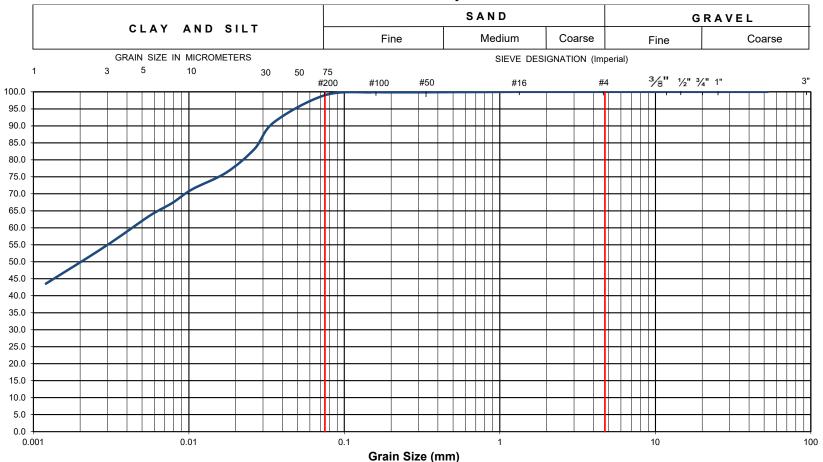

EXP Project No.:	OTT-23014181-E0	Project Name :	Project Name : Geotechnical Investigation - Proposed Residentia						al Development.	
Client :	PulseSocieties Ltd.	Project Location	roject Location : 1132 St. Pierre Street, Ottawa							
Date Sampled :	July 3, 2024	Borehole No:	Borehole No:			nple No.:	SS4		Depth (m) :	2.3-2.9m
Sample Description :	: % Silt and Clay 99 % San		% Sand	1 % Gravel 0				Fi	7	
Sample Description : Silty Clay of High Plasticity (CH), trace sand								Figure :	1	



exp Services Inc. 1595 Clark Boulevard, Brampton Ontario, Canada, L6T 4V1 Telephone: (905) 793-9800 Fax: (905) 793-0641

Plasticity Index Test Report

ST03

Project No.: <u>Ott-23014181-E0</u>

Sample Number: $\frac{451477-2}{\text{Date Sampled:}}$ $\frac{\text{July 3, 2024}}{\text{July 3, 2024}}$

Date Received: July 8, 2024

Liquid Limit

Date Reported:	<u>July 16, 2024</u>
Borehole No:	BH 24-01 / SS 4
Sample Depth:	<u>2.3 - 2.9 m</u>

Location: 1132 St. Pierre St.

Trial Number	1	2	3	4	5
Number of Blows	41	26	16		
Moisture Tin No.	4	20	35		
Mass of Soil and Tin, g	22.308	23.557	24.216		
Mass of Dry Soil and Tin, g	19.669	20.834	20.682		
Mass of Tin, g	15.501	16.681	15.614		
Mass of Water, g	2.639	2.723	3.534		
Mass of Dry Soil, g	4.168	4.153	5.068		
Water Content	63.3%	65.6%	69.7%		

Plastic Limit

Trial Number	1	2	3
Moisture Tin No.	3	16	25
Mass of Soil and Tin, g	22.964	24.437	24.081
Mass of Dry Soil and Tin, g	21.816	22.984	22.692
Mass of Tin, g	16.727	16.738	16.628
Mass of Water, g	1.148	1.453	1.389
Mass of Dry Soil, g	5.089	6.246	6.064
Water Content	22.6%	23.3%	22.9%


Summary of Results


Liquid Limit (*LL*): 66

Plastic Limit (*PL*): 23

Plasticity Index (*Pl*) 43

Classification: **CH**

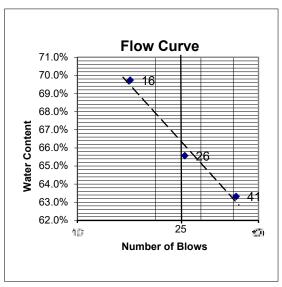

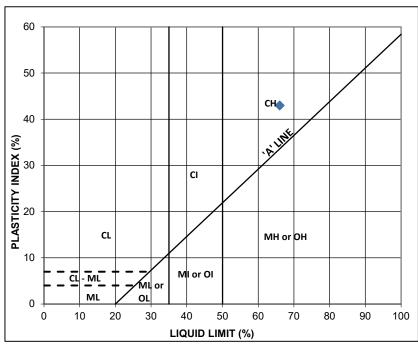

Tested By: **E. Charles Geonzon**Lab. Technician

Checked By: **Arcadio Petrola, CET**Senior Lab. Technician

Figure 7a




Percent Passing

Grain-Size Distribution Curve Method of Test For Particle Size Analysis of Soil ASTM C-136/ASTM D422

100-2650 Queensview Drive Ottawa, ON K2B 8H6

Unified Soil Classification System

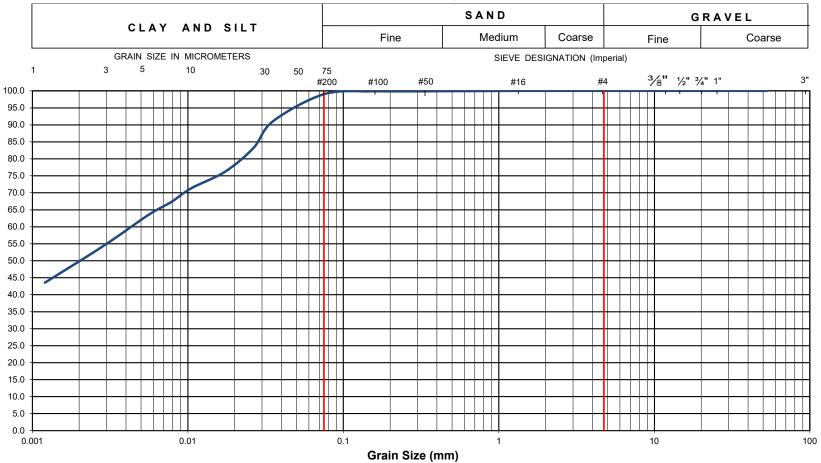

EXP Project No.:	OTT-23014181-E0	Project Name :		Geotechnical Investigation - Proposed Residential Development.							
Client :	PulseSocieties Ltd.	Project Location	ı:	1132 St. Pierre Street, Ottawa							
Date Sampled :	July 3, 2024	Borehole No:	Borehole No:		Sample No.:		SS7		Depth (m) :	4.6 - 5.2	
Sample Description :		% Silt and Clay	96	% Sand	4	% Gravel		0	Figure :	0	
Sample Description : Silty Clay of Low Plasticity (CL), trace sand									Figure :	0	



exp Services Inc. 1595 Clark Boulevard, Brampton Ontario, Canada, L6T 4V1 Telephone: (905) 793-9800 Fax: (905) 793-0641

Plasticity Index Test Report

ST03

Project No.: <u>Ott-23014181-E0</u>

Sample Number: $\frac{451478-2}{\text{Date Sampled:}}$ $\frac{\text{July 3, 2024}}{\text{July 3, 2024}}$

Date Received: July 8, 2024

Liquid Limit

Date Reported:	July 16, 2024
Borehole No:	BH 24-01 / SS 7
Sample Depth:	<u>4.6 - 5.2 m</u>

Location: 1132 St. Pierre St.


Trial Number	1	2	3	4	5
Number of Blows	39	28	15		
Moisture Tin No.	17	31	32		
Mass of Soil and Tin, g	23.674	23.034	24.449		
Mass of Dry Soil and Tin, g	21.543	20.692	21.546		
Mass of Tin, g	16.699	15.520	15.624		
Mass of Water, g	2.131	2.342	2.903		
Mass of Dry Soil, g	4.844	5.172	5.922		
Water Content	44.0%	45.3%	49.0%		


Plastic Limit

Trial Number	1	2	3
Moisture Tin No.	2	23	34
Mass of Soil and Tin, g	24.413	23.840	24.339
Mass of Dry Soil and Tin, g	23.135	22.482	23.039
Mass of Tin, g	16.826	15.833	16.584
Mass of Water, g	1.278	1.358	1.300
Mass of Dry Soil, g	6.309	6.649	6.455
Water Content	20.3%	20.4%	20.1%

Summary of Results

Liquid Limit (*LL*): 46
Plastic Limit (*PL*): 20
Plasticity Index (*Pl*) 26
Classification: **Cl**

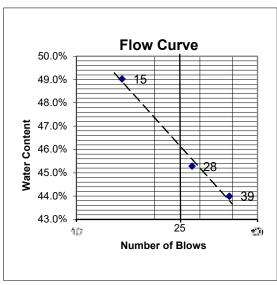

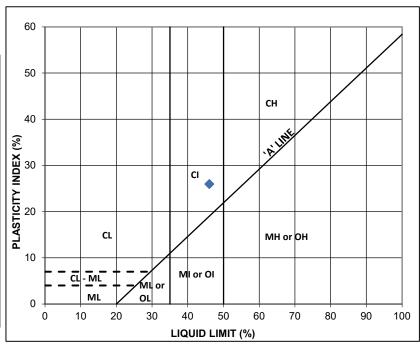

Tested By: **E. Charles Geonzon**Lab. Technician

Checked By: **Arcadio Petrola, CET**Senior Lab. Technician

Figure 8a

EXP Services Inc.

Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025 Final Report, Rev. 3

Appendix A – AGAT Laboratory Certificate of Analysis





5835 COOPERS AVENUE MISSISSAUGA, ONTARIO CANADA L4Z 1Y2 TEL (905)712-5100 FAX (905)712-5122 http://www.agatlabs.com

CLIENT NAME: EXP SERVICES INC
2650 QUEENSVIEW DRIVE, UNIT 100
OTTAWA, ON K2B8H6
(613) 688-1899

ATTENTION TO: Daniel Wall

PROJECT: OTT-23014181-AO

AGAT WORK ORDER: 24Z170272

SOIL ANALYSIS REVIEWED BY: Nivine Basily, Inorganic Team Lead

DATE REPORTED: Jul 12, 2024

PAGES (INCLUDING COVER): 6 VERSION*: 1

Should you require any information regarding this analysis please contact your client services representative at (905) 712-5100

*Notes	

Disclaimer:

- All work conducted herein has been done using accepted standard protocols, and generally accepted practices and methods. AGAT test methods may
 incorporate modifications from the specified reference methods to improve performance.
- All samples will be disposed of within 30 days after receipt unless a Long Term Storage Agreement is signed and returned. Some specialty analysis may
 be exempt, please contact your Client Project Manager for details.
- AGAT's liability in connection with any delay, performance or non-performance of these services is only to the Client and does not extend to any other
 third party. Unless expressly agreed otherwise in writing, AGAT's liability is limited to the actual cost of the specific analysis or analyses included in the
 services.
- This Certificate shall not be reproduced except in full, without the written approval of the laboratory.
- The test results reported herewith relate only to the samples as received by the laboratory.
- Application of guidelines is provided "as is" without warranty of any kind, either expressed or implied, including, but not limited to, warranties of
 merchantability, fitness for a particular purpose, or non-infringement. AGAT assumes no responsibility for any errors or omissions in the guidelines
 contained in this document.
- All reportable information is available on request from AGAT Laboratories, in accordance with ISO/IEC 17025:2017, ISO/IEC 17025:2005 (Quebec), DR-12-PALA and/or NELAP Standards.
- This document is signed by an authorized signatory who meets the requirements of the MELCCFP, CALA, CCN and NELAP.
- For environmental samples in the Province of Quebec: The analysis is performed on and results apply to samples as received. A temperature above 6°C upon receipt, as indicated in the Sample Reception Notification (SRN), could indicate the integrity of the samples has been compromised if the delay between sampling and submission to the laboratory could not be minimized.

AGAT Laboratories (V1)

Page 1 of 6

Member of: Association of Professional Engineers and Geoscientists of Alberta (APEGA)

Western Enviro-Agricultural Laboratory Association (WEALA) Environmental Services Association of Alberta (ESAA) AGAT Laboratories is accredited to ISO/IEC 17025 by the Canadian Association for Laboratory Accreditation Inc. (CALA) and/or Standards Council of Canada (SCC) for specific tests listed on the scope of accreditation. AGAT Laboratories (Mississauga) is also accredited by the Canadian Association for Laboratory Accreditation Inc. (CALA) for specific drinking water tests. Accreditations are location and parameter specific. A complete listing of parameters for each location is available from www.cala.ca and/or www.scc.ca. The tests in this report may not necessarily be included in the scope of accreditation. Measurement Uncertainty is not taken into consideration when stating conformity with a specified requirement.



Certificate of Analysis

AGAT WORK ORDER: 24Z170272 PROJECT: OTT-23014181-AO

5835 COOPERS AVENUE MISSISSAUGA, ONTARIO CANADA L4Z 1Y2 TEL (905)712-5100 FAX (905)712-5122 http://www.agatlabs.com

CLIENT NAME: EXP SERVICES INC SAMPLING SITE:1132 ST PIERRE STREET

ATTENTION TO: Daniel Wall SAMPLED BY:EXP

(0011) 11101 9111110 01111110111	
	DATE DEDORTED COOK OF

				•	<u>, </u>	<u> </u>
DATE RECEIVED: 2024-07-04						DATE REPORTED: 2024-07-12
				BH24-1 ss4 (7.	BH24-1 ss7	
	s	AMPLE DESC	CRIPTION:	5-9.5')	(15-17')	
		SAME	LE TYPE:	Soil	Soil	
		DATE S	AMPLED:	2024-07-03	2024-07-03	
Parameter	Unit	G/S	RDL	5984873	5984874	
Sulphate (2:1)	μg/g		2	119	89	
Chloride (2:1)	μg/g		2	415	75	

(Soil) Inorganic Chemistry

RDL - Reported Detection Limit; G / S - Guideline / Standard

Analysis performed at AGAT Toronto (unless marked by *)



Certificate of Analysis

AGAT WORK ORDER: 24Z170272 PROJECT: OTT-23014181-AO

5835 COOPERS AVENUE MISSISSAUGA, ONTARIO CANADA L4Z 1Y2 TEL (905)712-5100 FAX (905)712-5122 http://www.agatlabs.com

CLIENT NAME: EXP SERVICES INC SAMPLING SITE:1132 ST PIERRE STREET **ATTENTION TO: Daniel Wall**

SAMPLED BY:EXP

O. Reg. 153(511) - ORPs (Soil)

DATE RECEIVED: 2024-07-04					
				BH24-1 ss4 (7.	BH24-1 ss7
	s	AMPLE DES	CRIPTION:	5-9.5')	(15-17')
		SAM	PLE TYPE:	Soil	Soil
		DATE SAMPLED:		2024-07-03	2024-07-03
Parameter	Unit	G/S	RDL	5984873	5984874
Electrical Conductivity (2:1)	mS/cm		0.005	0.843	0.283
pH, 2:1 CaCl2 Extraction	pH Units		NA	6.93	6.96
Resistivity (2:1) (Calculated)	ohm.cm		1	1190	3530

RDL - Reported Detection Limit; G / S - Guideline / Standard Comments:

5984873-5984874 EC was determined on the DI water extract obtained from the 2:1 leaching procedure (2 parts DI water:1 part soil). pH was determined on the 0.01M CaCl2 extract obtained from 2:1 leaching procedure (2 parts extraction fluid:1 part wet soil).

Analysis performed at AGAT Toronto (unless marked by *)



5835 COOPERS AVENUE MISSISSAUGA, ONTARIO CANADA L4Z 1Y2 TEL (905)712-5100 FAX (905)712-5122 http://www.agatlabs.com

Quality Assurance

CLIENT NAME: EXP SERVICES INC PROJECT: OTT-23014181-AO

AGAT WORK ORDER: 24Z170272 ATTENTION TO: Daniel Wall

SAMPLING SITE:1132 ST PIERRE STREET

SAMPLED BY:EXP

80% 120%

Soil Analysis															
RPT Date: Jul 12, 2024			DUPLICATE				REFERENCE MATERIAL			METHOD BLANK SPIKE			MATRIX SPIKE		KE
PARAMETER	Batch	Sample	Dup #1	Dup #2	RPD	Method Blank	Measured	Acceptable Limits		Recovery	Acceptable Limits		Recovery	Acceptable Limits	
		ld					Value	Lower	Upper	7	Lower	Upper	, ,	Lower	Upper
O. Reg. 153(511) - ORPs (Soil)															
Electrical Conductivity (2:1)	5982442		0.171	0.166	2.9%	< 0.005	90%	80%	120%						

Comments: NA signifies Not Applicable.

pH duplicates QA acceptance criteria was met relative as stated in Table 5-15 of Analytical Protocol document.

6.83

6.85

5984768

(Soil) Inorganic Chemistry

pH, 2:1 CaCl2 Extraction

Sulphate (2:1)	5980859	57	57	0.0%	< 2	96%	70% 130%	100%	80% 120%	99%	70%	130%
Chloride (2:1)	5980859	35	36	2.8%	< 2	97%	70% 130%	100%	80% 120%	97%	70%	130%

0.3%

NA

100%

Certified By:





5835 COOPERS AVENUE MISSISSAUGA, ONTARIO CANADA L4Z 1Y2 TEL (905)712-5100 FAX (905)712-5122 http://www.agatlabs.com

Method Summary

CLIENT NAME: EXP SERVICES INC PROJECT: OTT-23014181-AO SAMPLING SITE:1132 ST PIERRE STREET AGAT WORK ORDER: 24Z170272 ATTENTION TO: Daniel Wall

SAMPLED BY:EXP

PARAMETER	AGAT S.O.P	LITERATURE REFERENCE	ANALYTICAL TECHNIQUE					
Soil Analysis	·	·						
Sulphate (2:1)	INOR-93-6004	modified from SM 4110 B	ION CHROMATOGRAPH					
Chloride (2:1)	INOR-93-6004	modified from SM 4110 B	ION CHROMATOGRAPH					
Electrical Conductivity (2:1)	INOR-93-6075	modified from MSA PART 3, CH 14 and SM 2510 B	PC TITRATE					
pH, 2:1 CaCl2 Extraction	INOR-93-6075	modified from EPA 9045D, MCKEAGUE 3.11 E3137	PC TITRATE					
Resistivity (2:1) (Calculated)	INOR-93-6036	McKeague 4.12, SM 2510 B,SSA #5 Part 3	EC METER					

GGT Laboratories



00									56 15	Carin	distription	eogius.		Lab	orato	ry Us	e O	nly			_		
AG	(A) L	aborat	ories	Ha So	ve feedb can here juick surv	for a	Ph. 905.3			s: not	7.10	5122		Work	Order #	d	4	t	70	7	ta	,	
						micros.	potable wate		_					Arriva	r Quant Tempe : Tempe	rature	s: 2		2 12		100	6.3	
						gulatory Requirements:								Custo	dy Seal	Intact:		□Yes	tre	□N	D	□N/	
						Regulation 153/04 Regulation	406	Sewer Use					99	Notes: bagget (a									
					, -		Sanitary Storm						Turnaround Time (TAT) Required:										
radicos.	Ottawa, Ontario. K2B 8H6				Tat	able Table Indicate One	в Опе	Region				Regul	ar TA	Т	F	71 E 4-	7 0	inees C					
						Res/Park Res/Park							Regular TAT 5 to 7 Business Days										
Phone: Reports to be sent to:	F8X;				11	Agriculture Agricultur Texture (Cneck One) Regulation		Prov. Water Quality Objectives (PWQO) Other				Rush TAT (Rush Surcharges Apply) 3 Business 2 Business Days Day OR Date Required (Rush Surcharges May Apply):											
1. Email:	eport Information: EXP Services Inc Daniel Wall Idress: 2650 Queensview Drive, Ottawa, Ontario. K2B 81 613-688-1899 daniel wall@exp.com Email: Email: Email: COTT-23014181-A0 Ilia St Pierre Street EXP IAT Quote #: Piease note: If quotation numb Intract: Idress:		a			CCME	1 558																
	Laboratories of Custody Record If this is a Drinking Water sample, ple Information: EXP Services Inc Daniel Wall 2650 Queensview Drive, Suite 100 Ottawa, Ontario. K2B 8H6 613-688-1899 Fax: sent to: daniel wall@exp.com ryan.digiuseppe@exp.com Information: OTT-23014181-A0 1132 St Pierre Street EXP #: PO: Please note: If quotation number is not provided, client will be billed full price for analysis Information: Bill To Same: Yes IN to I		Is th	his submission for a Recor d		Report Guideline on																	
Site Location: 1132 St Pierre Street Sampled By: EXP			0	of Site Condition (RSC)?	Ce	Certificate of Analysis					Ш	Please provide prior notification for rush TAT *TAT is exclusive of weekends and statutory holidays											
Site Location:	1132 St Pierre Street					☐ Yes ☐ No			☐ Yes ☐ No														
Sampled By:											_	For 'Same Day' analysis, please contact your AGAT CSR											
AGAT Quote #:					Leg	Legal Sample □		O. Reg 153					O. Reg 405 O. Reg 958 S										
Invoice information Company: Contact: Address: Email:	nation:	В	ill To Same: Ye	s⊠No□	San gw o P s	mple Matrix Legend Ground Water SD Sediment Oil SW Surface W Paint R Rock/Shal	73	s & Inorganics	3 - □ CrVI, □ Hg, □ HWSB	BTEX, F1-F4 PHCs			€ E	tion 406 Characterization Pack tals, BTEX, F1-F4 B	Regulation 406 SPLP Rainwater Leach	haracter	M&I □ VOCS □ ABNs vity. □ Moisture □		Sulphate	Cloride Electro Resistivity		right Mozaconia or Aleh Concentration	
Samp	ole Identification			# of Containers	Sample Matrix	Comments/ Special Instructions	Y/N	Metals	Metals	втех,	VOC	PAHS	PCBs	Regulation 4 pH, Metals, E	Regula	Landfi	Corros	Hd	Sul	Clo		Potenti	
1. BH24-1 ss4 (7:5-9:5')	July 3																	1507000	Z Z			
2. BH24-1 ss7 (15-17')	July 3	AM PM	1														V					
3.			AM PM																				
4.																							
5.			1										T										
6.		-						1															
7.					1			+					=			-						==	
8.								1	-				-			1	+						
9.		+						1	+				-	-	-	-	+		_	-	+	-	
								-	-	-		_	-			-	-	-	-		+	-	
10.								-	-	-		-	-		-	-		-					
11.			PN														4						
Samples Relinquished By (Pr	int Name and Sign):	7-5	Deth Deth	Time	T ₁ X	Samulas Seranded By Drawt Harm and Signi Samulas Seranded By Drawt South and Sym	w					Date	10	4/24	1(a)	115	-	\	Page_		of	-	
(A)	ruuc	all)	MIUT		24M							Cinto	11	DIO	Time	NN	JL	,					

Any and all products and/or services provided by AGAT Labs are pursuant to the terms and conditions as set forth at www.agatlabs.com_lottnsand.conditions unless otherwise agreed in a current written contractual document.

Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025

Final Report, Rev. 3

Legal Notification

This report was prepared by EXP Services for the account of PulseSocieties Ltd.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. EXP Services Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this project.



Project Name: Geotechnical Investigation Proposed Residential Development 1132 St. Pierre, Ottawa, Ottawa Project Number: OTT-23014181-E0 February 21, 2025

February 21, 2025 Final Report, Rev. 3

List of Distribution

Report Distributed To:

Mr. Sael Nemorin

sael@nemoringroup.ca

