

[illegible]

STATION	DESCRIPTION	GRADE ELEVATION	TOP OF PIPE	DEPTH OF COVER	NOTES
0+000.0	SEWAGE PUMP STATION	122.38	119.21	3.17	—
0+028.0	—	122.10	119.35	2.75	CROSSING 450 ST INV. 120.85 FORCEMAIN TOP 119.35 1500mm CLEARANCE
0+066.1	—	122.09	119.49	2.60	CROSSING 450 ST INV. 120.95 FORCEMAIN TOP 119.49 1460mm CLEARANCE
0+071.1	—	122.42	119.65	2.77	CROSSING 150 WM U/S 119.80 FORCEMAIN TOP 119.65 150mm CLEARANCE
0+083.4	—	122.10	119.70	2.40	CROSSING 250 ST INV. 121.12 FORCEMAIN TOP 119.63 1490mm CLEARANCE
0+113.5	—	122.26	119.78	2.48	—
0+126.8	—	122.39	119.84	2.55	—
0+157.9	—	122.71	120.00	2.71	START OF 125mm THICK, 3.0m WIDE INSULATION AS PER DETAIL ON C-15
0+160.9	—	122.66	121.56	1.10	END OF 125mm THICK, 3.0m WIDE INSULATION AS PER DETAIL ON C-15


[illegible]

D. B. GRAY ENGINEERING INC.
Stormwater Management • Grading & Drainage • Storm & Sanitary Sewers • Watermain

700 Long Point Circle 613-425-8044
Ottawa, Ontario d.gray@dbgrayengineering.com

Project **SUNBELT RENTALS INC. –
EQUIPMENT MAINTENANCE
FACILITY**
CARRP, ONTARIO

SANITARY FORCEMAIN PROFILE TABLE

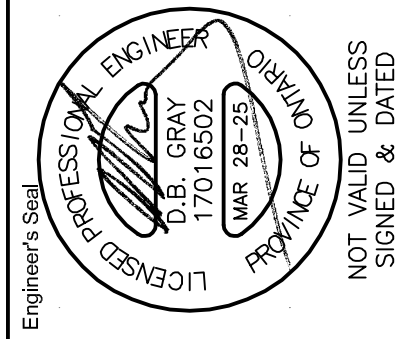

REFER TO NOTES, DETAILS & SCHEDULES
ON DRAWINGS C-7, C-8, C-14 & C-15