Wateridge Development Block 6 OTTAWA, ON


SWM Infiltration Facility Design


Wateridge Development Block 6 STORMWATER MANAGEMENT PLAN

ISSUED FOR REVIEW

LIST OF DRAWINGS:	
GENERAL PLAN	(GP-1)
EROSION AND SEDIMENT CONTROL PLAN	(ESC-1)
STORAGE FACILITY LAYOUT	(L-1)
INFILTRATION FACILITY LAYOUT	(L-2)
TYPICAL CONSTRUCTION DETAILS - A	(CD-1)
TYPICAL CONSTRUCTION DETAILS - B	(CD-2)
TYPICAL PIPE PENETRATION DETAILS	(CD-2)
TYPICAL ISOLATION ROW DETAILS	(CD-3)
SUPPLEMENTARY NOTES (1 OF 2)	(CD-4)
SUPPLEMENTARY NOTES (2 OF 2)	(CD-5)


REVIEWED BY DEVELOPMENT REVIEW SERVICES BRANCH 2025

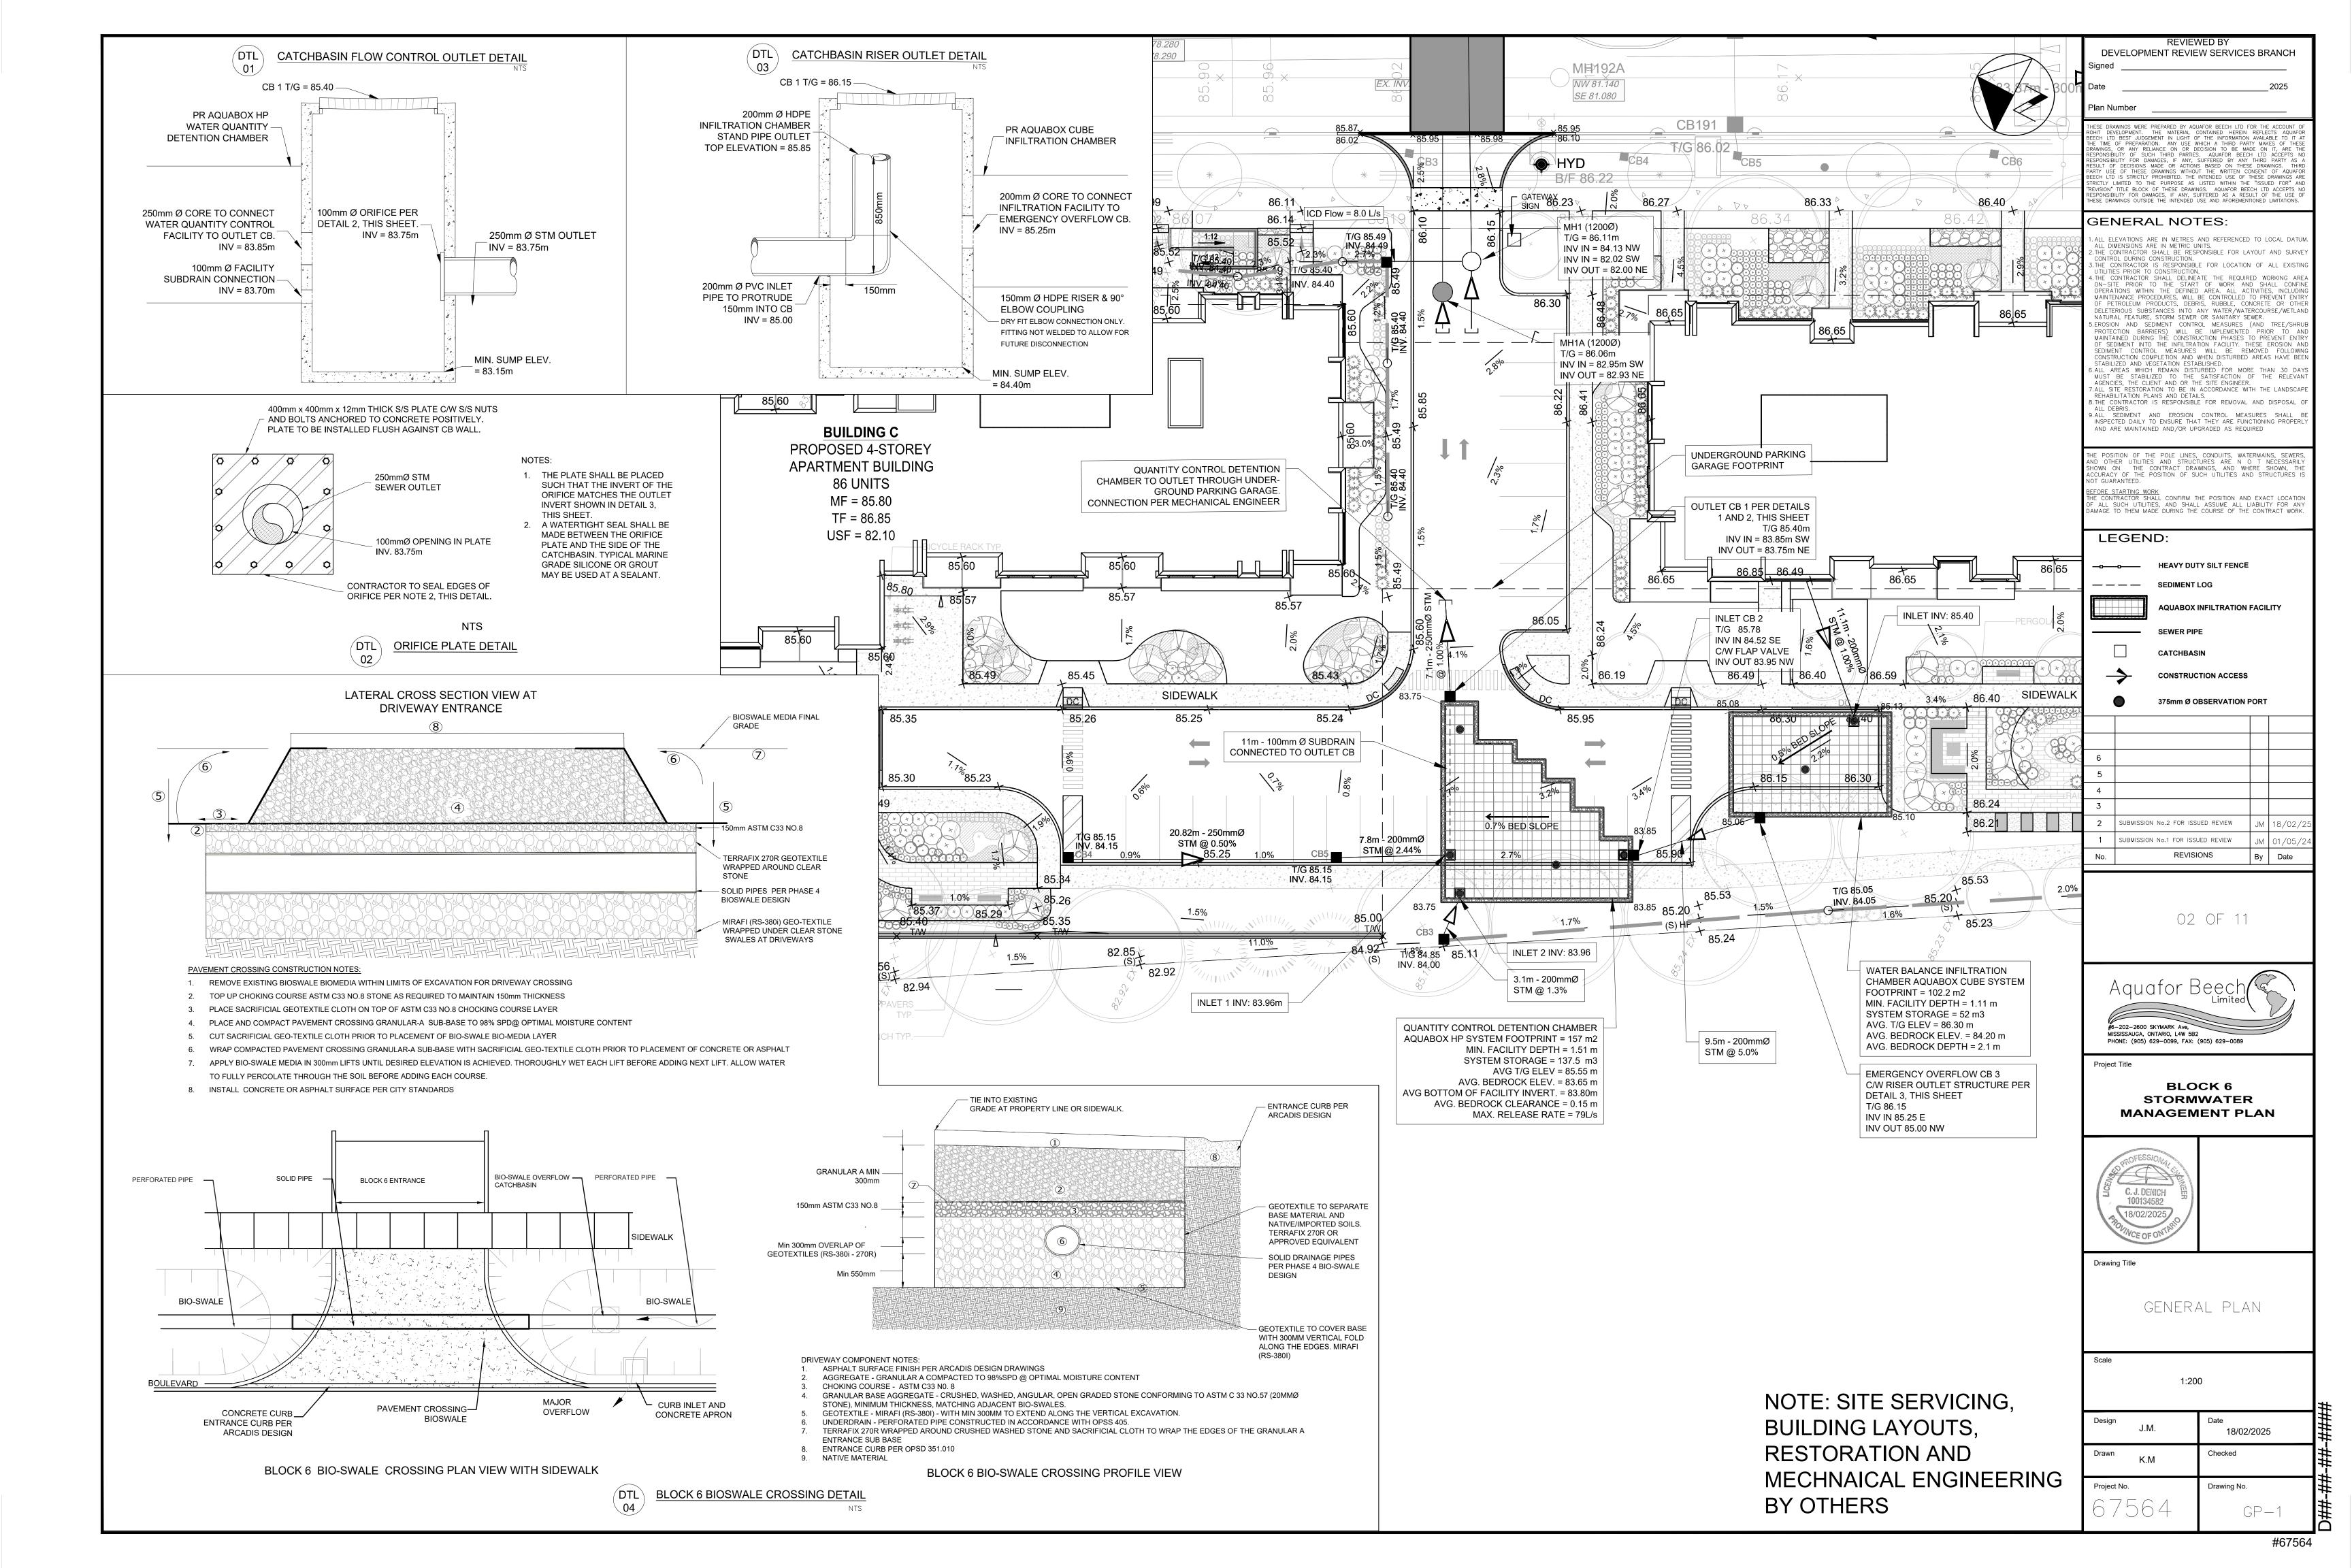

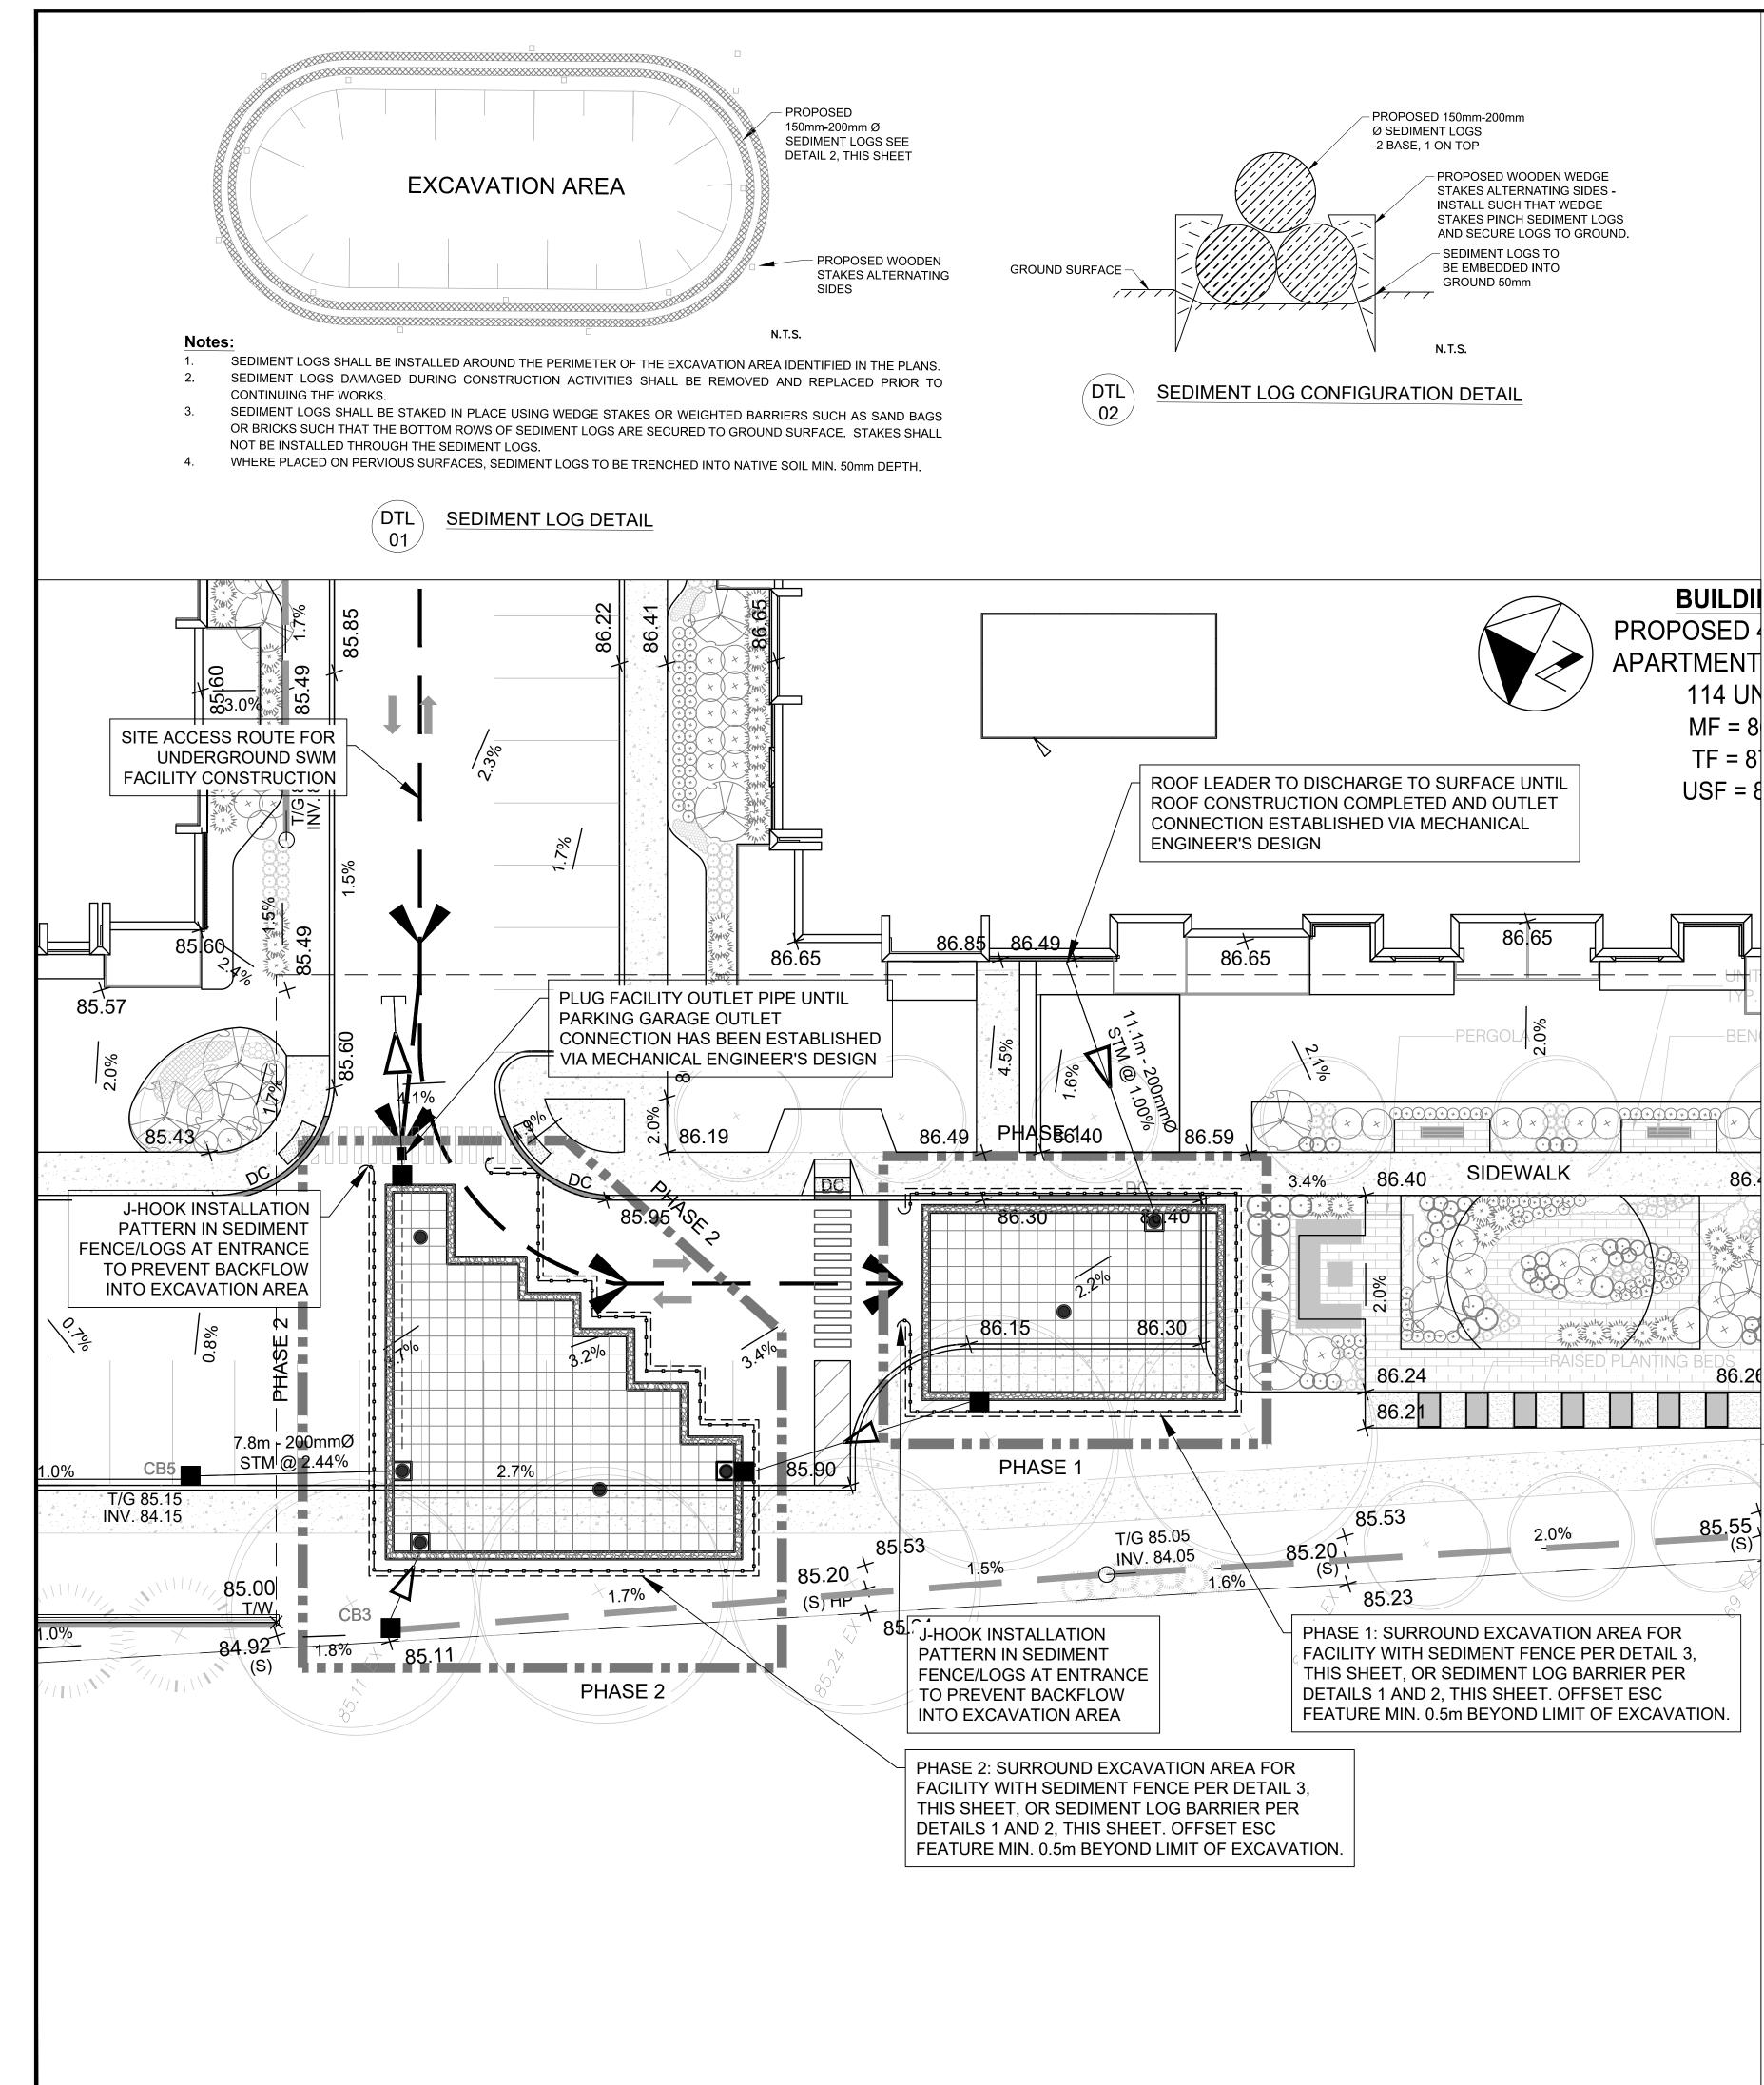

INFILTRATION FACILITY ESC NOTES

- 1. CONTRACTOR TO COMPLETE INFILTRATION TESTING IN LOCATION RATE PRIOR TO AQUABOX INSTALLATION.
- 2. DURING CONSTRUCTION, PROVISIONS SHALL BE MADE FOR PROPE ALL EROSION CONTROL MEASURES, TEMPORARY WATER COLLECT MAINTENANCE OF SUCH THROUGHOUT THE CONSTRUCTION PERIO COMPLETED INFILTRATION CHAMBER AREA. PRIOR TO THE COMPL CONNECTION OF THE OUTLET TO THE STORM SEWER VIA UNDERG INFILTRATION CHAMBER AREA. SHOULD SEDIMENT ENTER THE FAC CONTAMINATED AREA SHOULD BE TESTED USING THE GUELPH PE POTENTIAL. SHOULD A LOSS OF INFILTRATION CAPACITY BE CONFI AREA TO THE SATISFACTION OF THE CLIENT/ ENGINEER/ LANDSCA
- 3. THE EROSION AND SEDIMENT CONTROL STRATEGIES OUTLINED ON TO MINIMIZE SEDIMENT LADEN RUNOFF FROM LEAVING THE WORK RELEASE OF A DELETERIOUS SUBSTANCE, THEN ALTERNATIVE ME
- 4. ADHERENCE TO CONSTRUCTION SEQUENCING IS REQUIRED AS PAPACTICES AND HAS BEEN DESIGNED IN ORDER TO ENSURE THAT CONSTRUCTION ACTIVITIES.
- 5. TEMPORARY SEDIMENT CONTROLS TO BE INSTALLED PRIOR TO, A MEASURES SHOULD BE REPAIRED WITHIN 48 HOURS OF THE INSP
- 6. SEDIMENT LOG/SOCKS, HEAVY DUTY SEDIMENT FENCE, OR APPRO INFILTRATION CHAMBER WITH A 0.5m SETBACK PRIOR TO FACILIT
- 7. ANY AND ALL ACCUMULATED AND/OR STORED WATER WITHIN THE DETERMINED BY THE FIELD ENGINEER PRIOR TO PUMPING/DISCH/
- AFTER THE COMMENCEMENT OF EXCAVATION, SHOULD A SIGNIFI PUMPING SHOULD BE UNDERTAKEN AS PER NOTE 6.
- 9. NO RUNOFF FROM THE EXCAVATED AREA AND UNVEGETATED AR
- 10. CONTRACTOR IS RESPONSIBLE FOR ANY REMEDIATION/REPAIR O
- 11. THE CONTRACTOR SHALL DELINEATE THE REQUIRED WORKING A
- AREA. 12. TEMPORARY TOPSOIL AND/OR FILL MATERIAL STOCKPILE AREAS
- OF PROPOSED FACILITY LOCATION(S). 13.LOCATION OF STOCKPILE AREAS TO BE DETERMINED ON-SITE PRIC
- 14. WORKING AREAS, ACCESS REQUIREMENTS, AND TEMPORARY MA AREAS AFFECTED BY THE CONTRACTOR'S ACTIVITIES TO BE REIN
- 15.NO RUNOFF FROM EXCAVATED OR UNVEGETATED AREAS SHALL E 16. ALL ACCUMULATED SEDIMENTS TO BE REMOVED PRIOR TO THE R
- (LOCATION TO BE DETERMINED IN THE FIELD). 17. ON-SITE EQUIPMENT REFUELING AND MAINTENANCE TO BE ONLY
- 18. ALL SEDIMENT CONTROLS TO BE INSPECTED DAILY AND AFTER EA UNTIL COMPLETION OF CONSTRUCTION AND SITE RESTORATION F
- 19. ANY DAMAGE TO EXISTING FEATURES OR SURFACES DUE TO CON COMPLETION OF CONSTRUCTION ACTIVITIES ON SITE TO THE SATI
- 20. ALL ROADWAYS TO BE CLEANED OF SEDIMENTS RESULTING FROM
- 21.EROSION PROTECTION TO BE PROVIDED AROUND ALL EXISTING S 22.REMOVE TEMPORARY SEDIMENT CONTROLS FOLLOWING COMPLE
- EXISTING CONDITIONS OR BETTER TO THE SATISFACTION OF THE
- INFILTRATION FACILITY CONSTRUCTION SEQUENCING NOTES
- 1. EROSION AND SEDIMENTATION PROTECTION MEASURES ARE REC
- ROUGH EXCAVATION OF BOTH THE INFILTRATION AND QUANTITY OF COURSE ANGULAR STONE. FINAL GRADE OF BOTH FACILITIES TO E FACILITY CLOGGING OF STONE LAYERS.
- EXCAVATION, 19mm ANGULAR STONE BACKFILLING AND CHAMBER
 EXCAVATION OF FINAL 100mm OF NATIVE MATERIAL TO FINAL FAC
- INSTALLATION OF BACKFILL MATERIALS.5. INSTALL AQUABOX CHAMBER COMPONENTS TO SPECIFIED LOCAT
- CONNECTIONS.
- 6. APPLY19mm ANGULAR STONE IN 300mm LIFTS UNTIL DESIRED ELE¹7. SURFACE INSTALLATION:
- A. APPLY AND COMPACT BACKFILL MATERIAL/PARKING LOT SUB E B. INSTALL PROPOSED IMPERVIOUS/PERVIOUS SURFACE MATERI/
- CONSTRUCTION PHASING NOTES
- 1. PHASE 1 INFILTRATION FACILITY: SHALL BE CONSTRUCTED FIRST EROSION AND SEDIMENT CONTROLS ARE TO REMAIN IN PLACE UN
- 2. PHASE 2 WATER QUANTITY CONTROL FACILITY: CONSTRUCTION S CONNECTION OF ROOF LEADER INLET PIPE TO INFILTRATION FACIL RESTORATION WORKS FOR PHASE 2 HAVE BEEN COMPLETED.

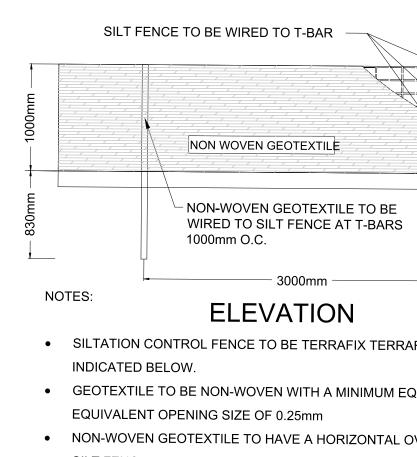


SILT FENCE TO BE UV STABILIZED HIGH DENSITY POI

DTL 03 H

	Signed	
ON OF PROPOSED INFILTRATION FACILITY AT THE PROPOSED INVERT ELEVATION TO CONFIRM INFILTRATION	Date	2025
DPER WATER MANAGEMENT AND DRAINAGE OF THE SITE. THIS SHALL INCLUDE ALL APPLICABLE SILT TRAPS, ECTION DITCHES AND OVERFLOW STRUCTURES DENOTED WITHIN THIS ESC PLAN, AS WELL AS THE PROPER RIOD. AT NO TIME SHALL SEDIMENT LADEN WATER BE ALLOWED TO ENTER THE EXCAVATED/BACKFILLED OR IPLETION OF ROOFTOP AREAS FOR BUILDING(S) CONNECTING TO INFILTRATION FACILITY, AS WELL AS RGROUND PARKING GARAGE, NO SITE DRAINAGE AND/OR STORM DRAINAGE IS TO ENTER THE PROPOSED FACILITY PRIOR TO RECEIVING APPROVAL FROM FIELD ENGINEER, THE INFILTRATION RATE OF THE PERMEAMETER TEST OR DOUBLE-RING INFILTRATION TEST, TO CONFIRM NO LOSS IN INFILTRATION NFIRMED, THE CONTRACTOR WILL BE RESPONSIBLE FOR THE REPAIR/ REMEDIATION OF THE CONTAMINATED GCAPE ARCHITECT, USING APPROVED MEASURES/ MATERIALS AND PRACTICES.	Plan Number	CONTAINED HEREIN REFLECTS AQUAFOR F THE INFORMATION AVAILABLE TO IT AT HHICH A THIRD PARTY MAKES OF THESE ECISION TO BE MADE ON IT, ARE THE S. AQUAFOR BEECH LTD ACCEPTS NO SUFFERED BY ANY THIRD PARTY AS A S BASED ON THESE DRAWINGS. THIRD IN THE WRITTEN CONSENT OF AQUAFOR INTENDED USE OF THESE DRAWINGS ARE LISTED WITHIN THE "ISSUED FOR" AND VGS. AQUAFOR BEECH LTD ACCEPTS NO
O ON THE PLANS ARE NOT STATIC AND MAY NEED TO BE UPGRADED / AMENDED AS SITE CONDITIONS CHANGE ORK AREAS. IF THE PRESCRIBED MEASURES ON THE PLANS ARE NOT EFFECTIVE IN PREVENTING THE	RESPONSIBILITY FOR DAMAGES, IF ANY, SU THESE DRAWINGS OUTSIDE THE INTENDED U	USE AND AFOREMENTIONED LIMITATIONS.
MEASURES SHOULD BE IMPLEMENTED IMMEDIATELY TO MINIMIZE POTENTIAL ECOLOGICAL IMPACTS. PART OF THE ESC PLAN. CONSTRUCTION SEQUENCING IS AN INTEGRAL COMPONENT OF ESC PROCEDURES/ AT NO CONTAMINATION/ REDUCTION IN INFILTRATION CAPACITY TAKES PLACE AS A RESULT OF	1. ALL ELEVATIONS ARE IN METRES ALL DIMENSIONS ARE IN METRIC U	AND REFERENCED TO LOCAL DATUM.
), AND MAINTAINED DURING THE CONSTRUCTION PHASES. ALL DAMAGED EROSION AND SEDIMENT CONTROL SPECTION.	CONTROL DURING CONSTRUCTION. 3. THE CONTRACTOR IS RESPONSIBL UTILITIES PRIOR TO CONSTRUCTION 4. THE CONTRACTOR SHALL DELINE, ON-SITE PRIOR TO THE START OPERATIONS WITHIN THE DEFINED	E FOR LOCATION OF ALL EXISTING
PROVED EQUIVALENT SHALL BE INSTALLED ALONG THE PERIMETER OF THE EXCAVATION AREA OF THE LITY CONSTRUCTION TO PREVENT SEDIMENT ENTRY INTO THE INFILTRATION CHAMBER.	OF PETROLEUM PRODUCTS, DEBR DELETERIOUS SUBSTANCES INTO A NATURAL FEATURE, STORM SEWER 5.EROSION AND SEDIMENT CONTR	RIS, RUBBLE, CONCRETE OR OTHER ANY WATER/WATERCOURSE/WETLAND OR SANITARY SEWER. OL MEASURES (AND TREE/SHRUB
THE EXCAVATED AREAS SHALL BE ALLOTTED SUFFICIENT TIME TO SETTLE OUT SUSPENDED SEDIMENTS AS CHARGE TO A DESIGNATED AREA AND SEDIMENT BAG.	MAINTAINED DURING THÉ CONSTRU OF SEDIMENT INTO THE INFILTRAT SEDIMENT CONTROL MEASURES	BE IMPLEMENTED PRIOR TO AND JCTION PHASES TO PREVENT ENTRY TION FACILITY. THESE EROSION AND WILL BE REMOVED FOLLOWING WHEN DISTURBED AREAS HAVE BEEN
FICANT STORM EVENT OCCUR THAT FILLS OR PARTIALLY FILLS THE EXCAVATED AREA/CONSTRUCTION SITE,	MUST BE STABILIZED TO THE AGENCIES, THE CLIENT AND OR TH	URBED FOR MORE THAN 30 DAYS SATISFACTION OF THE RELEVANT
REAS SHALL BE DISCHARGED OFF SITE INTO ACTIVE AND/OR INACTIVE STORM SEWERS. SEE NOTE 6 ABOVE. OF INFILTRATION FACILITIES DAMAGED AS A RESULT OF INADEQUATE OR IMPROPER SEDIMENT CONTROL.		E FOR REMOVAL AND DISPOSAL OF CONTROL MEASURES SHALL BE T THEY ARE FUNCTIONING PROPERLY
AREA ON-SITE PRIOR TO THE START OF WORK AND SHALL CONFINE OPERATIONS WITHIN THE DEFINED	THE POSITION OF THE POLE LINES, AND OTHER UTILITIES AND STRUCT SHOWN ON THE CONTRACT DRA	TURES ARE N O T NECESSARILY
S TO BE ENCLOSED WITH SILTATION CONTROL FENCE. MATERIALS ARE NOT TO BE STOCKPILED UPSTREAM	ACCURACY OF THE POSITION OF SUNOT GUARANTEED. <u>BEFORE STARTING WORK</u> THE CONTRACTOR SHALL CONFIRM T OF ALL SUCH UTILITIES, AND SHALL DAMAGE TO THEM MADE DURING THE	JCH UTILITIES AND STRUCTURES IS HE POSITION AND EXACT LOCATION ASSUME ALL LIABILITY FOR ANY
PRIOR TO CONSTRUCTION AND APPROVED BY THE ENGINEER.	LEGEND:	
INSTATED TO THE EXISTING CONDITIONS OR BETTER. L BE DISCHARGED OFF SITE INTO ACTIVE AND/OR INACTIVE STORM SEWERS OR WATERCOURSES.		Y SILT FENCE
E REMOVAL OF CONTROLS AND DISPOSED OF IN AN APPROVED ON-SITE LOCATION BY THE CONTRACTOR	SEDIMENT L	.OG
LY COMPLETED IN DESIGNATED AREAS.		NFILTRATION FACILITY
N FOR BOTH CONSTRUCTION PHASES.	SEWER PIP	
ATISFACTION OF THE RELEVANT AGENCIES, THE CLIENT, AND/OR THE SITE ENGINEER. OM CONSTRUCTION TRAFFIC FROM THE SITE EACH DAY.		TION ACCESS
STORM AND SANITARY MHS , DICBS AND CBS PRIOR TO CONSTRUCTION.	375mm Ø O	BSERVATION PORT
LETION OF BOTH PHASES OF CONSTRUCTION AND SITE RESTORATION, AND REINSTATE AFFECTED AREAS TO IE RELEVANT AGENCIES, THE CLIENT, AND/OR THE SITE ENGINEER.		
EQUIRED PRIOR TO THE COMMENCEMENT OF ANY AND ALL EXCAVATION ACTIVITIES.	6	
Y CONTROL FACILITIES IS PERMITTED TO A MAXIMUM 100mm OF FINAL GRADE AT INVERT OF 19mm LEVELING D BE EXCAVATED IMMEDIATELY PRIOR TO BACKFILLING WITH SPECIFIED AGGREGATE AVOID PREMATURE	5 4	
ER INSTALLATION IS ONLY TO OCCUR AFTER THE CONTRIBUTING DRAINAGE AREA HAS BEEN STABILIZED.	3 2 SUBMISSION No.2 FOR ISSI	UED REVIEW JM 18/02/25
ACILITY INVERT AS PER DESIGN DRAWINGS. SURFACE OF EXCAVATION SHALL BE SCARIFIED PRIOR TO	1 SUBMISSION No.1 FOR ISSU No. REVISI	0111 017 007 21
ATIONS AND DEPTHS AS MARKED ON THE ASSOCIATED DESIGN DRAWINGS. MAKE ALL REQUIRED PIPE		
LEVATION IS ACHIEVED.	0.7	
BASE MATERIALS APPROVED BY THE CONTRACT ADMINISTRATOR TO MINIMUM 300mm THICKNESS. RIALS ABOVE INFILTRATION FACILITY AREA AS PER DESIGN DRAWING.	03	OF 11
	Aquafor E	Beech
ST TO ALLOW FOR CONSTRUCTION ACCESS VIA THE SITE ENTRANCEWAY OFF RUE OSHEDINAA STREET. UNTIL ALL CONSTRUCTION AND RESTORATION WORKS FOR PHASE 1 HAVE BEEN COMPLETED.		Limited
N SHALL COMMENCE ONLY AFTER COMPLETE INSTALLATION OF THE PHASE 1 FACILITY, INCLUDING CILITY. EROSION AND SEDIMENT CONTROLS ARE TO REMAIN IN PLACE UNTIL ALL CONSTRUCTION AND	#6-202-2600 SKYMARK Ave, MISSISSAUGA, ONTARIO, L4W 5B2 PHONE: (905) 629-0099, FAX:	
	Project Title	
AREA UNDER AREA TO BE		CK 6 MANAGEMENT
CONSTRUCTION PROTECTED	INFILTRATION F	ACILITY DESIGN
PAGE WIRE FENCE MEASURE SUPPORT PARG WIRE FENCE PARG WIRE FENCE	PROFESSION4	
Image: Parks with a park of the park	C. J. DENICH	
	18/02/2025	
E RS - STANDARD T-BAR T-12	ROUNCE OF ONTABLE	
	Drawing Title	
RRAFENCE, OR EQUIVALENT, OR CONSTRUCTED AS		& SEDIMENT Ol Plan
I EQUIVALENT OPENING SIZE OF 0.15mm AND A MAXIMUM	Scale	
AL OVERLAP OF 1 METER AT JOINTS.	Scale 1:15	0
POLYETHYLENE OR APPROVED EQUAL.	Design J.M.	Date 18/02/2025
EAVY DUTY SEDIMENT FENCE DETAIL	Drawn K.M	Checked
	Project No.	Drawing No.
	67564	ESC-1

REVIEWED BY DEVELOPMENT REVIEW SERVICES BRANCH

#67564

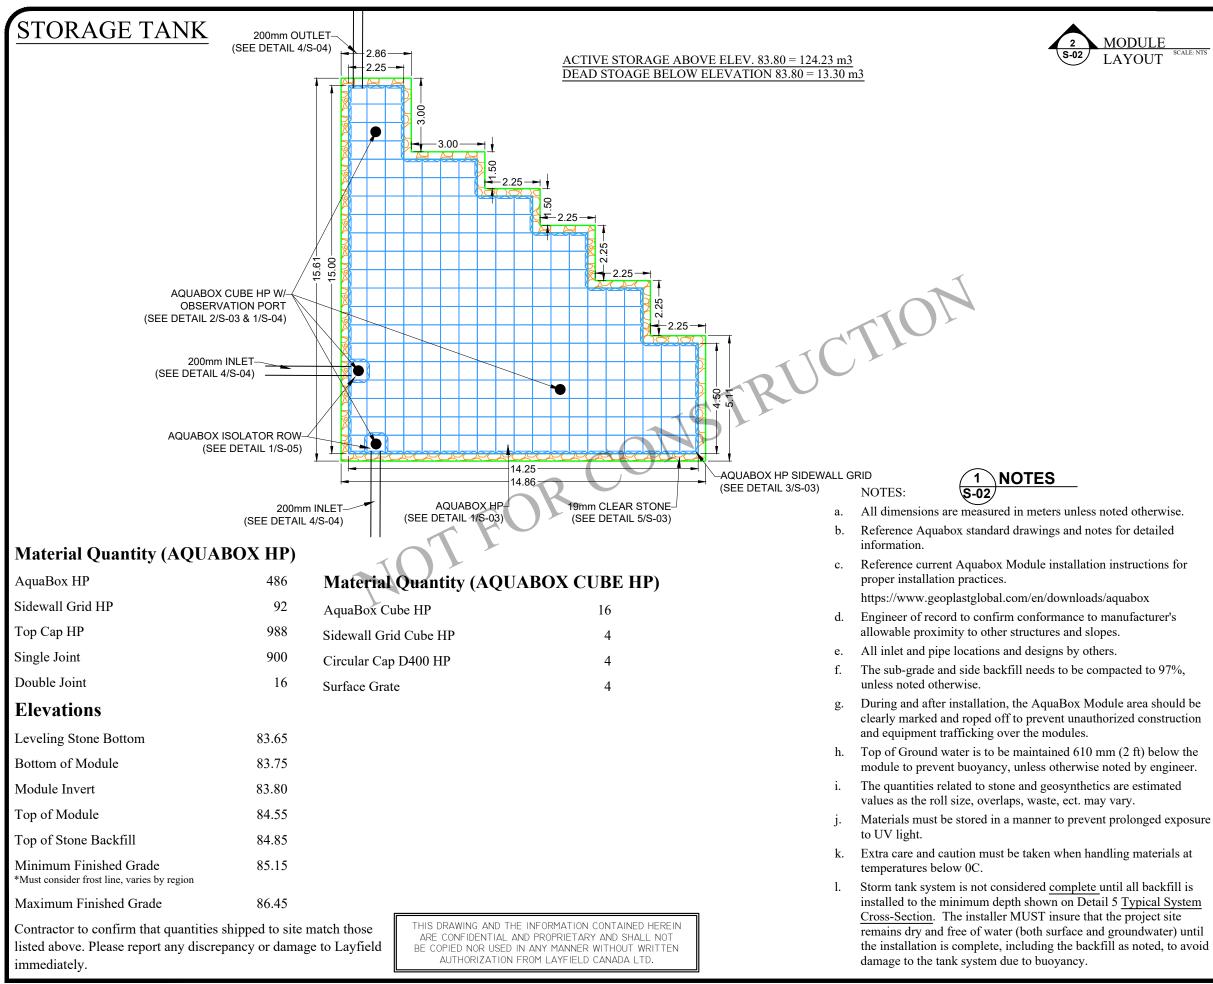



117 Basaltic Rd, Concord, ON L4K 1G4 Canada Ph: (905) 761-9123 www.layfieldgroup.com


Total Storage Volume	137.53 m ³			
Module Storage Volume	e	106.70 m ³		
Stone Storage Volume		30.83 m ³		
System Footprint		156.85 m ²		
Estimated Geotextile Fa	bric NuBarrier	427.47 m ²		
Estimated Geotextile Fa	bric LP8	1015.09 m ²		
Estimated Liner		507.55 m ²		
Estimated GeoGrid		m ²		
Estimated Stone Volum	e	77.07 m ³		
Excavation Required		235.27 m ³		
Minimum Excavation D	Minimum Excavation Depth			
Stone Type		19mm Clear Stone		
Stone Void Space				
Number of Module Lay	ers	1		
Allowable Loading		HS-25		
Surface	Surface Paved Surface			
Minimum Top Cover	0.60 m	0.80 m		
Maximum Tank Depth	2.60 m			
Rue	Rue Oshedinaa Street			

Ottawa, ON

REV	Record of Changes	Date	By
\triangle	Preliminary Drawing	09APRIL2024	AK
Project	Number: OP2024-8892		
Page 1	Name: Storage	Facility Layout (L-1)	
Draw	n by: AK	Checked By: JF	
Scale	·· NTS	Date: 09APRIL2024	
RECON ENGIN THE L. LAWS DESIG	AYOUT DRAWING WAS PREPA RD FOR THE PROPOSED SYSTEM IEER OF RECORD TO REVIEW T AYOUT AND DESIGN IS IN FULI AND REGULATIONS AND THAT NED IN ACCORDANCE WITH GINOT REVIEW OR APPROVE PLA	A. IT IS THE RESPONSIBILIT HE INFORMATION AND ENS COMPLIANCE WITH ALL A THE AQUABOX SYSTEM H. EOPLAST'S REQUIREMENTS.	Y OF THE URE THAT PPLICABLE AS BEEN
Sheet:		D 44	

04 OF 11

ANSI B Size Page (Horizontal)

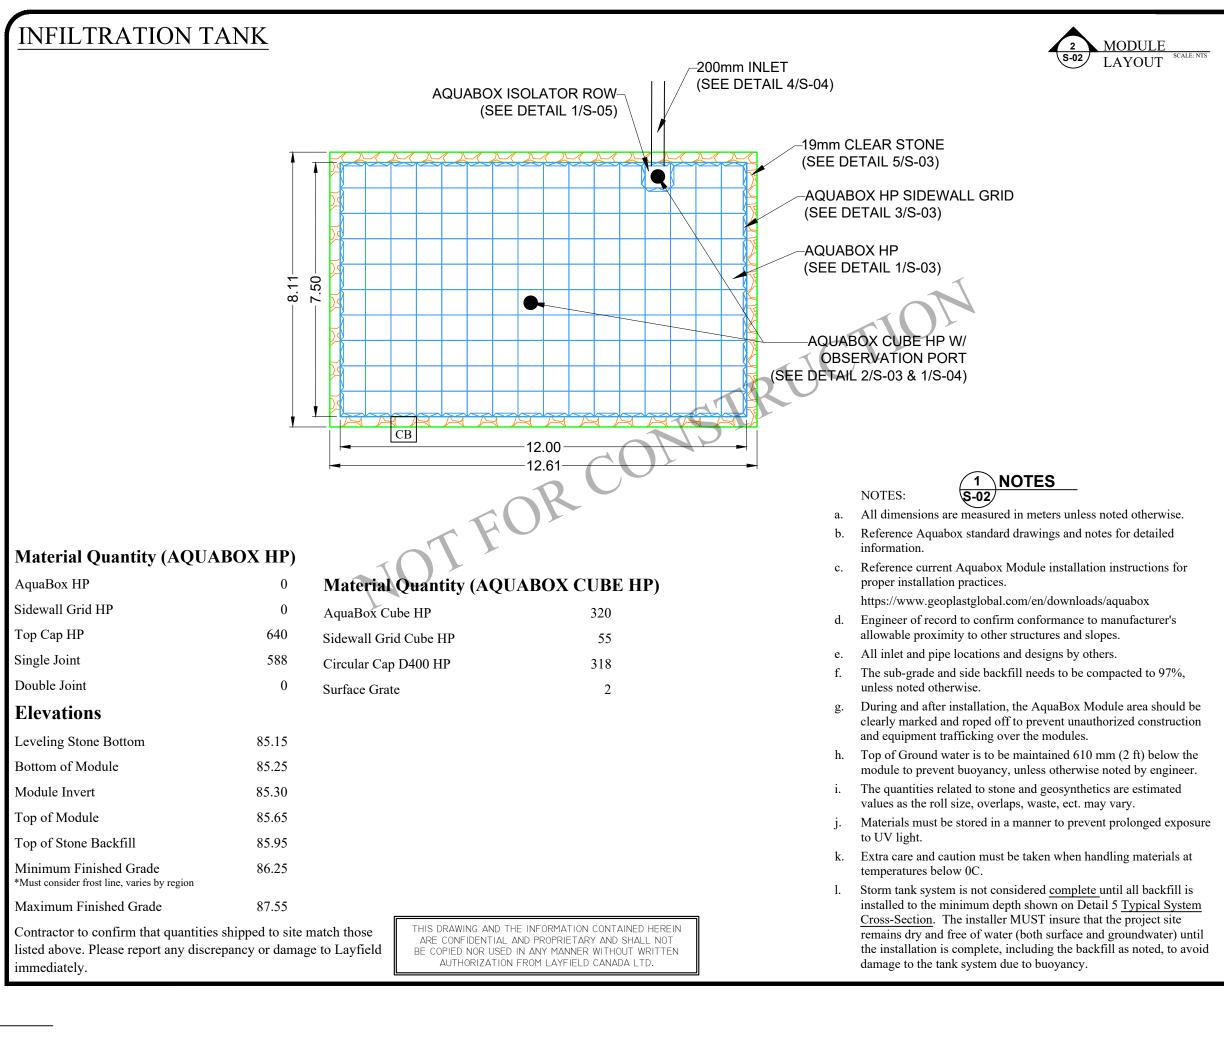



117 Basaltic Rd, Concord, ON L4K 1G4 Canada Ph: (905) 761-9123 www.layfieldgroup.com

Total Storage Volume	52.00 m ³		
Module Storage Volum	e	33.68 m ³	
Stone Storage Volume		18.32 m ³	
System Footprint		102.26 m ²	
Estimated Geotextile Fa	bric NuBarrier	263.44 m ²	
Estimated Geotextile Fa	bric LP8	463.00 m ²	
Estimated Liner		45.00 m ²	
Estimated GeoGrid		m ²	
Estimated Stone Volum	e	45.81 m ³	
Excavation Required	Excavation Required		
Minimum Excavation Depth		1.1 m	
Stone Type		19mm Clear Stone	
Stone Void Space		40%	
Number of Module Lay	ers	0.5	
Allowable Loading		HS-25	
Surface	Surface Paved Surface		
Minimum Top Cover	um Top Cover 0.60 m		
Maximum Tank Depth 2.30 m 2.20 m		2.20 m	
Rue Oshedinaa Street			

- - ---- ----- -- --


Ottawa, ON

REV	Record of Changes	Date	By
\triangle	Preliminary Drawing	09APRIL2024	AK
Project	Number: OP2024-8892		
Page 1	Name: Infiltrati	on Facility Layout (L-2))
Draw	n by: AK	Checked By: JF	
Scale	· NTS	Date: 09APRIL2024	
RECO ENGIN THE L LAWS	AYOUT DRAWING WAS PREPA RD FOR THE PROPOSED SYSTEM IEER OF RECORD TO REVIEW T AYOUT AND DESIGN IS IN FULI AND REGULATIONS AND THAT NED IN ACCORDANCE WITH GI	A. IT IS THE RESPONSIBILITY HE INFORMATION AND ENSU COMPLIANCE WITH ALL AF THE AQUABOX SYSTEM HA	OF THE JRE THAT PLICABLE AS BEEN

DOES NOT REVIEW OR APPROVE PLANS, SIZING OR DESIGNS.

05 OF 11

ANSI B Size Page (Horizontal)

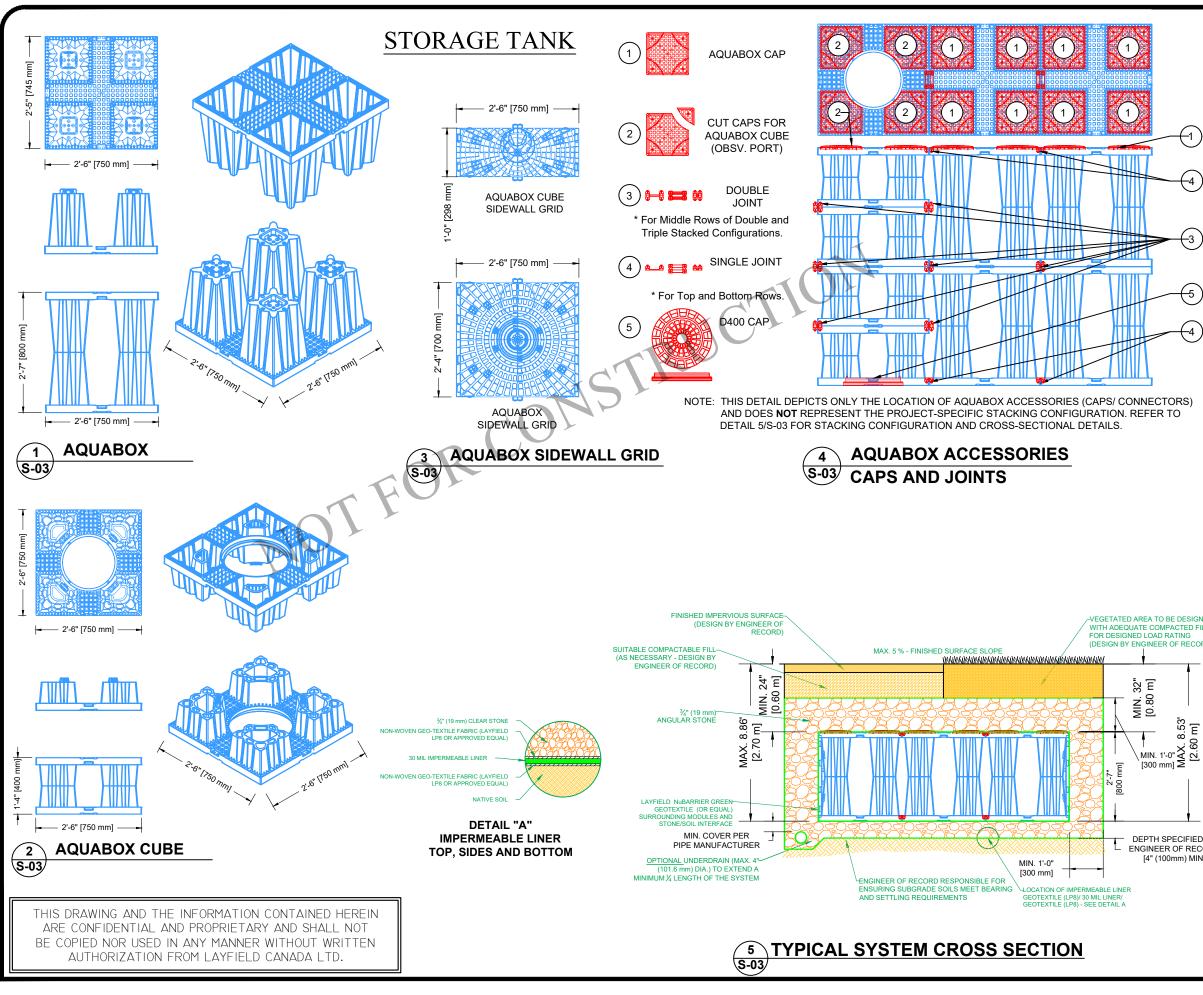




Total Storage Volume		137.53 m ³
Module Storage Volume	2	106.70 m ³
Stone Storage Volume		30.83 m ³
System Footprint		156.85 m ²
Estimated Geotextile Fa	bric NuBarri	er 427.47 m^2
Estimated Geotextile Fa	bric LP8	1015.09 m ²
Estimated Liner		507.55 m ²
Estimated GeoGrid	Estimated GeoGrid	
Estimated Stone Volume		77.07 m ³
Excavation Required		235.27 m ³
Minimum Excavation Depth		1.51 m
Stone Type		19mm Clear Stone
Stone Void Space		
Number of Module Layers		1
Allowable Loading		HS-25
Surface	Paved Surface	Vegetated/ Unpaved
Minimum Top Cover	0.60 m	0.80 m
Maximum Tank Depth	2.70 m	2.60 m

Ottawa, ON

REV	Record of Changes	Date	By	
\triangle	Preliminary Drawing	09APRIL2024	AK	
Project	t Number: OP2024-8892			
Page Name: TYP. Construction Details (CD-1)				
Draw	n by: AK	Checked By: JF		
Scale	» NTS	Date: 09APRIL2024		
THIS LAYOUT DRAWING WAS PREPARED TO SUPPORT THE ENGINEER OF RECORD FOR THE PROPOSED SYSTEM. IT IS THE RESPONSIBILITY OF THE ENGINEER OF RECORD TO REVIEW THE INFORMATION AND ENSURE THAT THE LAYOUT AND DESIGN IS IN FULL COMPLIANCE WITH ALL APPLICABLE LAWS AND REGULATIONS AND THAT THE AQUABOX SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH GEOPLAST'S REQUIREMENTS. LAYFIELD DOES NOT REVIEW OR APPROVE PLANS, SIZING OR DESIGNS.				
LAWS DESIG	AND REGULATIONS AND THAT THE IN ACCORDANCE WITH GINNOT REVIEW OR APPROVE PLA	Γ THE AQUABOX SYSTEM Η EOPLAST'S REQUIREMENTS	IAS BEE	

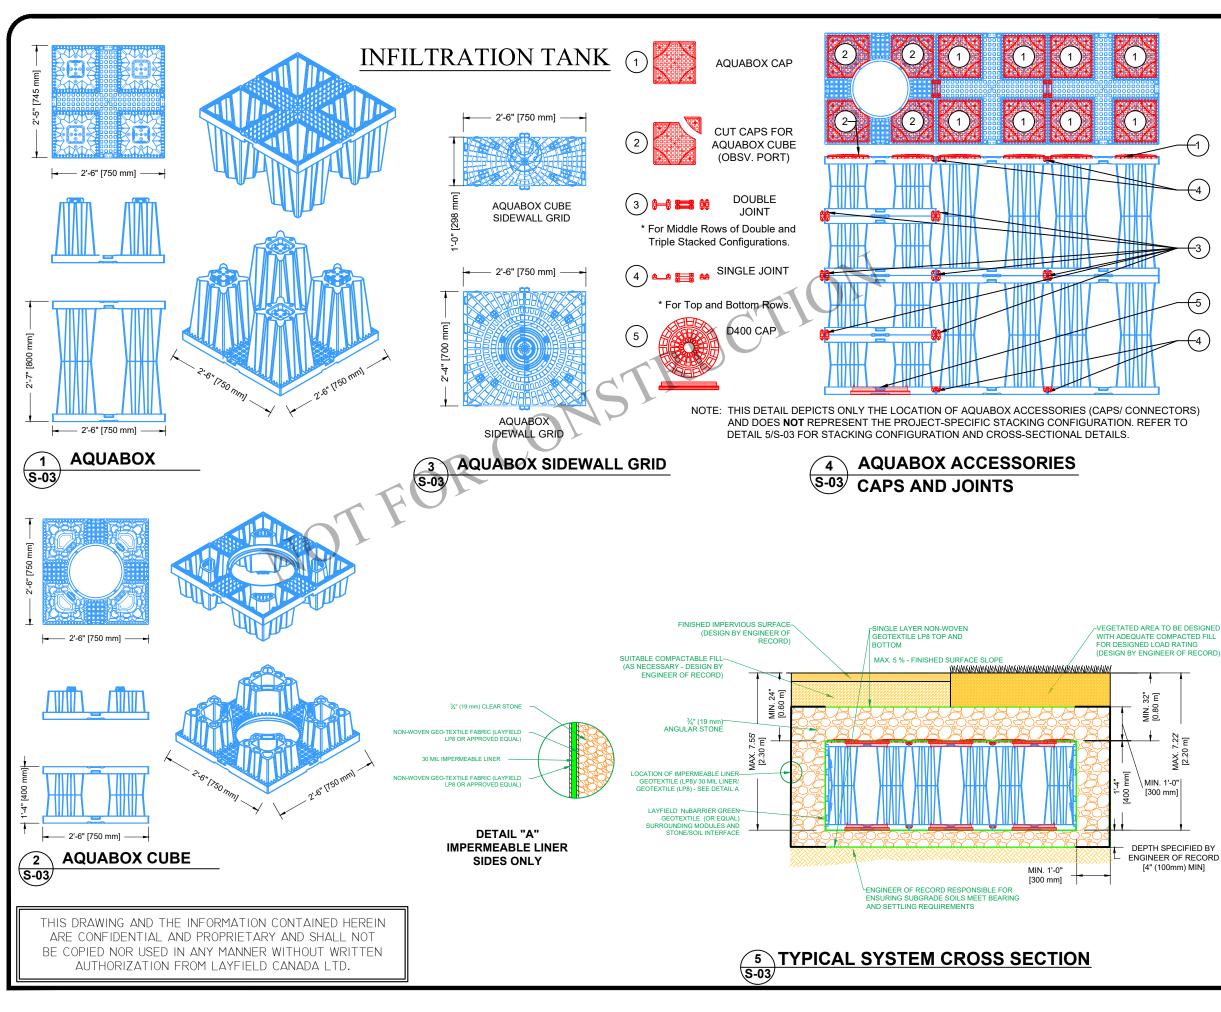




	-	
Total Storage Volume		52.00 m ³
Module Storage Volume	e	33.68 m ³
Stone Storage Volume		18.32 m^3
System Footprint		102.26 m ²
Estimated Geotextile Fa	bric NuBarrier	263.44 m ²
Estimated Geotextile Fa	bric LP8	463.00 m ²
Estimated Liner		45.00 m ²
Estimated GeoGrid	Estimated GeoGrid	
Estimated Stone Volume		45.81 m ³
Excavation Required		112.48 m ³
Minimum Excavation Depth		1.1 m
Stone Type		19mm Clear Stone
Stone Void Space	Stone Void Space	
Number of Module Layers		0.5
Allowable Loading		HS-25
Surface	Paved Surface	Vegetated/ Unpaved
Minimum Top Cover	0.60 m	0.80 m
Maximum Tank Depth 2.30 m		2.20 m

Ottawa, ON

REV	Record of Changes	Date	By
\triangle	Preliminary Drawing	09APRIL2024	AK
D : (N 1 000004 0000		
Project	Number: OP2024-8892		
Page N	TYP. Constru	action Details (CD-2)	
Drawn	n by: AK	Checked By: JF	
Scale	· NTS	Date: 09APRIL2024	
RECOF ENGIN THE LA	AYOUT DRAWING WAS PREPA RD FOR THE PROPOSED SYSTEN EER OF RECORD TO REVIEW T AYOUT AND DESIGN IS IN FULI AND REGULATIONS AND THA'	M. IT IS THE RESPONSIBILIT HE INFORMATION AND ENS L COMPLIANCE WITH ALL A	Y OF THE URE THAT PPLICABLI

Sheet:

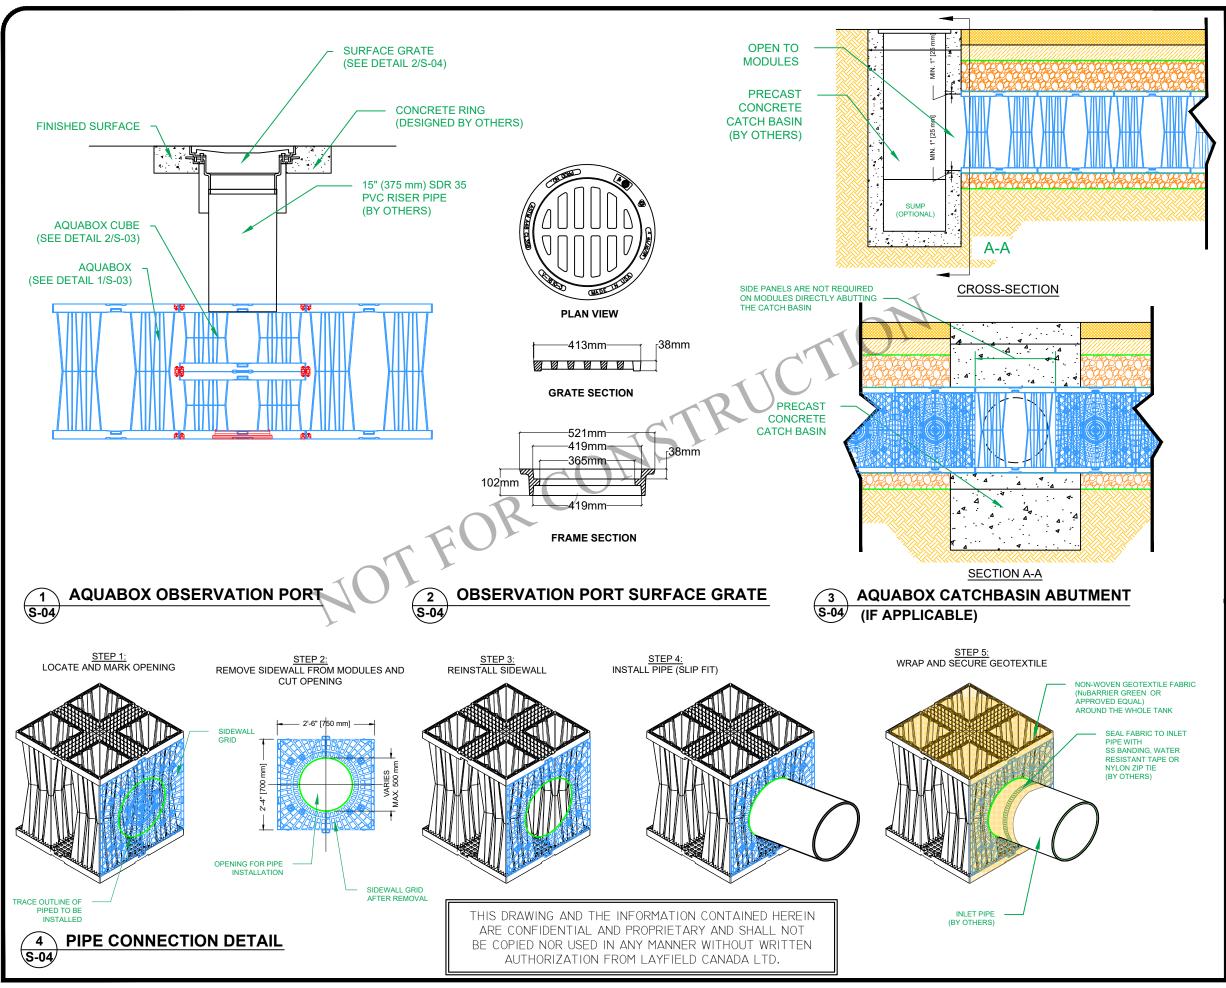



	-	
Total Storage Volume		189.53 m ³
Module Storage Volume	e	140.38 m ³
Stone Storage Volume		49.15 m ³
System Footprint		259.11 m ²
Estimated Geotextile Fa	bric NuBarrier	690.91 m ²
Estimated Geotextile Fa	bric LP8	1478.09 m ²
Estimated Liner		552.55 m ²
Estimated GeoGrid		m ²
Estimated Stone Volume		122.88 m ³
Excavation Required		347.75 m ³
Minimum Excavation D	epth	1.5/1.1 m
Stone Type		19mm Clear Stone
Stone Void Space		40%
Number of Module Lay	ers	1/0.5
Allowable Loading		HS-25
Surface	Paved Surface	Vegetated/ Unpaved
Minimum Top Cover	0.60 m	0.80 m
Maximum Tank Depth	2.70/2.30 m	2.60/2.20 m

Ottawa, ON

REV	Record of Changes	Date	Ву	
\triangle	Preliminary Drawing	09APRIL2024	AK	
Project Number: OP2024.8892				

Project Number: OP2024-8892

Page Name


TYP. Pipe Penetration Details (CD-3)

Drawn by: AK	Checked By: JF
Scale: NTS	Date: 09APRIL2024

THIS LAYOUT DRAWING WAS PREPARED TO SUPPORT THE ENGINEER OF RECORD FOR THE PROPOSED SYSTEM. IT IS THE RESPONSIBILITY OF THE ENGINEER OF RECORD TO REVIEW THE INFORMATION AND ENSURE THAT THE LAYOUT AND DESIGN IS IN FULL COMPLIANCE WITH ALL APPLICABLE LAWS AND REGULATIONS AND THAT THE AQUABOX SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH GEOPLAST'S REQUIREMENTS. LAYFIELD DOES NOT REVIEW OR APPROVE PLANS, SIZING OR DESIGNS.

Sheet:

08 OF 11

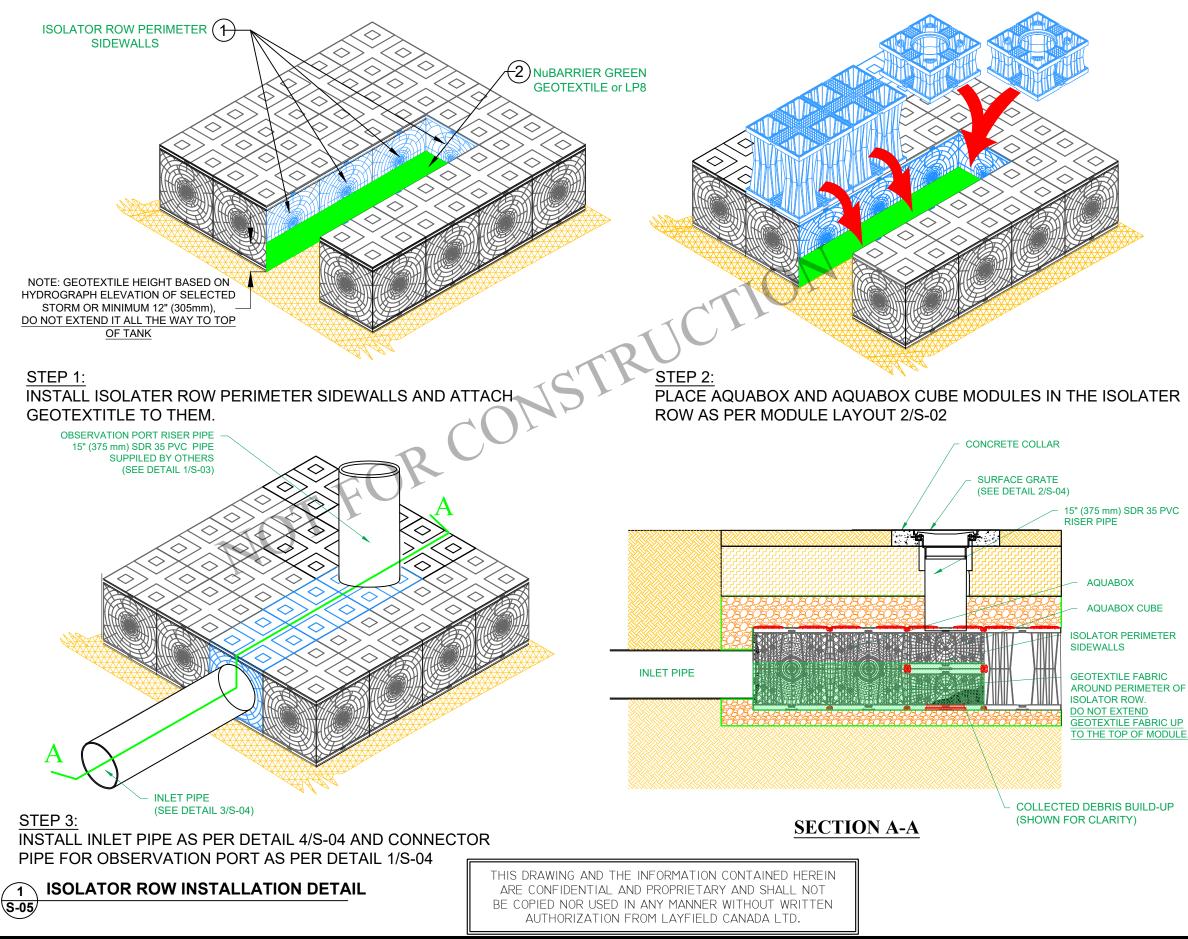



Total Storage Volume		189.53 m ³
Module Storage Volume		140.38 m ³
Stone Storage Volume		49.15 m ³
System Footprint		$259.11 \mathrm{m}^2$
Estimated Geotextile Fa	bric NuBarrier	690.91 m ²
Estimated Geotextile Fa	bric LP8	1478.09 m ²
Estimated Liner		552.55 m ²
Estimated GeoGrid	Estimated GeoGrid	
Estimated Stone Volum	Estimated Stone Volume	
Excavation Required		347.75 m ³
Minimum Excavation Depth		1.5/1.1 m
Stone Type		19mm Clear Stone
Stone Void Space		40%
Number of Module Layers		1/0.5
Allowable Loading		HS-25
Surface	Paved Surface	Vegetated/ Unpaved
Minimum Top Cover	0.60 m	0.80 m
Maximum Tank Depth 2.70/2.30 m		2.60/2.20 m

Ottawa, ON

REV	Record of Changes	Date	By
\triangle	Preliminary Drawing	09APRIL2024	AK

Project Number: OP2024-8892

Page Name:

TYP. Isolater Row Details (CD-4)

	· · · · · ·
Drawn by: AK	Checked By: JF
Scale: NTS	Date: 09APRIL2024

THIS LAYOUT DRAWING WAS PREPARED TO SUPPORT THE ENGINEER OF RECORD FOR THE PROPOSED SYSTEM. IT IS THE RESPONSIBILITY OF THE ENGINEER OF RECORD TO REVIEW THE INFORMATION AND ENSURE THAT THE LAYOUT AND DESIGN IS IN FULL COMPLIANCE WITH ALL APPLICABLE LAWS AND REGULATIONS AND THAT THE AQUABOX SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH GEOPLAST'S REQUIREMENTS. LAYFIELD DOES NOT REVIEW OR APPROVE PLANS, SIZING OR DESIGNS.

09 OF 11

General Conditions

- Review installation procedures and coordinate the installation with other construction activities, such as grading, excavation, utilities, construction access, erosion control, etc.
- Engineered Contract Drawings supersede all provided documentation, as the information furnished in this document is based on a typical installation.
- Coordinate the installation with the manufacturer's representative/distributor to be on-site to review start-up procedures and installation instructions.
- Components shall be unloaded, handled and stored in an area protected from traffic and in a manner to prevent damage.
- Assembled modules may be walked on, but vehicular traffic is prohibited until backfilled per the Manufacturer's requirements. Protect the installation against damage with highly visible construction tape, fencing, or other means until construction is complete.
- Ensure all construction occurs in accordance with Federal, Provincial and Local Laws, Ordinances, Regulations, and Safety Requirements.
- Extra care and caution should be taken when temperatures are at or below 0° C.

NOT FOR CONSTRUCTION

These drawings shall not be used for construction until they have been reviewed for all design aspects (structural, geotechnical, stormwater) and approved by the Engineer of Record for the Project.

It is the Buyer's responsibility to ensure that the design into which the Product will be used has been approved by the Engineer of Record (not Layfield) with a review that may include, but not be limited to, Inlet and outlet configurations including inverts and pipe connections, storage volume, system footprint, Aquabox elevations including cover soil requirements, buoyancy and groundwater conditions, and proximity to structures and slopes.

Site design/engineering elements may include but not be limited to the following:

- Review elevations and if necessary adjust grading to ensure the chamber cover requirements are met.
- Evaluating site-specific information on soil conditions and/or bearing capacity.
- Assessing the bearing resistance (allowable bearing capacity) of the subgrade soils and the depth of foundation stone with consideration for the range of expected soil moisture conditions.

1.0 Basin Excavation

- 1. Stake out and excavate to elevations per approved plans. Excavation Requirements:
 - a. Sub-grade excavation must be a minimum of 4" (102 mm) below the designed AquaBox Module

invert.

- b. The excavation should extend a minimum of 12" (305 mm) beyond the AquaBox dimensions in each length and width (an additional 24" [610 mm] in total length and total width) to allow for adequate placement of side backfill material.
- c. Remove objectionable material encountered within the excavation, including protruding material from the walls.
- d. Furnish, install, monitor, and maintain excavation support (e.g., shoring, bracing, trench boxes, etc.) as required by Federal, Provincial and Local Laws, Ordinances, Regulations, and Safety Requirements.

2.0 Sub-Grade Requirements

- Sub-grade shall be unfrozen, level (plus or minus 1%), and free of lumps, or debris with no standing water, mud or muck. Do not use materials nor mix with materials that are frozen and/or coated with ice or frost.
- 2. Unstable, unsuitable, and/or compromised areas should be brought to the Engineer's attention and mitigating efforts determined prior to compacting the sub-grade.
- 3. Sub-grade must be compacted to 97% Standard Proctor Density or as approved by the Engineer of Record. If code requirements restrict subgrade compaction, it is the requirement of the geotechnical engineer to verify that the bearing capacity and settlement criteria for support of the system are met.

* The Engineer of Record shall confirm minimum soil bearing capacity required based on Load Rating and top cover depth. Minimum soil bearing capacity is required so that settlements are less than 1" through the entire sub-grade and do not exceed long-term 1/2" differential settlement between any two adjacent units within the system. Sub-grade must be designed to ensure soil bearing capacity is maintained throughout all soil saturation levels.

3.0 Leveling Bed Installation

- 1. Install geotextile fabric and/or liner material, as specified.
 - a. Geotextile fabric shall be placed per the manufacturer's recommendations.
 - b. Additional material to be utilized for wrapping above the system must be protected from damage until use.
- 2. After the geotextile is secured, place a minimum 4" (102 mm) Leveling Bed.
 - a. Material should be a 3/4" (19 mm) angular stone meeting AASTHO #56, 57, 67, 68 Material specifications.
 - b. Material should be raked free of voids, lumps, debris, sharp objects, and plate vibrated to a level

with a maximum 1% slope.

3. Correct any unsatisfactory conditions.

4.0 AquaBox Module Assembly and Placement

1.0 AquaBox Assembly

AquaBox modules are delivered to the site as palletized components requiring simple assembly. No special equipment, tools or bonding agents are required; only a rubber mallet. The modules can be pre-assembled either inside or outside the trench. The pre-assembled modules must then be organized according to the design specifications.

ASSEMBLY INSTRUCTIONS:

1. Each AquaBox features plug and socket connections which makes assembling the modules quick and easy. Simply lay one element on the ground and join it to another by applying some pressure on the top.

GENERAL NOTES:

- Remove packaging material and check for any damage. Report any damaged components to an AquaBox Distributor or Layfield personnel.
- AquaBox components are backed by a 50 year warranty when installed per the manufacturer's recommendations.

2.0 AquaBox Placement

- 1. Install geotextile fabric and/or liner material, as specified.
 - a. Geotextile fabric shall be placed per the manufacturer's recommendations.
 - b. Additional material to be utilized for wrapping above the system must be protected from damage until use.
- 2. Mark the footprint of the modules for placement.
 - a. Ensure module perimeter outline is square or similar prior to Module placement.
 - b. Care should be taken to note any connections, ports or other irregular units to be placed.
- 3. Install the individual modules by hand, as detailed below.
 - a. The modules should be installed as shown in the AquaBox submittal drawings. Place AquaBox Cubes at the location of observation ports.
 - b. Modules are connected horizontally to adjacent modules with Single or Double Joints.
 - c. Use Single Joints for Bottom and Top rows while Double Joints are used for middle rows in Double or Triple stacking configuration.
 - d. For double/ triple stack configurations:
 - i. Use the Single Joints for the first bottom row.
 - ii. Install Double Joints on all the middle rows.
 - iii. Place the upper module directly on top of the bottom module in the same direction.



Total Storage Volume		189.53 m ³	
Module Storage Volume		140.38 m ³	
Stone Storage Volume		49.15 m ³	
System Footprint		259.11 m ²	
Estimated Geotextile Fa	bric NuBarrier	690.91 m ²	
Estimated Geotextile Fa	bric LP8	1478.09 m ²	
Estimated Liner		552.55 m ²	
Estimated GeoGrid	Estimated GeoGrid		
Estimated Stone Volume		122.88 m ³	
Excavation Required		347.75 m ³	
Minimum Excavation Depth		1.5/1.1 m	
Stone Type		19mm Clear Stone	
Stone Void Space		40%	
Number of Module Layers		1/0.5	
Allowable Loading		HS-25	
Surface	Paved Surface	Vegetated/ Unpaved	
Minimum Top Cover	0.60 m	0.80 m	
Maximum Tank Depth 2.70/2.30 m		2.60/2.20 m	

Rue Oshedinaa Street

Ottawa, ON

REV	Record of Changes	Date	Ву
\triangle	Preliminary Drawing	09APRIL2024	AK

Project Number: OP2024-8892

Page Name

Supplementary Notes (CD-5)

Drawn by: AK	Checked By: JF
Scale: NTS	Date: 09APRIL2024

THIS LAYOUT DRAWING WAS PREPARED TO SUPPORT THE ENGINEER OF RECORD FOR THE PROPOSED SYSTEM. IT IS THE RESPONSIBILITY OF THE ENGINEER OF RECORD TO REVIEW THE INFORMATION AND ENSURE THAT THE LAYOUT AND DESIGN IS IN FULL COMPLIANCE WITH ALL APPLICABLE LAWS AND REGULATIONS AND THAT THE AQUABOX SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH GEOPLAST'S REQUIREMENTS. LAYFIELD DOES NOT REVIEW OR APPROVE PLANS, SIZING OR DESIGNS.

10 OF 11

Sheet:

ANSI B Size Page (Horizontal)

- 4. Install the modules to completion, taking care to avoid damage to the geotextile and/or liner material.
- 5. Once all the modules have been placed, Install SIDEWALLS on the perimeter and CAPS on the top.
- 6. Locate any ports or other penetration of the AguaBox.
 - a. Install ports/penetrations in accordance with the approved submittals, contract documents, and manufacturer's recommendations.
- 6. Upon completion of module installation, wrap the modules in geotextile fabric and/or liner.
 - a. Geotextile fabric shall be wrapped and secured per the manufacturer's recommendations.
 - b. Seal any ports/penetrations per the Manufacturer's requirements

Notes:

• If damage occurs to the geotextile fabric or impermeable liner, repair the material in accordance with the geotextile/liner Manufacturer's recommendations

6.0 Side Backfill

- 1. Inspect all geotextiles, ensuring that no voids or damage exists; which will allow sediment into the AquaBox system.
- 2. Adjust the stone/soil interface geotextile along the side of the native soil to ensure the geotextile is taught to the native soil.
- 3. Once the geotextile is secured, begin to place the Side Backfill.
 - a. Material should be a 3/4" (19 mm) angular stone meeting AASTHO #56, 57, 67, 68 Material specifications.
 - b. Backfill sides "evenly" around the perimeter without exceeding single 12" (305 mm) lifts.
 - c. Place material utilizing an excavator, dozer, or conveyor boom.
 - d. Utilize a plate vibrator to settle the stone and provide uniform distribution.

Notes:

• Do not apply vehicular load to the modules during placement of side backfill. All material placement should occur with equipment located on the native soil surrounding the system.

• If damage occurs to the geotextile fabric or impermeable liner, repair the material in accordance with the geotextile/liner Manufacturer's recommendations

7.0 Top Backfill (Stone)

- 1. Begin to place the Top Backfill.
 - a. Material should be a 3/4" (19 mm) angular stone meeting AASTHO #56, 57, 67, 68 Material

specifications.

b. Place material utilizing an excavator, dozer, or conveyor boom and use a walk-behind plate vibrator to settle the stone and provide even distribution.

DO NOT DRIVE ON THE MODULES WITHOUT REQUIRED MINIMUM COVER.

- 2. Upon completion of Top Backfilling, wrap the system in geotextile fabric and/or liner per the manufacturer's recommendations.
- 3. Install metallic tape around the perimeter of the system to mark the area for future utility detection.

Notes:

• If damage occurs to the geotextile fabric or impermeable liner, repair the material in accordance with the geotextile/liner Manufacturer's recommendations.

• Only Low Ground Pressure tracked equipment can be used during construction with at least 300 mm suitably compacted covering created over the AquaBox System. Abrupt maneuvers such as steering should be avoided at this stage.

• The passage of heavy goods vehicles with a wheel load of more than 50 kN over the basin is possible if the thickness of the covering is adequately compacted and not less than 600 mm. When dumping the backfill material, the load per wheel shall not exceed 50 kN.

8.0 Suitable Compactable Fill

Following Top Backfill placement and geotextile fabric wrapping; complete the installation as noted below.

Vegetated Area

- 1. Place fill onto the geotextile.
 - a. Maximum 12" (305 mm) lifts, compacted with a vibratory plate or walk behind roller to a minimum of 90% Standard Proctor Density.
 - b. The minimum top cover/backfill to finished grade must not be less then that shown on Detail 5 Typical System Cross Section, and the maximum depth from final grade to the bottom of the lowest module should not exceed that shown on Detail 5.
- 2. Finish to the surface and complete with vegetative cover.

Impervious Area

- 1. Place fill onto the geotextile.
 - a. Maximum 12" (305 mm) lifts, compacted with a vibratory plate or walk behind roller to a minimum of 90% Standard Proctor Density.
 - b. b. The minimum top cover/backfill to finished grade must not be less then that shown on Detail 5 Typical System Cross Section, and

the maximum depth from final grade to the bottom of the lowest module should not exceed that shown on Detail 5.

2. Finish to the surface and complete with asphalt, concrete, etc.

Notes:

• Adequate cover for frost protection must be considered, this will vary by Region.

• A vibratory roller may only be utilized after a minimum cover has been placed or for the installation of the asphalt wearing course.

• If damage occurs to the geotextile fabric, repair the material in accordance with the geotextile Manufacturer's recommendations.

• For most recent installation guidelines visit: https://www.geoplastglobal.com/en/downloads/aquabox

9.0 Inspection and Maintenance

If the following inspections and maintenance procedures are not followed as specified below then the end-user is responsible for the performance of the modules. This maintenance procedure must be performed after termination of site operations, heavy rainfall, flooding, or any incident that will vary the flow of water drastically.

Inspection

- 1. Inspect all observation ports, inflow, and outflow connection and the discharge area
- 2. Identify and log any sediment and debris accumulation, system backup, or discharge rate changes.
- 3. If there is a sufficient need for a cleanout, contact a local cleaning company for assistance.
- 4. Inspect module for any damaged components, movement, or other irregularities and replace immediately.

Cleaning:

- 1. If a pre-treatment device is installed, follow manufacturer recommendations.
- 2. Using a vacuum pump truck, evacuate debris from the inflow and outflow points.
- 3. Flush the system with clean water, forcing debris from the system.
- 4. Repeat steps 2 and 3 until no debris is evident

Notes:

• For spray probe cleaning, the use of a 90° rotating nozzle with a 45° water jet is recommended. The nozzles used should have a pressure of 80 to 120 bar; higher pressures may damage the geotextile.

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY AND SHALL NOT BE COPIED NOR USED IN ANY MANNER WITHOUT WRITTEN AUTHORIZATION FROM LAYFIELD CANADA LTD.



Total Storage Volume		189.53 m ³	
Module Storage Volume		140.38 m ³	
Stone Storage Volume		49.15 m ³	
System Footprint		$259.11 \mathrm{m}^2$	
Estimated Geotextile Fa	bric NuBarrier	690.91 m ²	
Estimated Geotextile Fa	bric LP8	1478.09 m ²	
Estimated Liner		552.55 m ²	
Estimated GeoGrid		m ²	
Estimated Stone Volume		122.88 m ³	
Excavation Required		347.75 m ³	
Minimum Excavation Depth		1.5/1.1 m	
Stone Type		19mm Clear Stone	
Stone Void Space		40%	
Number of Module Layers		1/0.5	
Allowable Loading		HS-25	
Surface	Paved Surface	Vegetated/ Unpaved	
Minimum Top Cover	0.60 m	0.80 m	
Maximum Tank Depth 2.70/2.30 m		2.60/2.20 m	

Rue Oshedinaa Street

Ottawa, ON

REV	Record of Changes	Date	By	
\triangle	Preliminary Drawing	09APRIL2024	AK	
Project	Number: OP2024-8892			
Page 1	Name: Supplemen	ntary Notes (CD-6)		
Draw	n by: AK	Checked By: JF		
Scale	: NTS	Date: 09APRIL2024		
THIS LAYOUT DRAWING WAS PREPARED TO SUPPORT THE ENGINEER OF RECORD FOR THE PROPOSED SYSTEM. IT IS THE RESPONSIBILITY OF THE ENGINEER OF RECORD TO REVIEW THE INFORMATION AND ENSURE THAT THE LAYOUT AND DESIGN IS IN FULL COMPLIANCE WITH ALL APPLICABLE LAWS AND REGULATIONS AND THAT THE AQUABOX SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH GEOPLAST'S REQUIREMENTS. LAYFIELD DOES NOT REVIEW OR APPROVE PLANS, SIZING OR DESIGNS.				
Sheet:	11 ()F 11		