



BLOCK 3
REGISTERED PLAN 4M-1634
CITY OF OTTAWA

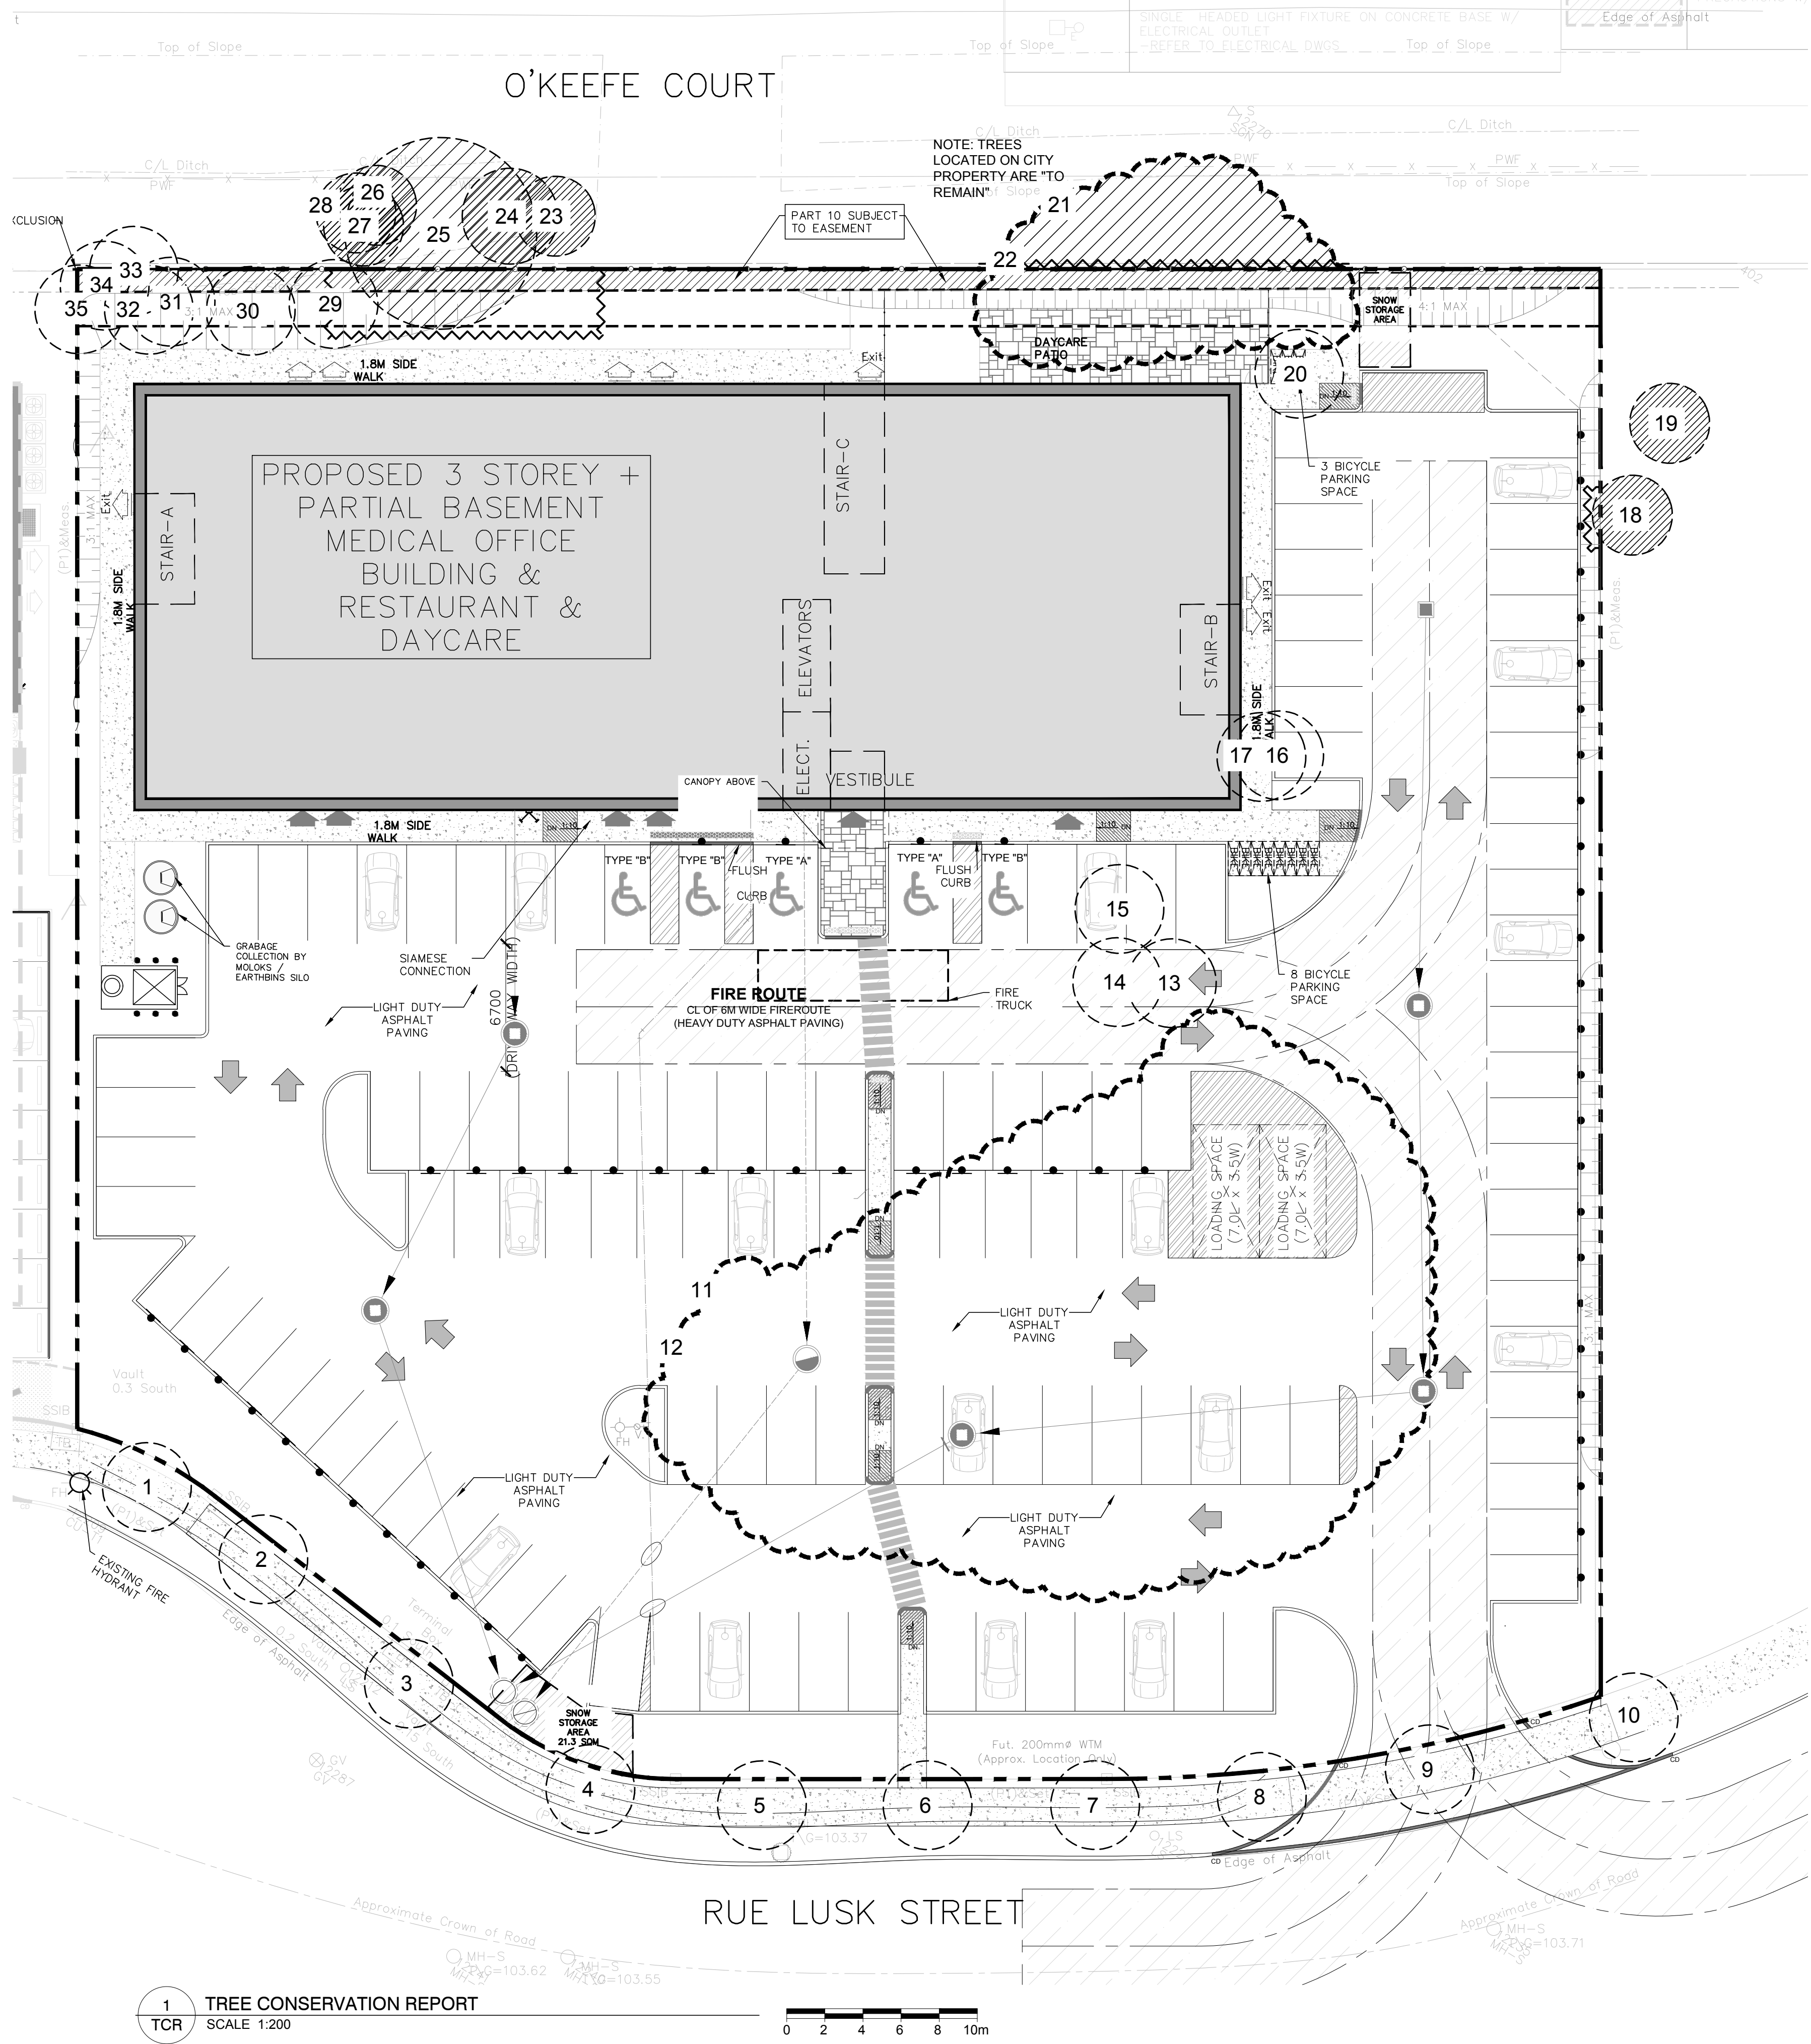

KEY PLAN N.T.S.

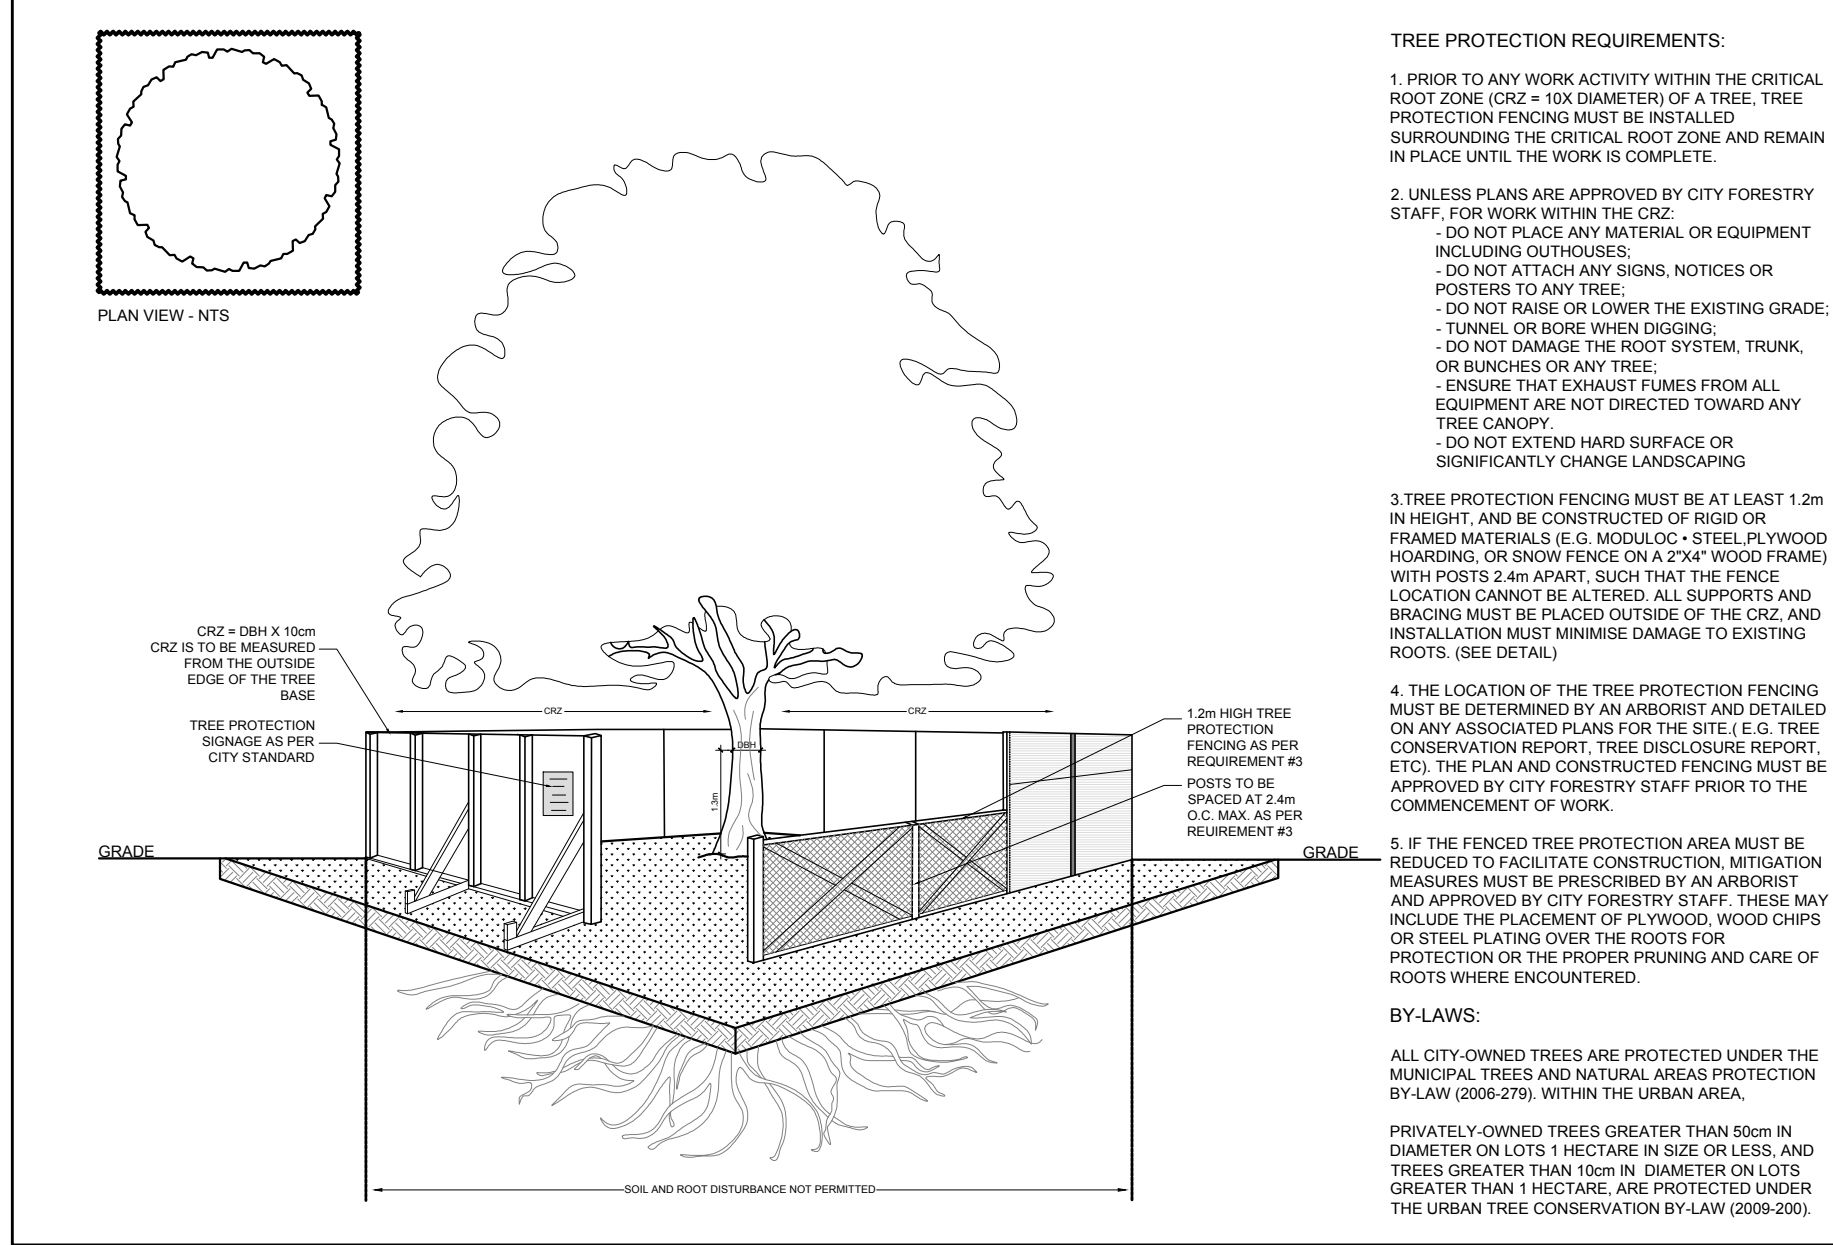

2 TREE PROTECTION FENCING
SCALE: N.T.S.

GENERAL NOTES:

1. It is the responsibility of the appropriate contractor or official to report any errors, omissions or discrepancies on this plan with actual site conditions to the Landscape Architect before proceeding with construction.
2. The contractor is to notify all utility companies and authorities prior to any excavation and ascertain locations of underground services.
3. The contractor is to restate all areas and items damaged as a result of construction activity.
4. The contractor is to comply with all pertinent codes and by-laws.
5. The contractor is to maintain a positive surface run-off throughout the entire construction period.
6. The Landscape Architect is not responsible for subsurface conditions.
7. The contractor is to identify all existing trees to remain on site with the Landscape Architect prior to construction.

EXISTING TREE LIST

KEY	QTY.	BOTANICAL NAME	COMMON NAME	SIZE	CONDITION	REMARKS	OWNERSHIP	COMMENTS
1	1	<i>Acer rubrum</i>	Red Maple	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
2	1	<i>Acer rubrum</i>	Red Maple	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
3	1	<i>Acer saccharum</i>	Sugar Maple	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
4	1	<i>Acer saccharum</i>	Sugar Maple	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
5	1	<i>Acer saccharum</i>	Sugar Maple	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
6	1	<i>Acer saccharum</i>	Sugar Maple	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
7	1	<i>Acer saccharum</i>	Sugar Maple	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
8	1	<i>Quercus rubra</i>	Red Oak	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
9	1	<i>Quercus rubra</i>	Red Oak	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
10	1	<i>Quercus rubra</i>	Red Oak	70mm DBH	GOOD	To be removed	City of Ottawa	Canopy % TBD
11	52	<i>Populus deltoides</i>	Eastern Cottonwood	100-300mm DBH	FAIR-GOOD	To be removed	120 Lusk Street	Canopy % TBD
12	1	<i>Acer negundo</i>	Manitoba Maple	200mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
13	1	<i>Acer negundo</i>	Manitoba Maple	100mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
14	1	<i>Acer negundo</i>	Manitoba Maple	160mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
15	1	<i>Populus deltoides</i>	Eastern Cottonwood	2x150mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
16	1	<i>Populus deltoides</i>	Eastern Cottonwood	200mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
17	1	<i>Populus deltoides</i>	Eastern Cottonwood	300mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
18	1	<i>Acer negundo</i>	Manitoba Maple	200mm DBH	GOOD	To be removed	100 Lusk Street	Canopy % TBD
19	1	<i>Acer negundo</i>	Manitoba Maple	200mm DBH	GOOD	To be removed	100 Lusk Street	Canopy % TBD
20	1	<i>Populus deltoides</i>	Eastern Cottonwood	2x350mm DB	GOOD	To be removed	120 Lusk Street	Canopy % TBD
21	12	<i>Ulmus americana</i>	American Elm	15-200mm DBH	GOOD	See plan	120 Lusk Street / City	Canopy % TBD
22	1	<i>Acer negundo</i>	Manitoba Maple	200mm DBH	GOOD	To remain	City of Ottawa	Canopy % TBD
23	1	<i>Acer negundo</i>	Manitoba Maple	200mm DBH	GOOD	To remain	City of Ottawa	Canopy % TBD
24	1	<i>Acer negundo</i>	Manitoba Maple	250mm DBH	GOOD	To remain	City of Ottawa	Canopy % TBD
25	1	<i>Populus deltoides</i>	Eastern Cottonwood	500mm DBH	GOOD	To remain	City of Ottawa	Canopy % TBD
26	1	<i>Populus deltoides</i>	Eastern Cottonwood	200mm DBH	GOOD	To remain	City of Ottawa	Canopy % TBD
27	1	<i>Populus deltoides</i>	Eastern Cottonwood	200mm DBH	GOOD	To remain	City of Ottawa	Canopy % TBD
28	1	<i>Populus deltoides</i>	Eastern Cottonwood	200mm DBH	GOOD	To remain	City of Ottawa	Canopy % TBD
29	1	<i>Populus deltoides</i>	Eastern Cottonwood	450mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
30	1	<i>Ulmus americana</i>	American Elm	150mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
31	1	<i>Populus deltoides</i>	Eastern Cottonwood	400mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
32	1	<i>Populus deltoides</i>	Eastern Cottonwood	400mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
33	1	<i>Populus deltoides</i>	Eastern Cottonwood	600mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
34	1	<i>Populus deltoides</i>	Eastern Cottonwood	150mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD
35	1	<i>Populus deltoides</i>	Eastern Cottonwood	150mm DBH	GOOD	To be removed	120 Lusk Street	Canopy % TBD

CLIENT

Dr. Sandra Iroakazi

CONSULTANTS

ARCHITECTS:
MATAJ ARCHITECTS INC.
96 Forsythe Street, Oakville Ontario
Tel : (905) 281-4444

CIVIL ENGINEERS:
ARCADIS OTTAWA
333 PRESTON STREET SUITE 500
OTTAWA, ON K1S 5N4
Tel : (613) 721-0555

SURVEYORS:
ANNIS, O'SULLIVAN, VOLLEBEKK INC.
14 CONCOURSE GATE SUITE 500
OTTAWA, ON K2E 7S6
Tel : (613) 721-0850

LEGEND

EXISTING TREE TO REMAIN

GROUP OF EXISTING TREES TO REMAIN

EXISTING TREE TO BE REMOVED

GROUP OF EXISTING TREES TO BE REMOVED

TREE PROTECTION FENCE

4 REVISED PER NEW CIVIL DRAWING

09/18/2025

ML

JL

3 REVISED PER CITY COMMENTS

08/15/2025

ML

JL

2 REVISED PER CITY COMMENTS

08/01/2025

ML

JL

1 ISSUED FOR FORESTRY REVIEW

01/16/2025

ML

JL

No.

Issue

Date

DR

CK

JAMES B. LENNOX & ASSOCIATES INC.

LANDSCAPE ARCHITECTS

3332 CARLING AVE. OTTAWA, ONTARIO K2J 5A8

Tel. (613) 722-5168 Fax. (866) 343-3942

PROJECT

LUSK MEDICAL BUILDING

120 LUSK STREET, OTTAWA ON

DRAWING

TREE CONSERVATION REPORT

STAMP

SCALE

AS SHOWN

START DATE

MAY 2024

PROJECT NO.

24MIS2428

PROJECT NORTH

DRAWING NO.

TCR

PLOT SIZE ARCH-D