

KEY	QTY	BOTANICAL NAME	COMMON NAME	CAL/ HT.	NATIVE	OWNERSHIP	CONDITION/REMARKS
DECIDUC	US TRE	ES					
Ac	3	Amelanchier canadensis	Serviceberry	50 mm	Yes	Private	W/B - Tree Form
Ar	5	Acer rubrum	Red Maple	50 mm	Yes	Private	W/B - Tree Form
Сс	3	Celtis occidentalis	Hackberry	50 mm	Yes	2 City ROW / 2 Private	W/B - Tree Form
Gd	4	Gymnocladus dioica	Kentucky Coffeetree	50 mm	Yes	3 City ROW	W/B - Tree Form
Gt	6	Gleditsia triacanthos var. inermis 'Skyline'	Thornless Honey Locust	50 mm	Yes	Private	W/B - Tree Form
Qa	2	Quercus alba	White Oak	50 mm	Yes	2 Private	W/B - Tree Form
Qm	5	Quercus macrocarpa	Burr Oak	50 mm	Yes	1 City ROW / 4 Private	W/B - Tree Form
Qp	3	Quercus palustris	Pin Oak	50 mm	Yes	1 City ROW / 4 Private	W/B - Tree Form
Sa	1	Sorbus americana	American Mountain Ash	50 mm	Yes	Private	W/B - Tree Form
Sd	1	Sorbusdecora	Showy Mountain Ash	50 mm	Yes	Private	W/B - Tree Form
CONIFER	ROUS TF	REES					
Pg	8	Picea glauca	White Spruce	1800 cm Ht.	Yes	Private	W/B - Tree Form
SHRUBS							
Ca	55	Ceanothus americanus	New Jersey Tea	30 cm Ht.	Yes	Private	Container
DI	145	Diervilla lonicera	Bush Honeysuckle	30 cm Ht.	Yes	Private	Container
Ро	4	Physocarpus opulifolius	Common Ninebark	50 cm Ht.	Yes	Private	Container
Ra	75	Rhus aromatica 'Gro-Low'	Gro-Low Fragrant Sumac	30 cm Ht.	Yes	Private	Container
Vd	8	Viburnum lentago	Nannyberry	50 cm Ht.	Yes	Private	Container

3. ALL PLANT MATERIAL SHALL BE NURSERY GROWN STOCK UNLESS OTHERWISE NOTED.

4. DECIDUOUS TREES TO HAVE A MINIMUM 1800mm CLEAR STEM ABOVE GRADE WITH THE EXCEPTION OF POCKET FOREST SAPLINGS.


5. ALL PLANT MATERIAL SHALL BE WARRANTIED FOR TWO YEARS FROM THE DATE OF PERFORMANCE ACCEPTANCE AS DETERMINED BY THE PROJECT MANAGER.

6. ANY PROPOSED PLANT MATERIAL SUBSTITUTIONS SHALL BE MADE WITH PLANTS OF EQUIVALENT OVERALL FORM, HEIGHT, HABIT, FLOWER, LEAF. COLOUR AND CULTURE AND ONLY AFTER WRITTEN APPROVAL FROM THE PROJECT MANAGER.

7. ALL SEEDED AREAS TO RECEIVE A MINIMUM 100 mm OF IMPORTED TOPSOIL.

8. REFER TO ENGINEERING DRAWINGS FOR ALL HARDSCAPE AND SERVICING.

9. TREES TO BE SPACED A MINIMUM OF 1500mm FROM CURBS AND RETAINING WALLS 2000mm FROM LIGHT STANDARDS.

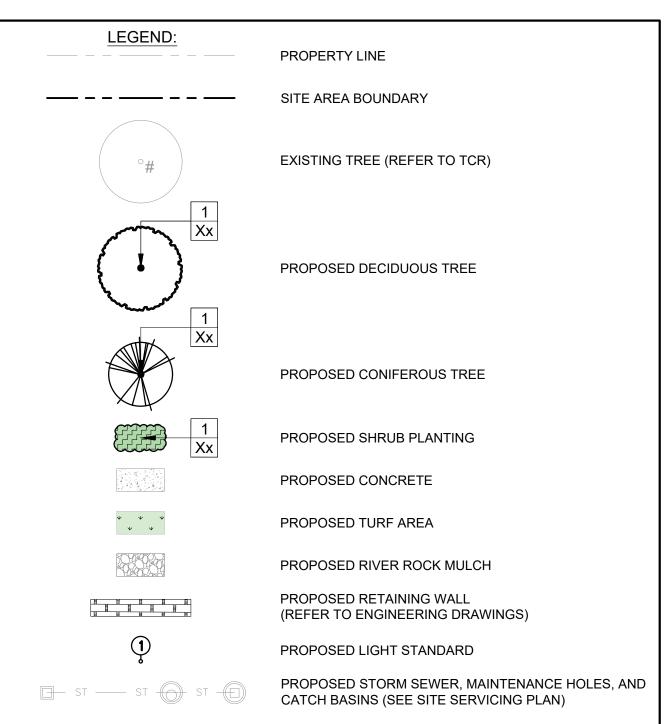

_	1							
		5	IS	SUED FOR R	EVIEW		KC	2025/03/18
		4	IS	SUED FOR R	EVIEW		KC	2025/01/23
		3	IS	SUED FOR R	EVIEW		KC	2024/12/09
		2	IS	SUED FOR R	EVIEW		KC	2024/10/31
		1	IS	SUED FOR R	EVIEW		KC	2024/10/25
		No.		Revision	1		Ву	Date (yy/mm/dd)
		Scal	le					
		I	5m	0		5		10m

THE OTTAWA HOSPITAL RIVERSIDE CAMPUS 1967 RIVERSIDE DR., OTTAWA

PARKING LOT D

PARKING LOT D LANDSCAPE PLAN

Designed by:	KC		Datum
Drawn by:	CS		2
Approved by:			
Project No.			Drawin
47			

ing No. L-3 #19228