


Copyright Reserved

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stanlec without delay.


The Copyrights to all designs and drawings are the property of Stanlec. Reproduction or use for any purpose other than that authorized by Stanlec is forbidden.

Legend

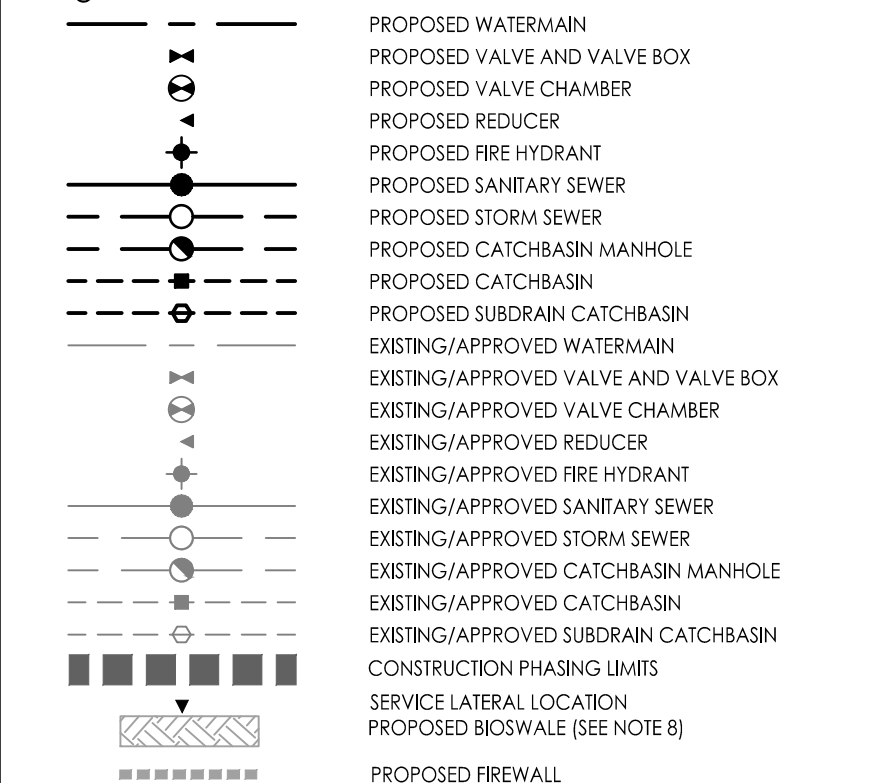

NOTES

1. PROPOSED UTILITY TO BE EQUIPPED WITH PRESSURE REDUCING VALVES (PRVs) AS PER THE ONTARIO BUILDING CODE.
2. PRESSURE REDUCING VALVES (PRVs) ARE TO HAVE CIRCULAR ORIFICES AS SPECIFIED AND REQUIRED TO BE VERTICAL SLIDING TYPE WITH FLOATABLE RATIO.
3. CONTROLLED SETTLEMENT JOINTS TO BE USED ON EACH BUILDING SERVICE CONNECTION CITY STANDARD S11
4. NO JUNCTIONS LATERALS HAD BEEN PREPARED FOR HAZELDEAN CREEK AS PER GEOTECH REPORT PG3042-2 DATED MAY 24, 2019 PROVIDED BY PATERSON GROUP INC.
5. REINFORCED CARRY RIVER CHANNEL AS PER CARRY RIVER, POOLE CREEK AND FEEDELM CREEK RESTORATION DRAWINGS DATED APRIL 15, 2016 PREPARED BY AECOM
6. WATERPROOFING AND COVER REQUIRED FOR SANITARY MAINTENANCE HOLES WITH PONDING AREAS.
7. NO SERVICE LATERALS SHALL HAVE MORE THAN 2, 22.5" BENDS AS PER CITY STD 11.3.1. SERVICES SHALL BE PROPOSED TO MAINTENANCE HOLES.
8. SERVICE LATERAL VARIATIONS SHALL BE IDENTIFIED AND EQUIPPED WITH BOWSLAID. THE LENGTH OF THE PROPOSED SUBDRAIN AS PER THE DETAILS SHOWN ON DGSW DS-3.

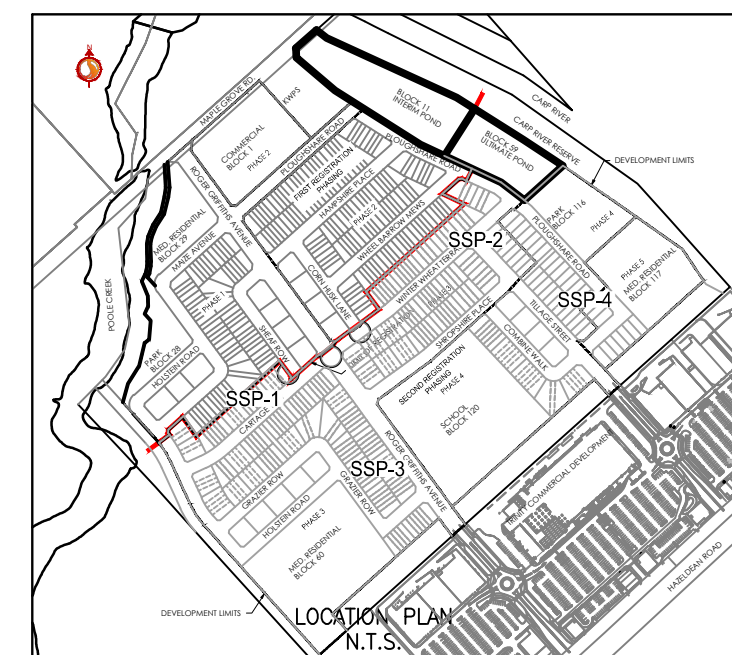

8	ISSUED FOR APPROVAL	WAJ	SGG	25.09.26
7	REVISED DRAFT PLAN	WAJ	SGG	25.07.10
6	REVISED DRAFT PLAN	WAJ	SGG	23.12.14
5	REVISED AS PER CITY COMMENTS	WAJ	SGG	22.08.23
4	ISSUED FOR TENDER	WAJ	SGG	22.07.22
3	REVISED AS PER CITY COMMENTS	WAJ	SGG	22.05.09
2	REVISED AS PER CITY COMMENTS	WAJ	SGG	21.07.07
1	ISSUED FOR FIRST SUBMISSION	WAJ	SGG	20.11.24

Revision	By	Appd.	YY.MM.DD
File Name: 1060401393-DB	WAJ	SGG	WAJ 17.12.20
Permit Seal	Dwn.	Chkd.	Dsgn. YY.MM.DD

Permit-Seed

Client/Project

RICHCRAFT HOMES
SECOND REGISTRATION PHASE

RICHCRAFT KANATA WEST
1620 MAPLE GROVE ROAD
OTTAWA, ON

Title
OVERALL SITE SERVICING PLAN

Project No. 160401393

Scale 1:1250

0 12.5 37.5 62.5

OSSP-2 3 of 44 8

