


Mark Y. P.

MARK YOUNG, MCIP, RPP
 (A) MANAGER, DEVELOPMENT REVIEW - WEST
 PLANNING, INFRASTRUCTURE & ECONOMIC
 DEVELOPMENT DEPARTMENT, CITY OF OTTAWA

APPROVED
 By Laurel McCreight at 8:09 am, Jan 13, 2020

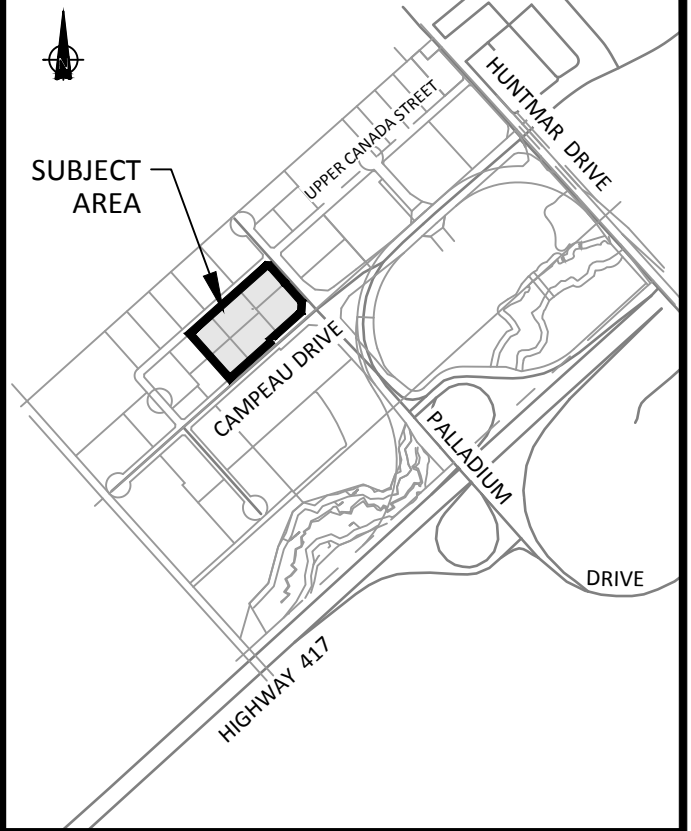

KEY PLAN
(NTS)

NOTES:
 1. SEE DETAIL DRAWING C-010 FOR ADDITIONAL DETAILS AND NOTES.
 2. SITE BENCHMARK TO BE OBTAINED FROM LEGAL SURVEYOR STANTEC GEOMATICS.

LEGEND :

- LIGHT DUTY SILT FENCE AS PER OFSD-219.110
- STRAW BALE CHECK DAM AS PER OFSD-219.160
- SILT SACK CATCHBASIN INSERT PLACED UNDER CB OR MH COVER
- TEMPORARY MUD MAT 0.15m THICK, 50mm CLEAR STONE ON NON WOVEN FILTER CLOTH

No.	REVISIONS	By	Date
14			
13			
12			
11			
10			
9			
8			
7			
6			
5			
4	REVISE SERVICES TO BUILDING PER NEW MECHANICAL DESIGN	T.R.B.	2019-11-27
3	REVISED AS PER CITY COMMENTS	T.R.B.	2019-10-29
2	REVISED AS PER NEW SITE PLAN AND CITY COMMENTS	T.R.B.	2019-09-30
1	ISSUED FOR SPA	T.R.B.	2019-07-09

PC KANATA DEVELOPMENTS INC.

IBI GROUP
 400 - 333 Preston Street
 Ottawa ON K1S 5N4 Canada
 tel 613 225 1311 fax 613 225 9868
 ibigroup.com

Project Title


8700 CAMPEAU DRIVE

T. R. BRULE
 2019/11/27
 PROVINCE OF ONTARIO

Drawing Title
EROSION AND SEDIMENT PLAN

Scale
 1 : 500

Design	JB	Date	JULY 2019
Drawn	DPS/DD/EH	Checked	TRB
Project No.	121693	Drawing No.	C-900

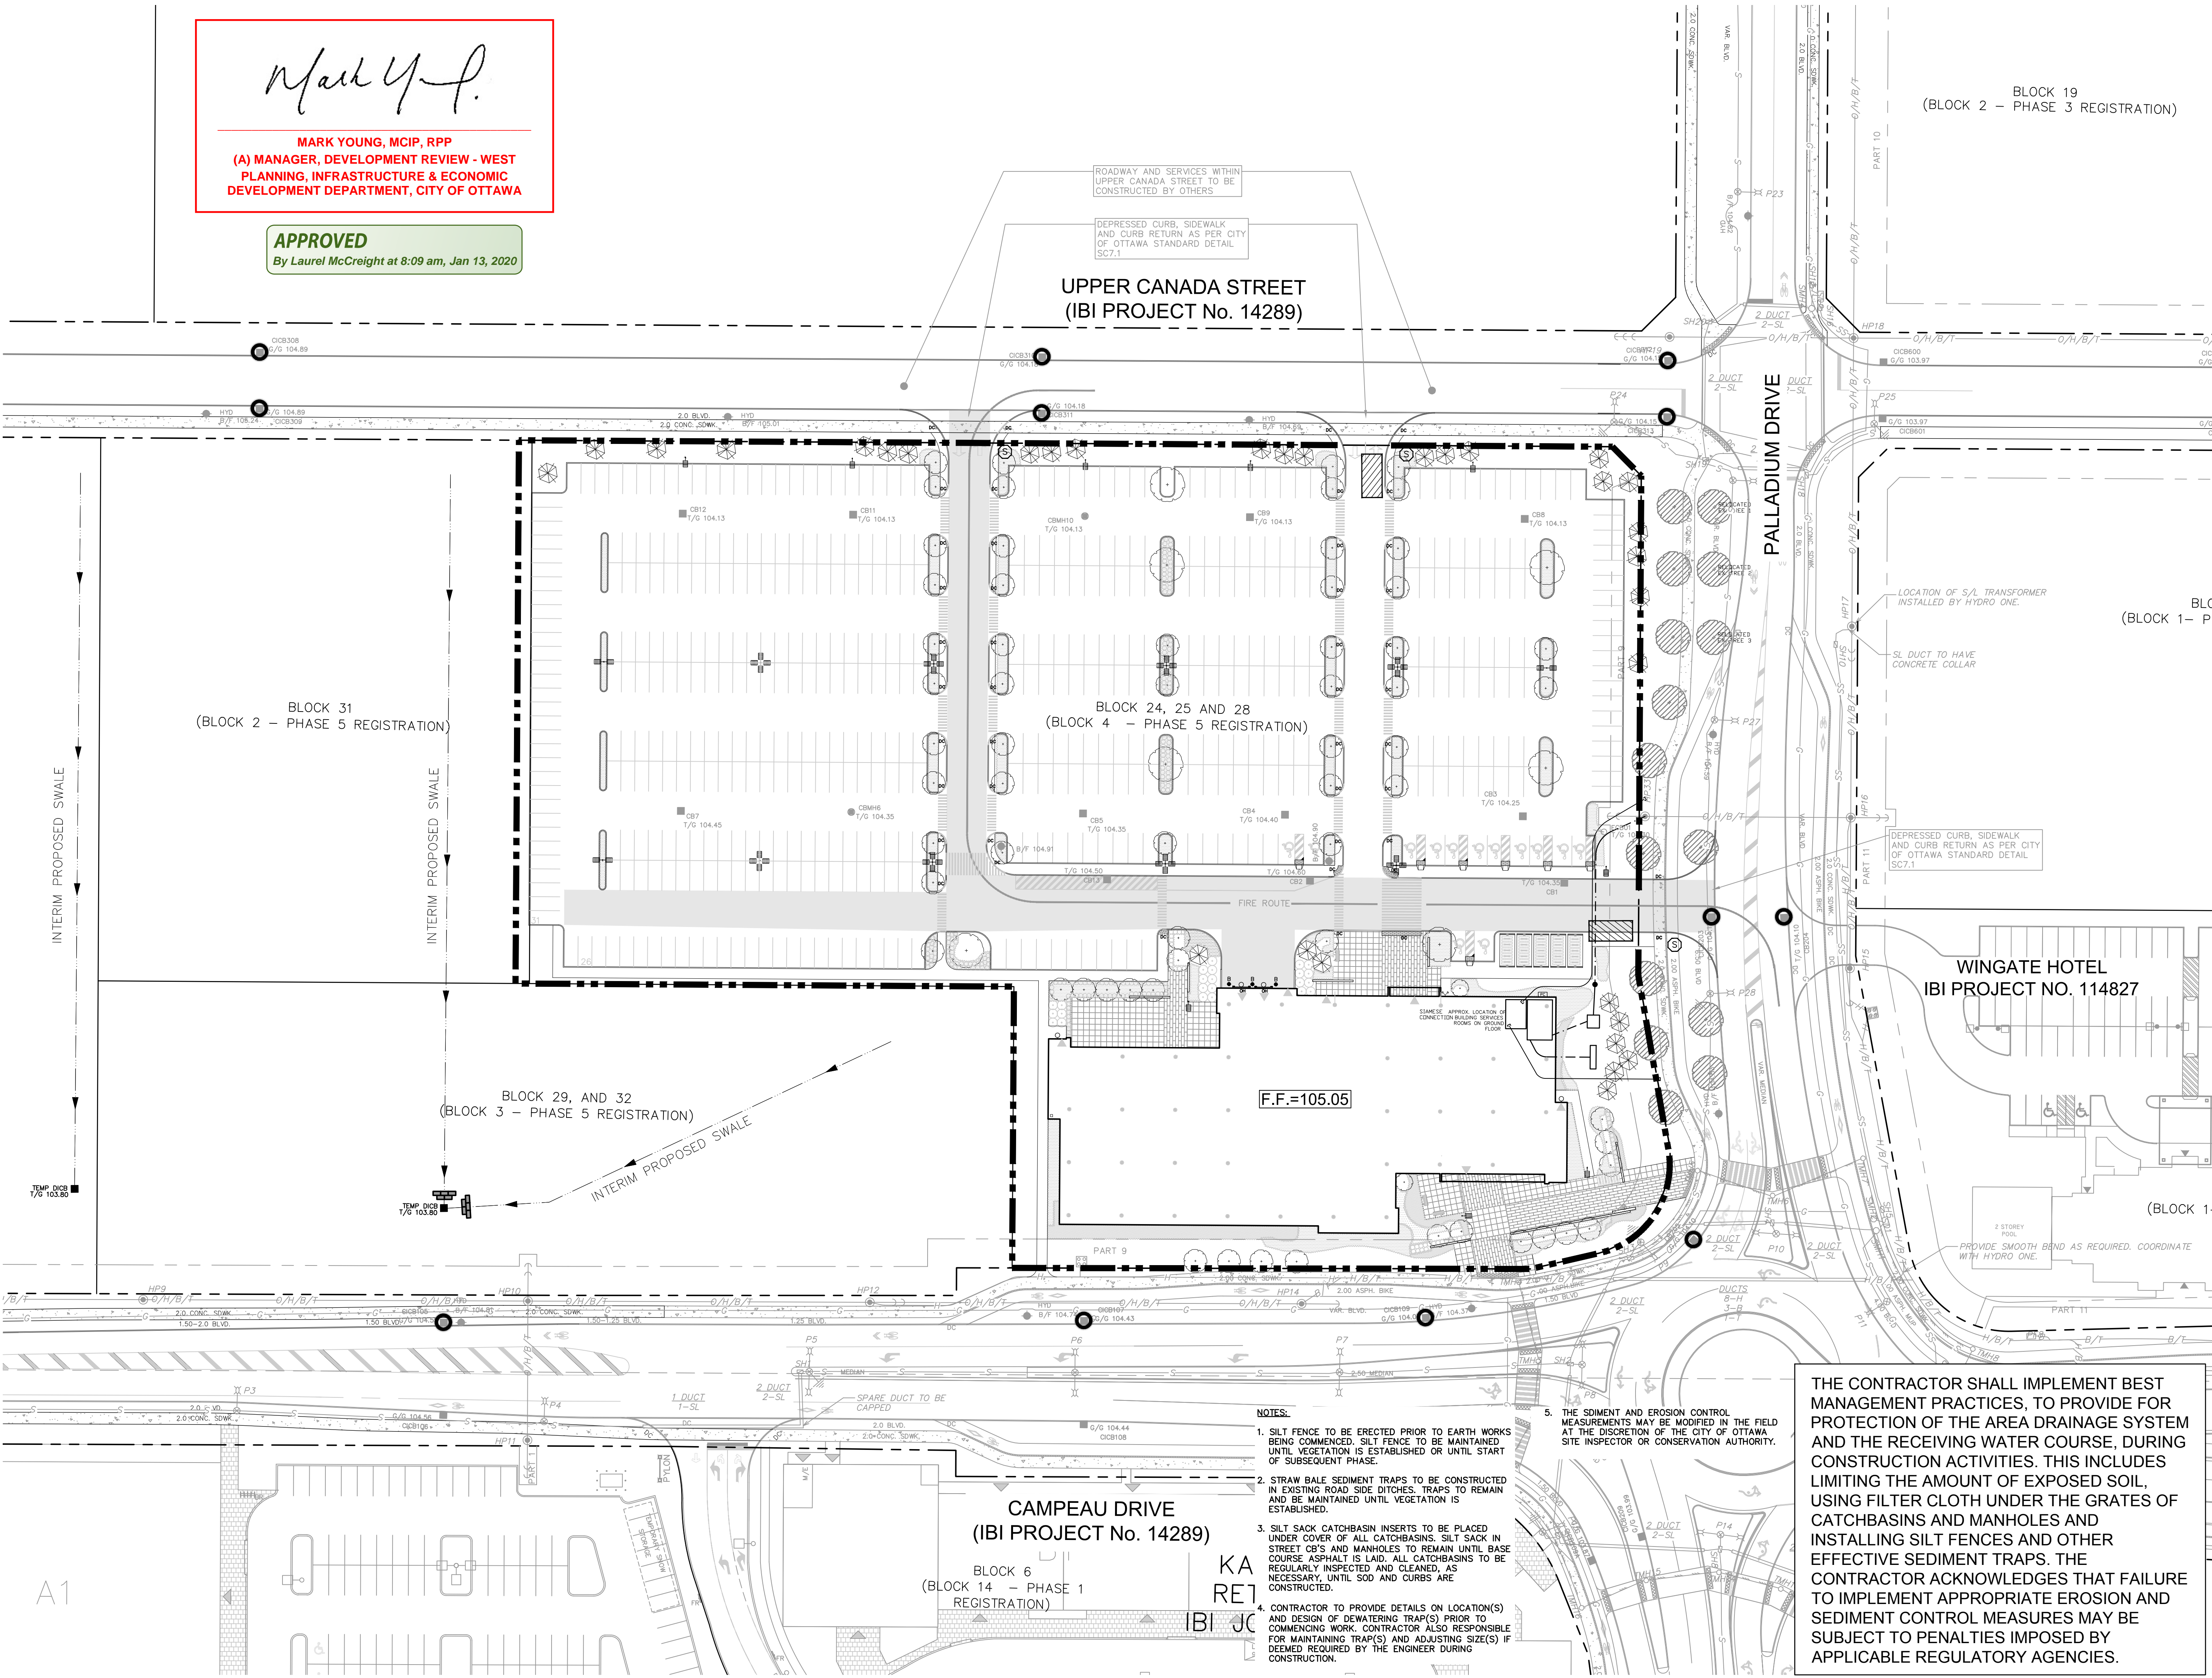

NOTES:

- SILT FENCE TO BE ERRECTED PRIOR TO EARTH WORKS BEING COMMENCED. SILT FENCE TO BE MAINTAINED UNTIL VEGETATION IS ESTABLISHED OR UNTIL START OF SUBSEQUENT PHASE.
- STRAW BALE SEDIMENT TRAPS TO BE CONSTRUCTED IN EXISTING ROAD SIDE DITCHES. TRAPS TO REMAIN AND BE MAINTAINED UNTIL VEGETATION IS ESTABLISHED.
- SILT SACK CATCHBASIN INSERTS TO BE PLACED UNDER COVER OF ALL CATCHBASINS. SILT SACK IN STREET C/S AND MANHOLES TO REMAIN UNTIL BASE COURSE ASPHALT IS LAID. ALL CATCHBASINS TO BE REGULARLY INSPECTED AND CLEANED, AS NECESSARY, UNTIL SOD AND CURBS ARE CONSTRUCTED.
- CONTRACTOR TO PROVIDE DETAILS ON LOCATION(S) AND DESIGN OF DEWATERING TRAP(S) PRIOR TO COMMENCING WORK. CONTRACTOR ALSO RESPONSIBLE FOR MAINTAINING TRAP(S) AND ADJUSTING SIZE(S) IF DEEMED REQUIRED BY THE ENGINEER DURING CONSTRUCTION.
- THE SEMENT AND EROSION CONTROL MEASUREMENTS MAY BE MODIFIED IN THE FIELD AT THE DISCRETION OF THE CITY OF OTTAWA SITE INSPECTOR OR CONSERVATION AUTHORITY.

THE CONTRACTOR SHALL IMPLEMENT BEST MANAGEMENT PRACTICES, TO PROVIDE FOR PROTECTION OF THE AREA DRAINAGE SYSTEM AND THE RECEIVING WATER COURSE, DURING CONSTRUCTION ACTIVITIES. THIS INCLUDES LIMITING THE AMOUNT OF EXPOSED SOIL, USING FILTER CLOTH UNDER THE GRATES OF CATCHBASINS AND MANHOLES AND INSTALLING SILT FENCES AND OTHER EFFECTIVE SEDIMENT TRAPS. THE CONTRACTOR ACKNOWLEDGES THAT FAILURE TO IMPLEMENT APPROPRIATE EROSION AND SEDIMENT CONTROL MEASURES MAY BE SUBJECT TO PENALTIES IMPOSED BY APPLICABLE REGULATORY AGENCIES.

J:\121693_Kinaxis\0_Production\03_Design\04_Civil\Sheets\C-900_EROSION - SEDIMENT PLAN.dwg Layout Name: C-900_Plan_Silver_AA_STANDARD-FULL.CTB Plot Scale: 1:254.4 Printed At: 11/27/2019 11:26 AM Last Saved By: D:\JRM\A.L...

D07-12-19-0122