

LEGEND


■ SILT FENCE BARRIER LOCATION

EROSION AND SEDIMENT CONTROL NOTES


BEST MANAGEMENT PRACTICES

EROSION AND SEDIMENT CONTROLS (BEST MANAGEMENT PRACTICES) SHALL BE PROVIDED DURING CONSTRUCTION OF THIS PROJECT. EROSION MUST BE MINIMIZED AND SEDIMENTS MUST BE REMOVED FROM CONSTRUCTION SITE RUNOFF IN ORDER TO PROTECT DOWNSTREAM AREAS. DURING ALL CONSTRUCTION, EROSION AND SEDIMENTATION SHOULD BE CONTROLLED BY THE FOLLOWING TECHNIQUES:

1. MINIMIZE THE EXTENT OF EXPOSED SOILS.
2. MINIMIZE THE AREA TO BE CLEARED AND GRUBBED.
3. PROTECT EXPOSED SLOPES WITH PLASTIC OR SYNTHETIC MULCHES.
4. INSTALL "SILT-SACK" CATCH BASIN SEDIMENT CONTROL DEVICE OR EQUAL IN CATCH BASINS ALONG MERIVALE ROAD ON-SITE AND OFF-SITE WITHIN THE ROAD RIGHT OF WAY ADJACENT TO THIS PROPERTY AS RECOMMENDED BY THE MANUFACTURER. SILT-SACK SHALL BE INSPECTED EVERY 2 TO 3 WEEKS AND AFTER EVERY MAJOR STORM.
5. INSTALL SILT FENCES AROUND THE PERIMETER OF STOCKPILES OF TOPSOIL TO BE USED OR REMOVED FROM SITE. (LOCATION TO BE DETERMINED).
6. SEDIMENT CONTROL DEVICES SHALL BE INSPECTED EVERY 2 TO 3 WEEKS AND AFTER MAJOR STORMS AND CLEANED OF ANY ACCUMULATED SILT AS REQUIRED. THE DEPOSITS WILL BE DISPOSED OF AS PER THE REQUIREMENTS OF THE CONTRACT.
7. IN SOME CASES SOME FILTER BARRIERS MAY BE REMOVED TEMPORARILY TO ACCOMMODATE CONSTRUCTION OPERATIONS. THE AFFECTED BARRIERS WILL BE REINSTATED AT NIGHT WHEN CONSTRUCTION IS COMPLETED. REMOVAL SHALL NOT OCCUR IF RUNOFF OR RAINFALL IS PREDICTED UNLESS A NEW DEVICE HAS BEEN INSTALLED TO PROTECT THE EXISTING STORM AND SANITARY SEWER SYSTEMS.
8. NO REFUELING OR CLEANING OF EQUIPMENT IS PERMITTED NEAR ANY EXISTING WATERWAYS.
9. DURING THE CONSTRUCTION PERIOD, THE CONTRACTOR SHALL INSPECT, MAINTAIN AND REMOVE THE CONTROL MEASURES.
10. THIS PROPOSED EROSION AND SEDIMENT CONTROL PLAN IS CONSIDERED BY (RVCA) A LIVING DOCUMENT WHICH MAY BE MODIFIED IN THE EVENT THE CONTROL MEASURES ARE INSUFFICIENT.
11. CONTRACTOR IS RESPONSIBLE TO KEEP THE ROADS FREE AND CLEAN FROM MUD AND DEBRIS DURING THE CONSTRUCTION PERIOD.

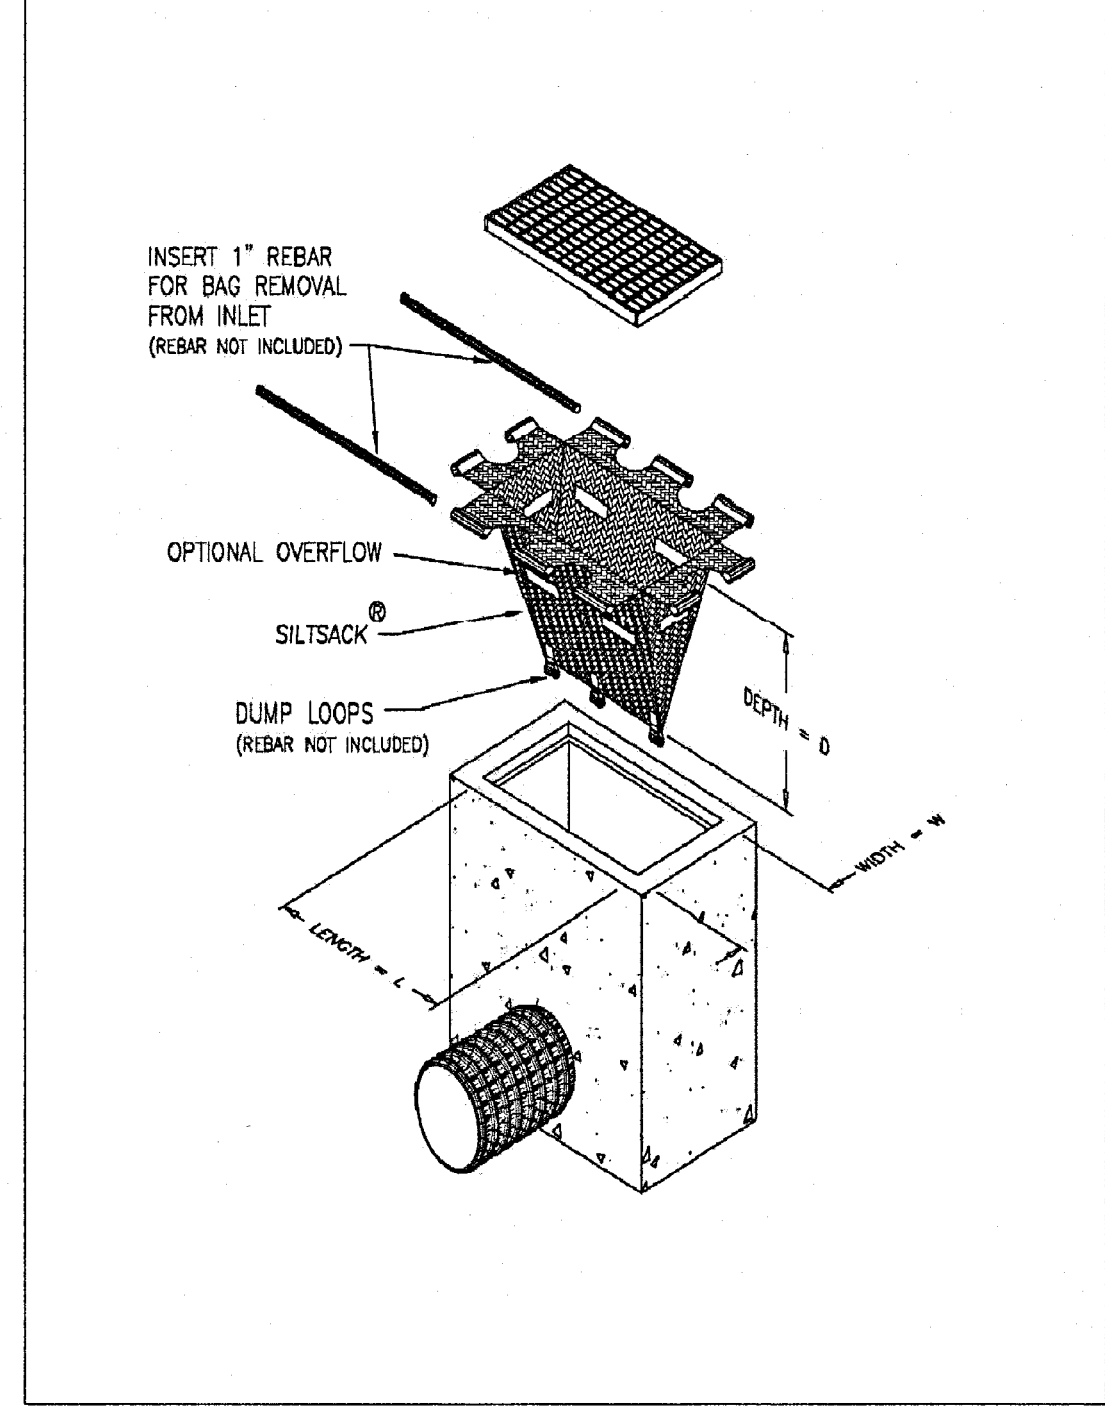

TYPICAL CATCH BASIN CONTROL DEVICE
N.T.S.

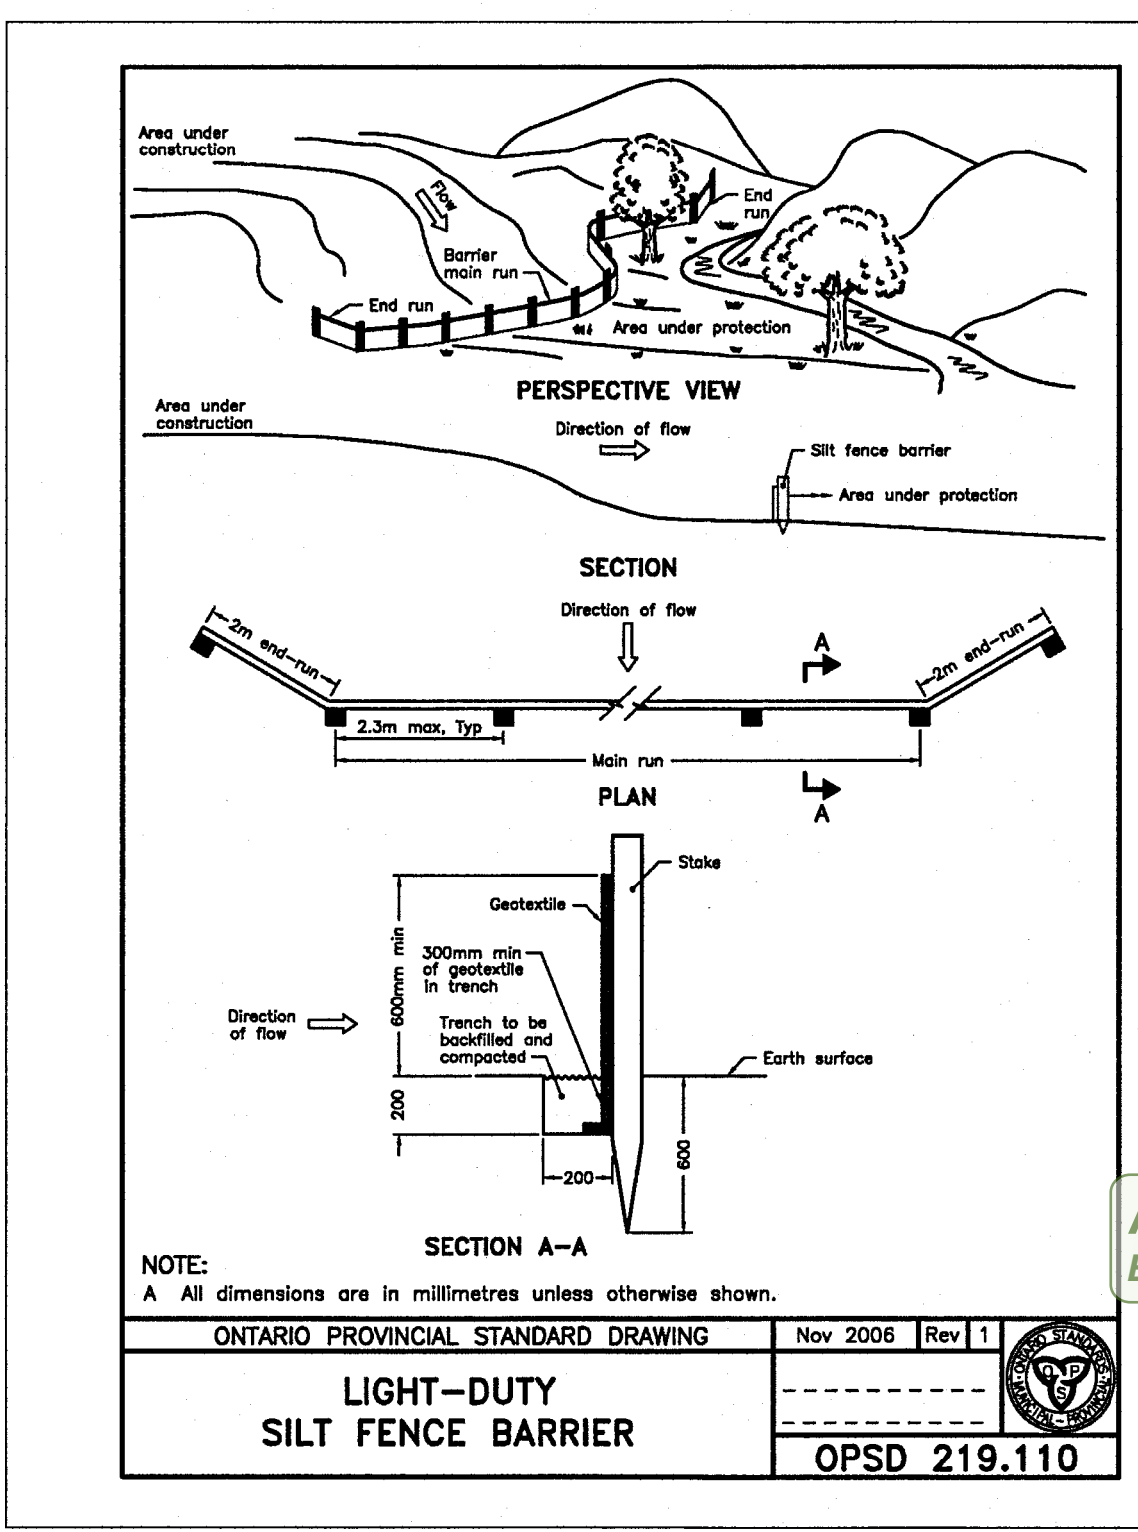

APPROVED
By Lily Xu at 4:35 pm, May 12, 2025

LILY XU, MCIP, RPP
MANAGER, DEVELOPMENT REVIEW SOUTH
PLANNING, DEVELOPMENT, AND BUILDING SERVICES
DEPARTMENT, CITY OF OTTAWA

| | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--|---|--|--|--|--|--|--|--|--|---|--|--|---|--|--|--|--|--|--|--|--|
| <div>3</div> <div>REVISIONS AS PER CITY'S REVIEW COMMENTS OF JANUARY 24, 2025</div> <div>2</div> <div>ISSUED FOR PERMIT</div> <div>1</div> <div>ISSUED FOR SITE PLAN APPLICATION - 2ND SUBMISSION</div> <div>No.</div> <div>REVISION</div> <div>DATE</div> <div>BY</div> | | | <div>02/12/25</div> <div>01/17/25</div> <div>11/05/24</div> <div></div> <div></div> | | | <div>TLM</div> <div>TLM</div> <div>TLM</div> <div></div> <div></div> | | | <div>SCALE</div> <div>0 1.25m 3.75m 6.25m</div> <div>1:125</div> <div>HORIZONTAL</div> <div>VERTICAL</div> | | | <div>DESIGN</div> <div>T.L.M.</div> <div>CHECKED</div> <div>T.L.M.</div> <div>DRAWN BY</div> <div>P.M.</div> <div>CHECKED</div> <div>T.L.M.</div> <div>APPROVED</div> <div>T.L.M.</div> | | | <div>PROJECT</div> <div>917 MERIVALE ROAD</div> <div>LOT 1</div> <div>REGISTERED PLAN 268160</div> <div>CITY OF OTTAWA</div> <div>DRAWING TITLE</div> <div>PROPOSED EROSION AND SEDIMENT CONTROL PLAN</div> | | | <div>PROJECT No.</div> <div>823-102</div> <div>DATE</div> <div>JULY 2024</div> <div>DRAWING No.</div> <div>ESC-1</div> | | | <div>T.L. MAK ENGINEERING CONSULTANTS LTD.</div> <div>CONSULTING ENGINEERS</div> | | |
|--|--|--|---|--|--|--|--|--|--|--|--|---|--|--|---|--|--|--|--|--|--|--|--|

D07-12-24-0067